
## Harnett County Department of Public Health

Improvement Permit

PROPERTY LOCATION: 108 Fred Burns Rd, Holly Springs 2
ISSUED TO: NC CUStom Homes LLC SUBDIVISION LOT # 2
NEW ST. DEDAID TO EVERYCON TO See Improvements required prior to Construction Authorization Issuence:
Type of Structure: SFD 76' × 85.3'
Proposed Wastewater System Type: 25% REDUCTION
Projected Daily Flow: 360 GPD
Number of bedrooms: 3 Number of Occupants: 6max
Basement IYes INO
Pump Required: Yes No May be required based on final location and elevations of facilities
Type of Water Supply: Community Public Well Distance from wellfeet Permit valid for: Five years
Permit conditions: No expiration
5 M 1 NOTE REHS
Authorized State Agent: Date: 9-11-23 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This
site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.
the carry and multi-not senage recallent and disposal and to conditions of this permit.
Construction Authorization
(Required for Building Permit)
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958 and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance
with the attached system layout.
ISSUED TO: NC Custom Homes LLC PROPERTY LOCATION: 108 Fred Burns Rd, Holly Spr. of Subdivision LOT # 2  Facility Type: SFD 76' x 85.3' New Expansion Repair
SUBDIVISION
Facility Type: 31 P New L Expansion L Repair
pasement:   162   Mo   pasement tixtures:   162   Mo
Type of Wastewater System** 25% 126000 System (Initial) Wastewater Flow: 360 GPD
(see note below, if applicable )
25% REDUCTION System (Repair)
Installation Requirements/Conditions Number of trenches 3
Septic Tank Sizegallons
Maximum Trench Depth of: 22-718 inches (Maximum soil cover shall not exceed
(Trench bottoms shall be level to +/-1/4" 36" above the trench bottom)
in all directions)
Pump Requirements:ft. TDH vsGPM inches below pipe
Aggregate Depth: inches above pipe
Conditions: inches total
WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.
**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
1 applicable. I understand the system type specimed is different from the type specimed on the application. I accept the specimentons of this perime.
Owner/Legal Representative Signature: Date:
This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This
Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.
Authorized State Agent: Pare Manhan Jan 125H3
Authorized State Agent: Date: 9-11-28  Construction Authorization Expiration Date: 5-11-28
Construction Authorization Expiration Date: 5-11-28

## Harnett County Department of Public Health Site Sketch

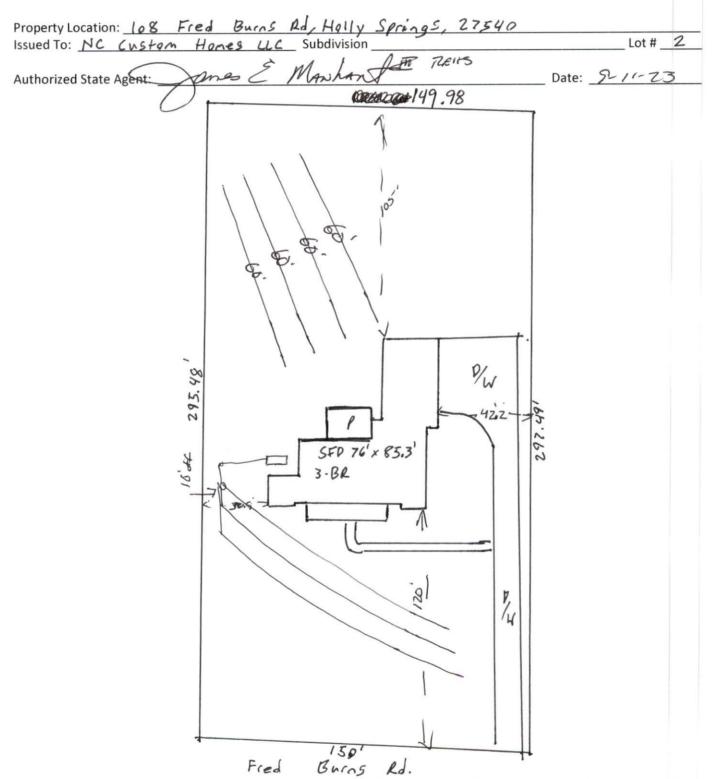

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.