


Cotton Farm - Lot 12
 4-Bedroom - Septic Design
 262 Hook Drive
 Paramount Homes, Inc

*Not a Survey
 Sketched from a plot plan supplied by owner
 Drawing for illustration purpose

**1000 Gallon Septic and Pump Tank
 Tank and trenches to be located minimum of 10'
 from any property line and minimum of 5'
 from any building foundation.
 *Do Not Cut, Fill, or Alter Drainfield or Repair Area
 *Comply with all setbacks

System: Pressure Manifold
 Lines: 4-7 (400')
 0.3 LTAR
 15-16" Max Trench Bottom
 Accepted Status System
 Repair: Pressure Manifold
 Lines: 1-3,8-9 (280')
 0.3 LTAR
 15-16" Max Trench Bottom
 T&J Panel Block - 50% reduction system

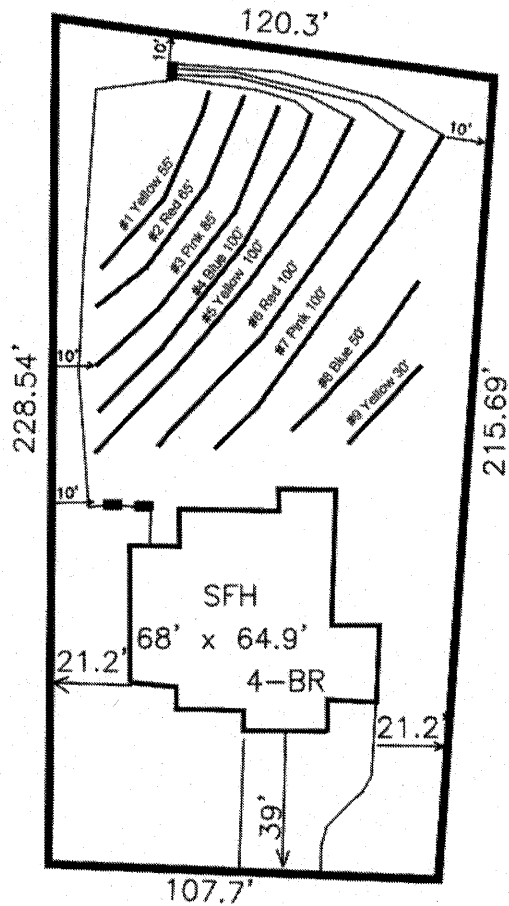

Hook Drive

Adams
 Soil Consulting
 919-414-6761
 Job #1863

GRAPHIC SCALE
 1" = 50'

