

4-Bedroom Septic Plan
 Lot #50 - Duncan's Crossing
 Harnett County
 Smith Douglas Homes

*House footprint to be field staked by surveyor and system verified prior to any construction
 **Septic area must not be altered by construction activities.
 ***No cuts of 2' or greater within
 within 15' of septic area
 **** Recommend protective barrier around septic field during construction.

50

28,735 SF
 (0.66 AC)

*If plumbing is not sufficient a pump tank will be required to septic field.

System: Gravity to D-Box.
 Lines: Lines 1-4 (360')
 0.35 LTAR
 24" Max Trench Bottom
 Accepted Status System
 Repair: Gravity to D-Box
 Lines: Lines 5-8 (360')
 0.35 LTAR
 24" Trench Bottom
 Accepted Status System

258.03'


263.62'

116.86'



GRAPHIC SCALE
 1" = 50'

DECOY SPREAD
 50' R/W (PUBLIC
 & UTILITY ACCESS)

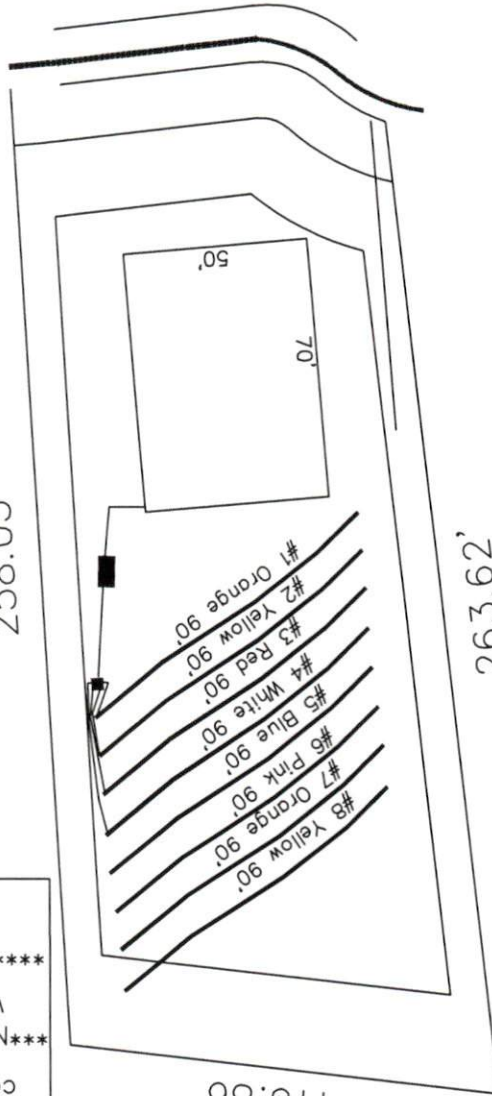

Adams
 Soil Consulting
 919-414-6761
 Job #1146