

Trenco 818 Soundside Rd Edenton, NC 27932

Re: J1223-6845


Lot 145 Duncans Creek

The truss drawing(s) referenced below have been prepared by Truss Engineering Co. under my direct supervision based on the parameters provided by Comtech, Inc - Fayetteville.

Pages or sheets covered by this seal: I62356652 thru I62356660

My license renewal date for the state of North Carolina is December 31, 2023.

North Carolina COA: C-0844



December 5,2023

Gilbert, Eric

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

Job	Truss	Truss Type	Qty	Ply	Lot 145 Duncans Creek
					162356652
J1223-6845	F01	Floor	1	1	
					Job Reference (optional)


1-0-0

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Mon Dec 4 15:53:17 2023 Page 1 ID:Dm7ZyERNI?2o6wzlFxt7?MyCJDH-RfC?PsB70Hq3NSgPqnL8w3ulTXbGKWrCDoi7J4zJC?f



Scale = 1:24.3

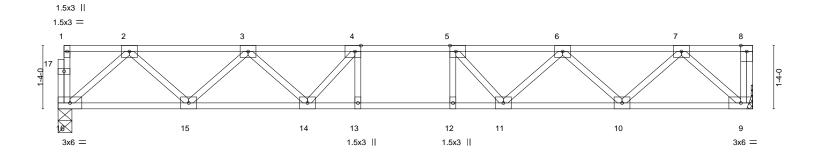

				14-7-8	
Plate Off	fsets (X,Y)	[4:0-1-8,Edge], [5:0-1-8,Edge]			
LOADIN	IG (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) I/defl L/d	PLATES GRIP
TCLL	40.0	Plate Grip DOL 1.00	TC 0.31	Vert(LL) -0.11 11-12 >999 480	MT20 244/190
TCDL	10.0	Lumber DOL 1.00	BC 0.64	Vert(CT) -0.14 11-12 >999 360	
BCLL	0.0	Rep Stress Incr YES	WB 0.36	Horz(CT) 0.03 9 n/a n/a	
BCDL	5.0	Code IRC2015/TPI2014	Matrix-S		Weight: 77 lb FT = 20%F, 11%E

14-7-8

LUMBER-**BRACING-**

TOP CHORD 2x4 SP No.1(flat) TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, BOT CHORD 2x4 SP No.1(flat) except end verticals.

WEBS 2x4 SP No.3(flat) **BOT CHORD** Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 16=0-3-8, 9=Mechanical Max Grav 16=784(LC 1), 9=791(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown. TOP CHORD 2-3=-1378/0, 3-4=-2133/0, 4-5=-2329/0, 5-6=-2133/0, 6-7=-1378/0

BOT CHORD

 $15 - 16 = 0/840,\ 14 - 15 = 0/1886,\ 13 - 14 = 0/2329,\ 12 - 13 = 0/2329,\ 11 - 12 = 0/2329,\ 10 - 11 = 0/1886,$ 9-10=0/840

 $2-16 = -1115/0, \ 2-15 = 0/749, \ 3-15 = -707/0, \ 7-9 = -1119/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 6-10 = -706/0, \ 7-10 = 0/748, \ 7-10 = 0/$ **WEBS**

6-11=0/410, 3-14=0/410, 4-14=-465/0, 5-11=-465/0

NOTES-

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are 3x4 MT20 unless otherwise indicated.
- 3) Plates checked for a plus or minus 1 degree rotation about its center.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.





Job	Truss	Truss Type	Qty	Ply	Lot 145 Duncans Creek
					162356653
J1223-6845	F02	Floor	11	1	
					Job Reference (optional)

8.430 s Jan 6 2022 MiTek Industries, Inc. Mon Dec 4 15:53:18 2023 Page 1 ID:Dm7ZyERNI?2o6wzlFxt7?MyCJDH-RfC?PsB70Hq3NSgPqnL8w3ulTXbGKWrCDoi7J4zJC?f

Structural wood sheathing directly applied or 6-0-0 oc purlins,

Rigid ceiling directly applied or 10-0-0 oc bracing.

except end verticals.



1-7-8

Scale = 1:37.4




Plate Offsets (X,Y)--[20:0-1-8,Edge], [21:0-1-8,Edge] LOADING (psf) SPACING-CSI. DEFL. in (loc) I/defl L/d **PLATES GRIP** TCLL 40.0 Plate Grip DOL 1.00 TC 0.33 Vert(LL) -0.33 21 >795 480 MT20 244/190 TCDL 10.0 Lumber DOL 1.00 BC 0.47 Vert(CT) -0.4621 >578 360 M18AHS 186/179 **BCLL** 0.0 Rep Stress Incr YES WB 0.52 Horz(CT) 0.08 16 n/a n/a BCDL Code IRC2015/TPI2014 5.0 FT = 20%F, 11%E Matrix-S Weight: 118 lb

TOP CHORD

BOT CHORD

LUMBER-**BRACING-**

TOP CHORD 2x4 SP 2400F 2.0E(flat) BOT CHORD 2x4 SP 2400F 2.0E(flat) BOT CHORD

WEBS 2x4 SP No.3(flat)

> (size) 26=0-3-8, 16=Mechanical Max Grav 26=968(LC 1), 16=973(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1837/0, 3-4=-3187/0, 4-5=-3187/0, 5-6=-4021/0, 6-7=-4422/0, 7-8=-4422/0,

8-9=-4422/0, 9-11=-4018/0, 11-12=-3188/0, 12-13=-3188/0, 13-14=-1837/0

BOT CHORD 25-26=0/1059, 24-25=0/2591, 22-24=0/3710, 21-22=0/4307, 20-21=0/4422, 19-20=0/4308,

18-19=0/3710, 17-18=0/2591, 16-17=0/1060

WFBS 2-26=-1408/0, 2-25=0/1082, 3-25=-1049/0, 3-24=0/810, 14-16=-1411/0, 14-17=0/1082,

13-17=-1049/0, 13-18=0/811, 11-18=-709/0, 11-19=0/429, 9-19=-432/0, 5-24=-710/0,

5-22=0/432, 6-22=-409/0, 6-21=-194/494, 9-20=-192/508, 8-20=-274/75

NOTES-

REACTIONS.

- 1) Unbalanced floor live loads have been considered for this design.
- All plates are MT20 plates unless otherwise indicated.
- 3) All plates are 3x4 MT20 unless otherwise indicated.
- 4) Plates checked for a plus or minus 1 degree rotation about its center.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 7) CAUTION, Do not erect truss backwards.



December 5,2023



Job	Truss	Truss Type	Qty	Ply	Lot 145 Duncans Creek
J1223-6845	F02	Floor	4	1	162356654
J1223-0845	F03	Floor	4	1	Job Reference (optional)

8.430 s Jan 6 2022 MiTek Industries, Inc. Mon Dec 4 15:53:20 2023 Page 1 ID:Dm7ZyERNI?2o6wzIFxt7?MyCJDH-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Structural wood sheathing directly applied or 6-0-0 oc purlins,

Rigid ceiling directly applied or 10-0-0 oc bracing.

except end verticals.



1-8-0

0-1-8 Scale = 1:38.4




Plate Offsets (X,Y)--[20:0-1-8,Edge], [21:0-1-8,Edge] **PLATES GRIP** LOADING (psf) SPACING-CSI. DEFL. in (loc) I/defl L/d -0.35 20-21 244/190 TCLL 40.0 Plate Grip DOL 1.00 TC 0.32 Vert(LL) >767 480 MT20 TCDL 10.0 Lumber DOL 1.00 BC 0.48 Vert(CT) -0.48 20-21 >558 360 M18AHS 186/179 **BCLL** 0.0 Rep Stress Incr YES WB 0.52 Horz(CT) 0.08 16 n/a n/a BCDL Code IRC2015/TPI2014 Weight: 119 lb FT = 20%F. 11%E 5.0 Matrix-S

TOP CHORD

BOT CHORD

LUMBER-**BRACING-**

TOP CHORD 2x4 SP 2400F 2.0E(flat) BOT CHORD 2x4 SP 2400F 2.0E(flat)

WEBS 2x4 SP No.3(flat)

REACTIONS. (size) 26=0-3-8, 16=0-3-8 Max Grav 26=981(LC 1), 16=981(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1865/0, 3-4=-3242/0, 4-5=-3242/0, 5-6=-4101/0, 6-7=-4540/0, 7-8=-4540/0,

8-9=-4540/0, 9-11=-4101/0, 11-12=-3242/0, 12-13=-3242/0, 13-14=-1865/0 BOT CHORD

25-26=0/1074, 24-25=0/2632, 22-24=0/3779, 21-22=0/4402, 20-21=0/4540, 19-20=0/4402,

18-19=0/3779, 17-18=0/2632, 16-17=0/1074

2-26=-1427/0, 2-25=0/1101, 3-25=-1068/0, 3-24=0/829, 14-16=-1427/0, 14-17=0/1101, WFBS 13-17=-1068/0, 13-18=0/829, 11-18=-729/0, 11-19=0/449, 9-19=-428/0, 5-24=-729/0,

5-22=0/449, 6-22=-428/0, 6-21=-184/526, 7-21=-252/52, 9-20=-184/526, 8-20=-252/52

NOTES-

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) All plates are 3x4 MT20 unless otherwise indicated.
- 4) Plates checked for a plus or minus 1 degree rotation about its center.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.



December 5,2023



Job	Truss	Truss Type	Qty	Ply	Lot 145 Duncans Creek	٦
		5,000			162356655	ز
J1223-6845	F04	FLOOR	2	1		
					Job Reference (optional)	


8.430 s Jan 6 2022 MiTek Industries, Inc. Mon Dec 4 15:53:21 2023 Page 1 ID:Dm7ZyERNI?2o6wzlFxt7?MyCJDH-RfC?PsB70Hq3NSgPqnL8w3ulTXbGKWrCDoi7J4zJC?f




H| 1-3-0 1-0-0 1-10-4 1-0-0



0-1-8 Scale = 1:41.5





TOP CHORD

LUMBER-**BRACING-**

TOP CHORD 2x4 SP No.1(flat) BOT CHORD 2x4 SP No.1(flat) WEBS 2x4 SP No.3(flat)

BOT CHORD

Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals. Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 23-25,22-23,21-22.

REACTIONS. (size) 28=0-3-8, 22=0-3-8, 17=0-3-8

Max Grav 28=589(LC 3), 22=1513(LC 1), 17=617(LC 4)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-958/0, 3-4=-1294/0, 4-5=-1294/0, 5-6=-1294/0, 6-7=-637/172, 7-8=0/964,

8-9=0/964, 9-11=-662/125, 11-12=-1421/0, 12-13=-1421/0, 13-14=-1421/0, 14-15=-1020/0

 $27 - 28 = 0/623,\ 26 - 27 = 0/1250,\ 25 - 26 = 0/1294,\ 23 - 25 = -9/1066,\ 22 - 23 = -342/203,\ 24 - 24 = 0/1250,\ 25 - 26 = 0/1294,\ 23 - 25 = -9/1066,\ 24 - 23 = -342/203,\ 24 - 24 = 0/1250,\ 25 - 26 = 0/1294,\ 24 - 25 = -9/1066,\ 24 - 23 = -342/203,\ 25 - 26 = 0/1294,\ 25 - 25 = -9/1066,\ 27 - 25 =$ **BOT CHORD** 21-22=-296/194, 20-21=0/1120, 19-20=0/1421, 18-19=0/1340, 17-18=0/655 WEBS 2-28=-827/0, 2-27=0/466, 3-27=-406/0, 7-22=-1043/0, 7-23=0/663, 6-23=-670/0,

6-25=0/550, 5-25=-305/0, 9-22=-1079/0, 9-21=0/697, 11-21=-698/0, 11-20=0/583,

15-17=-869/0, 15-18=0/507, 14-18=-446/0, 12-20=-287/0

NOTES-

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are 3x4 MT20 unless otherwise indicated.
- 3) Plates checked for a plus or minus 1 degree rotation about its center.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 5) CAUTION, Do not erect truss backwards.





Job	Truss	Truss Type	Qty	Ply	Lot 145 Duncans Creek
J1223-6845	F06	Floor	a	1	162356656
01220-0040	F06	1 1001	١		Job Reference (optional)

Fayetteville, NC - 28314, Comtech, Inc.

8.430 s Jan 6 2022 MiTek Industries, Inc. Mon Dec 4 15:53:23 2023 Page 1 ID:Dm7ZyERNI?2o6wzlFxt7?MyCJDH-RfC?PsB70Hq3NSgPqnL8w3ulTXbGKWrCDoi7J4zJC?f


Structural wood sheathing directly applied or 6-0-0 oc purlins,


Rigid ceiling directly applied or 6-0-0 oc bracing.


except end verticals.



HI 1-9-0 1-3-0 1-6-4 1-9-0







BRACING-

LUMBER-

TOP CHORD 2x4 SP No.1(flat) BOT CHORD 2x4 SP No.1(flat)

WEBS 2x4 SP No.3(flat)

TOP CHORD

BOT CHORD REACTIONS. (size) 32=0-3-8, 29=0-3-8, 19=0-3-8

Max Uplift 32=-121(LC 4)

Max Grav 32=275(LC 3), 29=1536(LC 1), 19=774(LC 7)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD

8-9=-1716/0, 9-10=-1716/0, 10-12=-2500/0, 12-13=-2802/0, 13-14=-2780/0,

14-15=-2356/0, 15-16=-2356/0, 16-17=-1418/0

31-32=-231/316, 30-31=-555/334, 29-30=-981/63, 28-29=-519/0, 27-28=0/1143, **BOT CHORD**

25-27=0/2189, 24-25=0/2802, 23-24=0/2802, 22-23=0/2802, 21-22=0/2678, 20-21=0/1972,

5-29=-904/0, 2-32=-372/275, 2-31=-440/25, 5-30=0/750, 4-30=-380/0, 7-29=-1366/0, 7-28=0/1071, 8-28=-1035/0, 8-27=0/796, 17-19=-1116/0, 17-20=0/805, 16-20=-770/0,

16-21=0/523, 14-21=-437/0, 14-22=-16/271, 10-27=-657/0, 10-25=0/494, 12-25=-610/0,

13-22=-283/209

NOTES-

WEBS

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are 3x4 MT20 unless otherwise indicated.
- 3) Plates checked for a plus or minus 1 degree rotation about its center.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb)
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.



December 5,2023



Job	Truss	Truss Type	Qty	Ply	Lot 145 Duncans Creek
14000 0045	F07	Floor			162356657
J1223-6845	F07	Floor	2	1	Job Reference (optional)

8.430 s Jan 6 2022 MiTek Industries, Inc. Mon Dec 4 15:53:24 2023 Page 1 ID:Dm7ZyERNI?2o6wzlFxt7?MyCJDH-RfC?PsB70Hq3NSgPqnL8w3ulTXbGKWrCDoi7J4zJC?f

Structural wood sheathing directly applied or 6-0-0 oc purlins,

Rigid ceiling directly applied or 10-0-0 oc bracing.

except end verticals.





0-1-8 Scale = 1:33.7

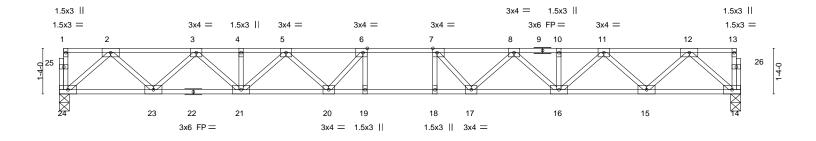


Plate Offsets (X,Y)--[6:0-1-8,Edge], [7:0-1-8,Edge] LOADING (psf) SPACING-CSI. DEFL. in (loc) L/d **PLATES GRIP** -0.26 18-19 TCLL 40.0 Plate Grip DOL 1.00 TC 0.37 Vert(LL) >905 480 244/190 MT20 TCDL 10.0 Lumber DOL 1.00 BC 0.84 Vert(CT) -0.36 18-19 >657 360 **BCLL** Rep Stress Incr YES WB 0.44 0.07 0.0 Horz(CT) 14 n/a n/a BCDL Code IRC2015/TPI2014 Weight: 105 lb FT = 20%F. 11%E Matrix-S

TOP CHORD

BOT CHORD

LUMBER-**BRACING-**

TOP CHORD 2x4 SP No.1(flat) BOT CHORD 2x4 SP No.1(flat)

WEBS 2x4 SP No.3(flat)

REACTIONS. (size) 24=0-3-8, 14=0-3-8 Max Grav 24=860(LC 1), 14=860(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1603/0, 3-4=-2727/0, 4-5=-2727/0, 5-6=-3333/0, 6-7=-3496/0, 7-8=-3333/0,

8-10=-2727/0, 10-11=-2727/0, 11-12=-1603/0

BOT CHORD

 $23-24=0/937,\ 21-23=0/2246,\ 20-21=0/3125,\ 19-20=0/3496,\ 18-19=0/3496,\ 17-18=0/3496,$

16-17=0/3125, 15-16=0/2246, 14-15=0/937

2-24=-1245/0, 2-23=0/927, 3-23=-894/0, 3-21=0/654, 5-21=-541/0, 5-20=0/408, WFBS

12-14=-1245/0, 12-15=0/927, 11-15=-894/0, 11-16=0/654, 8-16=-541/0, 8-17=0/408,

7-17=-484/79, 6-20=-484/79

NOTES-

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are 3x6 MT20 unless otherwise indicated.
- 3) Plates checked for a plus or minus 1 degree rotation about its center.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.







Job	Truss	Truss Type	Qty	Ply	Lot 145 Duncans Creek
					162356658
J1223-6845	FKW01	GABLE	1	1	
					Job Reference (optional)

0118

8.430 s Jan 6 2022 MiTek Industries, Inc. Mon Dec 4 15:53:25 2023 Page 1 ID:Dm7ZyERNI?2o6wzlFxt7?MyCJDH-RfC?PsB70Hq3NSgPqnL8w3ulTXbGKWrCDoi7J4zJC?f

Scale: 1/2"=1





LUMBER-BRACING-

TOP CHORD 2x4 SP No.1(flat) BOT CHORD 2x4 SP No.1(flat) 2x4 SP No.3(flat) WEBS

OTHERS 2x4 SP No.3(flat) TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.

BOT CHORD

Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 14-7-8.

(lb) - Max Grav All reactions 250 lb or less at joint(s) 24, 13, 23, 22, 21, 20, 19, 18, 17, 16, 15, 14

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- 1) All plates are 1.5x3 MT20 unless otherwise indicated.
- 2) Plates checked for a plus or minus 1 degree rotation about its center.
- 3) Gable requires continuous bottom chord bearing.
- 4) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 5) Gable studs spaced at 1-4-0 oc.
- 6) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.



December 5,2023




Job	Truss	Truss Type	Qty	Ply	Lot 145 Duncans Creek	7
					162356659	
J1223-6845	FKW02	GABLE	1	1		
					Job Reference (optional)	

8.430 s Jan 6 2022 MiTek Industries, Inc. Mon Dec 4 15:53:26 2023 Page 1 ID:Dm7ZyERNI?2o6wzlFxt7?MyCJDH-RfC?PsB70Hq3NSgPqnL8w3ulTXbGKWrCDoi7J4zJC?f

0-<u>1</u>-8

0-11-8 Scale = 1:37.2



1-4-0 2-8-0 1-4-0 1-4-0		-8-0 -4-0 8-0-0 1-4-0		12-0-0 1-4-0 1-4-0		16-0-0 17-4-0 1-4-0 1-4-0	18-8-0 20-0-0 1-4-0	21-4-0 22-4-8 1-4-0 1-0-8
LOADING (psf) TCLL 40.0 TCDL 10.0 BCLL 0.0 BCDL 5.0	Plate Grip DOL 1 Lumber DOL 1	-0-0 1.00 1.00 /ES 114	CSI. TC 0.06 BC 0.01 WB 0.03 Matrix-R	DEFL. Vert(LL) Vert(CT) Horz(CT)	in (loc) n/a - n/a - 0.00 20	l/defl L/d n/a 999 n/a 999 n/a n/a	PLATES MT20 Weight: 98 lb	GRIP 244/190 FT = 20%F, 11%E

LUMBER-BRACING-

2x4 SP No.1(flat) TOP CHORD BOT CHORD 2x4 SP No.1(flat) 2x4 SP No.3(flat) **WEBS OTHERS** 2x4 SP No.3(flat)

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.

BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 22-4-8.

(lb) - Max Grav All reactions 250 lb or less at joint(s) 38, 20, 37, 36, 35, 34, 33, 32, 30, 29, 28, 27, 26, 25, 24, 23, 22, 21

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) All plates are 1.5x3 MT20 unless otherwise indicated.
- 2) Plates checked for a plus or minus 1 degree rotation about its center.
- 3) Gable requires continuous bottom chord bearing.
- 4) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 5) Gable studs spaced at 1-4-0 oc.
- 6) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.



December 5,2023



Job Truss Truss Type Qty Lot 145 Duncans Creek 162356660 J1223-6845 FKW07 **GABLE** Job Reference (optional) 8.430 s Jan 6 2022 MiTek Industries, Inc. Mon Dec 4 15:53:27 2023 Page 1


Comtech, Inc,

Fayetteville, NC - 28314,

ID:Dm7ZyERNI?2o6wzlFxt7?MyCJDH-RfC?PsB70Hq3NSgPqnL8w3ulTXbGKWrCDoi7J4zJC?f

0_1_8 0-1-8

Scale = 1:15.6

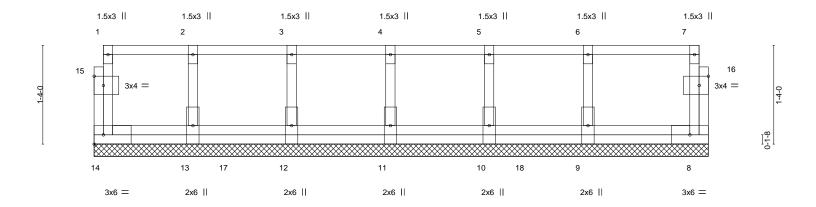

		1-4-0	1-4-0	1	1-4-0	1-4-0		-	1-4-0) '	1-7-8	
Plate Offs	sets (X,Y) [15:0-1-8,0-1-8], [16:0-1-8,0-1-8]									
LOADING	G (psf)	SPACING-	2-0-0	CSI.		DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip I	DOL 1.00	TC	0.10	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DC	DL 1.00	BC	0.03	Vert(CT)	n/a	-	n/a	999		
BCLL	0.0	Rep Stress	Incr YES	WB	0.03	Horz(CT)	0.00	8	n/a	n/a		
BCDL	5.0	Code IRC2	2015/TPI2014	Matri	x-R						Weight: 49 lb	FT = 20%F, 11%E

LUMBER-

2x4 SP No.1(flat) TOP CHORD BOT CHORD 2x4 SP No.1(flat)

WEBS 2x4 SP No.3(flat) **OTHERS** 2x4 SP No.3(flat) BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins,

except end verticals.

BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 8-3-8.

(lb) - Max Grav All reactions 250 lb or less at joint(s) 14, 8, 13, 12, 11, 10, 9

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Plates checked for a plus or minus 1 degree rotation about its center.
- 2) Gable requires continuous bottom chord bearing.
- 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 4) Gable studs spaced at 1-4-0 oc.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00 Uniform Loads (plf)

Vert: 8-14=-10. 1-7=-100 Concentrated Loads (lb)

Vert: 11=-92 17=-92 18=-92



December 5,2023



Symbols

PLATE LOCATION AND ORIENTATION



offsets are indicated and fully embed teeth Center plate on joint unless x, y Apply plates to both sides of truss Dimensions are in ft-in-sixteenths



edge of truss. plates 0- 1/16" from outside For 4 x 2 orientation, locate

₹

connector plates. required direction of slots in This symbol indicates the

* Plate location details available in MiTek software or upon request

PLATE SIZE

to slots. Second dimension is the length parallel to slots. width measured perpendicular The first dimension is the plate

LATERAL BRACING LOCATION



by text in the bracing section of the output. Use T or I bracing if indicated. ndicated by symbol shown and/or

BEARING



Min size shown is for crushing only number/letter where bearings occur reaction section indicates joint (supports) occur. Icons vary but Indicates location where bearings

ANSI/TPI1: Industry Standards: National Design Specification for Metal

DSB-22:

Plate Connected Wood Trusses Installing, Restraining & Bracing of Metal Guide to Good Practice for Handling, Building Component Safety Information, Design Standard for Bracing. Plate Connected Wood Truss Construction.

Numbering System



JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

Product Code Approvals

ICC-ES Reports:

ESR-1988, ESR-2362, ESR-2685, ESR-3282 ESR-4722, ESL-1388

Design General Notes

truss unless otherwise shown Trusses are designed for wind loads in the plane of the

established by others section 6.3 These truss designs rely on lumber values Lumber design values are in accordance with ANSI/TPI 1

© 2023 MiTek® All Rights Reserved

MiTek



MiTek Engineering Reference Sheet: MII-7473 rev. 1/2/2023

General Safety Notes

Damage or Personal Injury Failure to Follow Could Cause Property

- Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI
- Ņ Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
- Never exceed the design loading shown and never stack materials on inadequately braced trusses.
- Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
- Cut members to bear tightly against each other

'n

- joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TPI 1. Place plates on each face of truss at each
- Design assumes trusses will be suitably protected from the environment in accord with ANSI/TPI 1.
- Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.

œ

- Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
- Camber is a non-structural consideration and is the camber for dead load deflection responsibility of truss fabricator. General practice is to
- 11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
- Lumber used shall be of the species and size, and in all respects, equal to or better than that
- Top chords must be sheathed or purlins provided at spacing indicated on design.
- Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
- 15. Connections not shown are the responsibility of others
- Do not cut or alter truss member or plate without prior approval of an engineer.
- Install and load vertically unless indicated otherwise.
- Use of green or treated lumber may pose unacceptable project engineer before use. environmental, health or performance risks. Consult with
- 19. Review all portions of this design (front, back, words is not sufficient. and pictures) before use. Reviewing pictures alone
- Design assumes manufacture in accordance with ANSI/TPI 1 Quality Criteria.
- 21. The design does not take into account any dynamic or other loads other than those expressly stated.