




System:
 Repair:

System: Gravity to Serial Dist. Lines: 4-7, (345') Accepted Status System 0.3 Soil LTAR 22" Trench Bottom
Repair: Pressure Manifold Lines: 1-3,8 (205') T&J Panel 50% Reduction 0.3 Soil LTAR 22" Trench Bottom

- *Keep tanks and drain lines 10' from property lines.
- *Not a survey.
- *Not a guarantee of a septic permit.
- *Keep supply lines >5' from property lines.
- *Some lines are flagged longer in the field than lengths indicate.
- *No grading septic area.

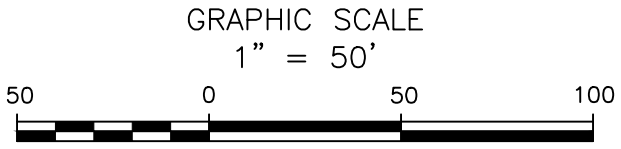

Central Carolina Soil Consulting, PLLC
 1900 South Main Street, Suite 110
 Wake Forest, North Carolina 27587
 Phone (919)569-6704 Fax (919)569-6703

3-Bedroom Septic Layout
 Lot 62, Birchwood Subdivision
 Harnett County, North Carolina

Job# : 3753
Drawn By : LW
Date : 04/15/2023
Revision: