


Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
1	21' 0"	14" BCI® 5000s-1.8	1	12	MFD
2	21' 0"	14" BCI® 5000s-1.8	2	4	MFD
3	19' 0"	14" BCI® 5000s-1.8	1	1	MFD
4	19' 0"	14" BCI® 5000s-1.8	2	2	MFD
5	18' 0"	14" BCI® 5000s-1.8	1	6	MFD
6	18' 0"	14" BCI® 5000s-1.8	2	2	MFD
7	16' 0"	14" BCI® 5000s-1.8	1	23	MFD
8	9' 0"	14" BCI® 5000s-1.8	1	3	MFD
9	8' 0"	14" BCI® 5000s-1.8	1	5	MFD
10	5' 0"	14" BCI® 5000s-1.8	1	6	FF
11	5' 0"	14" BCI® 5000s-1.8	2	2	MFD
12	8' 0"	1-3/4" x 9-1/4" VERSA-LAM® LVL 2.1E 3100 SP	2	2	FF
13	22' 0"	1-3/4" x 16" VERSA-LAM® LVL 2.1E 3100 SP	3	3	FF
Rm-1	12' 0"	1" x 14" BC RIM BOARD OSB	1	11	FF
Bk1	2' 0"	14" BCI® 5000s-1.8	1	6	FF
Bk2	2' 0"	14" BCI® 5000s-1.8	1	41	MFD

Connector Summary			
PlotID	Qty	Manuf	Product
H1	1	Simpson	HU4.12/11
H2	13	Simpson	IUS2.06/14

**Second Floor Layout**

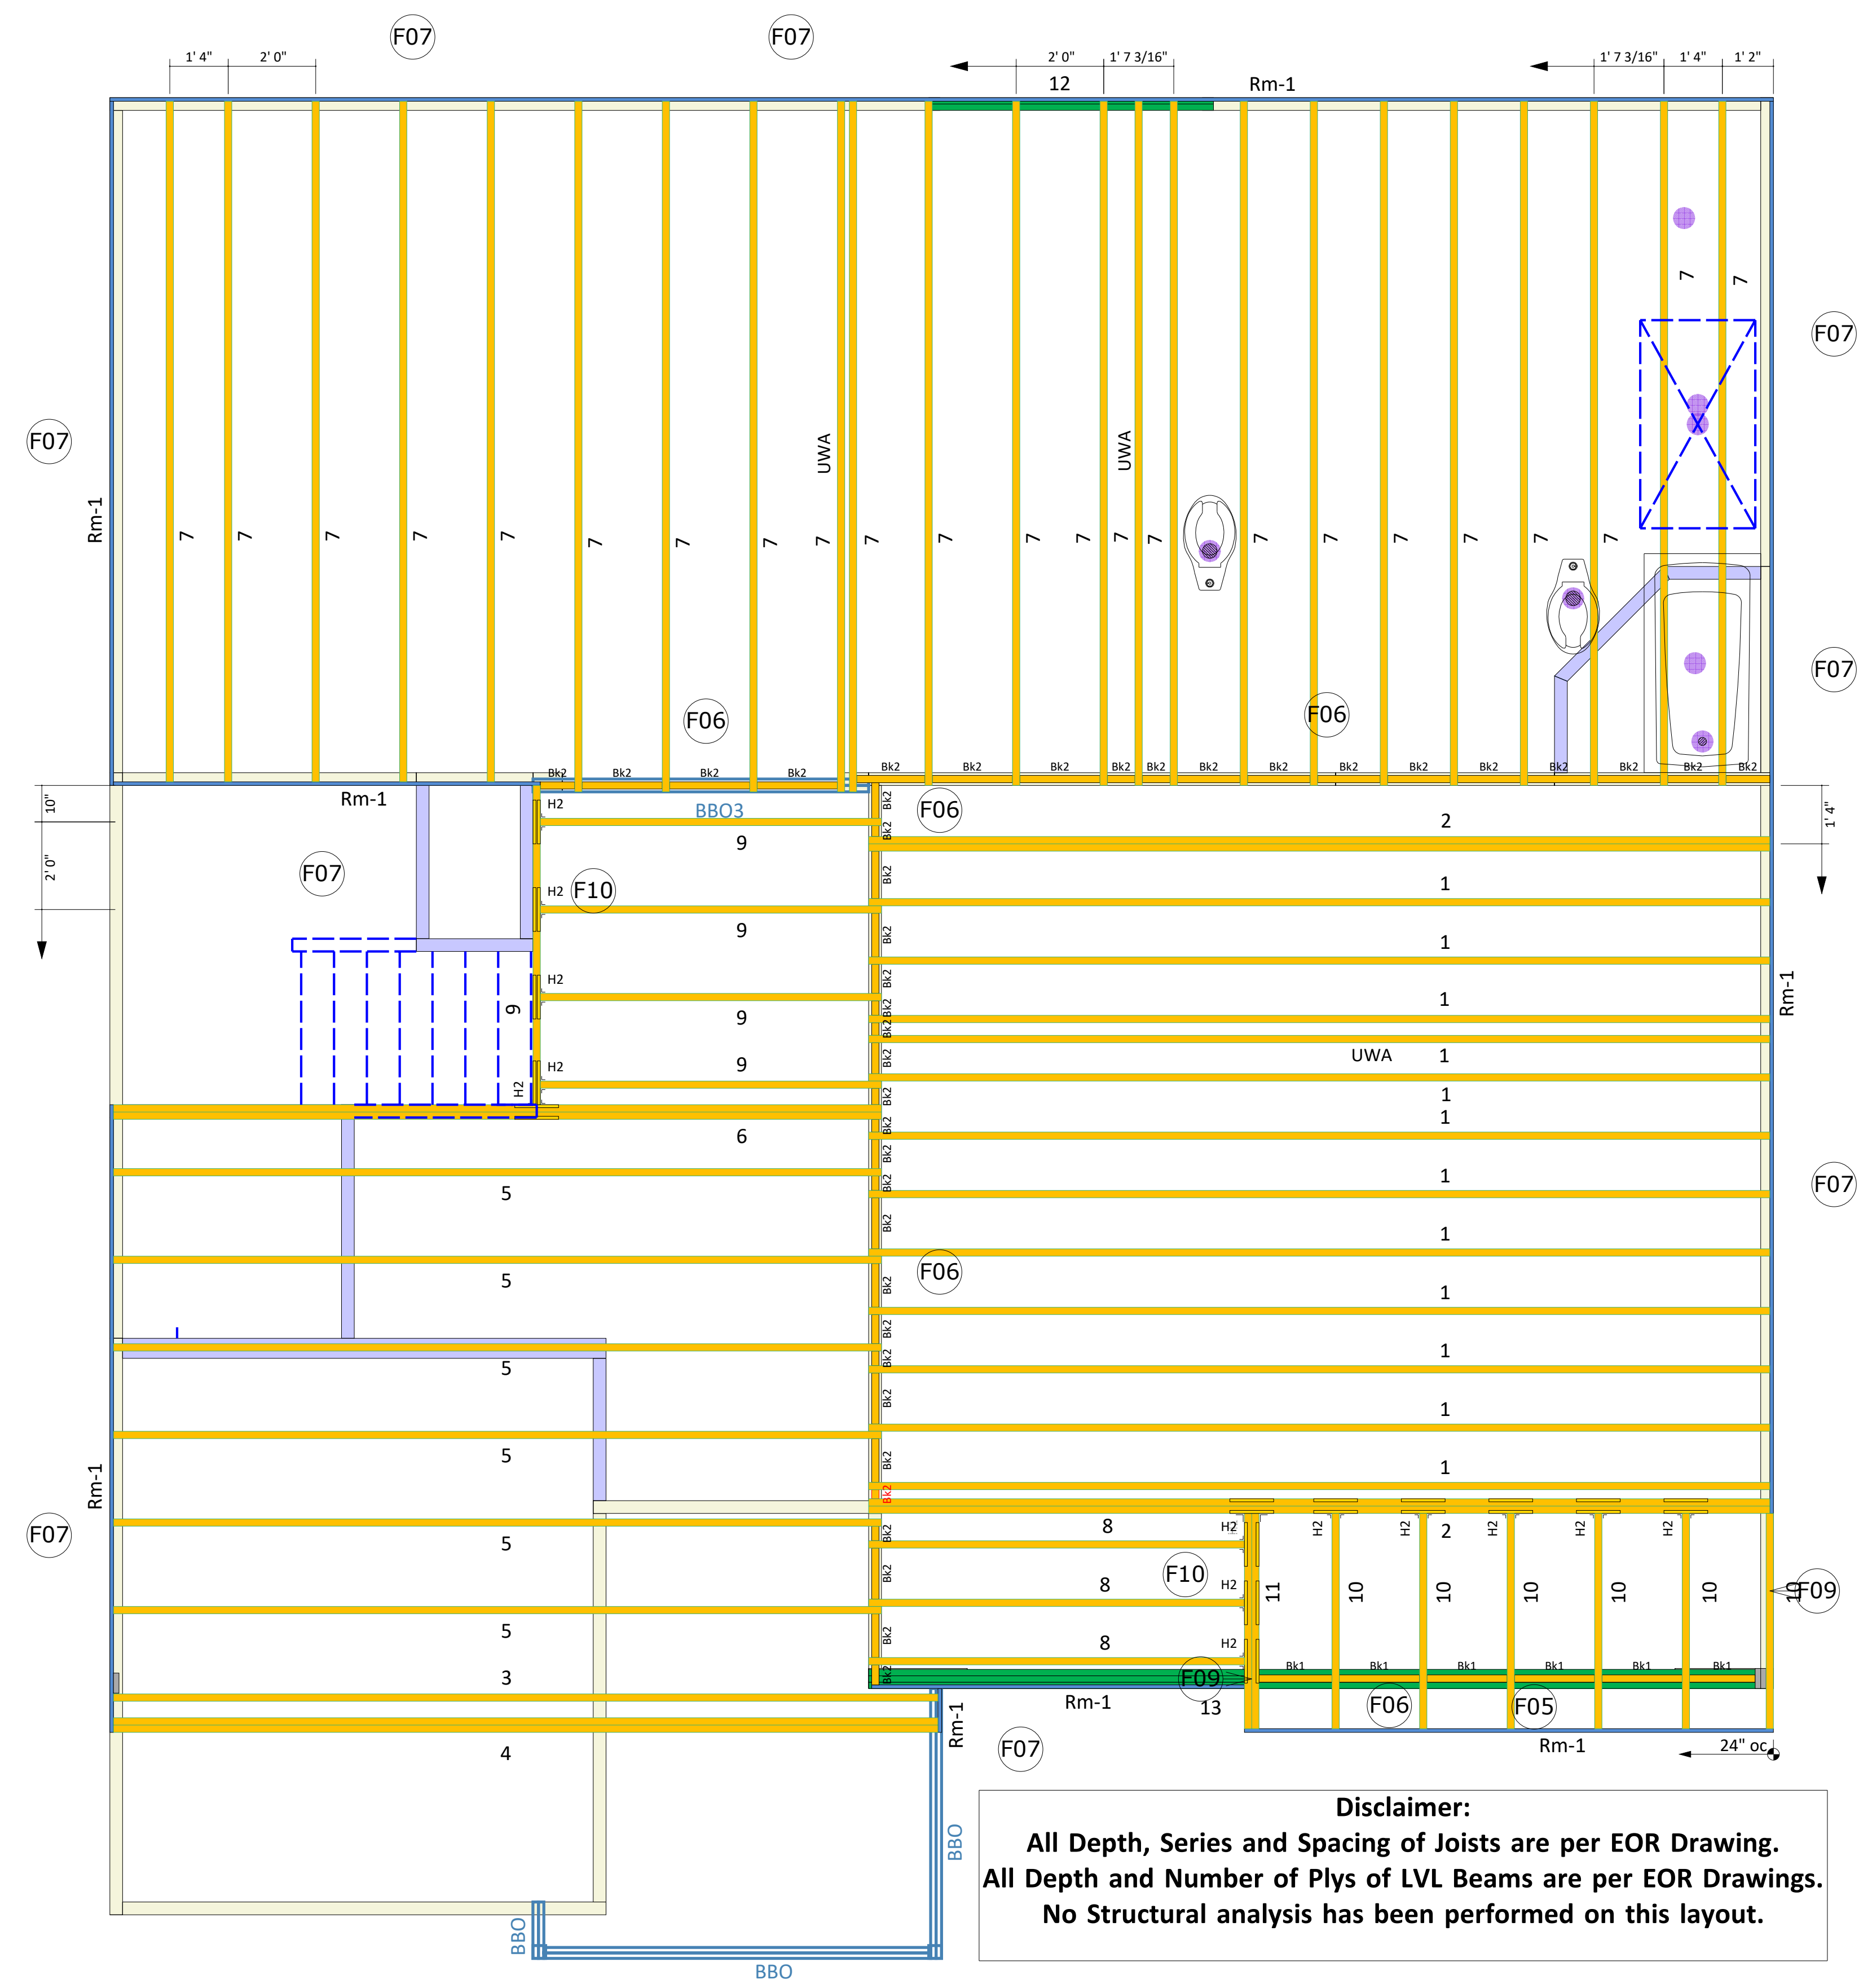

**Disclaimer:**  
 All Depth, Series and Spacing of Joists are per EOR Drawing.  
 All Depth and Number of Plies of LVL Beams are per EOR Drawings.  
 No Structural analysis has been performed on this layout.

Indicates "NO CUT END" === Material to be Trimmed from OTHER END ONLY

**\*\*\* ANY Concealed Flange Hangers MUST be installed PRIOR to Setting the Carried Members! \*\*\***

**International Residential Code - R502.8.2 Engineered Wood Products** - - - Cuts, notches and holes bored in trusses, laminated veneer lumber, glue-laminated members or I-joists are not permitted unless such penetrations are specifically considered in the design of the member or meet the manufacturers guidelines.

Builder or framer should review this material placement layout prior to beginning construction of floor system. This layout DOES NOT supersede the plan set.

Dimensions to any obstructions are approximate and should be field verified. Any discrepancies will be reported prior to floor installation.

Squash blocks shall be installed under all point loads, and are to be greater than or equal to the dimensions of the post transferring the load from above.

All materials, (EWP, hangers etc.) shall be installed per manufacturer specific installation guides.

Plan Information	
Lot Number: 59 Birchwood Grove	
Model: 2338 A	
Builder: KB Homes	
Boise BC FRAMER II / SAPHIRE Structure	
Plan Date: 2/28/2020	
Structural Date: 2/28/2020	
<b>Not To Scale</b>	By: GO
Sheet: 2F	Current Date: Enter Current Date