


4-Bedroom Septic Plan
 Lot #51 - Duncan's Crossing
 Harnett County
 Smith Douglas Homes

*House footprint to be field staked by surveyor and system verified prior to any construction

**Septic area must not be altered by construction activities.

***No cuts of 2' or greater within 15' of septic area

**** Recommend protective barrier around septic field during construction.

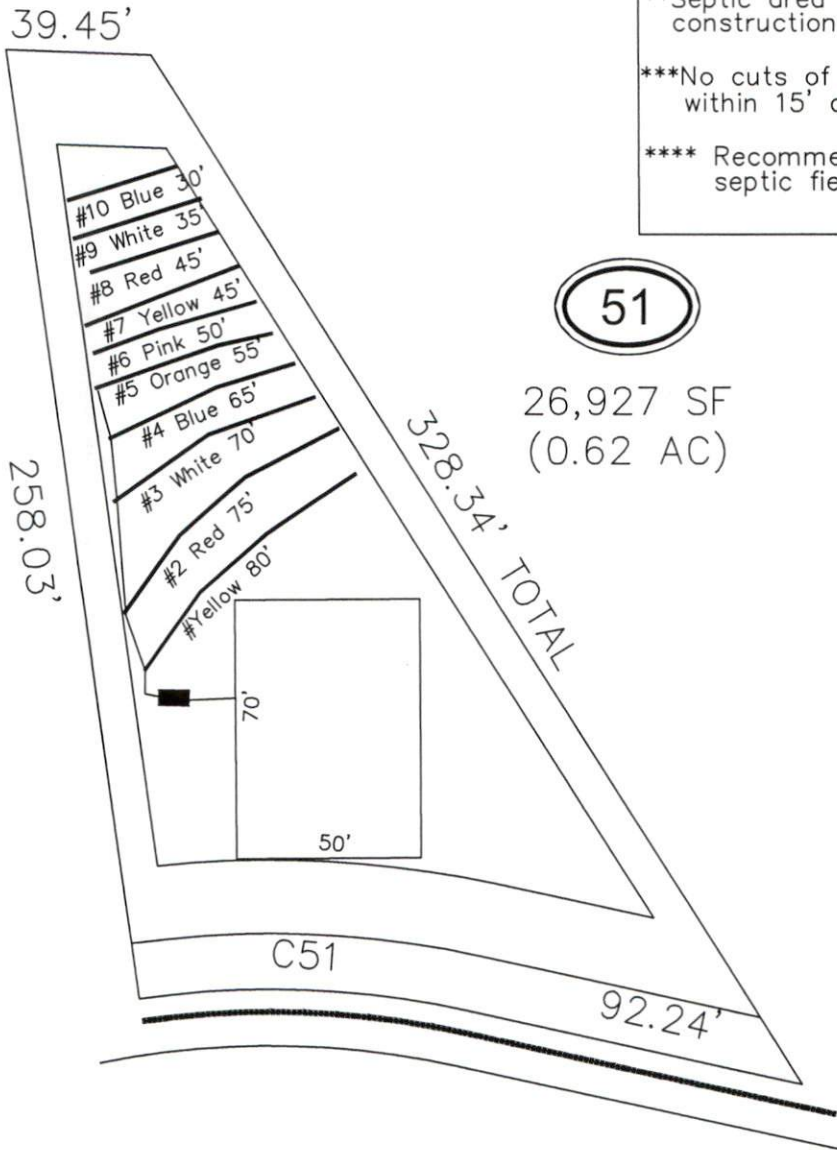

51

26,927 SF
 (0.62 AC)

*If plumbing is not sufficient a pump tank will be required to septic field.

System: Gravity to serial dist.
 Lines: Lines 1-5 (340')
 0.4 LTAR
 24" Max Trench Bottom
 Accepted Status System
 Repair: Gravity to Serial Dist.
 Lines: Lines 6-10 (200')
 0.4 LTAR
 24" Trench Bottom
 Accepted Status System

DECOY SPREAD
 50' R/W (PUBLIC
 & UTILITY ACCESS)

GRAPHIC SCALE
 1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #1146