




Client: WEAVER  
 Project:  
 Address:

Date: 2/14/2024  
 Input by: Lenny Norris  
 Job Name: LINDSAY B 3-CAR  
 Project #:

**GDH9' 3-car Kerto-S LVL 1.750" X 11.875" 2-Ply - PASSED**

Level: Level

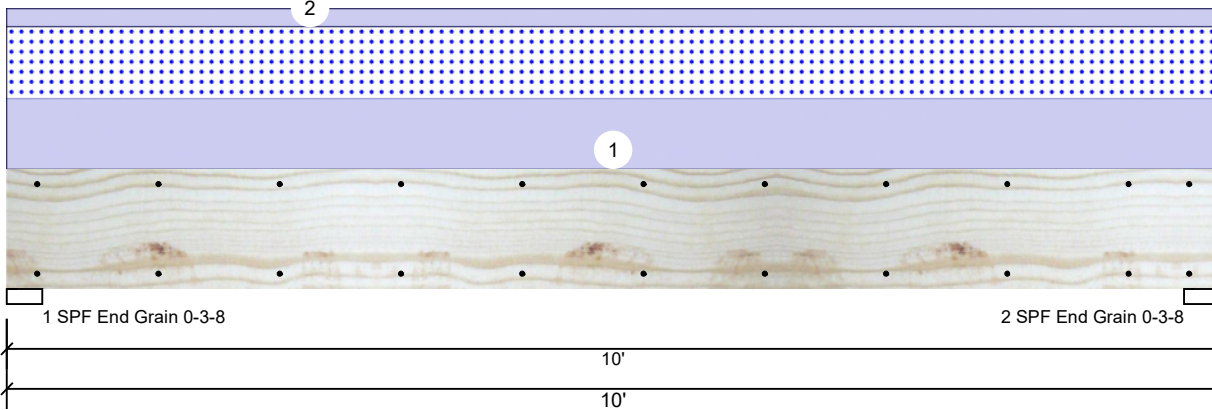

**Member Information**

|                     |               |                |              |
|---------------------|---------------|----------------|--------------|
| Type:               | Girder        | Application:   | Floor        |
| Plies:              | 2             | Design Method: | ASD          |
| Moisture Condition: | Dry           | Building Code: | IBC/IRC 2015 |
| Deflection LL:      | 480           | Load Sharing:  | No           |
| Deflection TL:      | 360           | Deck:          | Not Checked  |
| Importance:         | Normal - II   |                |              |
| Temperature:        | Temp <= 100°F |                |              |

**Reactions UNPATTERNED lb (Uplift)**

| Brg | Direction | Live | Dead | Snow | Wind | Const |
|-----|-----------|------|------|------|------|-------|
| 1   | Vertical  | 0    | 1511 | 1165 | 0    | 0     |
| 2   | Vertical  | 0    | 1511 | 1165 | 0    | 0     |

**Bearings**

| Bearing           | Length | Dir. | Cap. | React D/L lb | Total | Ld. Case | Ld. Comb. |
|-------------------|--------|------|------|--------------|-------|----------|-----------|
| 1 - SPF End Grain | 3.500" | Vert | 26%  | 1511 / 1165  | 2676  | L        | D+S       |
| 2 - SPF End Grain | 3.500" | Vert | 26%  | 1511 / 1165  | 2676  | L        | D+S       |

**Analysis Results**

| Analysis     | Actual         | Location | Allowed       | Capacity    | Comb. | Case |
|--------------|----------------|----------|---------------|-------------|-------|------|
| Moment       | 6091 ft-lb     | 5'       | 22897 ft-lb   | 0.266 (27%) | D+S   | L    |
| Unbraced     | 6091 ft-lb     | 5'       | 9721 ft-lb    | 0.627 (63%) | D+S   | L    |
| Shear        | 2000 lb        | 1'3 3/8" | 10197 lb      | 0.196 (20%) | D+S   | L    |
| LL Defl inch | 0.052 (L/2209) | 5'       | 0.239 (L/480) | 0.217 (22%) | S     | L    |
| TL Defl inch | 0.119 (L/962)  | 5'       | 0.318 (L/360) | 0.374 (37%) | D+S   | L    |

**Design Notes**

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be laterally braced at end bearings.
- 7 Bottom must be laterally braced at end bearings.
- 8 Lateral slenderness ratio based on single ply width.

| ID | Load Type   | Location | Trib Width | Side | Dead 0.9 | Live 1 | Snow 1.15 | Wind 1.6 | Const. 1.25 | Comments        |
|----|-------------|----------|------------|------|----------|--------|-----------|----------|-------------|-----------------|
| 1  | Uniform     |          |            | Top  | 233 PLF  | 0 PLF  | 233 PLF   | 0 PLF    | 0 PLF       | D1 TRUSS        |
| 2  | Uniform     |          |            | Top  | 60 PLF   | 0 PLF  | 0 PLF     | 0 PLF    | 0 PLF       | FRAME DOWN WALL |
|    | Self Weight |          |            |      | 9 PLF    |        |           |          |             |                 |

**Notes**

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

**Lumber**

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

**Handling & Installation**

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 6/28/2026

**Manufacturer Info**



Metsä Wood  
 301 Merritt 7 Building, 2nd Floor  
 Norwalk, CT 06851  
 (800) 622-5850  
[www.metsawood.com/us](http://www.metsawood.com/us)

Comtech, Inc.  
 1001 S. Reilly Road, Suite #639  
 Fayetteville, NC  
 USA  
 28314  
 910-864-TRUS



**GDH18' Kerto-S LVL 1.750" X 14.000" 2-Ply - PASSED**

Level: Level

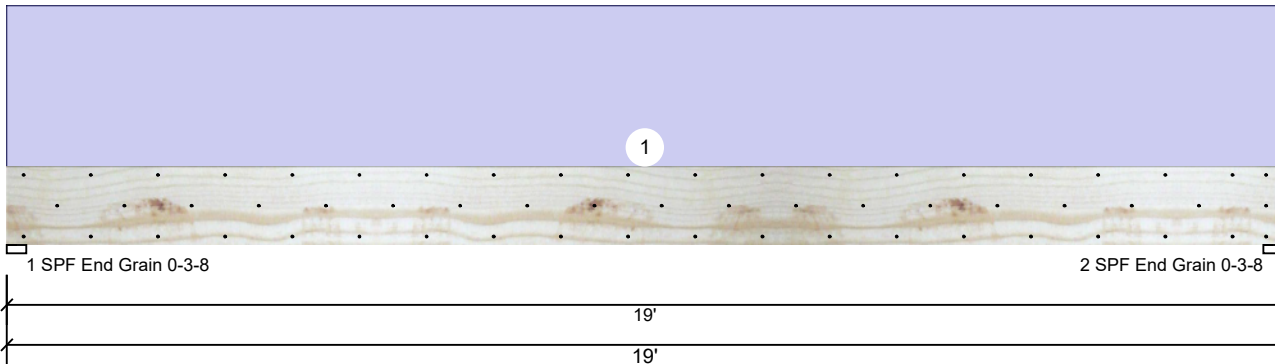

**Member Information**

|                     |               |                |              |
|---------------------|---------------|----------------|--------------|
| Type:               | Girder        | Application:   | Floor        |
| Plies:              | 2             | Design Method: | ASD          |
| Moisture Condition: | Dry           | Building Code: | IBC/IRC 2015 |
| Deflection LL:      | 480           | Load Sharing:  | No           |
| Deflection TL:      | 360           | Deck:          | Not Checked  |
| Importance:         | Normal - II   |                |              |
| Temperature:        | Temp <= 100°F |                |              |

**Reactions UNPATTERNED lb (Uplift)**

| Brg | Direction | Live | Dead | Snow | Wind | Const |
|-----|-----------|------|------|------|------|-------|
| 1   | Vertical  | 0    | 2003 | 0    | 0    | 0     |
| 2   | Vertical  | 0    | 2003 | 0    | 0    | 0     |

**Bearings**

| Bearing           | Length | Dir. | Cap. | React D/L lb | Total | Ld. Case | Ld. Comb. |
|-------------------|--------|------|------|--------------|-------|----------|-----------|
| 1 - SPF End Grain | 3.500" | Vert | 19%  | 2003 / 0     | 2003  | Uniform  | D         |
| 2 - SPF End Grain | 3.500" | Vert | 19%  | 2003 / 0     | 2003  | Uniform  | D         |

**Analysis Results**

| Analysis     | Actual        | Location  | Allowed       | Capacity     | Comb. | Case    |
|--------------|---------------|-----------|---------------|--------------|-------|---------|
| Moment       | 9063 ft-lb    | 9'6"      | 24299 ft-lb   | 0.373 (37%)  | D     | Uniform |
| Unbraced     | 9063 ft-lb    | 9'6"      | 9077 ft-lb    | 0.998 (100%) | D     | Uniform |
| Shear        | 1709 lb       | 1'5 1/2"  | 9408 lb       | 0.182 (18%)  | D     | Uniform |
| LL Defl inch | 0.000 (L/999) | 0         | 999.000 (L/0) | 0.000 (0%)   |       |         |
| TL Defl inch | 0.372 (L/599) | 9'6 1/16" | 0.618 (L/360) | 0.601 (60%)  | D     | Uniform |

**Design Notes**

- Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- Fasten all plies using 3 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- Refer to last page of calculations for fasteners required for specified loads.
- Girders are designed to be supported on the bottom edge only.
- Top loads must be supported equally by all plies.
- Top must be laterally braced at a maximum of 12'3 3/4" o.c.
- Bottom must be laterally braced at end bearings.
- Lateral slenderness ratio based on single ply width.

| ID | Load Type   | Location | Trib Width | Side | Dead 0.9 | Live 1 | Snow 1.15 | Wind 1.6 | Const. 1.25 | Comments                |
|----|-------------|----------|------------|------|----------|--------|-----------|----------|-------------|-------------------------|
| 1  | Uniform     |          |            | Top  | 200 PLF  | 0 PLF  | 0 PLF     | 0 PLF    | 0 PLF       | FRAME DOWN WALL & GABLE |
|    | Self Weight |          |            |      | 11 PLF   |        |           |          |             |                         |

**Notes**

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

**Lumber**

- Dry service conditions, unless noted otherwise
- LVL not to be treated with fire retardant or corrosive chemicals

**Handling & Installation**

- LVL beams must not be cut or drilled
- Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
- Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 6/28/2026

**Manufacturer Info**

Metsä Wood  
 301 Merritt 7 Building, 2nd Floor  
 Norwalk, CT 06851  
 (800) 622-5850  
[www.metsawood.com/us](http://www.metsawood.com/us)

Comtech, Inc.  
 1001 S. Reilly Road, Suite #639  
 Fayetteville, NC  
 USA  
 28314  
 910-864-TRUS

