Harnett County Environmental Health

File/Permit Number: SFD2402-0018 IMPROVEMENT PERMIT County: Harnett PIN/Lot Identifier: 0643-35-8631.000 Lot14 Applicant: Lilium Homes Owner: Lilium Homes Property Location: 300 HOOK DR FUQUAY-VARINA, NC 27526, SR 1426 Cotton Rd Subdivision (if applicable) COTTON FARMS ___ Lot #: 14 System Relocation Change of Use Expansion New 🔳 Facility Type: SFD 60' X 60' Number of bedrooms: 4 Number of Occupants: 8 Other: ☐ Industrial Process Wastewater High Strength Design Wastewater Strength: Domestic Proposed LTAR (Initial): .3 Proposed LTAR (Repair): .3 Proposed Design Daily Flow: 480 Proposed Wastewater System Type*: 25% Reduction System (Initial) Pump Required: Yes No May be required Proposed Wastewater System Type*: 50% Reduction System (Repair) Pump Required: Yes No May be required *Please include system classification for proposed wastewater system types in accordance with Rule .1301 Table XXXII Effluent Standard: DSE HSE NSF/ANSI 40 TS-I TS-II RCW Saprolite System (Repair): Yes No Saprolite System (Initial): Yes No Fill System (Initial): Yes No If yes, specify: New Existing (when adding more than 6 inches of fill to system area provide a fill plan) Fill System (Repair): Yes No If yes, specify: New Existing (when adding more than 6 inches of fill to system area provide a fill plan) Usable Depth to LC (Repair)x: 38" * Limiting Condition Usable Depth to LC (Initial)x: 38" Max. Trench Depth (Initial)*: 18"-24" Max. Trench Depth (Repair)*: 18"-24" * Measured on the downhill side of the trench Artificial Drainage Required: Yes No If yes, please specify details: Type of Water Supply: Private well Public well Shared well Municipal Supply Spring Other: Drainfield location meets requirements of Rule .0508: Yes 🔳 No 🗌 Drainfield location meets requirements of Rule .0601: Yes 🔳 No 🗍 Permit valid for: Five years [site plan submitted pursuant to GS 130A-334(13a)] No expiration [plat submitted pursuant to GS 130A-334(7a)] Permit conditions: No Foundation or Gutter Drain to be Directed Towards Septic System. 4-15-30 Ren , Levocz Expiration Date: _ Authorized Agent's Printed Name: Authorized Agent's Signature *See attached site sketch*

The issuance of this permit in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. <u>This permit is subject to revocation if the site plan, plat, or the intended use changes.</u> The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of 15A NCAC 18E and to the conditions of this permit.

Harnett County Environmental Health

	File/Permit Number: SFD2402-0018
	CONSTRUCTION AUTHORIZATION
Harnett	0643-35-8631 000 L ot14
Lilium Homes	Applicant: Lillium Homes
Owner: Lilium Homes	OK DR FUQUAY-VARINA, NC 27526, SR 1426 Cotton Rd
Facility Type: SFD 60' X 60	0'
Number of bedrooms: 4	Number of Occupants: 8 Other:
■ New	
Basement? Yes	■ No Basement Fixtures?
Crawl Space?	□ No Slab Foundation? □ Yes ■ No
Type of Wastewater System*	25% Reduction System (Initial) 50% Reduction System (Repair)
*Please include system classij	fication for proposed wastewater system types in accordance with Rule .1301 Table XXXII
	GPD Wastewater Strength: Domestic High Strength Industrial Process Wastewater
Rule .0403(e) Engineering De (if yes, please provide engine	sign Utilizing Low-flow Fixtures and Low-flow Technologies (S.L. 2013-413 and 2014-120)? Yes No ering documentation)
	HSE NSF/ANSI 40 TS-I TS-II RCW
Type of Water Supply: Pri	vate well Public well Shared well Municipal Supply Spring Other:
Installation Requirements/C	onditions
Septic Tank Size: 1,000	gallons Total Trench/Bed Length: 400' feet Trench/Bed Spacing: 9' feet on center
Trench/Bed Width: 36"	inches LTAR: .3 gpd/ft ² Usable Depth to LC (Initial) ³ : 30 *Limiting condition
Soil Cover: 6" inches	Slope Corrected Maximum Trench/Bed Depth [‡] : 18"-24" inches * Measured on the downhill side of the trench
): 1,000 gallons Requires more than one pump? Yes No
Pump Requirements:	ft. TDH vs GPM Grease Trap Size (if applicable): gallons
Distribution Method: Ser	rial D-Box or Parallel Pressure Manifold(s) LPP Other: 4 - 100 Lines
Artificial Drainage Required:	Yes No III If yes, please specify details:
Legal Agreements (If the ons	wer is "Yes" to any type of legal agreements, please attach a copy of the agreement.)
Multi-party Agreement Requ	ired [Rule .0204(g)]: Yes No
	Encroachment Agreement Required [Rule .0204(d)]: Yes No
Declaration of Restrictive Co	venants: Yes No Pre-Construction Conference Required: Yes No
Management Entity Required	d: Yes No Minimum O&M Requirements:
Conditions: No Foundation	on or Gutter Drain to be Directed Towards Septic System.
with the attached site sketch	CAC 18E are incorporated by reference into this permit and shall be met. Systems shall be installed in accordance the <u>This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes.</u> The shall not be affected by a change in ownership of the site. This Construction Authorization is subject to compliance ICAC 18E, or 15A NCAC 18A .1900, as applicable, and to the conditions of this permit.
	4.15.30
Authorized Agent's Printed	. U. v. a. r
Authorized Agent's Signature	*See attached site sketch*

Harnett County Environmental Health

SITE SKETCH

0643-35-8631.000

Permit Number SFD2402-0018

Lilium Homes

Applicant's Name

Authorized State Agent


COTTON FARMS Lot14

Subdivision/Section/Lot Number

4.15-23

Date

System components represent approximate contours only. The contractor must flag the system prior to beginning the installation to ensure that the proper grade is maintained.

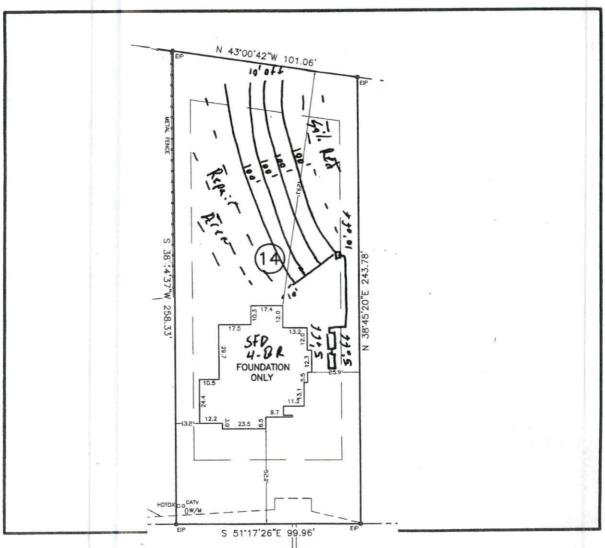

HOOK DRIVE

(50' PUBLIC R/W)