


2" TRIM CAP
ABOVE 8" TRIM
J = U" PLATE

BOARD & BATTEN (TYP.)

APPLIED STONE (TYP.)

> PROVIDE HANDRAIL WHEN REQUIRED BY

CODE

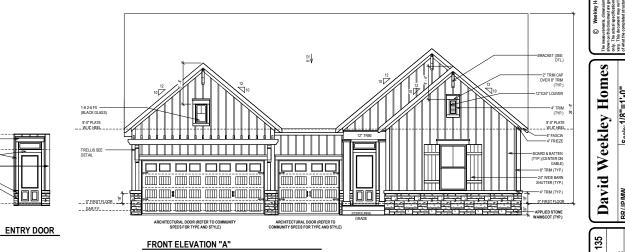

Scale: 1/8"=1'-0" Rev: 1/31/24 AM

> BR/JP/MW Date: 03/09/2021

Block:

Proj. No.: 3277 Job No.: 0135

SERENITY 65' 552 SERENITY WALK PARKWAY FUQUAY VARINA, NC


SOUTH


B326-A ELV-1


BLAKESTONE


RALEIGH

Lot



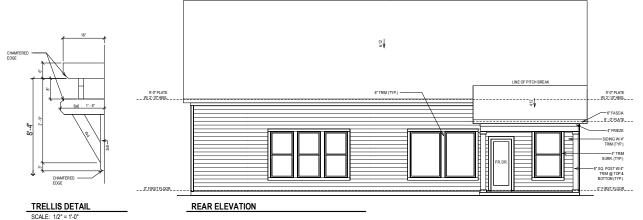

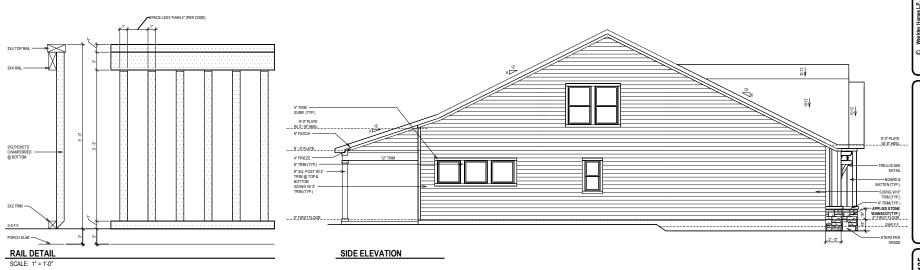

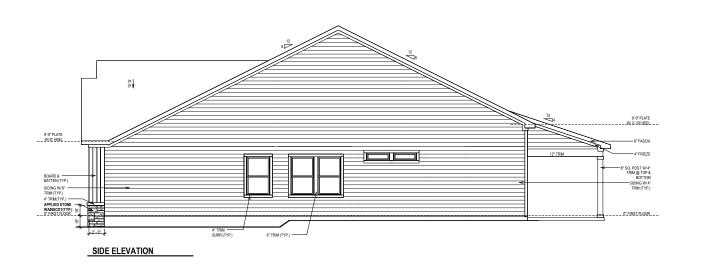

 David Weekley Homes
 Internet Properties

 BRJPIMW
 Scale: 1/8"=1"-0"

 Date: 03/09/2021
 Rev: 1/31/24 AM

9777 Lot: 135 3277 Block: Job No.: Block: 0135 Sect:

SERENITY 65' 552 SERENITY WALK PARKWAY FUQUAY VARINA, NC

SOUTH
B326-A
ELV-2
BLAKESTONE
RALEIGH

SHEET INDEX:

S-0 COVER SHEET S-0.1 GENERAL STRUCTURAL NOTES

MONOLITHIC SLAB FOUNDATION PLAN

S-2 ROOF FRAMING PLAN

SD-1 BRACED WALL DETAILS SD-2 HOLD DOWN DETAILS BRACED WALL NOTES & DETAILS SD-3

SD-4 PORTAL FRAME DETAILS

SD-5 MISCELLANEOUS FRAMING DETAILS SD-6 MISCELLANEOUS FRAMING DETAILS

MONOLITHIC SLAB FOUNDATION DETAILS SD-7 SD-8

SD-9 NOT USED SD-10 NOT USED NOT USED

SD-11

SD-12 ADVANCED FRAMING DETAILS & NOTES



1900 AM DRIVE, SUITE 201, QUAKERTOWN, PA 18951 www.kse-eng.com (215) 804-4449

B326 BLAKESTONE SERENITY, LOT #135

RALEIGH, NORTH CAROLINA

THESE DRAWINGS ARE TO BE USED IN CONJUNCTION WITH AND COORDINATED WITH THE ARCHITECTURAL, CIVIL, MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS. THIS COORDINATION IS NOT THE RESPONSIBILITY OF THE RECORDING LENGINEER OF RECORD (SER). SHOULD ANY DISORPEANAUES BECOME APPARENT, THE CONTRACTOR SHALL NOTIFY KSE ENGINEERING, P. SEFORE CONSTRUCTION BEGINS. IT IS THE INTELL OF THE ENGINEER LISTED ON THESE DOCUMENTS PLAND THE THESE DOCUMENTS BE ACCURATE, PROVIDING LENSEED PROFESSIONALS CLEAR INFORMATION. EVERY ATTEMPT HAS BEEN MADE TO PREVENT ERROR. THE BUILDER AND ALL SUBCONTRACTORS ARE REQUIRED TO REVIEW ALL OF THE INFORMATION CONTRACTED IN THESE DOCUMENTS PRIOR TO THE COMMENCEMENT OF ANY WORK. THE ENOINEER IS NOT RESPONSIBLE TO RANT PLAN ERRORS, OMISSIONS, OR MISMITERPRETATIONS UNDETECTED AND NOT REPORTED TO THE SOMERER FROM TO CONSTRUCTION. ALL CONSTRUCTION MUST BE IN ACCORDANCE TO THE INFORMATION FOUND IN THESE DOCUMENTS.

DESIGN SPECIFICATIONS:

DESIGN BUILDING CODE (REFERRED TO HEREIN AS 'THE BUILDING CODE'):

2018 NORTH CAROLINA RESIDENTIAL CODE, WALL BRACING PER INTERNATIONAL RESIDENTIAL

CODE 2015 EDITION.

ROOF = 20 PSF (LOAD DURATION FACTOR=1.25)

- UNINHABITABLE ATTICS WITH LIMITED STORAGE = 20 PSF (WHERE SPECIFIED ON PLANS)

- HABITABLE ATTICS AND ATTICS SERVED WITH FIXED STAIRS = 30 PSF

- FLOOR (SLEEPING AREAS) = 30 PSF
- DECK/BALCONY = 40 PSF
 STAIRS = 40 PSF

DESIGN DEAD LOADS:

- ROOF TRUSS = 17 PSF (TC=7, BC=10) FLOOR TRUSS = 15 PSF (TC=10, BC=5)
- FLOOR JOIST = 10 PSF STANDARD BRICK = 40 PSF
- · QUEEN ANNE BRICK = 25 PSF

NOTE: STRUCTURAL FRAMING HAS NOT BEEN DESIGNED FOR TILE, GRANITE, MARBLE OR OTHER MATERIALS HEAVIER THAN THE ABOVE LOADING UNLESS SPECIFICALLY NOTED ON PLANS..

DESIGN WIND LOADS:

• ULTIMATE WIND SPEED = 115 MPH

• EXPOSURE CATEGORY = B

ASSUMED SOIL BEARING CAPACITY = 2000 PSF

ASSUMED LATERAL SOIL PRESSURE = 45 PCF

FROST DEPTH = 12" MINIMUM

SEISMIC DESIGN CATEGORY = B

ENGINEERED LUMBER SHALL HAVE THE FOLLOWING MINIMUM DESIGN VALUES:

* TJI 210 SERIES (SERIES AND SPACING PER PLANS)

LSL: E=1,550,000 PSI, F₈=2,325 PSI, F₄=310 PSI, F₆=900 PSI

LVL: E=2,000,000 PSI, F₈=2,600 PSI, F₈=286 PSI, F₆=50 PSI

PSI: E=2,100,000 PSI, F₈=2,900 PSI, F₆=290 PSI, F₆=625 PSI



David Weekley Homes

Serenity, Lot #135 B326 Blakestone Model North H. H. 115

Cover Project #: 047-22002 Designed By:LMR

Checked By: Issue Date: 3/18/24

Sheet

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34



- THE DESIGN PROFESSIONAL WHOSE SEAL APPEARS ON THESE DRAWINGS IS THE STRUCTURAL ENGINEER OF RECORD (SER) FOR THIS PROJECT. THE SER BEARS THE RESPONSIBILITY OF THE PRIMAR STRUCTURAL ELEMENTS AND THE PERFORMANCE OF THIS STRUCTURE.
 NO OTHER PARTY MAY REVISE, ALTER, OR DELETE ANY STRUCTURAL
 ASPECTS OF THESE CONSTRUCTION DOCUMENTS WITHOUT WRITTEN ASPECTS OF THESE CONSTRUCTION DOCUMENTS WITHOUT WRITTEN CONSENT OF KEE ENGINEERING P.C. OR THE SET, FOR THE PURPOSES OF THESE CONSTRUCTION DOCUMENTS, THE SER AND KSE ENGINEERING SHALL BE CONSIDERED THE SAME ENTITY. THE STRUCTURE IS DONLY STABLE IN ITS COMPLETED FORM. THE CONTRACTOR SHALL PROVIDE ALL REQUIRED THEOPORATY BRACKING DURING CONSTRUCTION TO STABILIZE THE STRUCTURE. THE SET IS NOT RESPONSIBLE FOR CONSTRUCTION SCULENCES, METHODS, OR TECHNIQUES IN CONNECTION WITH THE CONSTRUCTION OF THIS STRUCTURE. THE SET WILL NOT BE HELD RESPONSIBLE FOR
- THE CONTRACTOR'S FAILURE TO CONFORM TO THE CONTRACT
- THE CONTRACTOR'S FAILURE TO CONFORM TO THE CONTRACT DOCUMENTS, SHOULD ANY NON-CONFORMITES COCUR.
 THE SER DOES NOT CERTIFY DIMENSIONAL ACCURACY OR ARCHITECTURAL LAYOUT INCLUDING ROOF GEOMETRY. THE SER ASSUMES NO LUBBILITY FOR CHANGES MADE TO THESE PLANS BY OTHERS, OR FOR CONSTRUCTION METHODS, OR FOR ANY DEVANTON FROM THE PLANS. THE SER SHALL BE NOTIFIED PRIOR TO CONSTRUCTION IF ANY DISCREPANCIES ARE NOTIFIED PRIOR TO CONSTRUCTION IF ANY DISCREPANCIES ARE NOTIFIED ON THE PLANS. ANY STRUCTURAL ELEMENTS OR DETAILS NOT FULLY DEVELOPED ON THE CONSTRUCTIONS SHALL BE CONSESSED SHALL BE CONSESSED THE DEVELOPED ON THE CONSTRUCTION DEMANDS SHALL BE CONSESSED THE DISCREPANCES ARE NOTIFIED THE DISCREPANCES ARE NOTIFIED ON THE CONSTRUCTIONS DEVALUES SHALL BE CONSESSED THE DISCREPANCES ARE NOTIFIED THE DISCREPANCES.
- ANY STRUCTURAL ELEMENTS OR DETAILS NOT FULLY DEVELOPED ON THE CONSTRUCTION DEARWING SHALL BE COMPLETED UNDER THE DIRECTION OF A LICENSED PROFESSIONAL INSINEER. THESE SHOP DRAWNINGS SHALL BE SUBMITTED IN SEE DANGER FOR REVENE BEFORE ANY CONSTRUCTION BEGINS. THE SHOP DRAWNINGS WILL BE REVENUED FOR PERFAIL COMPLIANCE AS IT RELATES TO THE STRUCTURAL DESIGN OF THIS PROJECT, VERRICATION OF THE SHOP DRAWNINGS FOR DIMENSIONS, OF FOR ACTUAL FILLD COMODITION, SI VERRICATION OF ASSUMED THE LICENSTRUCTION OF THE STRUCTURE WESPONSIBILITY OF THE SET ACTUAL FILLD COMMITTION, P.C. VERRICATION OF ASSUMED THE LICENSTRUCTION, P.C. VERRICATION OF ASSUMED THE LICENSTRUCTION.
- RESPONSIBILITY OF THE SER. THE CONTRACTOR SHALL VERIFY THE FIELD CONDITIONS FOR ACCURACY AND REPORT ANY DISCREPANCIES TO KSE ENGINEERING, P.C. BEFORE CONSTRUCTION BEGINS.
 THE SER IS NOT RESPONSIBLE FOR ANY SECONDARY STRUCTU
 ELEMENTS OR NON-STRUCTURAL ELEMENTS, EXCEPT FOR THE
- FLEMENTS SPECIFICALLY NOTED ON THE STRUCTURAL DRAWINGS THIS STRUCTURE AND ALL CONSTRUCTION SHALL CONFORM TO ALL APPLICABLE SECTIONS OF THE BUILDING CODE AND ANY LOCAL CODES OR RESTRICTIONS.
- 9. DO NOT SCALE DRAWINGS. WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALED DIMENSIONS ALL DIMENSIONS ARE TO FACE OF STUD OR TO FACE OF FRAMING LINESS OTHERWISE NOTED WATERPROOFING AND FLASHING BY OTHERS

FOUNDATIONS: FOUNDATIONS SHALL BE CONSTRUCTED IN ACCORDANCE WITH CHAPTER A OF THE BUILDING CODE

CONTRACTOR IS SOLELY RESPONSIBLE FOR VERIFYING THE SUITABILITY OF THE SITE SOIL CONDITIONS AT THE TIME OF CONSTRUCTION. THE BUILDER SHALL FURNISH ANY AND ALL REPORTS RECEIVED FROM THE GEOTECHNICAL ENGINEER ON THE STUDY OF THE PROPOSED SITE TO THE DESIGNER, STRUCTURAL ENGINEER, AND GENERAL CONTRACTOR

- CONTRACTOR.

 MAXIMUM DEPTH OF UNBALANCED FILL AGAINST MASONRY WALLS TO BE AS SPECIFIED IN THE BUILDING CODE.

 THE SER HAS NOT PERFORMED A SUBSURFACE INVESTIGATION. VERIFICATION OF THE ASSUMED VALUE IS THE RESPONSIBILITY OF THE OWNER OR THE CONTRACTOR. SHOULD ANY ADVERSE SOIL CONDITION BE ENCOUNTERED, THE SER MUST BE CONTACTED BEFORE DEPORTEDING.
- THE BOTTOM OF ALL FOOTINGS SHALL EXTEND BELOW THE FROST LINE FOR THE REGION IN WHICH THE STRUCTURE IS TO BE CONSTRUCTED, BUT NOT LESS THAN A MINIMUM OF 12" BELOW GRADE. ALL FOOTINGS TO HAVE A MINIMUM PROJECTION OF 2" ON EACH SIDE OF FOUNDATION WALLS, MAXIMUM FOOTING PROJECTION SHALL NOT EXCEED THE THICKNESS OF THE FOOTING.
 WOOD SILL PLATES SHALL BE ANCHORED TO THE FOUNDATION WITH
- 16" ANCHOR BOLTS WITH MINIMUM 7" EMBEDMENT SPACED A MAXIMUM OF 6'-0" O.C. INSTALL MINIMUM 2 ANCHOR BOLTS PER SECTION, 12 MAXIMUM FROM CORNERS. ½" DIAMETER x 8" LONG SIMPSON TITEN HD OR USP SCREW-BOLT+ SCREWS MAY BE SUBSTITUTED ON A 1 FOR 1 BASIS FOR CONCRETE FOUNDATIONS ONLY.

 ANY FILL SHALL BE PLACED UNDER THE DIRECTION OR
- RECOMMENDATION OF A LICENSED PROFESSIONAL ENGINEER, THE RESULTING SOIL SHALL BE COMPACTED TO A MINIMUM OF 95% MAXIMIM DRY DENSITY
- MAXIMON BY DESTITE.

 EXCAVATIONS OF FOOTINGS SHALL BE LINED TEMPORARILY WITH A 6
 MIL POLYTHYLENE MEMBRANE IF PLACEMENT OF CONCRETE DOES

 NOT OCCUR WITHIN 24 HOURS OF EXCAVATION.
- NO CONCRETE SHALL BE PLACED AGAINST ANY SUBGRADE CONTAINING WATER, ICE, FROST, OR LOOSE MATERIAL.
 PROVIDE FOUNDATION WATERPROOFING AND DRAIN WITH POSITIVE SLOPE TO OUTLET AS REQUIRED BY SITE CONDITIONS (SEE
- ARCHITECTURAL PLANS AND DETAILS).

 NONE OF THE FOUNDATION DESIGNS IN THESE DOCUMENTS ARE SUITABLE
- FOR INSTALLATION IN SHRINK/SWELL CONDITIONS, REFER TO GEOTECHNICAL ENGINEER FOR APPROPRIATE DESIGN.
 LOTS SHALL BE GRADED TO DRAIN SURFACE WATER AWAY FROM
- FOUNDATION WALLS. THE GRADE SHALL FALL A MINIMUM OF 6 INCHES WITHIN THE FIRST TEN FEET.
- WITHIN THE FIRST IEN FEEL.
 CRAWL SPACE TO BE GRADED LEVEL AND CLEAR OF ALL DEBRIS.
 PROVIDE MINIMUM 6 MIL APPROVED VAPOR BARRIER. ALL JOINTS TO
 BE LAPPED MINIMUM 12" AND SEALED.

- CONCRETE & REINFORCING
 - CONCRETE DESIGN BASED ON ACI 318 AND ACI 318.1 OR ACI 332.
 CONCRETE SHALL HAVE A NORMAL WEIGHT AGGREGATE AND A MINIMUM
 COMPRESSIVE STRENGTH (f'c) = 3,000 PSI MINIMUM AT 28 DAYS PER CODE (VARIES W/ WEATHER), UNLESS OTHERWISE NOTED ON THE PLAN. CONCRETE SHALL BE PROPORTIONED, MIXED, AND PLACED IN
- ACCORDANCE WITH THE LATEST EDITIONS OF ACL 318: "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE" AND ACI 301 "SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS"
- AIR ENTRAINED CONCRETE MUST BE USED FOR ALL STRUCTURAL ELEMENTS EXPOSED TO FREEZE/THAW CYCLES AND DEICING CHEMICALS. ARE ENTRAINMENT AMOUNTS (IN PERCENT) SHALL BE WITHIN -1% TO +2% OF 5% FOR FOOTINGS AND EXTERIOR SLABS.

 NO ADMIXTURES SHALL BE ADDED TO AMY STRUCTURAL CONCRETE WITHOUT WRITTEN PERMISSION OF THE SER. WATER ADDED TO
- CONCRETE ON SITE SHALL NOT EXCEED THAT ALLOWED BY THE MIX DESIGN.
 CONCRETE SLABS—ON—GRADE SHALL BE CONSTRUCTED IN ACCORDANCE
- WITH ACI 302.1R: "GUIDE FOR CONCRETE SLAB AND SLAB CONSTRUCTION" CONTROL OR SAW CUT JOINTS (CUT OR TOOLED) SHALL BE SPACED IN
- INTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 15'-0" O.C. AND IN EXTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 10'-0" UNLESS OTHERWISE NOTED, CARE SHALL BE TAKEN TO AVOID RE-ENTRANT
- CONTROL OR SAW CUT JOINTS SHALL BE PRODUCED USING CONVENTIONAL CUT OR TOOLED PROCESSES WITHIN 4 TO 12 HOURS AFTER THE SLAB HAS BEEN FINISHED. REINFORCING STEEL MAY EXTEND THROUGH A SAW CUT JOINT
- ALL WELDED WIRE FABRIC (W.W.F.) FOR CONCRETE SLABS-ON-GRADE SHALL BE PLACED AT MID-DEPTH OF SLAB. THE W.W.F. SHALL BE SECURELY SUPPORTED DURING THE CONCRETE POUR, FIBROUS CONCRETE REINFORCEMENT, OR POLYPROPYLENE FIRERS MAY BE LISED. CONCRETE REINFORCEMENT, OR POLYPROPILENE FIBERS MAY BE USED IN LIEU OF WW.F. APPLICATION OF POLYPROPYLENE FIBERS PER CUBIC YARD OF CONCRETE SHALL BE PER MANUFACTURER AND COMPLY WITH ASTM C1116, ANY LOCAL BUILDING CODE REQUIREMENTS AND SHALL MEET OR EXCEED CURRENT INDUSTRY STANDARD.
- 10. POLYPROPYLENE REINFORCING TO BE 100% VIRGIN, CONTAINING NO REPROCESSED OLEFIN MATERIALS AND SPECIFICALLY MANUFACTURED FOR USE AS CONCRETE SECONDARY REINFORCEMENT.

 11. STEEL REINFORCING BARS SHALL BE NEW BILLET STEEL CONFORMING.
- TO ASTM A615, GRADE 60. DETAILING, FABRICATION, AND PLACEMENT OF REINFORCING STEEL SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF ACI 315: "MANUAL
- OF STANDARD PRACTICE FOR DETAILING CONCRETE STRUCTURES". HORIZONTAL FOOTING AND WALL REINFORCEMENT
- CONTINUOUS AND SHALL HAVE 90° BENDS, OR CORNER BARS WITH THE SAME SIZE/SPACING AS THE HORIZONTAL REINFORCEMENT.
- 14. PROVIDE REINFORCEMENT LAP AS NOTED BELOW, UNLESS NOTED OTHERWISE: #4 BARS - 30" LENGTH
- #5 BARS 38" LENGTH #6 BARS 45" LENGTH
- 15. WHERE REINFORCING DOWELS ARE REQUIRED. THEY SHALL BE 10. WHERE REINFURING DOWNES ARE REJUMED, HEET SHALL SEED OF THE DOWNES HALL EXTEND 50 BAR DIAMETERS VERTICALLY AND 20 BAR DIAMETERS INTO THE FOOTING. SEE KSE FOUNDATION DETAILS.

 16. WHERE FOOTING BOTTOMS ARE TO BE STEPPED AT SLOPING GRADE
- CONDITIONS PROVIDE CONTINUOUS REINFORCING WITH 7 BARS (TO MATCH FOOTING REINFORCING) AS REQUIRED.

 17. BAR SUPPORT ACCESSORIES SHALL BE PROVIDED IN ACCORDANCE WITH
- THE LATEST ACL MANUAL OF STANDARD PRACTICE FOR DETAILING REINFORCED CONCRETE STRUCTURES, EXCEPT THAT REINFORCING SHALL BE CHAIRED ON THE BOTTOM AND/OR THE SIDES ON BOLSTERS SPACED NOT MORE THAN 4 FEET ON CENTER NO ROCKS CMIL CLAY
- SPACED NOT MORE HAM 4 FEET ON CENTER, NO ROCKS, CMD, CLAT TILE, OR BRICK SHALL BE USED TO SUPPORT REINFORCING. FOR GRADE SUPPORTED SLABS, SLAB REINFORCING SHALL BE HELD IN PLACE BY BAR SUPPORTS AND ACCESSORIES AS DESCRIBED IN THE CRSI MANUAL OF STANDARD PRACTICE, BAR SUPPORTS SHALL BE SPACED A MAXIMUM OF 4'-0" O.C. BOTH WAYS IN STRAIGHT LINES ON

MASONRY

- ALL MASONRY SHALL CONFORM TO ASTM C-90, F'm=1500 PSI, ALL BRICK SHALL CONFORM TO ASTM C-216, Fm=1500 PSI ALL MORTAR SHALL BE TYPE 'S' (TYPE 'M' RELOW CRADE) AND CONFORM TO ASTM C-270. COARSE GROUT SHALL CONFORM TO ASTM C-476 WITH A MAXIMUM AGGREGATE SIZE OF 36" AND A MINIMUM COMPRESSIVE STRENGTH OF 2,000
- ALL MASONRY WORK SHALL BE IN ACCORDANCE WITH "BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES" ACI 530/ASCE 5/TUMS 402 AND "SPECIFICATIONS FOR MASONRY STRUCTURES" ACI 530.1/ ASCE
- THE UNSUPPORTED HEIGHT OF SOLID MASONRY PIERS SHALL NOT
- THE UNSUPPORTED HEIGHT OF SOLID MASONRY PIERS SHALL NOT EXCEED TEN TIMES THER LESS IDMENSION. UPICILED HOLLOW PIERS MAY BE USED IF THE UNSUPPORTED HEIGHT IS NOT MORE THAN FOUR TIMES THER LESST DIMENSION. EACH CRAW, SPACE PIER SHALL BEAR IN THE MIDDLE THIRD OF TIS EXSPECTIVE FOOTION AND EACH GIDDER SHALL BEAR IN THE MIDDLE THIRD OF THE PIERS. PILASTERS TO BE BONDED TO PERIMETER FOUNDATION WILL LIGHT PERIORCEMENT SMALL BE CROUTED SOLID. WINDSTAMMER WILL INDIAN PERIORCEMENT SMALL BE CROUTED SOLID.
- HORIZONTAL WALL JOINT REINFORCEMENT SHALL BE STANDARD 9 GAGE
- GALVANIZED LADDER OR TRUSS TYPE SPACED AT 16" O.C., UNLESS SHOWN OTHERWISE ON THE DRAWINGS. SPLICED WIRE REINFORCEMENT SHALL BE LAPPED AT LEAST 6" AND CONTAIN AT LEAST ONE CROSS WIRE OF EACH PIECE OF REINFORCEMENT WITHIN THE 6". LAP WITH STANDARD 'I' AND 'L' SHAPED PIECES AT INTERSECTIONS AND CORNERS

WOOD FRAMING:

- SOLID SAWN WOOD FRAMING MEMBERS SHALL CONFORM TO THE SPECIFICATIONS LISTED IN THE LATEST EDITION OF THE "NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION*: (NDS). LINESS OTHERWISE NOTED, ALL WOOD FRAMING MEMBERS ARE DESIGNED TO
- SPRUCE-PINE-FIR (SPE) WITH THE FOLLOWING MINIMUM DESIGN
- VALUES: E=1,400,000 PSI, F_b=875 PSI, F_v=135 PSI
- 1.1. FRAMING: SPF #2.
- 1.2. PLATES: SPF #2. 1.3. STUDS: SPF STUD GRADE
- ALL LUMBER EXPOSED TO WEATHER OR IN CONTACT WITH CONCRETE SHALL BE PRESERVATIVE TREATED SOUTHERN YELLOW PINE #2 OR
- ANCHOR SILL PLATES IN ACCORDANCE W/ GENERAL STRUCTURAL NOTES. ANCHOR SILL PURIS IN MOCODANCE MY GENERAL STRUCTIONS IN VIEW.

 ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY. LARGER MEMBERS MAY
 BE SUBSTITUTED AS NEEDED FOR EASE OF CONSTRUCTION.

 NAILS SHALL BE COMMON WIRE NAILS UNLESS OTHERWISE NOTED.

 BOLT HOLES AND LEAD HOLES FOR LAG SCREWS SHALL BE IN
- ACCORDANCE WITH NDS SPECIFICATIONS
- INDIVIDUAL STUDS FORMING A COLUMN SHALL BE ATTACHED WITH (2) ROWS 10d NAILS @ 6" O.C. STAGGERED, THE STUD COLUMN SHALL BE FULLY BLOCKED AT ALL FLOOR LEVELS TO ENSURE PROPER LOAD
- TRANSFER. WALL SHEATHING SHALL BE NAILED TO EDGE OF EACH STUD.
 FACE NAIL ALL MULTI-PLY BEAMS AND HEADERS WITH (2) ROWS 164 COMMON NAILS @ 16" O.C., STAGGERED, OR PER MANUFACTURER'S SPECIFICATIONS FOR ENGINEERED LUMBER. APPLY NAILING FROM BOTH FACES FOR (3) OR MORE PLIES.
- FASTEN 4-PLY BEAMS WITH (1) 1/2" DIAMETER THROUGH BOLT w/ NUT WASHERS AT 12" O.C. STAGGERED TOP AND BOTTOM, 1%" MINIMUM EDGE DISTANCE. (UNLESS OTHERWISE NOTED)
- ALL BEAMS AND HEADERS SHALL HAVE (1)2x JACK STUD & (1)2x KING STUD LINESS OTHERWISE NOTED. THE NUMBER OF STUDS INDICATED ON PLANS ARE THE TOTAL NUMBER OF JACK STUDS REQUIRED, UNLESS
- PROVIDE KING STUDS AT EACH END OF HEADERS AS NOTED BELOW. 16" O.C. STUD SPACING: (1) STUD UP TO 3' OPENING 24" O.C. STUD SPACING: (1) STUD UP TO 4' OPENING (2) STUDS UP TO 4' OPENING (2) STUDS UP TO 8' OPENING (5) STUDS UP TO 12' OPENING (4) STUDS UP TO 16' OPENING
- (6) STUDS UP TO 16' OPENING
 ALL BEAMS TO BE CONTINUOUSLY SUPPORTED LATERALLY AND SHALL
 BEAR FULL WIDTH ON THE SUPPORTING WALLS OR COLUMNS INDICATED
- BEAR FULL WIDH ON HE SUPPRINE WALLS OF COLUMNS MUICALED WITH A MINIMAM OF TWO STUDS, UNLESS OTHERWISE NOTED, ALL BEAM SPLICES SHALL OCCUR OVER SUPPORTS.

 13. SOLD BLOCKING TO BE PROVIDED AT ALL POINT LOADS THROUGH FLOOR LEVELS TO THE FOUNDATION OR TO OTHER STRUCTURAL COMPONENTS.

 14. ALL LUMBER SPECIFIED ON DRAWINGS IS INTENDED FOR DRY USE ONLY
- (MOISTURE CONTENT <19%) UNLESS OTHERWISE NOTED.
 ALL WATERPROOFING AND FIRE SAFETY SYSTEMS ARE TH
- RESPONSIBILITY OF THE CONTRACTOR AND ARE TO BE DESIGNED AND DETAILED BY OTHERS DETAILED BY OTHERS.
 ANY WOOD FRAME INTERIOR BEARING WALL STUDS THAT HAVE HOLES IN THE CENTER OF THE STUD UP TO 1" DIAMETER SHALL HAVE STUD PROTECTION SHIELDS. ALL HOLES OVER 1" IN DIAMETER FOR PLUMBING
- LINES, ETC. SHALL BE REPAIRED WITH SIMPSON HSS2 OR USP STS1
 STUD SHOES, TYPICAL, UNLESS OTHERWISE NOTED. REARING WALLS SHALL BE SHEATHED ON NOT LESS THAN ONE SIDE WITH OSB OR GYPSUM BOARD. BRIDGING SHALL BE INSTALLED NOT GREATER THAN 4 FEET APART MEASURED VERTICALLY FROM EITHER END OF THE STUD IN LIEU OF SHEATHING.

EXTERIOR WOOD FRAMED DECKS:

- DECKS ARE TO BE FRAMED IN ACCORDANCE WITH APPLICABLE BUILDING CODES AND AS REFERENCED ON THE STRUCTURAL PLANS.
- BITHER THROUGH CODE REFERENCES OR CONSTRUCTION DETAILS.

 PRESERVATIVE TREATED WOOD FRAMING TO BE SOUTHERN YELLOW PINE #2 OR BETTER.
- GUARD RAILS AND LATERAL BRACING IS REQUIRED AT DECKS. DESIGN BY
- 4 PROVIDE DECK LATERAL LOAD CONNECTIONS PER BUILDING CODE

RAFTER FRAMED ROOF CONSTRUCTION:

- PROVIDE 2x4x4"-0" RAFTER TIES AT 50" O.C.
 RAFTERS SHALL BE SUPPORTED BY PURLINS AND PURLIN BRACES
 AS SHOWN ON THE PLAN. PURLIN BRACES SHALL NOT BEAR ON ANY CELLING JOIST STRONGRACK OR HEADER LINEESS SPECIFICALLY
- SHOWN ON PLAN. RAFTERS MAY BE SPLICED AT PURLIN LOCATIONS.
 CEILING JOISTS SHALL HAVE LATERAL SUPPORT W/ 1x4 FLAT RRACING ON TOP FOCE OF JOIST AT LOOSE JOIST FNDS (WHERE JOISTS NOT FASTENED TO RAFTERS) OR FULL DEPTH BLOCKING. FASTEN END OF BRACING TO RAFTER OR GABLE END FRAMING.
- FASTEN RAFTER AND CEILING JOIST WITH (6) 12d NAILS UNLESS OTHERWISE NOTED.
- PROVIDE VERTICAL 2x6 STRONGBACKS AT CEILING JOISTS @ 8'-0" O.C. TIE STRONGBACK ENDS TO GABLE STUDS OR RAFTERS WHERE POSSIBLE. PROVIDE BLOCKING BETWEEN TOP PLATES AND STRONGBACKS. PROVIDE 2x4 FLAT FASTENED TO EACH JOIST WITH (2) 12d NAILS FASTEN STRONGRACK TO 2v4 FLAT WITH 12d NAILS 12" O.C. AND FASTENED TO EACH JOIST WITH (1) 12d TOENAIL.

WOOD TRUSSES (FLOOR & ROOF):

- THE WOOD TRUSS MANUFACTURER/FABRICATOR IS RESPONSIBLE FOR THE DESIGN OF THE WOOD TRUSSES. SUBMIT SEALED SHOP DRAWINGS AND SUPPORTING CALCULATIONS TO THE SER FOR REVIEW PRIOR TO FABRICATION. THE SER SHALL HAVE A MINIMUM OF (5) DAYS FOR REVIEW. THE REVIEW BY THE SER SHALL BE FOR OVERALL COMPLIANCE OF THE DESIGN DOCUMENTS. THE SER SHALL ASSUME NO RESPONSIBILITY FOR THE CORRECTNESS OF THE STRUCTURAL DESIGN FOR THE WOOD TRUSSES.
- THE WOOD TRUSSES SHALL BE DESIGNED FOR ALL REQUIRED LOADINGS AS SPECIFIED IN THE LOCAL BUILDING CODE THE ASCE STANDARD. MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES. (ASCE 7), AND THE LOADING REQUIREMENTS SHOWN ON THESE SPECIFICATIONS. THE TRUSS DRAWINGS SHALL BE COORDINATED WITH ALL OTHER CONSTRUCTION DOCUMENTS AND PROVISIONS PROVIDED FOR LOADS SHOWN ON THESE DRAWINGS INCLUDING BUT NOT LIMITED TO HVAC FOLIPMENT, PIPING, AND ARCHITECTURAL FIXTURES ATTACHED TO
- THE TRUSSES.
 THE TRUSSES SHALL BE DESIGNED, FABRICATED, AND ERECTED IN ACCORDANCE WITH THE LATEST EDITION OF THE ANSI/TIP 1: "NATIC DESIGN STANDARD FOR METAL PLATE CONNECTED WOOD TRUSS CONSTRUCTION"
- THE TRUSS MANUFACTURER SHALL PROVIDE ADEQUATE BRACIN INFORMATION IN ACCORDANCE WITH "BUILDING COMPONENT SAFETY INFORMATION GUIDE TO GOOD PRACTICE FOR HANDLING, INSTALLING, RESTRAINING & BRACING OF METAL PLATE CONNECTED WOOD TRUSSES' (RCI) THIS REACING BOTH TEMPORARY AND PERMANENT SHALL BE SHOWN ON THE SHOP DRAWINGS. ALSO, THE SHOP DRAWINGS SHALL SHOW THE REQUIRED ATTACHMENTS FOR THE TRUSSES.
- THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING TEMPORARY BRACING HE. CONTRACTOR IS RESPONSIBLE FOR INSTALLING TEMPORARY BRADING AND SHORING FOR THE FLOOR AND ROOF TRUSSES AS REQUIRED DURING CONSTRUCTION. AT A MINIMUM, CONTRACTOR SHALL FOLLOW THE REQUIREMENTS OF THE LATEST BIG. THE CONTRACTOR SHALL FOLLOW THE PROJECT OF THE BIG SUMMARY SHEETS ON SITE.

 THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL PERMANENT
- THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL PERMANENT TRUSS BROADS FORM IN THE STRUCTURAL DRAWINGS AND IN THE TRUSS BESIONS, ALL CONTINUOUS LATERAL BRACING OF WEST REQUIRE BRACES. REFER TO BOI SUDMANT SEET THE STOR THE STOR OF DRAWONE BRACES TO PROVIDE AT EACH CONTINUOUS LATERAL BRACE LINE. SUCH DIAGONAL BRACES SHALL DIS EXPACED MORE THAN 20 FEET OF. DIAGONAL BRACES SHALL BY EXPACED MORE THAN 20 FEET OF. DIAGONAL BRACES SHALL BY EXPACED MORE THAN 20 FEET OF. BRACE LINE. SHALL DIS FASTENED TO EACH TRUSS WEB WITH A WINNAM OF THOSE OF THE STRUCTURE BRACING CANNOT BE INSTALLED, DUE TO A MINIMAM OF THREE BRACES STRUCTURE OF THE STRUCTURE BRACES OF THE STRUCTURE AND THE STRUCTURE OF THE STRUCTUR COORDINATE WITH THE TRUSS SPECIALTY ENGINEER/MANUFACTURER TO DETERMINE WHAT TYPE OF ALTERNATE BRACE (I.E., T OR L BRACE, ETC.) IS REQUIRED
- ANY CHORDS OR TRUSS WERS SHOWN ON THESE DRAWINGS HAVE BEEN SHOWN AS A REFERENCE ONLY. THE FINAL DESIGN OF THE TRUSSES SHALL BE PER THE MANUFACTURER.

 TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH
- THE SUPPORT LOCATIONS SHOWN ON THE SEALED STRUCTURAL DRAWINGS. TRUSS PROFILES TO BE SEALED BY THE TRUSS MANUFACTURER. TRUSS PLANS TO BE COORDINATED WITH THE SEALED STRUCTURAL DRAWINGS.
- TRUSS MANUFACTURER TO PROVIDE REQUIRED UPLIFT CONNECTORS FOR ALL TRUSSES
- PROVIDE SIMPSON H2.5A, USP RT7 OR EQUIVALENT AT EACH TRUSS TO TOP PLATE CONNECTION, UNLESS OTHERWISE NOTED.

- WOOD STRUCTURAL PANELS:

 1. FABRICATION AND PLACEMENT OF STRUCTURAL WOOD SHEATHING SHALL BE IN ACCORDANCE WITH THE APA DESIGN/CONSTRUCTION GUIDE "RESIDENTIAL AND COMMERCIAL." AND ALL OTHER APPLICABLE
- ALL STRUCTURALLY REQUIRED WOOD SHEATHING SHALL BEAR THE
- LISING 76" OSR MINIMUM AT RRACED WALL PANELS PROVIDE BLOCKING AT ALL SHEET EDGES NOT FALLING ON STUDS OR
- PLATES,
 ROOF SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2. ROOF SHEATHING SHALL BE CONTINUOUS OVER TWO SUPPORTS MINIMUM AND ATTACHED TO ITS SUPPORTING ROOF FRAMING WITH BIG NAIL AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. IN PANEL FIELD UNLESS OTHERWISE NOTED ON THE PLANS. SHEATHING SHALL BE APPLIED WITH THE LONG DIRECTION PERPENDICULAR TO FRAMING BE APPLIED WITH THE LONG DIRECTION PER-PROJUCTOR TO FRAMIN'S SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE FRAMING SPACING, PROVIDE SUITABLE EDGE SUPPORT BY USE OF PLYWOOD CUPS OR LUMBER BLOCKING UNLESS OTHERWISE NOTED. PANEL END JOINTS SHALL OCCUR OVER FRAMING, ROOF SHEATHING
- TO BE $\%_6$ OSB MINIMUM. WOOD FLOOR SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2. ATTACH SHEATHING TO ITS SUPPORTING FRAMING WITH (1) 104 NAIL AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. IN PANEL FIELD UNLESS OTHERWISE NOTED ON THE PLANS. SHEATHING SHALL BE APPLIED PERPENDICULAR TO FRAMING SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE FRAMING SPACING, PROVIDE SUITABLE EDGE SUPPORT BY USE OF PANEL END JOINTS SHALL OCCUR OVER FRAMING.
- SHEATHING SHALL HAVE A 16" GAP AT PANEL ENDS AND EDGES AS RECOMMENDED IN ACCORDANCE WITH THE APA

STRUCTURAL FIBERBOARD PANELS:

- STRUCTURAL FIBERBOARD SHEATHING SHALL ONLY BE USED WHERE SPECIFICALLY NOTED ON THE STRUCTURAL PLANS. FABRICATION AND PLACEMENT OF STRUCTURAL FIBERBOARD SHEATHING SHALL BE IN ACCORDANCE WITH THE APPLICABLE ALFA STANDARDS
- FIBERBOARD WALL SHEATHING SHALL COMPLY WITH THE REQUIREMENTS OF LOCAL BUILDING CODES FOR THE APPROPRIATE STATE AS INDICATED ON THESE DRAWINGS. REFER TO WALL BRACING
- SHEATHING SHALL HAVE A 1/8" GAP AT PANEL ENDS AND EDGES AS RECOMMENDED IN ACCORDANCE WITH THE ALFA.

NOTES IN PLAN SET FOR MORE INFORMATION

- STRUCTURAL STEEL:


 1. STRUCTURAL SITEEL SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH THE AMERICAN INSTITUTE OF STEEL CONSTRUCTION "CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES" AND OF THE MANUAL OF STEEL CONSTRUCTION "LOAD RESISTANCE FACTOR DESIGN" LATEST EDITIONS. ALL STEEL SHALL HAVE A MINIMUM YIELD STRESS (F_v) OF 50 KSI
- UNLESS OTHERWISE NOTED.
 WELDING SHALL CONFORM TO THE LATEST EDITION OF THE AMERICAN WELDING SOCIETY'S STRUCTURAL WELDING CODE AWA DI.1. ELECTRODES FOR SHOP AND FICIDING WELDING SHALL BE CLASS E70XX. ALL WELDING SHALL BE PERFORMED BY A CERTIFIED WELDER PER THE ABOVE STANDARDS.

 ALL STEEL BEAMS TO BE SUPPORTED AT EACH END WITH A
- MINIMUM BEARING LENGTH OF 38" AND FULL FLANCE WIDTH UNLESS OTHERWISE NOTED. BEAMS MUST BE ATTACHED AT EACH END WITH A MINIMUM OF FOUR 16d NAILS OR (2) ½" x 4" LAG SCREWS
- UNLESS OTHERWISE NOTED.
 INSTALL 2x WOOD PLATE ON TOP OF STEEL BEAMS, RIPPED TO MATCH BEAM WIDTH, FASTEN PLATE TO BEAM w/ HILTI X-DIN 52 P8 PINS AT 12" O.C. STAGGERED OR 1/2" DIAMETER BOLTS AT 24"

MECHANICAL FASTENERS:

- ALL METAL HARDWARE AND FASTENERS TO BE SIMPSON STRONG-TIE OR APPROVED EQUIVALENT. ALL HARDWARE AND FASTENERS IN CONTACT WITH PRESERVATIVE
- PRESSURE TREATED LUMBER SHALL BE HOT DIPPED GALVANIZED IN ACCORDANCE WITH ASTM A 153 G-185
- ACCURDANCE WITH ASIM A 133, G-185.

 MANY OF THE NEW PRESSURE TREATED WOODS USE CHEMICALS
 THAT ARE CORROSIVE TO STEEL. IT IS THE CONTRACTOR'S
 RESPONSIBILITY TO VERIFY THE TYPE OF WOOD TREATMENT AND SELECT APPROPRIATE CONNECTORS THAT WILL RESIST THE APPLICABLE CORROSIVE CHEMICALS.



BRICK VENEER LINTEL SCHEDULE			
SPAN LINTEL SIZE END BEARING			
UP TO 3'-0"	3½"×3½"×¼"	4"	
UP TO 6'-3"	5"x3½"x%6" L.L.V.	8"	
UP TO 9'-6"	6"x3½"x5/6" L.L.V. 12"		
LINTELS ARE NOT DESIGNED TO BE BOLTED TO HEADERS UNLESS SPECIFIED ON UNIT PLANS.			
SPANS OVER 4'-0" SHALL RE SHORED LIP LINTIL CURED !			



odel #135 \geq Structural , Lot #13: lakestone $\vec{\bot}$ Gent. (Serenity, 775 Blc σ. \leq B326 115

Carolina

North

gh,

ERING
TOWN, PA 18951
(215) 804-4449

Ш

NUUN

Ш

S


Homes

Weekley I

David '

Ral Project #: 047-22002 Designed By:LMR Checked By: Issue Date: 3/18/24

Re-Issue: Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

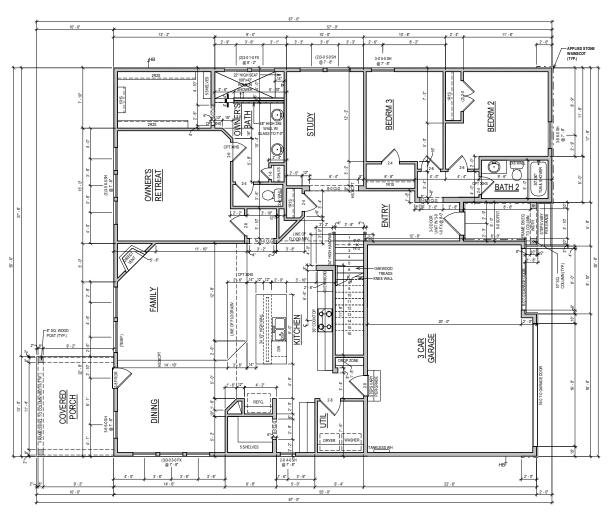

FIRST FLOOR



ADVANCED FRAMING: 2X6 EXTERIOR PERIMETER WALLS & ALL INSULATED WALLS UNLESS NOTED OTHERWISE

NOTE: ALL 1ST FLR. CEILING HEIGHTS 9'-0" UNLESS NOTED OTHERWISE

GENERAL REQUIREMENTS

SLOPED SURFACE REQUIREMENTS

GARAGE FLOOR TO BE SLOPED 1/8" PER FOOT TOWARDS VEHICLE ENTRY DOOR

ROOF DECKS AND BALCONIES TO BE SLOPED 1/4" PER FOOT TOWARDS RELIEF POIN

ALLING REQUIREMENTS NISHED HANDRAIL REQUIRED AT STAIRS WITH 4 OR MORE RISER

FINISHED HANDRAIL HEIGHT BETWEEN 34" AND 36" MEASURED VERTICALLY ABOVE TREAD

FINISHED GUARDRAILS REQUIRED AT DECKS, BALCONIES AND WALKWAYS THAT ARE 30° OR GREATER ABOVE GRADE AND BE AT A MINIMUM OF 36° IN HEIGHT

FINISHED GUARDRAIL AND HANDRAIL SPINDLES MUST BE SPACED SO A 4° SPHERE WILL NOT PASS THROUGH .

D FLOOR	476 SF	
TAL LIVING	2631 SF	
AB		
FLOOR	2155 SF	
VERED PORCH	130 SF	
ONT PORCH	49 SF	
RAGE	596 SF	
TAL SLAB	2930 SF	
AMING		
FLOOR	2155 SF	
D FLOOR	427 SF	
VERED PORCH	130 SF	
ONT PORCH	49 SF	

596 SF

PLAN SQFT

Weekley Hones LP. 2021

The reseasement, demonit, and other policy factors
in own on the occurrent residents or construction only. This start is specification is will be an expectation of the complete strain and the strain on the strain or t

| David Weekley Homes | BRUPMW | Scale: 1/8"=1'-0" | Date: 03/09/2021 | Rev: 1/31/24 AM

3277 Lot: 135 Job No.: Block: 0135 Sect:

SERENITY 65' 552 SERENITY WALK PARKWAY FUQUAY VARINA, NC

SOUTH
B326-A
PLN-1
BLAKESTONE
RALEIGH

LINE OF FLOOR BELOW -[3] 6" - 4" ٦. RETREAT BATH 3 BEDRM 4 LINE OF FLOOR BELOW 13" - 0"

SECOND FLOOR

53

[]

NOTE: ALL 2ND FLR. CEILING HEIGHTS 9' - 0" UNLESS NOTED OTHERWISE

ADVANCED FRAMING: 2X6 EXTERIOR PERIMETER WALLS & ALL INSULATED WALLS UNLESS NOTED OTHERWISE

135 Lot:

David Weekley Homes Scale: 1/8"=1'-0" Rev: 1/31/24 AM

Weekley Home
The measurements, dimensions, as shown on this document are guidelis only. The actual specifications of vary. This document may not be not of what the completed structure will of what the completed structure will also completed structure.

BR/JP/MW Date: Block: Proj. No.: 3277 Job No.: 0135

SERENITY 65' 552 SERENITY WALK PARKWAY FUQUAY VARINA, NC

SOUTH B326-A PLN-2 BLAKESTONE RALEIGH

ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
com (215) 804-4449

KSI





→ BEARING WALL ABOVE □□□□□□□ ⇒ INTERIOR BEARING WALL

⇒ BRACED WALL PANEL (SEE KSE STRUCTURAL DETAILS SET FOR BRACED WALL PANEL SHEATHING FASTENING & BLOCKING DETAILS)

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES

KEYNOTES:

(2)#4 x 4'-0" LONG BARS AT 3" O.C., CENTERED IN SLAB, TYP. WHERE SHOWN

Serenity, Lot #135
B326 Blakestone Model
MB15 M.P.H.
Raleigh, North Carolina Monolithic Project #: 047-22002 Designed By:LMR


Plan

Foundation

c Slab Four Lot #135


Checked By: Issue Date: 3/18/24

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

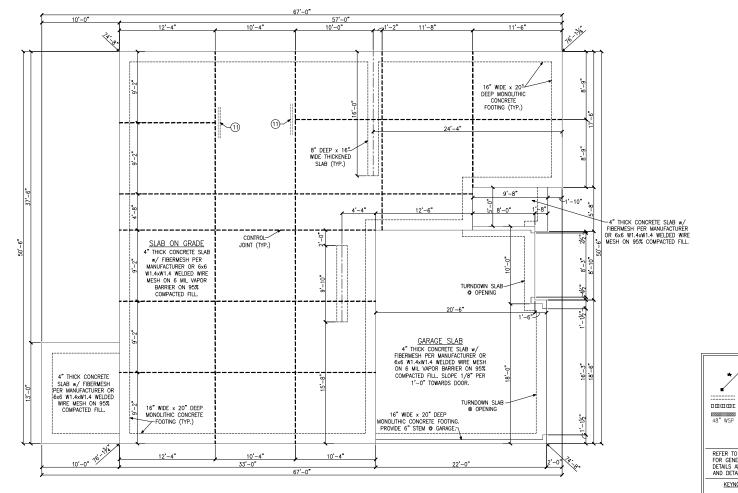







REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS

PLAN DESIGNED WITH 9' NOMINAL WALL PLATE HEIGHT

FLOOR FRAMING TO BE 14" DEEP TJI 210 SERIES OR EQUAL, SPACING PER MANUFACTURER. KEYNOTES:

 AT RAISED FLOOR BELOW, CONNECT STUD AT END OF BRACED WALL PANEL TO FRAMING BELOW WITH A 30" LONG SIMPSON CS20 COIL STRAP WITH MIN 8-10d NAILS EACH END. AT SLAB FOUNDATION BELOW, CONNECT STUD TO FOUNDATION w/ SIMPSON DTT1Z w/ SIMPSON 36" TITEN HD SCREW ANCHOR AND 3½" MINIMUM EMBEDMENT.



Serenity, B326 Blal Roof 115 Project #: 047-22002 Designed By: LMR Checked By:

Blakestone Model

Carolina


North


H.

Issue Date: 3/18/24

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34



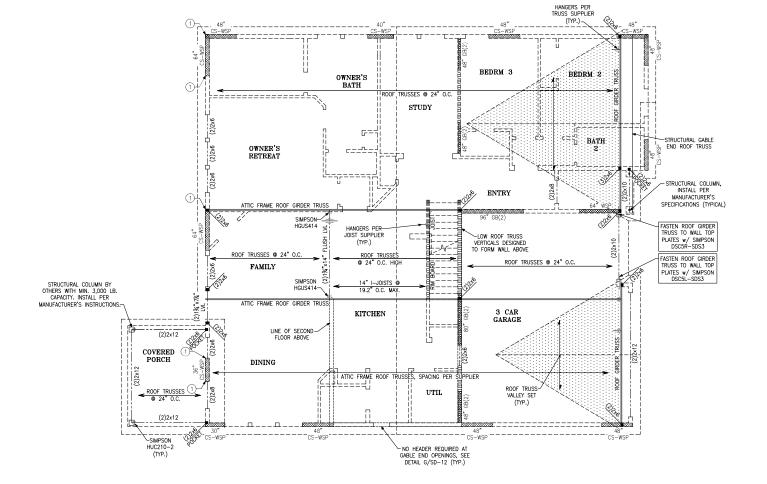

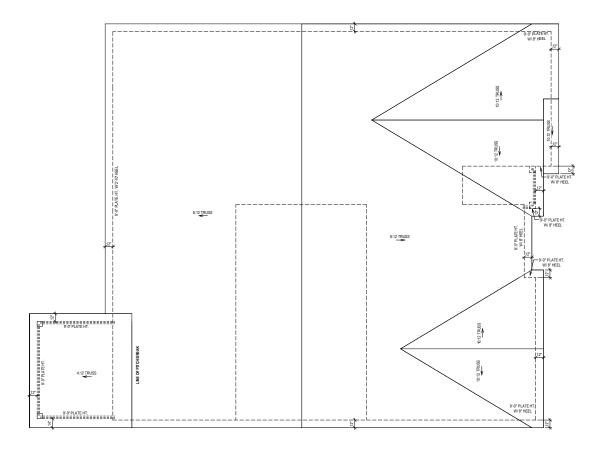

ROOF PLAN "A"

 David Weekley Homes


 BRJPMW
 Scale: 1/8"=1-0"

 Date: 03/09/2021
 Rev: 1/31/24 AM

Proj. No.: Lot: 135 3277 Block: Job No.: Block:

SERENITY 65' 552 SERENITY WALK PARKWAY FUQUAY VARINA, NC

SOUTH B326-A RFP-1 BLAKESTONE RALEIGH

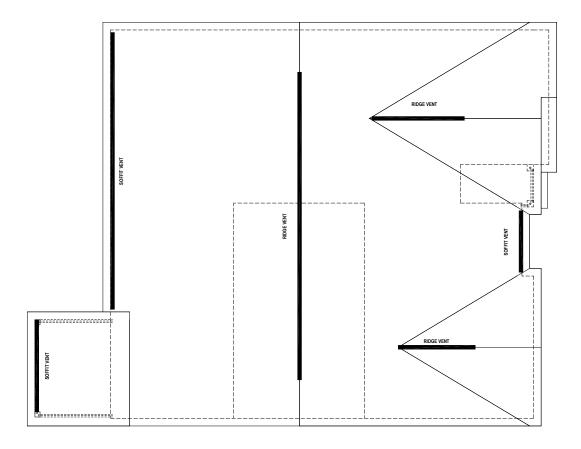

ROOF PLAN CALCS "A"

ROOF VENT CALCULATION: ATTIC SPACE: 2930 SQ.FT.

SOFFIT VENT PROVIDED: 58 LINEAL FEET RIDGE VENT PROVIDED: 62 LINEAL FEET AIR HAWK VENT PROVIDED: 0 UNITS

REQUIRED VENTILATION: 1406 SQ.IN. REQ.

PROVIDED VENTILATION: 1406 SQ.IN.

50-80% IN UPPER PORTION: 79%


David Weekley Homes Scale: 1/8"=1'-0" Rev: 1/31/24 AM BR/JP/MW Date:


Wee kley Homes LP.
The measurements, dimensions and other go shown on this document are guidelines for corony. The actual as guidelines for rose from Yeary. This document may not be reliefed on a of what the completed structure will look life.

135 Lot: Proj. No.: 3277 Job No.: 0135

SERENITY 65' 552 SERENITY WALK PARKWAY FUQUAY VARINA, NC

SOUTH B326-A RFP-2 BLAKESTONE RALEIGH

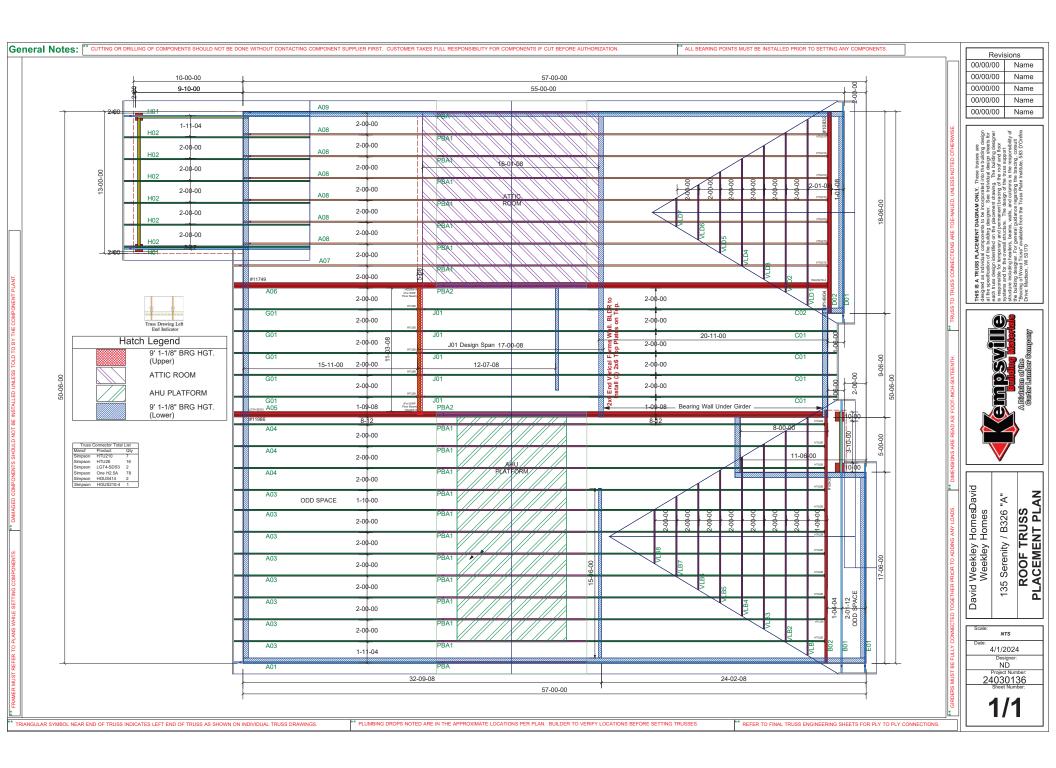

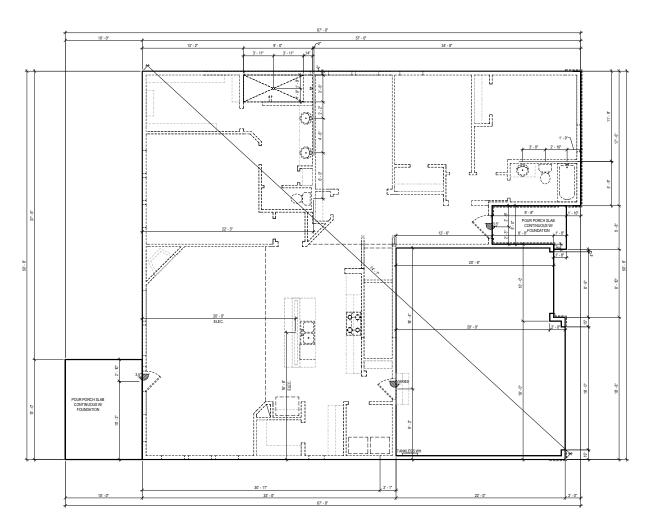

SEE ENGINEERING FOR ANCHOR BOLT REQUIREMENTS

Weekkey Homes LP. 2021
The measurement, dimension, and of the specifies from a thorn on this document see guideline for control and only. The state are published security may vary. This document may not be reliable on a nepsentiation of rive it the completed structure way.


David Weekley Homes

3277 Lot: 135 3277 Block: 00 No.: Block:

SERENITY 65' 552 SERENITY WALK PARKWAY FUQUAY VARINA, NC

SOUTH
B326-A
FS-1
BLAKESTONE
RALEIGH

FIRST FLOOR

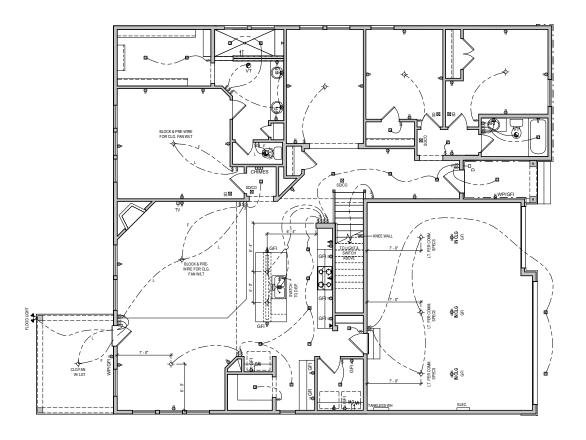

FIRST FLOOR

Scale: 1/8"=1'-0" Rev: 1/31/24 AM

BR/JP/MW Date: 03/09/2021

Block:

IN ALL HABITABLE ROOMS LIGHT BOXES MUST BE FAN RATED

David Weekley Homes UTILITY LEGEND 110V OUTLET 12" A.F.F. (U.N.O.) GROUND FAULT INTERRUPTOR (WEATHER PROOF AS NOTED) 1/2 HALF HOT OUTLET PHONE LINE CABLE TELEVISION 135 STANDARD SWITCH (3 OR 4 WAY AS NOTED) - SURFACE MOUNTED LIGHT Lot: - SURFACE MOUNTED LED DISC LIGHT Q WALL MOUNTED LIGHT CECESS CAN LIGHT (EYEBALL AS NOTED) VT EXHAUST VENT Proj. No.: 3277 Job No.: 0135

ALL RECESS CANS SHOWN ON PLAN ARE **LED** PER COMMUNITY SPEC.

₽	(CARBON MONOXIDE AS NOTED) DOOR BELL
FLEC	S DOOR BELL CHIMES PANELBOARD W/ CIRCUIT BREAKERS HOSE BIB
GAS	GAS TAP
CW HW	COLD/HOT WATER SUPPLY
F	ELEVATOR CALL BUTTON

SD SMOKE DETECTOR

MID-ATLANTIC General Notes

ALL ELECTRICAL PLUGS TO BE 9" TO TOP FROM FLOOR IN ROOMS WITH WALL MOULDINGS.


2. SWITCH FOR ATTIC LIGHT TO BE LOCATED OUTSIDE OF ATTIC SPACE, 12 INCHES FROM CEILING.

3. DO NOT RUN WIRES ON TOP OF JOISTS IN AREAS LIKELY TO HAVE DECKING IN ATTIC. (near disappearing stairs)

6. LOCATE ELECTRICAL PANEL IN LOCATION CLOSEST TO SERVICE.



SERENITY 65' 552 SERENITY WALK PARKWAY FUQUAY VARINA, NC

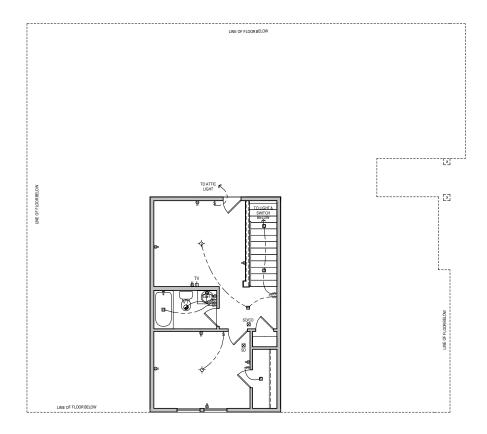

SECOND FLOOR

03


[]

Scale: 1/8"=1'-0" Rev: 1/31/24 AM

BR/JP/MW Date:

Block: Lot:

IN ALL HABITABLE ROOMS LIGHT BOXES MUST BE FAN RATED

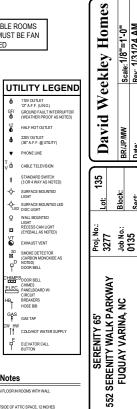

ALL RECESS CANS SHOWN ON PLAN ARE **LED** PER COMMUNITY SPEC.

3	11	COLD/HOT WATER SUPPLY
	F	ELEVATOR CALL BUTTON

MID-ATLANTIC General Notes

ALL ELECTRICAL PLUGS TO BE 9" TO TOP FROM FLOOR IN ROOMS WITH WALL MOULDINGS.


2. SWITCH FOR ATTIC LIGHT TO BE LOCATED OUTSIDE OF ATTIC SPACE, 12 INCHES FROM CEILING.

3. DO NOT RUN WIRES ON TOP OF JOISTS IN AREAS LIKELY TO HAVE DECKING IN ATTIC. (near disappearing stairs)

PROVIDE SMOKE DETECTORS IN EVERY BEDROOM. SEE SPECS FOR REQUIRED TYPE AND WIRING.

6. LOCATE ELECTRICAL PANEL IN LOCATION CLOSEST TO SERVICE.

SOUTH **B326-A** ELE-2 BLAKESTONE RALEIGH

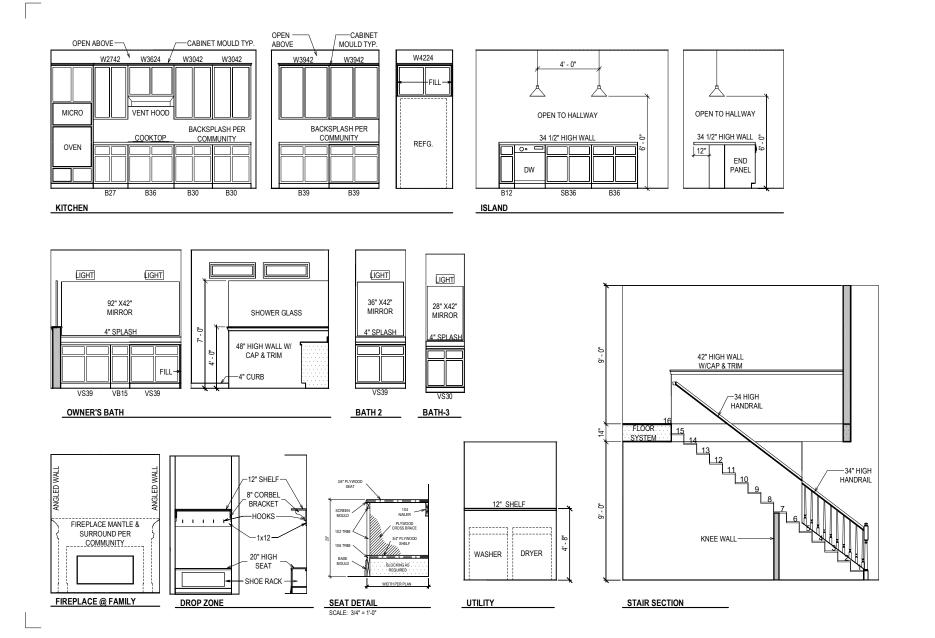

David Weekley Homes Scale: 1/4"=1'-0" Rev: 1/31/24 AM

BR/JP/MW Date: 03/09/2021

135 Block: Ë Proj. No.: 3277 Job No.: 0135

SERENITY 65' 552 SERENITY WALK PARKWAY FUQUAY VARINA, NC


SOUTH B326-A INT-1 BLAKESTONE RALEIGH




ENGINEERING E, SUITE 201, QUAKERTOWN, PA 18951 COM (215) 804-4449

David Weekley Homes













BRACED WALL INTERSECTIONS MAY BE FRAMED USING EITHER THE 3-STUD OR THE T-PLATE METHOD.

(C)METHOD GB(1) AND GB(2) INTERSECTION DETAILS

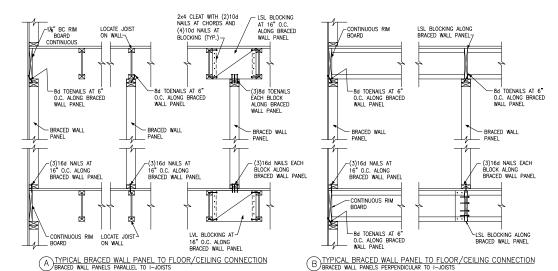







HEEL HEIGHT GREATER THAN 91/4" AND LESS THAN 151/4"

HEEL HEIGHT GREATER 15"

DTYPICAL EXTERIOR CORNER WALL FRAMING

NOTE: A THIRD STUD AND/OR PARTITION INTERSECTION BACKING STUDS SHALL BE PERMITTED TO BE OMITTED THROUGH THE USE OF WOOD BACKUP CLEATS, METAL DRYWALL CLIPS OR OTHER APPROVED DEVICES THAT WILL SERVE AS ADEQUATE BACKING FOR THE FACING MATERIALS.

E ROOF TRUSS BEARING/BLOCKING AT BRACED WALL PANELS ONLY REQUIRED AT BRACED WALL PANELS




Project #: 047-22002 Designed By:LMR Checked By: Issue Date: 3/18/24 Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

Braced Wall Details Serenity, Lot #135 B326 Blakestone Model

Raleigh, North

. Н. Н.

115











Re-Issue:

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34




B TYPICAL HOLD DOWN DETAIL

4'-0" LONG SIMPSON CS16-







G HOLD DOWN AT FOUNDATION STEM WALL

	OR USP RS150 COIL STRAP CENTERED BETWEEN FIRST FLOOR WALL AND KNEEWALL WITH MIN 11-10d MAILS EACH END
A36 ALL THREAD ROD SIMPSON CNW1/2 OR USP GREDNY SOLID A7 ALL THREAD ROD SET*/*E1* OR USP CIA-OEL ADHESIVE.	HOLD DOWN PER PLIN, INSTALLED PER MANUFACTURER'S SPECIFICATIONS A36 ALL THREAD ROD DRILLED AND EPOXIED 6" INTO FOOTING USING SIMPSON "SET"/ETT OR USP CIA-GEL ADHESIVE.
E HOLD DOWN AT CRAWL FOUNDATION	F HOLD DOWN AT FOUNDATION MONOLITHIC TURN-DOWN

SHEAR WALL, SEE SCHEDULE AND PLANS FOR LOCATION -

HOLD DOWN INSTALLED PER — HOLD DOWN SCHEDULE THIS SHEET, SEE PLANS FOR TYPE AND LOCATION.

(2) 2x FULL HEIGHT

STUD w/ 10d NAILS

@ 6" O.C. EACH PLY

2x FILL HEIGHT STUDS

A TYPICAL HOLD DOWN DETAIL

w/ 16d NAILS @ 6" O.C.

HOLD DOWN SCHEDULE				
HOLD DOWN		ALL TREAD ROD	FASTENERS	
SIMPSON	USP	ACC TROPO ROD	TASTERERS	
LTTP2	LTS20B	½" DIA.	(10)10d NAILS	
HTT4	HTT16	%" DIA.	(18)16dx2½" LONG NAILS	
HTT5	HTT45	%* DIA.	(26)16dx2½" LONG NAILS	

-HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET

(D)HOLD DOWN AT MONOLITHIC SLAB

- A36 ALL THREAD ROD DRILLED AND EPOXIED 6" INTO FOOTING USING SIMPSON "SET"/"ET" OR USP CIA-GEL ADHESIVE.

Details Model \approx Notes #135 Braced Wall Notes Serenity, Lot #135 B326 Blakestone N

115 Project #: 047-22002 Designed By:LMR


Carolina

North

P.H.

Checked By: Issue Date: 3/18/24

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

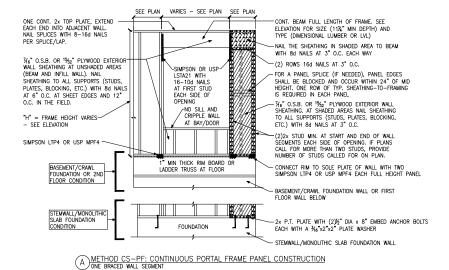


ONE CONT. 2x TOP PLATE, EXTEND EACH END INTO ADJACENT WALL. NAIL SPLICES 8—164 NAILS PER SPLICE/LAP. 7/4" O.S.B. OR 15/2" PLYWOOD EXTERIOR WALL SHEATHING AT UNSHADED AREAS (BEAM AND INFILL WALL). NAIL SHEATHING TO ALL SUPPORTS (STUDS, PLATES, BLOCKING, ETC.) WITH 8d NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. IN THE FIELD "H" = FRAME HEIGHT VARIES— — SEE ELEVATION WHERE FULL HEIGHT PANEL WIDTH EXCEEDS 16", PROVIDE ADDITIONAL STUDS AT 16" O.C. NAIL SHEATHING TO ALL STUDS WITH 8d NAILS AT 3" O.C. BASEMENT/CRAWL FOUNDATION OR 2ND ELOOR CONDITION	SEE PLAN VARIES - SEE PLAN SEE PLAN SIMPSON OR USP LSTAZ1 WITH 16 - 10d NNILS 14 - FIRST STUD 24 - EACH SIDE OF 0PENING CRIPPLE WALL AT BAY/DOOR 17 MIN THICK RIM BOARD OR LADDER TRUSS AT FLOOR	CONT. BEAM FULL LENGTH OF FRAME. SEE ELEVATION FOR 322 (11½" MIN DEPTH) AND TYPE (DIMENSIONAL LUMBER OR U.Y.) - MAIL THE SHEATHING IN SHADED AREA TO BEAM WITH 84 NAILS AT 3" O.C. ACAY WAY - (2) ROWS 16d NAILS AT 3" O.C. ACAY WAY - (2) ROWS 16d NAILS AT 3" O.C. PAPALE EDGES SHALL BE BLOCKED AND OCCUR WITHIN 24" OF MID HEIGHT, ONE ROW OF TYP. SHEATHING—TO—FRAMING IS REQUIRED IN EACH PANEL - 7/6" O.S.B. OR 15/2" PLYWOOD EXTERIOR WALL SHEATHING. AT SHADED AREAS NAIL SHEATHING TO ALL SUPPORTS (STIUS, PLATES, BLOCKING, ETC.) WITH 8d NAILS AT 3" O.C. - (2)22. STUD MIN, AT START AND END OF WALL SECMENTS EACH SIDE OF OPENING, IF PLANS OALL FOR MORE THAN WO STIUDS, REVUIDE NUMBER OF STIUDS CALLED FOR ON PLAN. - CONNECT RIN TO SOLE PLATE OF WALL WITH TWO SIMPSON LITH OR USE PLATE FACH FULL HEIGHT PANEL - BASEWENT/CRAWL FOUNDATION WALL OR FIRST
		- BASEMENT/CRAWL FOUNDATION WALL OR FIRST FLOOR WALL BELOW
STEMWALL/MONOLITHIC SLAB FOUNDATION CONDITION	FOUNDATION	-2x P.T. PLATE WITH (2)%" DIA x 8" EMBED ANCHOR BOLTS EACH WITH A 1/6"x2"x2" PLATE WASHER -STEMWALL/MONOLITHIC SLAB FOUNDATION WALL

(B) METHOD CS-PF: CONTINUOUS PORTAL FRAME PANEL CONSTRUCTION TWO BRACED WALL SEGMENTS

BRACED WALL PANEL AND ENGINEERED SHEAR WALL SCHEDULE			
PANEL TYPES	PANEL TYPE	MATERIAL	FASTENERS
WSP	INTERMITTENT WOOD STRUCTURAL PANEL	7/16" OSB	6d or 8d common nails at 6" o.c. at sheet edges and 12" o.c. at intermediate supports. <u>Engineered Alternative</u> : 16 <u>Gage By 1.75" Long</u> <u>STAPLES AT 3" o.c. at sheet edges and 6" o.c. at intermediate supports</u>
GB(1)	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GAL. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 7" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.
GB(1)-4	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GAL. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 4" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.
GB(2)	INTERMITTENT GYPSUM BOARD (SHEATHING BOTH FACES OF WALL)	1/2" GYPSUM	1.5" LONG GAL. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 7" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.
CS-WSP	CONTINUOUS SHEATHED WOOD STRUCTURAL PANEL	7/16" OSB	6d OR 8d COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. ENGINEERED ALTERNATIVE: 16 GAGE BY 1.75" LONG STAPLES AT 3" O.C. AT SHEET EDGES AND 6" O.C. AT INTERMEDIATE SUPPORTS
CS-PF	CONTINUOUS SHEATHED PORTAL FRAME	7/16" OSB	NAILING PER DETAIL
CS-EPF	PORTAL FRAME WITH HOLD DOWNS	7/16" OSB	NAILING PER DETAIL
CS-ESW(1)	ENGINEERED SHEAR WALL, TYPE 1	7/16" OSB	8d COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS
CS-ESW(2)	ENGINEERED SHEAR WALL, TYPE 2	7/16" OSB	8d COMMON NAILS AT 4" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS
CS-ESW(3)	ENGINEERED SHEAR WALL, TYPE 3	7/16" OSB	8d COMMON NAILS AT 3" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS

BRACED WALL PANEL NOTES:


- ALL BRACED WALL PANELS, EXCEPT GB(1) & GB(2), SHALL HAVE 2x BLOCKING BETWEEN WALL STUDS AT ALL HORIZONTAL SHEET EDGES.
- PROVIDE NAILING/BLOCKING ABOVE AND BELOW ALL BRACED WALL PANELS PER KSE BRACED WALL DETAILS.
- Sheath all exterior walls of the house with $\frac{1}{2}6^{\circ}$ o.s.b., or $\frac{15}{22}^{\circ}$ Plywood, fastened per irc. At exterior corners, sheathing shall be fastened per kse braced wall details. At interior wall intersections, fasten studs & wall bracing per kse braced wall details.
- BRACED WALL PANELS AND ENGINEERED SHEAR WALLS ARE PROVIDED PER IRC. PANEL LENGTHS SHOWN ON PLANS ARE THE MINIMUM LENGTH REQUIRED.

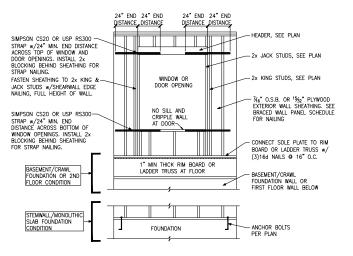

WINDOW OR DOOR REINFORCEMENT IN ENGINEERED SHEAR WALL ONLY REQUIRED WHERE SPECIFIED ON PLANS

NGINEERING
JITE 201, QUAKERTOWN, PA 18951
(215) 804-4449

S





North


P.H.

115 Project #: 047-22002 Designed By:LMR

Checked By: Issue Date: 3/18/24

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34



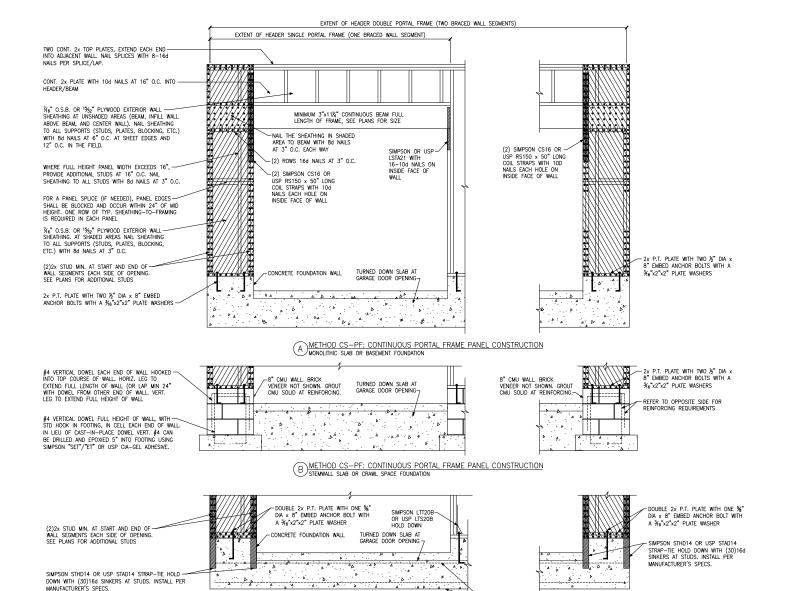

CONTINUOUS #4 HIGH AND LOW.

PROVIDE MIN 24" LAPS WHERE SPLICED.



ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
com (215) 804-4449

KSI





Issue Date: 3/18/24

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

Project #: 047-22002 Designed By:LMR Checked By:

115

Raleigh, North М.Р.Н.

(2)2x6 TOP PLATE

HEADER, SEE PLAN

- 7/16" O.S.B. EXTERIOR WALL SHEATHING. SEE BRACED WALL PANEL SCHEDULE FOR NAILING

-2x6 @ 12" O.C. BALLOON FRAMED WALL, SEE PLANS

2x6 JACK STUD, SEE PLAN FOR QUANTITY - 2x6 KING STUD, SEE PLAN FOR QUANTITY

2x6 SOLE PLATE

WALL STUD SIZE, HEIGHT & SPACING SCHEDULE BEARING WALLS NONBEARING WALLS MAXIMUM SPACING WHEN SUPPORTING WHEN SUPPORTING ONE FLOOR, PLUS A ROOF-CEILING A ROOF-CEILING A ROOF-CEILING A ROOF-CEILING A ROOF-CEILING A ROOF-CEILING LATERALLY UNSUPPORTED STUD HEIGHT LATERALLY UNSUPPORTED STUD SIZE A ROOF-CEILING ASSEMBLY OR A MAXIMUM SPACING STUD HEIGHT ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY HABITABLE ATTIC ASSEMBLY, ONLY 10'-0" 16" 14'-0" 24" 2x4 24" 10'-0" 24" 24" 16" 20'-0" 24"

WINDOW OPENING


WINDOW OPENING


DBALLOON FRAMED WALL DETAIL N.T.S.

WINDOW


WINDOW OPENING


WINDOW OPENING

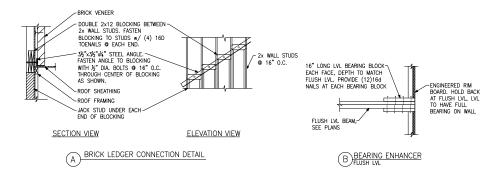



C AS REQUIRED @ PARALLEL WALLS -JOIST LADDER BLOCKING





F INTERIOR WALL DETAIL
N.T.S.

ENGINEERING E, SUITE 201, QUAKERTOWN, PA 18951 COM (215) 804-4449

S



Serenity, Lot #135 B326 Blakestone N Miscellaneous

Details

Framing

Checked By:

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

Issue Date: 3/18/24

Project #: 047-22002 Designed By:LMR


115


#135



-WALL STUD OR GABLE TRUSS

TOENAIL RAFTER TO LEDGER



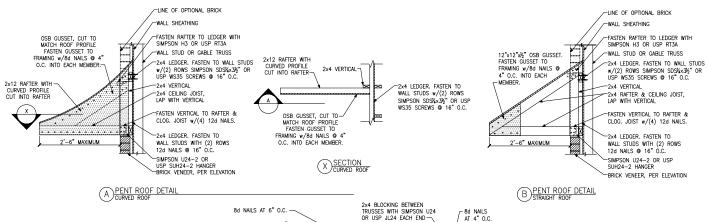


(E)GABLE END WALL DETAIL

(5) 10d-

ROOF TRUSSES AT 24" O.C.

SIMPSON A35 OR USP MPA1 SPACED PER SHEAR WALL BELOW ENTIRE GABLE END

NAILS.

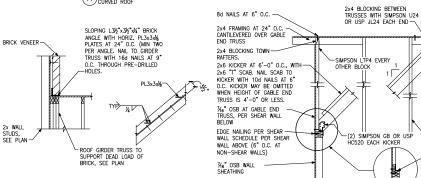

ENGINEERING UITE 201, QUAKERTOWN, PA 18951 (215) 804-4449

ທ



Foundation Slab * Lot Monolithic Serenity, B326 Bla

1/4"=1'-0" @ 22x34

Scale: 1/8"=1'-

Checked By: Issue Date: 3/18/24

Designed By:LMR

Project #: 047-22002


Ω

Carolina North F.H.







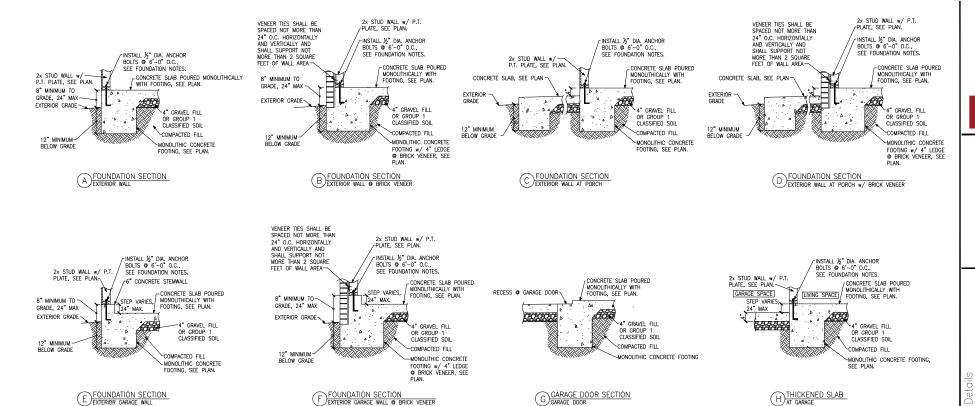


POST ABOVE, SEE PLAN

ISOLATED PAD FOOTING,

SFF PLAN FOR SIZE

CONCRETE SLAB, SEE PLAN



THICKENED SLAB SECTION (J)INTERIOR BEARING WALL

ISOLATED PAD FOOTING INTERIOR COLUMN

ENGINEERING

E, SUITE 201, QUAKERTOWN, PA 18951

(215) 804-4449

S





Notes


 \approx

<u>(N</u>



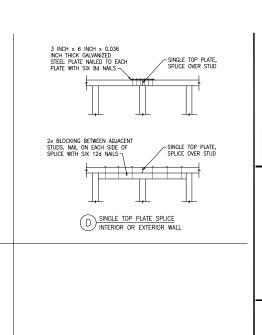







DRYWALL CLIP

GYPSUM WALLBOARD AS REQUIRED AND INSTALLED IN

-CONTINUOUS WOOD

STRUCTURAL PANEL

- DRYWALL CLIP

TYPICAL EXTERIOR CORNER FRAMING

OUTSIDE CORNER DETAIL

ACCORDANCE WITH CHAPTER 7

SINGLE TOP PLATE SPLICE WALL INTERSECTION

SINGLE TOP PLATE

3 INCH x 6 INCH x 0.036 -INCH THICK GALVANIZED

STEEL PLATE NAILED TO EACH WALL WITH SIX 8d NAILS

3 INCH x 6 INCH x 0.036 INCH THICK GALVANIZED STEEL PLATE NAILED TO EACH

WALL WITH SIX 8d NAILS

CONTINUOUS WOOD

STRUCTURAL PANEL

SEE TABLE R602.3(1)

FOR FASTENING (TYP.)

16D NAIL (3½"x0.131") -@ 12" O.C.


SEE TABLE R602 3(1) -

SINGLE TOP PLATE



SINGLE TOP PLATE SPLICE

WALL INTERSECTION



SINGLE LOAD BEARING HEADER

EXTERIOR WALL


NON-LOAD BEARING HEADER G NUN-LUND ...




INTERIOR FRAMING



-DRYWALL CLIP



TYPICAL EXTERIOR CORNER FRAMING INSIDE CORNER DETAIL



TYPICAL EXTERIOR CORNER FRAMING GARAGE DOOR CORNER DETAIL

ADVANCED FRAMING NOTES

1.) EXTERIOR WALLS TO BE 2x6 S.P.F. STUDS ®

24" O.C. WITH SINGLE TOP PLATE. TOP PLATE TO BE SPLICED PER NC RESIDENTIAL CODE.

2.) INTERIOR BEARING WALLS TO BE PER NO RESIDENTIAL CODE.

3.) ROOF TRUSSES AND FLOOR JOISTS ARE TO BE STACKED AND CENTERED OVER STUDS WITH A TOLERANCE OF NO MORE THAN 1 INCH. ADDITIONAL STUDS ARE TO BE ADDED WHERE THE ROOF TRUSSES AND FLOOR JOISTS ARE NOT STACKED OVER STUDS WITHIN 1" TOLERANCE.

4.) INTERIOR NON-LOAD BEARING WALLS TO BE 2x4 S.P.F. STUDS @ 24" O.C. WITH SINGLE TOP PLATE. TOP PLATE TO BE SPLICED PER NC RESIDENTIAL CODE.

5.) LOAD-BEARING HEADERS ARE NOT REQUIRED IN INTERIOR OR EXTERIOR NONBEARING WALLS. A SINGLE FLAT 2x MEMBER MAY BE USED AS A HEADER IN INTERIOR OR EXTERIOR NONBEARING WALLS FOR OPENINGS UP TO 8 FEET IN WIDTH IF THE VERTICAL DISTANCE TO THE PARALLEL NAILING SURFACE IS NOT MORE THAN 24 INCHES. FOR SUCH NONBEARING HEADERS, NO CRIPPLES OR BLOCKING ARE REQUIRED ABOVE THE HEADER.



Project #: 047-22002 Designed By:LMR Checked By: Issue Date: 3/18/24

1/4"=1'-0" @ 22x34