


www.blr.com
 1135 ROBESON STREET
 FAYETTEVILLE, NC 28305
 V (910) 485-1111
 7601 BOEING DRIVE
 GREENSBORO, NC 27409
 V (336) 884-5454
 3189 NC HIGHWAY 5
 ABERDEEN NC 28315
 V (910) 944-2516

This layout and associated materials list has been prepared based on project plans and/or information provided to Builders FirstSource (BFS). It remains the responsibility of the builder, architect, designer, or other responsible persons to review this information to assure that it is appropriate, accurate, complete and complies with applicable building codes.

- GENERAL NOTES:**
- 1.) READ THE INSTALLATION GUIDE BEFORE FRAMING.
 - 2.) ALL WALLS SHOWN ARE LOAD BEARING UNLESS NOTED OTHERWISE. WALLS NOT SHOWN ARE CONSIDERED NON-LOAD BEARING.
 - 3.) UNLESS STATED OTHERWISE ALL CEILING & ROOF LOADS BRACE DIRECTLY TO LOAD BEARING WALLS SUPPORTED BY FOUNDATION.
 - 4.) CONTACT BUILDERS FIRSTSOURCE BEFORE MAKING ANY ALTERATIONS OR ADJUSTMENTS...FAILURE TO DO SO MAY RESULT IN COSTLY REPAIRS.

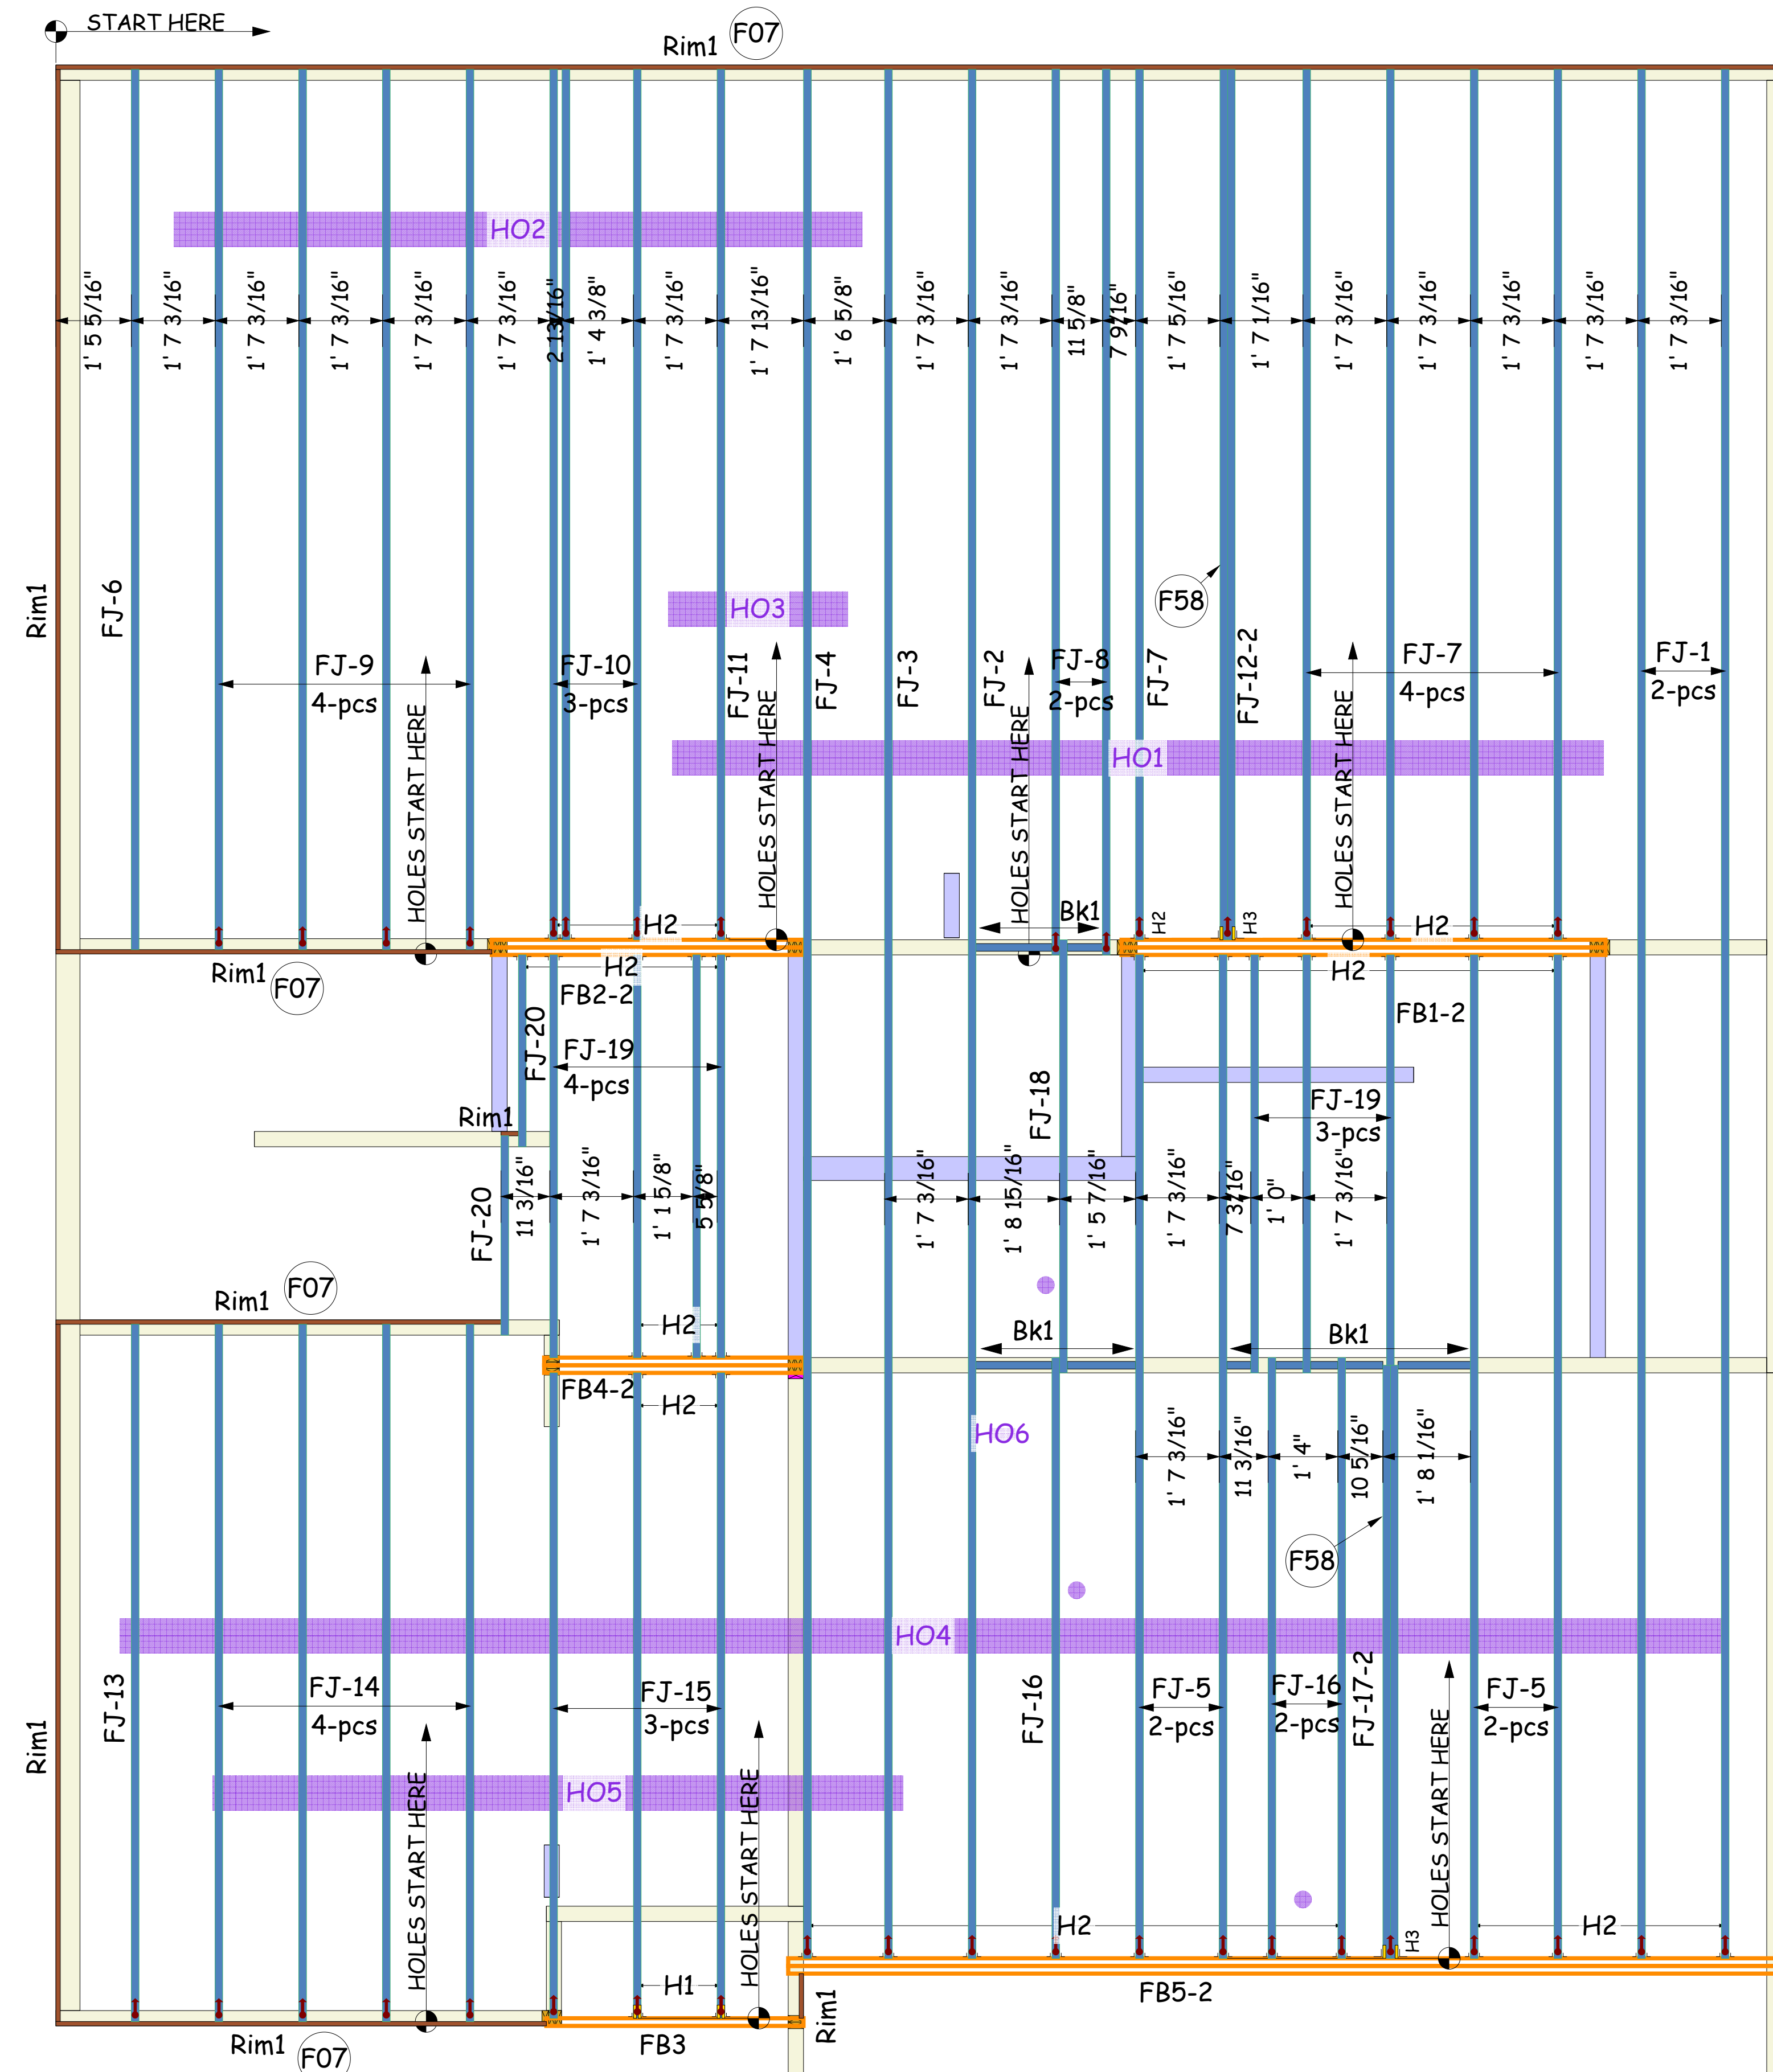

Products				
PlotID	Length	Product	Plies	Net Qty
FJ-1	38' 0"	14" BCI@ 4500s-1.8	1	2
FJ-2	38' 0"	14" BCI@ 4500s-1.8	1	1
FJ-3	38' 0"	14" BCI@ 4500s-1.8	1	1
FJ-4	38' 0"	14" BCI@ 4500s-1.8	1	1
FJ-5	20' 0"	14" BCI@ 4500s-1.8	1	4
FJ-10	18' 0"	14" BCI@ 4500s-1.8	1	3
FJ-11	18' 0"	14" BCI@ 4500s-1.8	1	1
FJ-6	18' 0"	14" BCI@ 4500s-1.8	1	1
FJ-7	18' 0"	14" BCI@ 4500s-1.8	1	5
FJ-8	18' 0"	14" BCI@ 4500s-1.8	1	2
FJ-9	18' 0"	14" BCI@ 4500s-1.8	1	4
FJ-12-2	18' 0"	14" BCI@ 4500s-1.8	2	2
FJ-13	14' 0"	14" BCI@ 4500s-1.8	1	1
FJ-14	14' 0"	14" BCI@ 4500s-1.8	1	4
FJ-15	14' 0"	14" BCI@ 4500s-1.8	1	3
FJ-16	12' 0"	14" BCI@ 4500s-1.8	1	3
FJ-17-2	12' 0"	14" BCI@ 4500s-1.8	2	2
FJ-18	10' 0"	14" BCI@ 4500s-1.8	1	1
FJ-19	8' 0"	14" BCI@ 4500s-1.8	1	7
FJ-20	4' 0"	14" BCI@ 4500s-1.8	1	2
FB1-2	10' 0"	1-3/4" x 14" VERSA-LAM@ 2.0 3100 SP	2	2
FB2-2	6' 0"	1-3/4" x 14" VERSA-LAM@ 2.0 3100 SP	2	2
FB3	6' 0"	1-3/4" x 14" VERSA-LAM@ LVL 2.1E 3100 SP	1	1
FB4-2	6' 0"	1-3/4" x 14" VERSA-LAM@ LVL 2.1E 3100 SP	2	2
FB5-2	20' 0"	1-3/4" x 24" VERSA-LAM@ LVL 2.1E 3100 SP	2	2
Rim1	12' 0"	1" x 14" BC RIM BOARD OSB	1	11
Bk1	9' 0"	14" BCI@ 4500s-1.8	1	1

Accessories				
PlotID	Length	Product	Plies	Net Qty
Web Stiffeners (14" BCI@ 4500s-1.8)				
			1	8

Hangers			
PlotID	Qty	Manuf	Product
H1	2	Simpson	HUI4
H2	38	Simpson	IUS1.81/14
H3	2	Simpson	MIU3.56/14

Hole Schedule							
Member	Net Qty	Obstruction	Shape	Width/Dia.	Height	Distance From Start	Distance From Top
FJ-10	3	HO1	Circular	8"	N/A	13' 7 1/16"	7"
FJ-1	2	HO4	Circular	8"	N/A	6' 2"	7"
FJ-11	1	HO2	Circular	8"	N/A	13' 7 1/16"	7"
		HO1	Circular	8"	N/A	3' 5 11/16"	7"
		HO3	Circular	8"	N/A	6' 3 15/16"	7"
FJ-12-2	2	HO1	Circular	8"	N/A	3' 5 11/16"	7"
FJ-13	1	HO4	Circular	8"	N/A	7' 4 1/2"	7"
FJ-14	4	HO5	Circular	8"	N/A	4' 4 3/8"	7"
		HO4	Circular	8"	N/A	7' 4 1/2"	7"
FJ-15	3	HO5	Circular	8"	N/A	4' 3 5/8"	7"
		HO4	Circular	8"	N/A	7' 3 3/4"	7"
FJ-16	3	HO4	Circular	8"	N/A	6' 2"	7"
FJ-17-2	2	HO4	Circular	8"	N/A	6' 2"	7"
FJ-2	1	HO1	Circular	8"	N/A	22' 11 1/2"	7"
		HO4	Circular	8"	N/A	6' 2"	7"
FJ-3	1	HO1	Circular	8"	N/A	22' 11 1/2"	7"
		HO5	Circular	8"	N/A	3' 1 7/8"	7"
		HO4	Circular	8"	N/A	6' 2"	7"
FJ-4	1	HO1	Circular	8"	N/A	22' 11 1/2"	7"
		HO3	Circular	8"	N/A	25' 9 11/16"	7"
		HO5	Circular	8"	N/A	3' 1 7/8"	7"
		HO2	Circular	8"	N/A	33' 0 13/16"	7"
		HO4	Circular	8"	N/A	6' 2"	7"
FJ-5	4	HO4	Circular	8"	N/A	6' 2"	7"
FJ-7	5	HO1	Circular	8"	N/A	3' 5 11/16"	7"
FJ-8	2	HO1	Circular	8"	N/A	3' 9 3/16"	7"
FJ-9	4	HO2	Circular	8"	N/A	13' 9 5/16"	7"

Lot 2 Fairground Farms

BEN STOUT
CARDINAL
 2ND FLOOR PLACEMENT PLAN
 Builders FirstSource, Central Carolina Markets
 DRAWN BY: Vernon Schmidt
 DATE: 6/13/2024
 JOB NUMBER:
 SCALE: NTS

MINIMUM DESIGN DATA
 LIVE LOAD 40 PSF
 DEAD LOAD 10 PSF

 TOTAL LOAD 50 PSF

 DOL = 100%
 DEFLECTION CRITERIA
 L/480 (MINIMUM)
 ARCHITECTURAL PLAN DATE
 5-2-2023
 REVISED ARCH. PLAN DATE
 xx-xx-xx
SD03132024
 Sheet
 1 of 1