CONNECTION SPECIFICATIONS (TYP. U.N.O.)

NOTE: 10d NAIL = 3" x 0.131" GUN NAIL	
JOIST TO SOLE PLATE	(3)10d TOENAILS
SOLE PLATE TO JOIST/BLK'G.	IOd NAILS @ 6" o.c.
STUD TO SOLE PLATE	(3)10d TOENAILS
TOP OR SOLE PLATE TO STUD	(3)10d NAIL5
RIM TO TOP PLATE	IOd TOENAILS @ 6" o.c.
BLK'G. BTWN. JOISTS TO TOP PL.	(3)10d TOENAILS
RAFTER/TRUSS TO TOP PLATE	(3)10d TOENAILS + (1) SIMPSON H2.5A
GAB. END TRUSS TO DBL. TOP PL.	IOd TOENAILS @ 8" o.c.
R.T. w/ HEEL HT. 91/4" TO 12"	2xIO BLK EVERY 3RD BAY FASTENED TO DBL. TOP PLATE w/ IOd TOENAILS @ 6" O.C.
R.T. w/ HEEL HT. 12" TO 16"	2x12 BLK EVERY 3RD BAY FASTENED TO DBL. TOP PLATE w/ IOd TOENAILS @ 6" O.C.
R.T. w/ HEEL HT. UP TO 24"	LAP WALL SHTG. W/ DBL. TOP PL. \$ INGTALL ON TRUSS VERT FASTEN W/ 8d NAILS @ 6" O.C.
R.T. w/ HEEL HT. 24" TO 48"	LAP WALL SHTG. W/ DBL. TOP PL. & INSTALL ON TRUSS VERT FASTEN W/ 80 ANILS @ 6" O.C. PROVIDE 2x BLK @ EA. BAY AT TOP OF HEEL
DOUBLE STUD	10d NAILS @ 24" o.c.
DOUBLE TOP PLATE	10d NAILS @ 24" o.c.
DOUBLE TOP PLATE LAP SPLICE	(10)10d NAILS IN LAPPED AREA
TOP PLATE LAP @ CORNERS & INTERSECTING WALLS	(2)10d NAILS
WALL TO FOUNDATION	WALL SHTG, LAP w/ SILL PL. \$ FASTENED PER SHEAR WALL FASTENING SPEC.

GARAGE SLAB

4" CONC. SLAB w/ 6x6-WI.4xWI.4 WWF ON 6 MIL VAPOR BARRIER ON 4" MIN. GRANULAR FILL ON 95% COMPACTED FILL/VIRGIN SOIL

PORCH SLAB

4" CONC. SLAB w/ 6x6-WI.4xWI.4 WWF ON 95% COMPACTED FILL/VIRGIN SOIL

BASEMENT SLAB 4" CONC. SLAB ON 6 MIL VAPOR BARRIER ON 4" MIN. GRANULAR FILL ON

95% COMPACTED FILL/VIRGIN SOIL SLAB ON GRADE 4" CONC. SLAB w/ 6x6-WI.4xWI.4 MWF ON 6

MIL VAPOR BARRIER ON 4" MIN. GRANULAR

FILL ON 95% COMPACTED FILL/VIRGIN SOIL

VENEER LINTEL SCHEDULE

SPAN (MAX)	HEIGHT OF VENEER ABOVE LINTEL	STEEL ANGLE SIZE
3'-0"	20 FT, MAX	L3"x3"x¼"
	3 FT. MAX	L3"x3"x¼"
6'-0"	I2 FT. MAX	L4"x3"x¼"
	20 FT. MAX	L5"x3½"x¾"
8'-0"	3 FT. MAX	L4"x4"x¼" *
	I2 FT. MAX	L5"x3½"x¾"
	I6 FT. MAX	L6"x3½"x¾6"
9'-6"	I2 FT. MAX	L6"x3½"x¾"
16'-0"	2 FT. MAX	L7"x4"x½" **
	3 FT, MAX	L8"x4"x½" **

- LI LINTELS.

 SHALL SUPPORT 2 ½° 3 ½° VEBER W 40 ppl MAXIMM PEIGHT.

 16 SHALL HAVE 4" MIL BEARING

 16 SHALL HAVE 5" MIL BEARING

 16 SHALL HAVE 5" MIL BEARING

 16 SHALL HAVE 5" MIL BEARING

 16 SHALL BE FASTIBED BACK TO HEADER.

 16 SHALL BE FASTIBED BACK TO HOOD HEADER IN WALL 646°0.c w/½" DIA. x 3 ½"

 LOKE LAG SECRESON 12" LIONS VERTICALLY SOUTHED HOLES.

 MAX VEBER HIT. APPLIES TO ANY PORTION OF BRICK OVER THE OPENING.

 HASH SHPORTING VEBER 5" HOD THE EXTRICAT TOE OF THE HORIZONTAL LEG

 MAY DE COIL IN THE FELL TO DE 3" MILEC OVER THE BEARING LIBIGHT OUT. THIS

 SEE STRICTIFAL PLANE FOR ANY LINTEL CONDITION NOT ENCOMPASSED BY THE

 BADVE PARAMETES.

LEGEND

- IIIIIIII INTERIOR BEARING WALL
- BEARING WALL ABOVE
 - BEAM / HEADER
 - EXTENT OF OVERFRAMING
- METAL HANGER
 - INDICATES EXTENT OF INT OSB SHEARWALL, BLOCKED PANEL EDGES, AND/OR 3" O.C. EDGE NAILING
- INDICATES HOLDOWN
- INDICATES POST ABOVE (P.A.) PROVIDE SOLID BLOCKING UNDER POST OR JAMB

ADDITIONAL NOTES FOR TRUSS \$ I-JOIST MANUFACTURER

ROOF TRUSS, FLOOR TRUSS AND ENGINEERED IOISTS SHALL BE DESIGNED TO MEET THE DEFLECTION CRITERIA BELOW, UNLESS NOTED OTHERWISE ON PLAN. MULHERN & KULP CANNOT BE HELD RESPONSIBLE FOR ANY STRUCTURAL ISSUES RELATED TO ANY BUILDING COMPONENT IE COMPONENT SHOP DRAWINGS ARE NOT SUBMITTED TO M&K FOR REVIEW PRIOR TO FABRICATION, DELIVERY, OR INSTALLATION.

TRUSSES/JOISTS SHALL BE DESIGNED SO THAT DIFFERENTIAL DEFLECTION BETWEEN AD JACENT PARALLEL TRUSSES/JOISTS OR GIRDER TRUSSES/FLUSH BEAMS DO NOT EXCEED THE FOLLOWING: ROOF TRUSSES:

1/4" DEAD LOAD

FLOOR TRUSSES, ATTIC TRUSSES, & I-JOISTS 1/8" DEAD LOAD

ABSOLUTE DEAD LOAD DEFECTION OF FLOOR TRUSSES/ATTIC TRUSSES WHEN ADJACENT TO FLOOR FRAMING BY OTHERS SHALL BE LIMITED TO 3/16". (NOT DIFFERENTIAL DEFLECTION)

GENERAL STRUCTURAL NOTES

FOUNDATION

- DESIGN IS BASED ON 2019 OHIO RESIDENTIAL CODE.
- FOOTING DESIGN 1,500 PSF NET ALLOWABLE SOIL BEARING PRESSURE IS ASSUMED. BUILDER/CONTRACTOR MUST VERIEY
- FASTEN 2x6 SILL PLATES TO CONC FND WITH A MINIMUM OF 2 ANCHORS PER PLATE, 12" MAX, FROM PLATE ENDS - UTILIZING
- I/2" DIA. ANCHOR BOLTS @ 6'-0" O.C,7" MIN. EMBEDMENT ■ SIMPSON MAB STRAPS @ 32" O.C.
- SIMPSON MASA ANCHOR STRAPS @ 6'-0" O.
- ALL LUMBER EXPOSED TO WEATHER OR IN CONTACT W/ PERIMETER FOUNDATION SHALL BE PRESERVATIVE TREATED SOUTHERN PINE #2
- BUILDER TO VERIFY CORROSION-RESISTANCE COMPATIBILITY OF HARDWARE & FASTENERS IN CONTACT W/ PRESERVATIVE-TREATED WOOD, CONTACT LUMBER & HARDWARE SUPPLIERS TO COORD.
- FOUNDATION WALLS & FOOTINGS SHALL BE PLAIN CONCRETE UN O
- CONCRETE DESIGN BASED ON ACI 318. CONCRETE SHALL ATTAIN THE FOLLOWING MIN. COMPRESSIVE STRENGTHS IN 28 DAYS, U.N.O.: FIGURE FULL OF THE PROPERTY OF
- fu = 60,000 psi
- BASEMENT FOUNDATION WALL DESIGN BASED ON: . 8' OR 9' HEIGHT (AS NOTED ON PLANS)
- TALLER WALLS MUST BE ENGINEERED.
- . NOMINAL WIDTH (8" FOR 8' WALL, IO" FOR IO' WALL).
- BASEMENT WALL DESIGN IS BASED ON 30 OR 45 PCF BACKFILL SOIL TYPE CLASSIFICATIONS:
- 30 PCF TYPE (GW. GP. SW. SP) 45 PCF TYPE (GM, GC, SM, SM-SC, ML)
- IMPORTANT IF 60 PCF SOIL TYPE (SC, ML-CL, OR CL) IS UTILIZED FOR BACKFILL, CONTACT MULHERN & KULP FOR FURTHER EVALUATION OF FOUNDATION DESIGN.
- BASEMENT WALLS SHALL BE BRACED, PRIOR TO BACKFILLING, BY ADEQUATE TEMPORARY BRACING OR INSTALL ISLET OOR DECK
- PROVIDE (2) #5 BARS AROUND ALL SIDES OF OPENINGS IN CONCRETE BSMT. FND. WALL WITH 2" CLEAR. REINFORCEMENT SHALL EXTEND 12" PAST CORNER OF OPENING IN ALL DIRECTIONS
- FOR OPENINGS UP TO 36". PROVIDE MINIMUM 10" CONCRETE DEPTH OVER OPENING OR (3)2xIO w/(2)2x6 JACK STUDS, U.N.O LARGER OPENINGS SHALL BE PER PLAN.
- ALL CONCRETE EXPOSED TO THE WEATHER SHALL NOT HAVE LESS THAN 5% OR MORE THAN 7% AIR ENTRAINMENT
- ALL FOOTINGS SHALL BEAR BELOW FROST LINE (TYP.) OR 12" MIN IN REGIONS WHERE CODE FROST DEPTH IS NOT APPLICABLE. CONSULT SOILS REPORT OR BUILDING DEPT. FOR MINIMUM DEPTH BELOW
- FOOTINGS AND SLABS ON GRADE SHALL BEAR ON VIRGIN SOIL OR
- PROVIDE CONTROL JOINTS AT ALL INSIDE CORNERS OF SLAB EDGES, AND OTHER LOCATIONS WHERE SLAB CRACKS ARE LIKELY TO DEVELOP.
- JOINTS SHALL BE LOCATED @ 10'-0" O.C. (RECOMMENDED) OR 15'-0" O.C. (MAXIMUM) · JOINT GRID PATTERN SHALL BE AS CLOSE TO SQUARES AS
- POSSIBLE (I:I RATIO), WITH A MAXIMUM OF I:I.5 RATIO · CONTROL JOINTS SHALL NOT BE INSTALLED IN STRUCTURAL
- TYPICAL REINFORCEMENT DETAILS: PROVIDE 3" MIN. CLEAR COVER WHERE CAST AGAINST EARTH, I I/2" MIN. CLEAR COVER AGAINST FORMS. LAP ALL REBAR 48 BAR DIAMETERS MIN. (24" FOR #4 BARS) & BEND BARS AND LAP AT CORNERS. PROVIDE 6" HOOK INTO SUPPORTING FOOTINGS WHEN FOOTINGS INTERSECT.
- DIMENSIONS BY OTHERS BUILDER TO VERIEY

LATERAL/WALL BRACING & WALL SHEATHING SPECIFICATIONS

THIS MODEL HAS BEEN DESIGNED TO RESIST LATERAL FORCES RESULTING FROM: 20 MPH WIND IN 2018 NGSBC

(120 MPH WIND SPEED IN ASCE 7-10 WIND MAP, PER IRC R301,21,1) EXP. B & SEISMIC CAT. A/B

EXT. WALL SHEATHING SPECIFICATION

- 7/16" OSB OR 15/32" PLYWOOD FASTEN SHEATHING W/ 2 3 "x0.II3 NAILS @ 6" O.C. AT EDGES & ● 12" O.C. IN THE PANEL FIELD. (TYP, U.N.O.)
- ALL SHEATHING PANELS SHALL BE ORIENTED VERTICALLY (LONG DIRECTION PARALLEL TO STUDS) AND INSTALLED FULL HEIGHT OF SHEAR WALL - OR 2x HORIZONTAL BLOCKING SHALL BE PROVIDED TO SUPPORT ALL UNSUPPORTED PANEL EDGES & EDGE
- ALL EXT. WALLS SHALL BE CONTINUOUSLY SHEATHED AND ARE CONSIDERED SHEAR WALLS.
- ALT. STAPLE CONNECTION SPEC: 1 3/4" 16 GA STAPLES (1/6" CROWN) @ 3" O.C. AT EDGES \$ @ 6" O.C IN FIELD.

3" O.C. EDGE NAILING

AT DESIGNATED AREAS - FASTEN PANEL EDGES OF WOOD STRUCTURAL WALL SHEATHING TO FRAMING W 2 3" × 0.113" NAILS @ 3" O.C. AND 12" O.C. IN THE PANEL FIELD NO STAPLE ALTERNATIVE AVAILABLE AT THIS SPEC. ALL SHEATHING PANELS SHALL BE ORIENTED VERTICALLY (LONG DIRECTION PARALLEL TO STUD) AND INSTALLED FULL HEIGHT OF SHEAR WALL - OR - 2x HORIZONTAL BLOCKING SHALL BE PROVIDED TO SUPPORT UNSUPPORTED PANEL EDGES AND 3" O.G. FDGE FASTENING.

- SEE CONNECTION SPECIFICATIONS CHART FOR STANDARD SHEAR TRANSFER DETAILING, IF ADDITIONAL CAPACITY IS REQUIRED BY DESIGN, IT WILL BE SPECIFICALLY NOTED ON PLAN.
- DESIGN ASSUMES 16" O.C MAX, STUD SPACING, U.N.O.
- ALL STRUCTURAL PANELS ARE TO BE DIRECTLY APPLIED TO STUD FRAMING.
- PRE-MANUFACTURED PANELIZED WALLS: FASTEN TOGETHER END STUDS OF WALL PANELS SHEATHED W/ OSB OR PLYWOOD W/ 10d NAILS a 4" O.C. (THRU ONE SIDE ONLY)
 - INDICATES EXTENT OF INT. OSB SHEARWALL, BLOCKED PANEL EDGES. AND/OR 3" O.C. EDGE NAILING



INDICATES POST ABOVE (P.A.) PROVIDE SOLID BLOCKING UNDER POST OR JAMB

GENERAL STRUCTURAL NOTES

FLOOR FRAMING

- L- MISTS/TRUSSES SHALL BE DESIGNED BY MANUE TO MEET OR EXCEED L/480 LIVE LOAD DEFLECTION CRITERIA. (EXCLUDES STONE/MARBLE OR WET BED CONSTRUCTED FLOORS - CONTACT M&K FOR EXCLUDED FLOOR DESIGNS)
- PER THE GUIDELINES OF THE TILE COUNCIL OF NORTH AMERICA (TCNA HANDBOOK), IT SHALL BE THE FLOOR FINISH INSTALLER'S RESPONSIBILITY TO VERIFY THAT THE FINISHES TO BE INSTALLED MATCH THE DESIGN CRITERIA NOTED ABOVE (UNDER "DESIGN LOADS*)
- AT I-JOIST FLOORS, PROVIDE LI/8" MIN, OSB RIM BOARD.
- METAL HANGERS SHALL BE SPECIFIED BY MANUFACTURER, U.N.O.
- I-, IOIST/TRUSS SHOP DWGS SHALL BE SUBMITTED TO ARCH & FNG FOR REVIEW AND APPROVAL PRIOR TO FABRICATION OR DELIVERY
- FLOOR SHEATHING SHALL BE 23/32" A.P.A. RATED STURD-LELOOR 24" O.C., EXPOSURE I (OR APPROVED EQUAL) WITH TONGUE AND
- GROOVE EDGES. FASTEN TO FRAMING MEMBERS W GLUE AND 2 1 × 0 131" NAILS @ 6"0 c @ PANEL EDGES & @ 12"0 c FIELD
- 2 3" x 0,120" NAILS @ 4" Q.C. @ PANEL EDGES & @ 8" Q.C. FIELD. - 2 3 × 0.113 NAILS @ 3 O.C. @ PANEL EDGES \$ @ 6 O.C. IN FIELD.

ROOF FRAMING

- ROOF SHEATHING SHALL BE 1/16" A.P.A. RATED SHEATHING 24/16 EXPOSURE I (OR APPROVED EQUAL). FASTEN TO FRAMING MEMBERS w/ 2 ½" x 0.131" NAILS @ 6"o.c. @ PANEL EDGES \$ @ 12" O.C. FIELD.
- · W/ 2 🖁 × 0.120" NAILS @ 4"o.c. @ PANEL EDGES & @ 8" O.C. FIELD. W/2 🐉 x 0.113" NAILS @ 3"o.c. @ PANEL EDGES \$ @ 6" O.C. FIELD.
- MITHIN 48" OF ALL ROOF EDGES, RIDGES, & HIPS FASTEN ROOF SHEATHING FIELDS PER EDGE NAILING SPEC FASTEN EACH ROOF TRUGS TO TOP PLATE W/ SIMPSON H2.5A CLIP
- (OR APPROVED EQUAL) @ ALL BEARING POINTS. PROVIDE (2) H2.5A CLIPS AT 2-PLY GIRDER TRUSSES, (3) H2.5A CLIPS AT 3-PLY GIRDER TRUSSES & ROOF BEAMS - AT ALL BEARING POINTS
- METAL HANGERS SHALL BE SPECIFIED BY THE MANUFACTURER, U.N.O. ROOF TRUSS SHOP DWGS. SHALL BE SUBMITTED TO ARCH & ENG. FOR REVIEW AND APPROVAL PRIOR TO FABRICATION OR DELIVERY
- ERECT AND INSTALL ROOF TRUSSES PER WICA & TPI'S BOSLL "GUIDE TO GOOD PRACTICE FOR HANDLING, INSTALLING & BRACING OF METAL PLATE CONNECTED WOOD TRUSSES."
- SUPPORT SHORT SPAN ROOF TRUSSES W/2×4 LEDGER EASTENED TO

FRAMING w/(2) 3" x 0.120" NAILS @ 16" O.C. (UP TO 7' SPAN).

MULHERN+KULP



MULHERN & KULE

GENERAL STRUCTURAL NOTES

 DESIGN IS BASED ON 2018 NORTH CAROLINA RESIDENTIAL CODE . WOOD FRAME ENGINEERING IS BASED ON NDS "NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION" - LATEST EDITION.

DESIGN LOADS:

LIVE = 20 PSE (IS PSE REDIKED) LOAD DURATION FACTOR = 1.15

FLOOR LIVE = 40 PSF (30 PSF @ SLEEPING AREAS) DEAD = 10 PSF (1-JOISTS & SOLID SAWN) ADD'L IO PSF @ CERAMIC TILE IN KITCHEN. BATHS, SUNROOM, & LAUND.

SOIL 1500 PSF ASSUMED ALLOWABLE BEARING PRESSURE (TO BE VERIFIED BY BUILDER)

GENERAL FRAMING

- ALL TYP, NAIL FASTENER REQUIREMENTS ARE NOTED IN STANDARD CONNECTIONS TABLE (IRC TABLE R602.3(I)) OR ON PLANS. ALL NAILS SPECIFIED ARE MIN DIAMETER AND LENGTH REQUIRED FOR MANUFACTURER'S REQUIREMENTS FOR MAX CHARTED CAPACITY NOTE: HANGERS USE COMMON NAIL DIAMETERS NOT TYPICAL FRAMING GUN NAILS.
- FXT. & INT. BEARING WALLS SHALL BE 2x4 OR 2x6 (AS SHOWN ON PLANS) @ 16" O.C. SPF "STUD" GRADE LUMBER, OR BETTER, U.N.O. . WALLS OVER 10' TALL SHALL BE PER PLAN.
- ALL INTERIOR BEARING WALLS ARE ASSUMED TO BE SHEATHED W GYP WALL BOARD (ONE SIDE MIN.) OR PROVIDE MID HT. BLOCKING
- ALL 2V8 2VID # 2VI2 HEADERS BEAMS # OTHER STRUCTURAL MEMBERS SHALL BE S.Y.P. #2 LUMBER, OR BETTER
- ALL 2x6 HEADERS, BEAMS & OTHER STRUCTURAL MEMBERS SHALL BE SPF "STUD" GRADE LUMBER, OR BETTER.
- SUPPORT ALL HEADERS/ BEAMS W (1)2x JACK STUD & (1)2x KING - THE NUMBER OF STUDS SPECIFIED AT A SUPPORT INDICATES THE
- NUMBER OF JACK STUDS REQUIRED, U.N.O. ALL NON-BEARING INTERIOR STUD WALLS SHALL BE CONSTRUCTED WITH 2x 'STUD' GRADE MEMBERS SPACED @ 24" O.C. (MAX., U.N.O.)
- HEADERS IN NON-LOAD BEARING WALLS SHALL BE: (I)2x4/6 FLAT @ OPENINGS UP TO 4', (2)2x4/6 FLAT UP TO 8'
- ALL FRAMING LUMBER SHALL BE DRIED TO 15% MC (KD-15). ENGINEERED LUMBER BEAMS TO MEET OR EXCEED THE FOLLOWING: • 'LSL' - Fb=2325 psi, Fv=310 psi, E=1.55x10^6 psi
- LVL' Fb=2600 psi; Fv=285 psi; E=2.0xl0^6 psi ENGINEERED LUMBER POSTS TO MEET OR EXCEED THE FOLLOWING: 'LVL' - Fb=2400 psi; FcII=2500 psi; E=I.8xI0^6 psi
- FOR 2 & 3 PLY BEAMS OF EQUAL 13/4" MAX. WIDTH, FASTEN PLIES TOGETHER WITH 3 ROWS OF 3"XO.120" NAILS @ 8" O/C OR 2 ROWS 4"x3/2" SIMPSON SDS SCREWS (OR 3'/2" TRUSSLOK SCREWS) **0** 16" O/C. USE A MINIMUM OF 4 ROWS FOR BEAM DEPTHS OF 14" OR GREATER. APPLY EASTENING AT BOTH FACES FOR 3-PLY CONDITION. LOCATE TOP & BOTTOM NAILS/SCREWS 2" FROM EDGE. SOLID 3 ½" OR 5 ¼" BEAMS ARE ACCEPTABLE. USE 2 ROWS OF NAILS FOR 2x6 & 2x8 MEMBERS.
- FOR 4 PLY BEAMS OF EQUAL 13/4" MAX. WIDTH, FASTEN PLIES TOGETHER WITH 3 ROWS OF $\frac{1}{4}$ "%6" SIMPSON SDS SCREWS (OR 6 $\frac{3}{4}$ " TRUSSLOK SCREWS) © 16" O/C. USE A MINIMUM OF 4 ROWS FOR BEAM DEPTHS OF 14" OR GREATER, APPLY FASTENING AT BOTH FACES (ONE SIDE ONLY FOR TRUSSLOK SCREWS). LOCATE TOP AND BOTTOM SCREWS 2" FROM EDGE. A SOLID T" BEAM IS ACCEPTABLE.
- PROVIDE SOLID BLOCKING IN FLOOR SYSTEM UNDER ALL POSTS CONTINUOUS TO FND./BEARING. BLOCKING TO MATCH POST ABOVE.
- FASTEN 2x WOOD PLATES TO TOP FLANGE OF STEEL BEAMS WITH P.A.F.'S ('HILTI' XU PINS OR EQUAL) • 16" O.C. STAGGERED, OR 1/2" DIA. BOLTS • 48" O.C. STAGGERED.
- STEEL PIPE COLUMN "ASD CAPACITIES" SHALL MEET OR EXCEED THE LOADS PROVIDED AT EACH STEEL PIPE COLUMN LOCATION ON PLAN, COLUMNS ARE TO BE INSTALLED PER THE MANUFACTURER'S REQUIREMENT THAT ACHIEVES THE RATED CAPACITY USED, INCLUDING BUT NOT LIMITED TO POSITIVE CONNECTIONS AT THE TOP AND BOTTOM OF THE COLUMN, TWO COLUMNS MAY BE USED UNDER CONTINUOUS BEAMS TO ACHIEVE THE FULL PLAN SPECIFIED REQUIRED CAPACITY IF INSTALLED CENTERED ON THE EXISTING FOOTING/ PLAN SPECIFIED SINGLE COLUMN LOCATION.

S Ш \sum $\overline{\mathsf{O}}$ I S

Ш

Ш

2

lulhern+Kulp project number:

BSM CN 08-12-22

REVISIONS

roject mg

ssue date:


initial:

MULHERN+KULP RENDERTIAL STRUCTURAL ENGINEERING

Y

S Ш Ш PO STRUCTUR Ó ΑĎ Ш

 $\bar{\sum}$

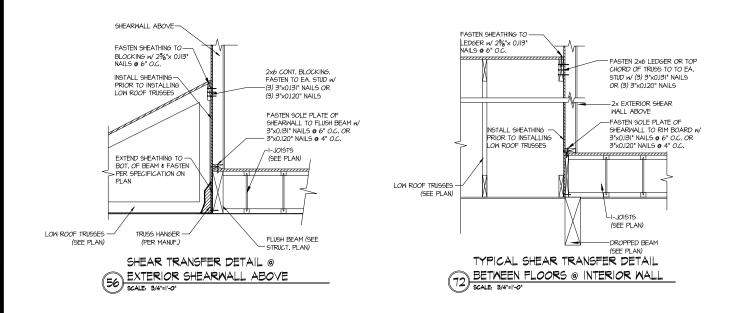

ES S HOME DREES

Mulhern+Kulp project number:

BSM project mgr: drawn by: CNV issue date: 08-12-22

REVISIONS:

initial:

MULHERN+KULP RESIDENTAL STRUCTURAL ENENIESING FRANKEN STRUCTURAL VALUE AND TOTAL

Y

LATERAL DETAILS MEADOW MODE

SD-2

RHL