




System:   
 Repair: 

**System: Pressure Manifold**  
 Lines: 5-9, (320')  
 Ezflow or Chambers 25%  
 0.4 Soil LTAR  
 28" Trench Bottom

**Repair: Pressure Manifold**  
 Lines: 1-4, (232')  
 T&J Panel 50% Reduction  
 0.35 Soil LTAR  
 28" Trench Bottom

- \*Keep tanks and drain lines 10' from property lines.
- \*Not a survey.
- \*Not a guarantee of a septic permit.
- \*Keep supply lines >5' from property lines.
- \*Some lines are flagged longer in the field than lengths indicate.
- \*No grading septic area.

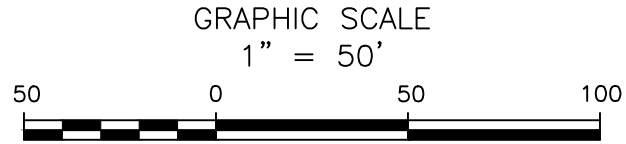

Central Carolina Soil Consulting, PLLC  
 1900 South Main Street, Suite 110  
 Wake Forest, North Carolina 27587  
 Phone (919)569-6704 Fax (919)569-6703

4-Bedroom Septic Layout  
 Lot 47, Birchwood Grove Subdivision  
 Harnett County, North Carolina

Job# : 3753
Drawn By : LW
Date : 01/09/2024
Revision: