Floor Plan Room Labels

- GRILLING PORCH
- MASTER SUITE
- DINING
- GREAT ROOM
- BEDROOM 2
- BATH
- BEDROOM 3
- LAU
- GARAGE

NOTE:
SEE OWNER FOR ALL FLOOR OUTLET LOCATIONS.

CEILING OUTLET

OPT. MASTER BATH

ELECTRICAL LEGEND

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
F	EXHAUST FAN		ELECTRICAL OUTLET
	CEILING FAN		220V ELECTRICAL OUTLET
			CEILING MOUNTED OUTLET
			FLOOR MOUNTED OUTLET
	CEILING FAN W/ LIGHT		HIDDEN OUTLET
			SWITCHED OUTLET
			BREAKER BOX
			PHONE
FL	EXHAUST FAN W/ LIGHT	SD	SMOKE DETECTOR
HLV	HEAT, LIGHT AND VENT LIGHT	$	SWITCH
			STACKED SWITCHES
	4' FLORESCENT LIGHT	3	THREE WAY
	2' X 4' FLORESCENT LIGHT	4	FOUR WAY
		GFI	GROUND FAULT INTERRUPTER
	6" RECESSED CAN LIGHT	W.P.	WATERPROOF
	3" RECESSED CAN LIGHT		ELECTRICAL WIRE
	FLOOD LIGHT		CABLE TV
	WALL MOUNTED LIGHT		TRACK LIGHTING

SLAB FOUNDATION SECTIONAL DETAIL
3/4" = 1'-0"

- ROOFING – SEE ELEVATION
- 5/8" HUBER WOOD ZIP SYSTEM SHEATHING WITH ZIP TAPE W/ SELF ADHESIVE MEMBRANE INSTALLED TO MANUF. SPEC.
- 2X6 OR 2X8 RAFTERS @ 16"o.c.
- MIN. R-30 BLOWN INSULATION
- 2X6 OR 2X8 CEILING JOISTS @16"o.c.
- 2 - 2X4 TOP PL.
- 2X4 CONTINUOUS NAILER
- 2X4 LOOKOUT @ 24"o.c.
- 2X4 SUB-FASCIA
- 1X2 TRIM
- SEE OWNER FOR INTER. FINISHES
- 1X6 FASCIA
- 3/8" EXT. PLYWOOD SOFFIT W/ 8"X 16" VENTS @ 5'0"o.c.
- 1X2 TRIM
- 1X6 FRIEZE
- SEE ELEVATION
- 2X4 STUDS @ 16"o.c.
- 1/2" HUBER WOOD ZIP SHEATHING SYSTEM WITH ZIP TAPE INSTALLED TO MANUF. SPEC.
- MIN. R-13 BATT INSULATION
- LAP SIDING
- CONCEALED FLASHING WITH CAULKING @ ALL SEAMS AND JOINTS
- 2X DRIP (TYP) 6" ABOVE F.F. LINE LOCATED BELOW WINDOW SILL
- 2X4 SILL
- ROWLOCK
- BRICK W/ TIES

CRAWL FOUNDATION SECTIONAL DETAIL
3/4" = 1'-0"

- 2X4 STUDS @ 16"o.c.
- 1/2" HUBER WOOD ZIP SHEATHING SYSTEM WITH ZIP TAPE INSTALLED TO MANUF. SPEC.
- MIN. R-13 BATT INSULATION
- LAP SIDING
- CONCEALED FLASHING WITH CAULKING @ ALL SEAMS AND JOINTS
- 2X DRIP (TYP) 6" ABOVE F.F. LINE LOCATED BELOW WINDOW SILL
- 3/4" PW T&G ADVANTECH FLOOR GLUED & SCREWED.
- 2X10 RIM JOIST
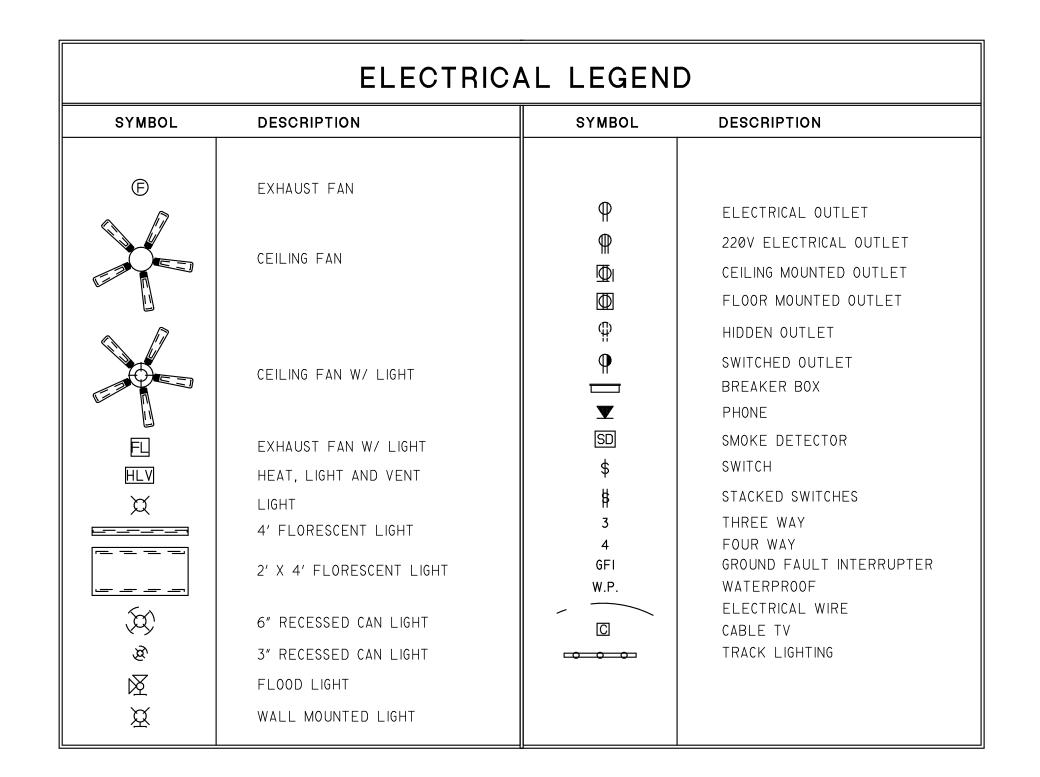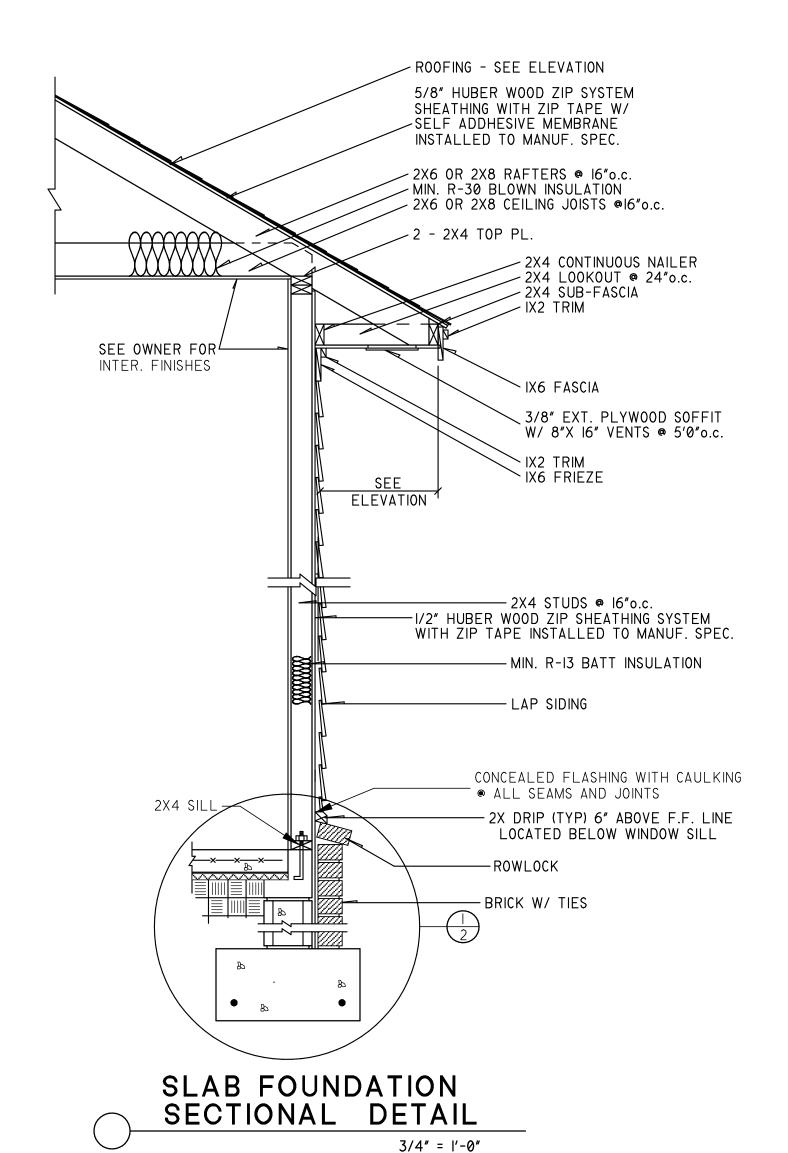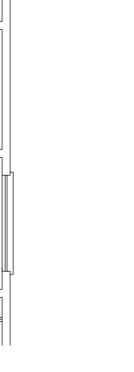- 2X10 @ 16" o.c. R-19 BATT INSULATION
- ROWLOCK
- BRICK W/ TIES

NOTE:
1.- OWNER TO VERIFY & APPROVE ALL ELECTRICAL & POSSIBLE FLOOR OUTLET LOCATIONS NOT NOTED.
2.- PROVIDE ARC-FAULT INTERRUPTER PROTECTION FOR ALL BEDROOMS. REFERENCE IRC SECTION E3802.
3.- OWNER TO LOCATE AND VERIFY PHONE & CABLE JACKS.
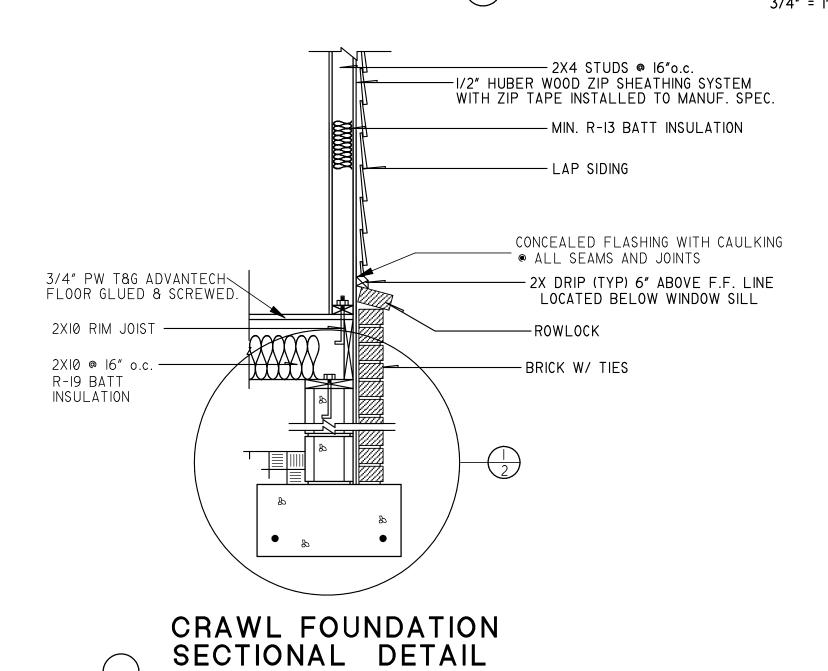4.- SEE OWNER FOR ALL OUTDOOR ELECTRICAL NEEDS AND LIGHTING.

| REVISIONS	BY
24x36	

DATE	7-9-21
SCALE	1/4" = 1'-0"
BUILDER	
JOB	MEN5326R
DRAWN BY	MN/AT

4 / 5