isDesign

Client: Wellco Contractors


Project: Address:

Date: 9/9/2022 Input by: Curtis Quick

Job Name: Plan 8 Beams Project #:

Kerto-S LVL 2-Ply - PASSED 1.750" X 11.875" **GDH**

Level: Level

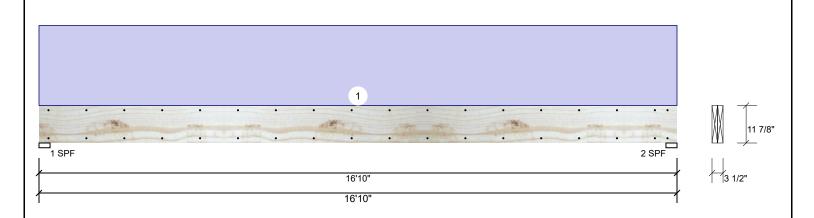

Member Information Reactions UNPATTERNED Ib (Uplift) Application: Wind Type: Floor Brg Direction Live Dead Snow Const Plies: 2 Design Method: ASD 0 2182 Vertical n 0 0 1 Moisture Condition: Dry **Building Code: IBC/IRC 2015** 2 Vertical 0 2182 0 0 0 Deflection LL: 480 Load Sharing: No Deflection TL: 360 Deck: Not Checked Importance: Normal - II Temp <= 100°F Temperature: **Bearings** Bearing Length Dir. Cap. React D/L lb Total Ld. Case Ld. Comb. D 1 - SPF 3.500" Vert 42% 2182 / 0 2182 Uniform 2 - SPF 3.500" Vert 42% 2182 / 0 2182 Uniform D

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	8689 ft-lb	8'5"	17919 ft-lb	0.485 (48%)	D	Uniform
Unbraced	8689 ft-lb	8'5"	8702 ft-lb	0.998 (100%)	D	Uniform
Shear	1859 lb	15'6 5/8"	7980 lb	0.233 (23%)	D	Uniform
LL Defl inch	0.000 (L/999)	0	999.000 (L/0)	0.000 (0%)		
TL Defl inch	0.453 (L/433)	8'5 1/16"	0.546 (L/360)	0.831 (83%)	D	Uniform

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be laterally braced at a maximum of 10'8 15/16" o.c.
- 7 Bottom must be laterally braced at end bearings.
- 8 Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments	
1	Uniform			Тор	250 PLF	0 PLF	0 PLF	0 PLF	0 PLF		
	Self Weight				9 PLF						

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

- Handling & Installation
- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
 Provide lateral support at bearing points to avoid
 lateral displacement and rotation
- 6. For flat roofs provide proper drainage to prevent ponding

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



Page 1 of 6

This design is valid until 11/3/2024



isDesign

Client: Wellco Contractors


Project: Address: 9/9/2022

Input by: Curtis Quick Job Name: Plan 8 Beams

Project #:

Kerto-S LVL GDH

1.750" X 11.875" 2-Ply - PASSED Level: Level

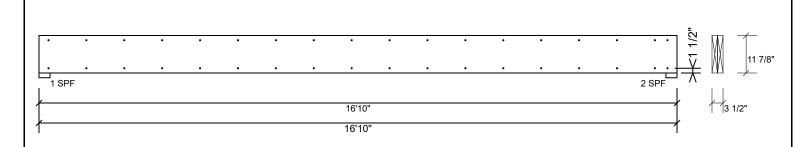

Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c., Maximum end distance not to exceed 6".

1 3		,	,
Capacity	0.0 %		
Load	0.0 PLF		
Yield Limit per Foot	163.7 PLF		
Yield Limit per Fastener	81.9 lb.		
Yield Mode	IV		
Edge Distance	1 1/2"		
Min. End Distance	3"		
Load Combination			
Duration Factor	1.00		

Notes

NOtes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- Handling & Installation

 1. UVI beams must not be cut or drilled

 2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

 3. Damaged Beams must not be used

 4. Design assumes top edge is laterally restrained

 5. Provide lateral support at bearing points to avoid lateral displacement and rotation

For flat roofs provide proper drainage to prevent ponding

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



Page 2 of 6

This design is valid until 11/3/2024 CSD DESIGN



Client: Wellco Contractors

Project: Address:

9/9/2022 Input by: Curtis Quick


Project #:

Kerto-S LVL BM1

1.750" X 9.250" 2-Ply - PASSED

Level: Level

Job Name: Plan 8 Beams

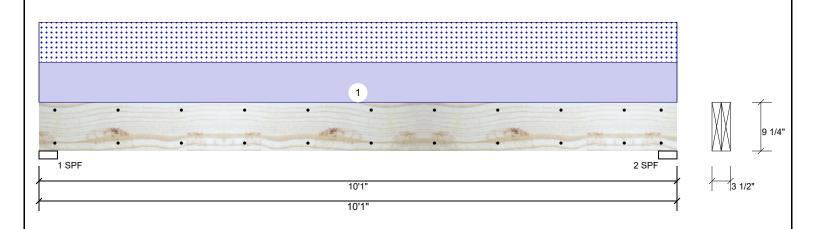

Member Info	rmation			Rea	ctions UNP	ATTERI	NED Ib	(Uplift)			
Type:	Girder	Application:	Floor	Brg	Direction	Live)	Dead	Snow	Wind	Const
Plies:	2	Design Method:	ASD	1	Vertical	()	1811	1775	0	0
Moisture Condition	on: Dry	Building Code:	IBC/IRC 2015	2	Vertical	()	1811	1775	0	0
Deflection LL:	360	Load Sharing:	No								
Deflection TL:	240	Deck:	Not Checked								
Importance:	Normal - II										
Temperature:	Temp <= 100°F										
				Bea	rings						
				Bea	aring Length	Dir.	Сар.	React D/L lb	Total	Ld. Case	Ld. Comb.
				1 -	SPF 3.500"	Vert	69%	1811 / 1775	3586	L	D+S
				2 -	SPF 3.500"	Vert	69%	1811 / 1775	3586	L	D+S

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	8236 ft-lb	5' 1/2"	14423 ft-lb	0.571 (57%)	D+S	L
Unbraced	8236 ft-lb	5' 1/2"	8246 ft-lb	0.999 (100%)	D+S	L
Shear	2836 lb	1' 3/4"	7943 lb	0.357 (36%)	D+S	L
LL Defl inch	0.162 (L/714)	5' 1/2"	0.321 (L/360)	0.504 (50%)	S	L
TL Defl inch	0.327 (L/353)	5' 1/2"	0.481 (L/240)	0.679 (68%)	D+S	L

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be laterally braced at a maximum of 8'8 11/16" o.c.
- 7 Bottom must be laterally braced at end bearings.
- 8 Lateral slenderness ratio based on single ply width.

		3 1 7				4					
ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments	
1	Uniform			Тор	352 PLF	0 PLF	352 PLF	0 PLF	0 PLF	B2	
	Self Weight				7 PLF						

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive
- Handling & Installation
- I. LVL beams must not be cut or drilled
 Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
 Damaged Beams must not be used

- Design assumes top edge is laterally restrained
 Provide lateral support at bearing points to avoid
 lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



Page 3 of 6

This design is valid until 11/3/2024 CSD DESIGN isDesign

Client: Wellco Contractors

Project: Address: 9/9/2022


Input by: Curtis Quick Job Name: Plan 8 Beams

Project #:

1.750" X 9.250" **Kerto-S LVL** BM1

2-Ply - PASSED

Level: Level

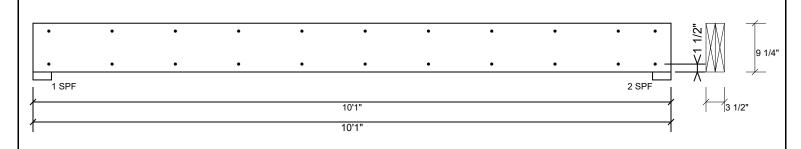

Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

	* * * * * * * * * * * * * * * * * * * *
Capacity	0.0 %
Load	0.0 PLF
Yield Limit per Foot	163.7 PLF
Yield Limit per Fastener	81.9 lb.
Yield Mode	IV
Edge Distance	1 1/2"
Min. End Distance	3"
Load Combination	
Duration Factor	1.00

Notes

NOtes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- Handling & Installation

 1. UVI beams must not be cut or drilled

 2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

 3. Damaged Beams must not be used

 4. Design assumes top edge is laterally restrained

 5. Provide lateral support at bearing points to avoid lateral displacement and rotation
- For flat roofs provide proper drainage to prevent ponding

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



Page 4 of 6

This design is valid until 11/3/2024



Client: Wellco Contractors


Project: Address: Date:


9/9/2022 Input by: Curtis Quick Job Name: Plan 8 Beams

Project #:

2.000" X 10.000" 2-Ply - PASSED S-P-F #2

Level: Level

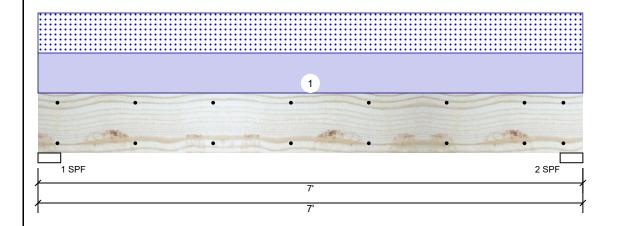



Page 5 of 6

Member Information

Type: Plies: 2 Moisture Condition: Dry Deflection LL: 360 Deflection TL: 240 Importance: Temp <= 100°F

Normal - II

Application: Floor Design Method: ASD **Building Code: IBC/IRC 2015** Load Sharing: No Deck: Not Checked

Reactions UNPATTERNED Ib (Uplift) Brg Direction Live Dead Snow Wind Const Vertical 0 1232 1232 0 0 1 2 Vertical 0 1232 1232 0 0

Bearings

Bearing Length Dir. Cap. React D/L lb Total Ld. Case Ld. Comb. 1-SPF 3.500" Vert 1232 / 1232 2464 L D+S 1232 / 1232 2 - SPF 3.500" Vert 55% 2464 L D+S

Analysis Results

Temperature:

	•						
ſ	Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
	Moment	3766 ft-lb	3'6"	3946 ft-lb	0.954 (95%)	D+S	L
	Unbraced	3766 ft-lb	3'6"	3766 ft-lb	1.000 (100%)	D+S	L
	Shear	1716 lb	1' 3/4"	2872 lb	0.597 (60%)	D+S	L
	LL Defl inch	0.052 (L/1499)	3'6"	0.218 (L/360)	0.240 (24%)	S	L
	TL Defl inch	0.105 (L/750)	3'6"	0.327 (L/240)	0.320 (32%)	D+S	L

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be laterally braced at a maximum of 3'10 5/8" o.c.
- 7 Bottom must be laterally braced at end bearings.
- 8 Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Тор	352 PLF	0 PLF	352 PLF	0 PLF	0 PLF	B2

This design is valid until 11/3/2024

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS Manufacturer Info соттесн

Client: Wellco Contractors Date: 9/9/2022 Project: Input by: Curtis Quick isDesign Address: Job Name: Plan 8 Beams Project #: Level: Level 2.000" X 10.000" 2-Ply - PASSED **BM2** S-P-F #2

2 SPF

Multi-Ply Analysis

1 SPF

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

0.0 % Capacity 0.0 PLF Load 157.4 PLF Yield Limit per Foot Yield Limit per Fastener 78.7 lb. Yield Mode IV Edge Distance 1 1/2" Min. End Distance 3" Load Combination Duration Factor 1.00

Manufacturer Info

Comtech, Inc.
101 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS



Page 6 of 6