


- \*Keep tanks and drain lines 10' from property lines.
- \*Not a survey.
- \*Not a guarantee of a septic permit.
- \*Keep supply lines >5' from property lines.
- \*Some lines are flagged longer in the field than lengths indicate.
- \*No grading septic area.

|   |
|---|
| System: Gravity to Serial Dist.<br>Lines: 1-4, (280')<br>T&J Panel 50% Reduction<br>0.35 Soil LTAR<br>18" Trench Bottom |
| Repair: Pressure Manifold<br>Lines: 5-8, (175')<br>T&J Panel 50% Reduction<br>0.35 Soil LTAR<br>12" Trench Bottom       |

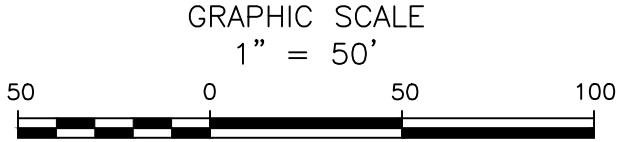

Central Carolina Soil Consulting, PLLC  
 1900 South Main Street, Suite 110  
 Wake Forest, North Carolina 27587  
 Phone (919)569-6704 Fax (919)569-6703

3-Bedroom Septic Layout  
 Lot 138, Birchwood Grove Subdivision  
 Harnett County, North Carolina

|                   |
|-------------------|
| Job# : 3753       |
| Drawn By : LW     |
| Date : 01/09/2024 |
| Revision:         |
|                   |
|                   |