

Harnett County Environmental Health

File/Permit Number: SFD2410-0007

IMPROVEMENT PERMIT

County: Harnett
PIN/Lot Identifier: 0635-11-6914.000
Owner: JOHNSON JONATHAN MURRAY & JOHNSON YVONNE MACHILEK Applicant: JOHNSON JONATHAN MURRAY & JOHNSON YVONNE MACHILEK
Property Location: 4550 COKESBURY RD FUQUAY VARINA, NC 27526
Subdivision (if applicable): _____ Lot #: _____ Block: _____ Section: _____
New Expansion System Relocation Change of Use
Facility Type: SFD 40' x 125'
Number of bedrooms: 3 Number of Occupants: 6 Other: _____
Design Wastewater Strength: Domestic High Strength Industrial Process Wastewater
Proposed Design Daily Flow: 360 GPD Proposed LTAR (Initial): .3 Proposed LTAR (Repair): .45
Proposed Wastewater System Type*: 25% Reduction System (Initial) Pump Required: Yes No May be required
Proposed Wastewater System Type*: 25% Reduction System (Repair) Pump Required: Yes No May be required
**Please include system classification for proposed wastewater system types in accordance with Rule .1301 Table XXXII*
Effluent Standard: DSE HSE NSF/ANSI 40 TS-I TS-II RCW
Saprolite System (Initial): Yes No Saprolite System (Repair): Yes No
Fill System (Initial): Yes No If yes, specify: New Existing (when adding more than 6 inches of fill to system area provide a fill plan)
Fill System (Repair): Yes No If yes, specify: New Existing (when adding more than 6 inches of fill to system area provide a fill plan)
Usable Depth to LC (Initial)*: 31" Usable Depth to LC (Repair)*: 38" * Limiting Condition
Max. Trench Depth (Initial)*: 18" - 19" Max. Trench Depth (Repair)*: 18" - 26" * Measured on the downhill side of the trench
Artificial Drainage Required: Yes No If yes, please specify details: _____
Type of Water Supply: Private well Public well Shared well Municipal Supply Spring Other: _____
Drainfield location meets requirements of Rule .0508: Yes No Drainfield location meets requirements of Rule .0601: Yes No
Permit valid for: Five years [site plan submitted pursuant to GS 130A-334(13a)] No expiration [plat submitted pursuant to GS 130A-334(7a)]

Permit conditions:
~~No Foundation or Gutter Drains to be Directed Towards Septic System.~~
~~No Cutting or Grading of Soil in Septic or Septic Repair Area.~~
~~The Existing Single Wide must be removed and its makeshift septic system must be abandoned/removed. (is not approved by environmental health)~~

Authorized Agent's Printed Name: Ren Levocz Expiration Date: 10-24-29
Authorized Agent's Signature:  Date: 10-24-24

See attached site sketch

The issuance of this permit in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This permit is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of 15A NCAC 18E and to the conditions of this permit.

Harnett County Environmental Health

File/Permit Number: SFD2410-0007

CONSTRUCTION AUTHORIZATION

County: Harnett PIN/Lot Identifier: 0635-11-6914.000
Owner: JOHNSON JONATHAN MURRAY & JOHNSON YVONNE MACHILEK Applicant: JOHNSON JONATHAN MURRAY & JOHNSON YVONNE MACHILEK
Property Location: 4550 COKESBURY RD FUQUAY VARINA, NC 27526
Facility Type: SFD 40' x 125'

Number of bedrooms: 3 Number of Occupants: 6 Other: _____

New Expansion Repair System Relocation Change of Use
Basement? Yes No Basement Fixtures? Yes No
Crawl Space? Yes No Slab Foundation? Yes No
Type of Wastewater System* 25% Reduction System (Initial) 25% Reduction System (Repair)

**Please include system classification for proposed wastewater system types in accordance with Rule .1301 Table XXXII*

Design Daily Flow: 360 GPD Wastewater Strength: Domestic High Strength Industrial Process Wastewater
Rule .0403(e) Engineering Design Utilizing Low-flow Fixtures and Low-flow Technologies (S.L. 2013-413 and 2014-120)? Yes No
(if yes, please provide engineering documentation)

Effluent Standard: DSE HSE NSF/ANSI 40 TS-I TS-II RCW
Type of Water Supply: Private well Public well Shared well Municipal Supply Spring Other: _____

Installation Requirements/Conditions

Septic Tank Size: 1,000 gallons Total Trench/Bed Length: 300' feet Trench/Bed Spacing: 9' feet on center
Trench/Bed Width: 36" inches LTAR: .3 gpd/ft² Usable Depth to LC (Initial)*: 31" **Limiting condition*
Soil Cover: 6" inches Slope Corrected Maximum Trench/Bed Depth†: 18"-19" MAX inches *† Measured on the downhill side of the trench*
Pump Tank Size (if applicable): 1,000 gallons Requires more than one pump? Yes No
Pump Requirements: _____ ft. TDH vs. _____ GPM Grease Trap Size (if applicable): _____ gallons
Distribution Method: Serial D-Box or Parallel Pressure Manifold(s) LPP Other: 3 - 100' Lines
Artificial Drainage Required: Yes No If yes, please specify details: _____

Legal Agreements (If the answer is "Yes" to any type of legal agreements, please attach a copy of the agreement.)

Multi-party Agreement Required [Rule .0204(g)]: Yes No
Easement, Right-of-Way, or Encroachment Agreement Required [Rule .0204(d)]: Yes No
Declaration of Restrictive Covenants: Yes No Pre-Construction Conference Required: Yes No
Management Entity Required: Yes No Minimum O&M Requirements: _____
Conditions: No Foundation or Gutter Drains to be Directed Towards Septic System.
No Cutting or Grading of Soil in Septic or Septic Repair Area.
The Existing Single Wide must be removed and its makeshift septic system must be abandoned/removed. (is not approved by environmental health)

The requirements of 15A NCAC 18E are incorporated by reference into this permit and shall be met. Systems shall be installed in accordance with the attached site sketch. This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be affected by a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of 15A NCAC 18E, or 15A NCAC 18A .1900, as applicable, and to the conditions of this permit.

Authorized Agent's Printed Name: Ren LeVOCZ Expiration Date: 10-24-29
Authorized Agent's Signature:  Date: 10-24-24

See attached site sketch

Harnett County Environmental Health

SITE SKETCH

PIN 0635-11-6914.000

Permit Number SFD2410-0007

JOHNSON JONATHAN MURRAY & JCH

Applicant's Name

REHS

Authorized State Agent


Subdivision/Section/Lot Number

10-24-24

Date

System components represent approximate contours only. The contractor must flag the system prior to beginning the installation to ensure that the proper grade is maintained.

Scale = NTS

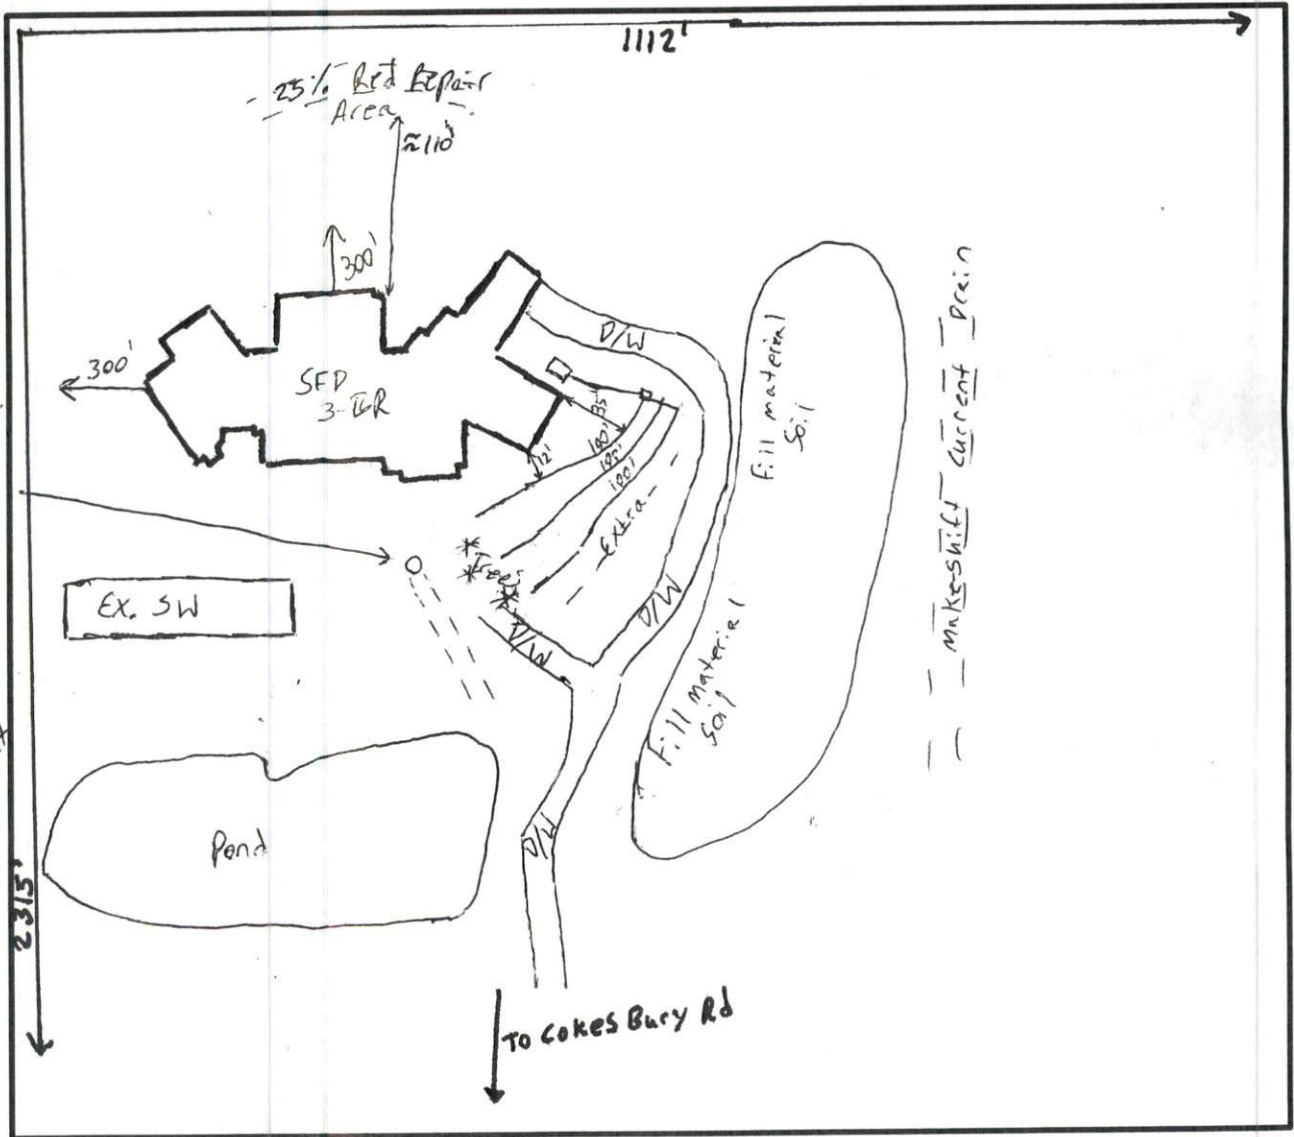

* Not Approved/
make-shift
septic system
to be Abandon
and Removed

* SW to be
Removed for
Final, Applicant
is aware.