

Mark Morris, P.E.

#126, 1317-M, Summerville, SC 29483

843 209-5784, Fax (866)-213-4614

The truss drawing(s) listed below have been prepared by **Atlantic Building Components** under my direct supervision based on the parameters provided by the truss designers.

AST #: 46674

JOB: 24-2119-F01

JOB NAME: LOT 0.0105 BLAKE POND

Wind Code: N/A

Wind Speed: Vult= N/A

Exposure Category: N/A

Mean Roof Height (feet): N/A

These truss designs comply with IRC 2015 as well as IRC 2018.

14 Truss Design(s)

Trusses:

F1-01, F1-02, F1-03, F1-04, F1-05, F1-06, F1-07, F1-08, F1-10, F1-11, F1-12, F1-14, F1-15, F1-16



3/18/2024

Mark Morris

Warning !—Verify design parameters and read notes before use.


This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to

Job	Truss	Truss Type	Qty	Ply	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC
24-2119-F01	F1-01	GABLE	1	1	Job Reference (optional) # 46674

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:23 2024 Page 1
 ID:fcZ0KwZoZQmeXTIMivGJ_CysCYm-BeyZC5cyJm1qFZI_Y7SHSYglVwjkj3e?Pi1It9zZbnY

0₁-8

Scale = 1:21.9

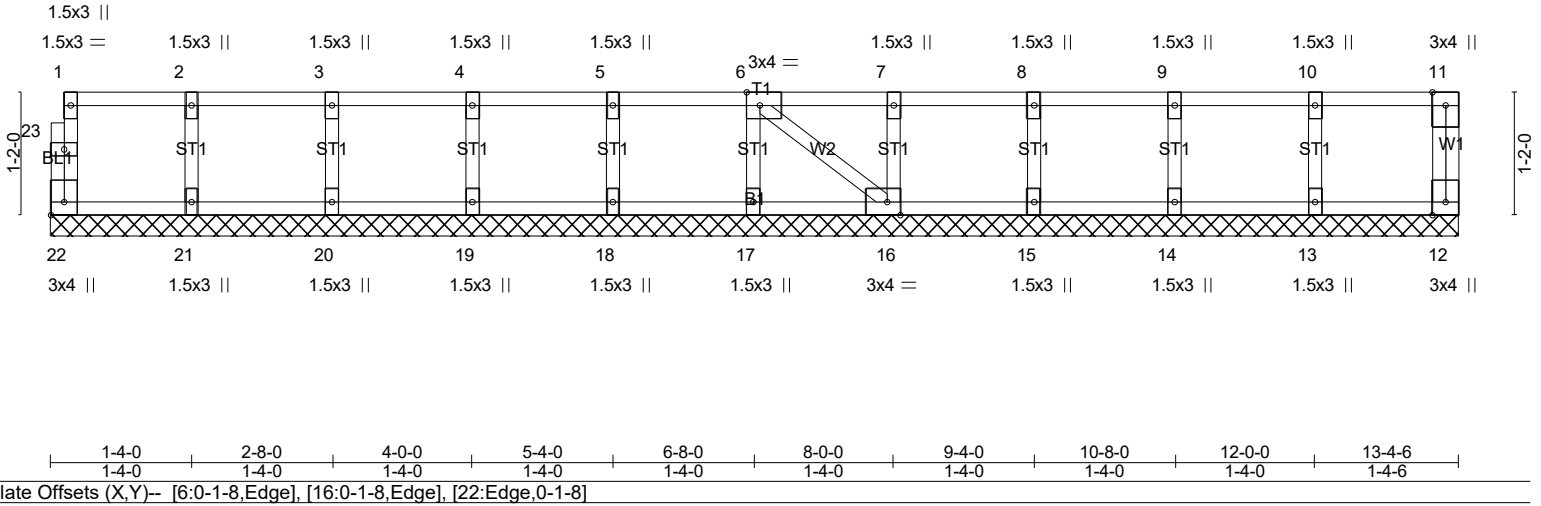

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.06	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.01	Vert(LL) n/a - n/a 999		
BCLL 0.0	Lumber DOL 1.00	WB 0.03	Vert(CT) n/a - n/a 999		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH	Horz(CT) 0.00 12 n/a n/a		
	Code IRC2021/TPI2014			Weight: 59 lb	FT = 20%F, 11%E

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)
 OTHERS 2x4 SP No.3(flat)

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 13-4-6.
 (lb) - Max Grav All reactions 250 lb or less at joint(s) 22, 12, 21, 20, 19, 18, 17, 16, 15, 14, 13

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (6)
- Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard



3/18/2024

Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC
24-2119-F01	F1-02	Floor	6	1	Job Reference (optional) # 46674

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:24 2024 Page 1
 ID:fcZ0KwZoZQmeXTIMivGJ_CysCYm-fqWxQRda449htjKB5rzW?ADsJKxOTQ?8eMmrPbzZbnX





Plate Offsets (X,Y)-- [4:0-1-8,Edge], [5:0-1-8,Edge], [9:Edge,0-1-8], [16:Edge,0-3-0]					
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.31	Vert(LL) -0.11 11-12 >999 480	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.62	Vert(CT) -0.14 11-12 >999 360		
BCLL 0.0	Rep Stress Incr YES	WB 0.41	Horz(CT) 0.03 9 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH			Weight: 69 lb FT = 20%F, 11%E

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)


BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 16=715/0-3-8 (min. 0-1-8), 9=721/0-5-4 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-987/0, 3-4=-1937/0, 4-5=-2244/0, 5-6=-1937/0, 6-7=-987/0
 BOT CHORD 15-16=0/326, 14-15=0/1621, 13-14=0/2244, 12-13=0/2244, 11-12=0/2244, 10-11=0/1621, 9-10=0/326
 WEBS 4-14=-524/0, 3-14=0/437, 3-15=-825/0, 2-15=0/861, 2-16=-864/0, 5-11=-524/0, 6-11=0/437, 6-10=-825/0, 7-10=0/861, 7-9=-851/0

NOTES- (4)
 1) Unbalanced floor live loads have been considered for this design.
 2) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 3) CAUTION. Do not erect truss backwards.

LOAD CASE(S) Standard

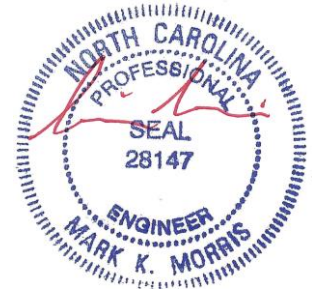

3/18/2024


Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-2119-F01	Truss F1-03	Truss Type GABLE	Qty 1	Ply 1	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 46674
--------------------	----------------	---------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:25 2024 Page 1
ID:fcZ0KwZoZQmeXTIMivGJ_CysCYm-704KdneCrOHYVtvNFYUixNm51kQ6Cz7Is0WOx1zZbnW

0-1-8

Scale = 1:15.1



LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 40.0	2-8-0	TC 0.06	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	1-4-0	BC 0.01	Vert(LL) n/a - n/a 999		
BCLL 0.0	1-4-0	WB 0.03	Vert(CT) n/a - n/a 999		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-P	Horz(CT) 0.00 9 n/a n/a		
				Weight: 40 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 8-4-8.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 15, 9, 14, 13, 12, 11, 10

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (6)
- Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard



3/18/2024

Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC
24-2119-F01	F1-04	Floor	3	1	Job Reference (optional) # 46674

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:26 2024 Page 1
 ID:fcZ0KwZoZQmeXTIMivGj_CysCYm-bDdir7fqbhPP61UZDF?_4blER717xOSR5gFyTUzZbnV




Plate Offsets (X,Y)-- [3:0-1-8,Edge], [7:0-1-8,Edge], [8:Edge,0-1-8]					
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc)	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.15	Vert(LL) -0.01 6 >999 480	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.09	Vert(CT) -0.01 6 >999 360		
BCLL 0.0	Rep Stress Incr YES	WB 0.16	Horz(CT) 0.00 5 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH		Weight: 27 lb	FT = 20%F, 11%E

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)


BRACING-
 TOP CHORD Structural wood sheathing directly applied or 4-11-6 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 8=252/0-3-8 (min. 0-1-8), 5=258/0-5-4 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 1-2=-263/0, 2-3=-263/0
 BOT CHORD 6-7=0/263, 5-6=0/263
 WEBS 1-7=0/326, 3-5=-339/0

NOTES- (4)
 1) Unbalanced floor live loads have been considered for this design.
 2) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 3) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

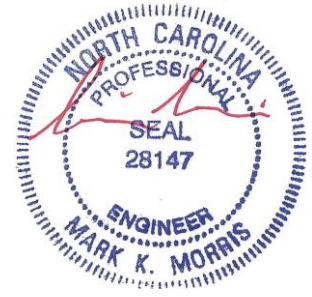

3/18/2024


Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D*Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC
24-2119-F01	F1-05	GABLE	1	1	
					# 46674

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:27 2024 Page 1
 ID:fcZ0KwZoZQmeXTIMivGJ_CysCYm-3PB42TfSM?XGkA3mnzXDcorRZX6fgeaKK?V0wzZbnU

0₁-8

Scale = 1:27.2

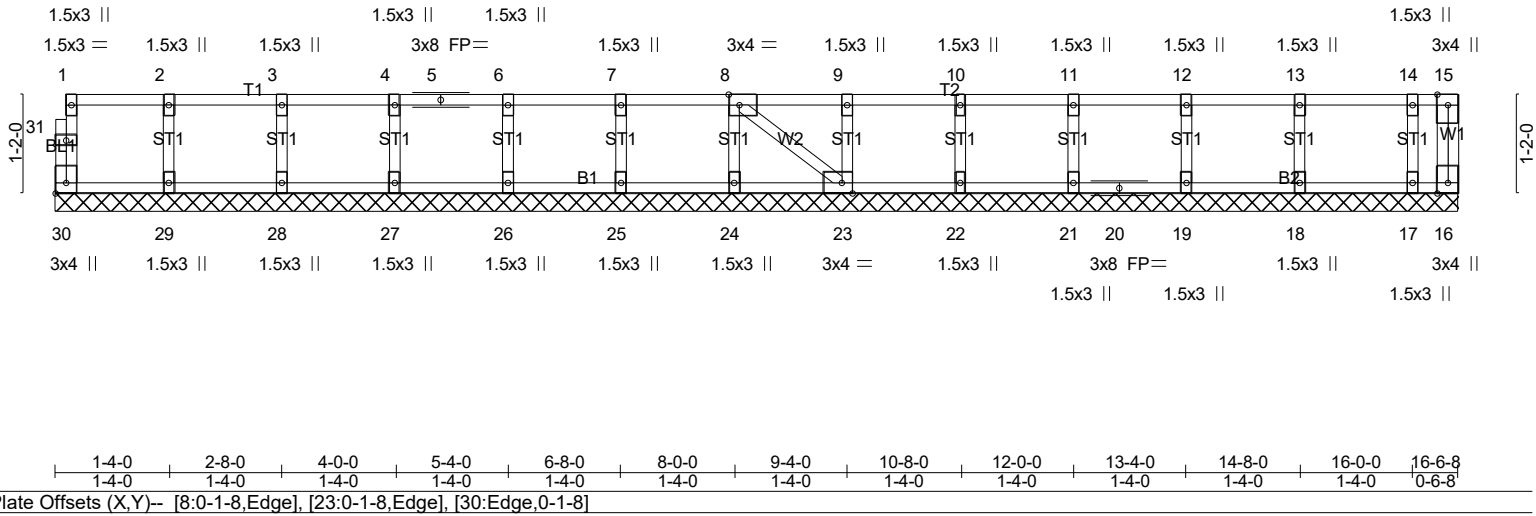

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP	
TCLL 40.0	Plate Grip DOL	1.00	TC 0.06	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	16	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH							
									Weight: 73 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	
OTHERS 2x4 SP No.3(flat)	

REACTIONS. All bearings 16-6-8.
 (lb) - Max Uplift All uplift 100 lb or less at joint(s) 16
 Max Grav All reactions 250 lb or less at joint(s) 30, 16, 29, 28, 27, 26, 25, 24, 23, 22, 21, 19, 18, 17

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (7)
- Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 16.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard



3/18/2024

Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D*Onofrio Drive, Madison, WI 53719.

Job 24-2119-F01	Truss F1-06	Truss Type Floor Supported Gable	Qty 1	Ply 1	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 46674
--------------------	----------------	-------------------------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:28 2024 Page 1
ID:fcZ0KwZoZQmeXTIMivGJ_CysCYm-XblSgog47Jf7MKdyKg2S90Ob9xStPrkZ_k3YMzZbnT

Scale = 1:28.5

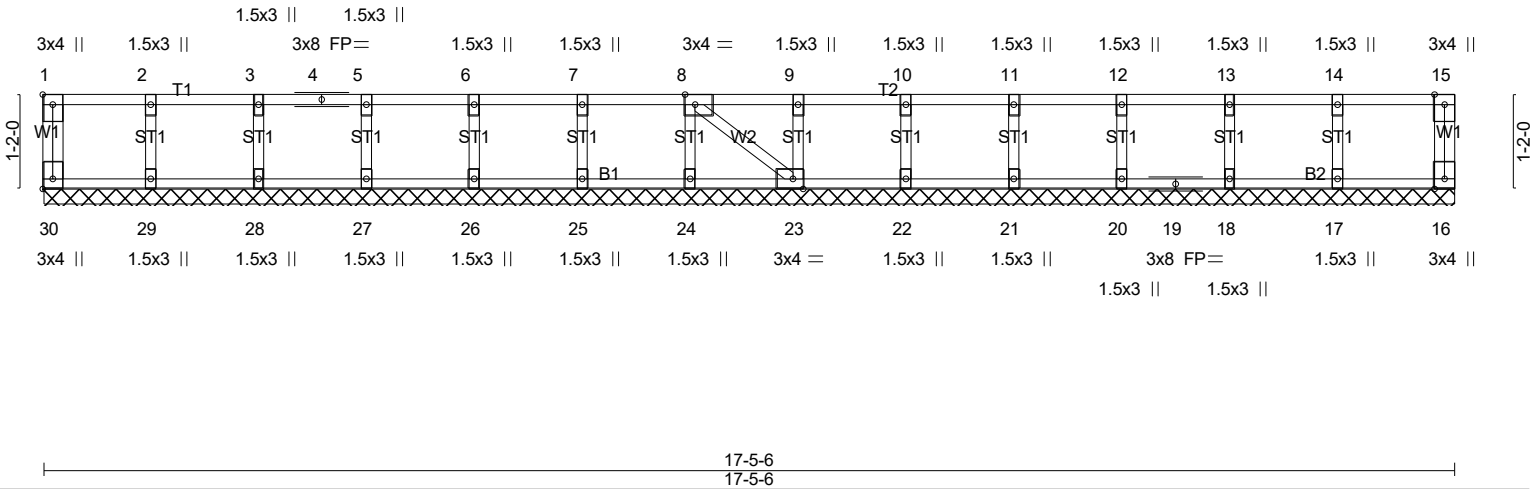


Plate Offsets (X,Y)-- [1:Edge,0-1-8], [8:0-1-8,Edge], [23:0-1-8,Edge], [30:Edge,0-1-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.07	Vert(LL)	n/a	-	n/a	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	23	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 76 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 17-5-6.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 30, 16, 29, 28, 27, 26, 25, 24, 23, 22, 21, 20, 18, 17

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (5)
1) Gable requires continuous bottom chord bearing.
2) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
3) Gable studs spaced at 1-4-0 oc.
4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard




3/18/2024

Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-2119-F01	Truss F1-07	Truss Type Floor	Qty 13	Ply 1	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 46674
--------------------	----------------	---------------------	-----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:29 2024 Page 1
ID:fcZ0KwZoZQmeXTIMivGJ_CysCYm-0oJqT8hjucn_zUC8uOZhhDwiuLdu8fOtnUc4ozZbnS



Scale = 1:29.2





Plate Offsets (X,Y)-- [5:0-1-8,Edge], [6:0-1-8,Edge], [20:Edge,0-1-8]

LOADING (psf)	SPACING-	1-4-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00		TC 0.32	Vert(LL) -0.19	15-16	>999	480	MT20	244/190
TCDL 10.0	Lumber DOL 1.00		BC 0.66	Vert(CT) -0.26	15-16	>806	360		
BCLL 0.0	Rep Stress Incr YES		WB 0.46	Horz(CT) -0.05	20	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 89 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 20=647/0-5-4 (min. 0-1-8), 10=647/0-5-4 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-20=-642/0, 9-10=-642/0, 1-2=-753/0, 2-3=-1861/0, 3-4=-1861/0, 4-5=-2496/0, 5-6=-2718/0, 6-7=-2510/0, 7-8=-1887/0, 8-9=-790/0
BOT CHORD 18-19=0/1422, 17-18=0/2280, 16-17=0/2718, 15-16=0/2718, 14-15=0/2718, 13-14=0/2296, 12-13=0/1456, 11-12=0/1456
WEBS 1-19=0/945, 2-19=-871/0, 2-18=0/572, 4-18=-544/0, 4-17=0/345, 5-17=-444/0, 6-14=-436/3, 7-14=0/345, 7-13=-533/0, 8-13=0/561, 8-11=-867/0, 9-11=0/973

NOTES- (3)
1) Unbalanced floor live loads have been considered for this design.
2) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard



3/18/2024

Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-2119-F01	Truss F1-08	Truss Type Floor	Qty 1	Ply 1	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 46674
--------------------	----------------	---------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:30 2024 Page 1
ID:fcZ0KwZoZQmeXTIMivGJ_CysCYm-U_tDgUilfvvrbenLS54wERTvpl3ntCK10ID9dFzZbnR



Scale = 1:10.7

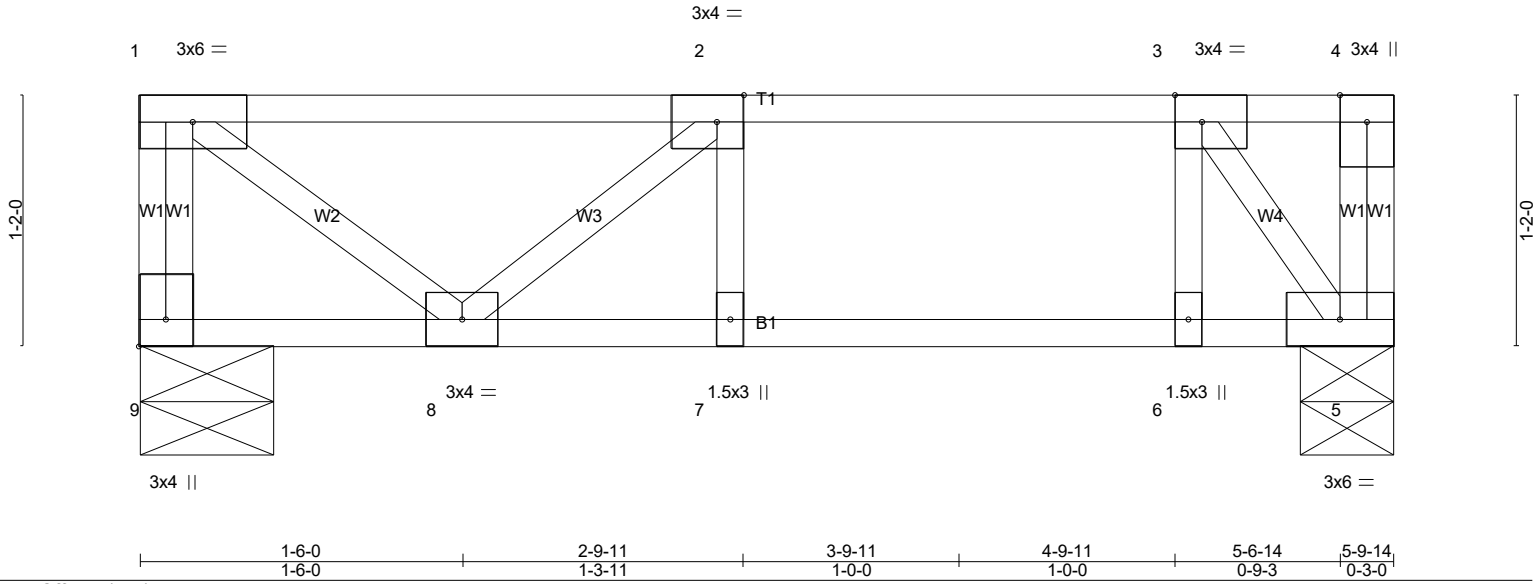


Plate Offsets (X,Y)-- [2:0-1-8,Edge], [3:0-1-8,Edge], [9:Edge,0-1-8]

LOADING (psf)	SPACING-	1-4-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.25	Vert(LL)	-0.03	7	>999	480	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.30	Vert(CT)	-0.04	7	>999	360		
BCLL 0.0	Rep Stress Incr	YES	WB 0.10	Horz(CT)	0.00	5	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						Weight: 32 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 5-9-14 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 9=204/0-7-8 (min. 0-1-8), 5=204/0-5-4 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 3-5=-387/0

NOTES- (3)
1) Unbalanced floor live loads have been considered for this design.
2) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard



3/18/2024

Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC
24-2119-F01	F1-10	GABLE	1	1	Job Reference (optional) # 46674

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:31 2024 Page 1
 ID:fcZ0KwZoZQmeXTiMivGJ_CysCYm-yARbuqizQE1iDoMX0pb9ne07W8TVcgcAFxzj9hzZbnQ

0-1-8

Scale = 1:13.0




Plate Offsets (X,Y)-- [3:0-1-8,Edge], [10:0-1-8,Edge], [13:Edge,0-1-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.06	Vert(LL)	n/a	-	n/a	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.01	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Lumber DOL 1.00	WB 0.03	Horz(CT)	0.00	8	n/a		
BCDL 5.0	Rep Stress Incr YES	Matrix-P					Weight: 35 lb	FT = 20%F, 11%E
	Code IRC2021/TPI2014							

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)
 OTHERS 2x4 SP No.3(flat)


BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 7-1-8.
 (lb) - Max Grav All reactions 250 lb or less at joint(s) 13, 8, 12, 11, 10, 9

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (6)
 1) Gable requires continuous bottom chord bearing.
 2) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 3) Gable studs spaced at 1-4-0 oc.
 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 5) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

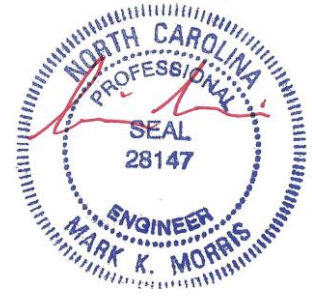

3/18/2024


Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC
24-2119-F01	F1-11	GABLE	1	1	Job Reference (optional) # 46674

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:32 2024 Page 1
 ID:fcZ0KwZoZQmeXTIMivGJ_CysCYm-QN?z5AjbBXAZqyxjZW6OJsYIGYpqL7sJTbiGh7zZbnP

0₁-8

Scale = 1:28.1



1-4-0	2-8-0	4-0-0	5-4-0	6-8-0	8-0-0	9-4-0	10-8-0	12-0-0	13-4-0	14-8-0	16-0-0	17-1-2
1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-1-2

Plate Offsets (X,Y)-- [1:Edge,0-1-8], [7:0-1-8,Edge], [24:0-1-8,Edge], [30:Edge,0-1-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.06	Vert(LL)	n/a	-	n/a	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	16	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 74 lb	FT = 20%F, 11%E

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)
 OTHERS 2x4 SP No.3(flat)

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 17-1-2.
 (lb) - Max Grav All reactions 250 lb or less at joint(s) 30, 16, 29, 28, 27, 26, 25, 24, 23, 22, 21, 20, 18, 17

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (6)
 1) Gable requires continuous bottom chord bearing.
 2) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 3) Gable studs spaced at 1-4-0 oc.
 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 5) CAUTION. Do not erect truss backwards.

LOAD CASE(S) Standard



3/18/2024

Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-2119-F01	Truss F1-12	Truss Type Floor	Qty 14	Ply 1	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 46674
--------------------	----------------	---------------------	-----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:33 2024 Page 1
ID:fcZ0KwZoZQmeXTIMivGJ_CysCYm-uZYLJWkDyrlQS5Ww7Eeds35OByzp4VwTiFSqDazZbnO



Scale = 1:28.8




Plate Offsets (X,Y)-- [1:Edge,0-1-8], [7:0-1-8,Edge], [8:0-1-8,Edge]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	1-4-0	TC 0.37	Vert(LL)	-0.20	17-18	>999	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.79	Vert(CT)	-0.28	17-18	>745		
BCLL 0.0	Lumber DOL 1.00	WB 0.36	Horz(CT)	0.04	12	n/a		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH						
	Code IRC2021/TPI2014						Weight: 89 lb	FT = 20%F, 11%E

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 21=634/0-5-4 (min. 0-1-8), 12=629/0-3-8 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-1067/0, 3-4=-2040/0, 4-5=-2040/0, 5-6=-2040/0, 6-7=-2516/0, 7-8=-2578/0, 8-9=-2226/0, 9-10=-1436/0
 BOT CHORD 20-21=0/478, 19-20=0/1635, 18-19=0/2392, 17-18=0/2578, 16-17=0/2578, 15-16=0/2578, 14-15=0/1926, 13-14=0/1926,
 12-13=0/916
 WEBS 7-18=-306/127, 6-18=0/266, 6-19=-450/0, 3-19=0/517, 3-20=-739/0, 2-20=0/766, 8-15=-558/0, 9-15=0/421,
 9-13=-639/0, 10-13=0/677, 10-12=-1085/0, 2-21=-797/0

NOTES- (4)
 1) Unbalanced floor live loads have been considered for this design.
 2) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 3) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard



3/18/2024

Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-2119-F01	Truss F1-14	Truss Type Floor	Qty 4	Ply 1	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 46674
--------------------	----------------	---------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:35 2024 Page 1
ID:fcZ0KwZoZQmeXTIMivGJ_CysCYm-qxg6kCmTUSY8hPglFeg5xUAHQmeZYLDmAZxwISzZbnM




Plate Offsets (X,Y)-- [2:0-1-8,Edge], [3:0-1-8,Edge], [9:0-1-8,Edge], [17:0-1-8,Edge], [26:Edge,0-1-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.51	Vert(LL)	-0.17	15-16	>999	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.84	Vert(CT)	-0.23	15-16	>788		
BCLL 0.0	Lumber DOL 1.00	WB 0.61	Horz(CT)	0.04	13	n/a		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH						
	Code IRC2021/TPI2014							
							Weight: 113 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS. (lb/size) 26=266/0-3-8 (min. 0-1-8), 21=1438/0-5-4 (min. 0-1-8), 13=776/0-3-8 (min. 0-1-8)
Max Uplift 26=-14(LC 4)
Max Grav 26=353(LC 3), 21=1438(LC 1), 13=789(LC 7)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 26-27=-352/6, 1-27=-352/6, 1-2=-321/59, 2-3=-543/246, 3-4=-108/602, 4-5=-317/0,
5-6=-317/0, 6-7=-1767/0, 7-8=-2709/0, 8-9=-2709/0, 9-10=-2537/0, 10-11=-1730/0
BOT CHORD 24-25=-246/543, 23-24=-246/543, 22-23=-246/543, 21-22=-1013/0, 20-21=-1009/0,
19-20=0/1218, 18-19=0/1218, 17-18=0/2306, 16-17=0/2709, 15-16=0/2709, 14-15=0/2303,
13-14=0/1125
WEBS 8-17=-274/0, 4-21=-1382/0, 1-25=-75/383, 2-25=-289/243, 3-22=-796/0, 4-22=0/597,
4-20=0/1275, 6-20=-1184/0, 6-18=0/755, 7-18=-752/0, 7-17=0/705, 9-15=-388/47,
10-15=0/359, 10-14=-746/0, 11-14=0/787, 11-13=-1333/0

NOTES- (5)
1) Unbalanced floor live loads have been considered for this design.
2) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 14 lb uplift at joint 26.
3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
4) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard





3/18/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-2119-F01	Truss F1-15	Truss Type Floor	Qty 6	Ply 1	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 46674
--------------------	----------------	---------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:36 2024 Page 1
ID:fcZ0KwZoZQmeXTIMivGJ_CysCYm-I8EUXm6Fmg_JZFUoMBKUijvC9_IHrkvODGuqVzZbnL



LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.38	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.80	Vert(LL) -0.17 12-13 >999 480		
BCLL 0.0	Lumber DOL 1.00	WB 0.42	Vert(CT) -0.24 12-13 >771 360		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH	Horz(CT) 0.05 9 n/a n/a		
	Code IRC2021/TPI2014			Weight: 79 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 17=846/0-7-8 (min. 0-1-8), 9=846/0-7-8 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1881/0, 3-4=-2834/0, 4-5=-3140/0, 5-6=-2832/0, 6-7=-1886/0
BOT CHORD 16-17=0/1183, 15-16=0/1183, 14-15=0/2519, 13-14=0/3140, 12-13=0/3140, 11-12=0/3140, 10-11=0/2519, 9-10=0/1217
WEBS 4-14=-590/0, 3-14=0/478, 3-15=-831/0, 2-15=0/891, 5-11=-591/0, 6-11=0/477, 6-10=-824/0, 7-10=0/871, 7-9=-1441/0, 2-17=-1418/0

NOTES- (3)
1) Unbalanced floor live loads have been considered for this design.
2) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard



3/18/2024

Warning !—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.


Job	Truss	Truss Type	Qty	Ply	LOT 0.0105 BLAKE POND 92 FROST MEADOW WAY LILLINGTON, NC
24-2119-F01	F1-16	Floor Supported Gable	1	1	Job Reference (optional) # 46674

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Mon Mar 18 20:47:37 2024 Page 1
 ID:fcZ0KwZoZQmeXTiMivGJ_CysCYm-nKos8tnk04orxjqhM3iZ0vF92ZW_0O73dtQ1MLzZbnK

0-1-8

0-1-8

Scale = 1:26.0



LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.06	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.01	Vert(LL) n/a - n/a 999		
BCLL 0.0	Lumber DOL 1.00	WB 0.03	Vert(CT) n/a - n/a 999		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH	Horz(CT) 0.00 14 n/a n/a		
	Code IRC2021/TPI2014			Weight: 69 lb	FT = 20%F, 11%E

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)
 OTHERS 2x4 SP No.3(flat)


BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 15-9-0.
 (lb) - Max Grav All reactions 250 lb or less at joint(s) 26, 14, 25, 24, 23, 22, 21, 20, 19, 18, 17, 16, 15

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (5)
- Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

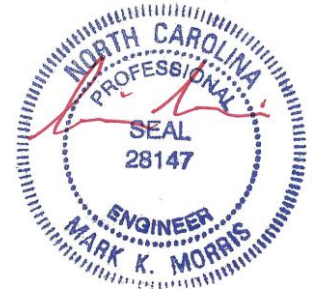

3/18/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.