


System:   
 Repair:

System: Gravity to D-Box. Lines: 5-8, (405') Accepted Status System 0.35 Soil LTAR 20" Trench Bottom
Repair: Pressure Manifold Lines: 1-4, (235') T&J Panel 50% Reduction 0.35 Soil LTAR 20" Trench Bottom

- \*Keep tanks and drain lines 10' from property lines.
- \*Not a survey.
- \*Not a guarantee of a septic permit.
- \*Keep supply lines >5' from property lines.
- \*Some lines are flagged longer in the field than lengths indicate.
- \*No grading septic area.

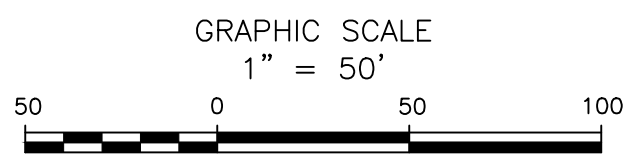

Central Carolina Soil Consulting, PLLC  
 1900 South Main Street, Suite 110  
 Wake Forest, North Carolina 27587  
 Phone (919)569-6704 Fax (919)569-6703

4-Bedroom Septic Layout  
 Lot 148, Birchwood Grove Subdivision  
 Harnett County, North Carolina

Job# : 3753
Drawn By : LW
Date : 03/06/2024
Revision: