


System: Pressure Manifold
 Lines: 4-7, (375')
 Accepted Status System
 0.35 Soil LTAR
 24" Trench Bottoms

Repair: Pressure Manifold
 Lines: 1-3 & 8 (240')
 T&J Panel
 0.35 Soil LTAR
 24" Trench Bottoms

- *Keep tanks and drain lines 10' from property lines.
- *Not a survey.
- *Not a guarantee of a septic permit.
- *Keep supply lines >5' from property lines.
- *Some lines are flagged longer in the field than lengths indicate.
- *No grading septic area.

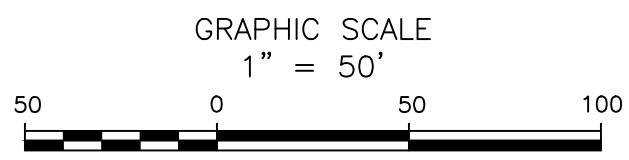

Central Carolina Soil Consulting, PLLC
 1900 South Main Street, Suite 110
 Wake Forest, North Carolina 27587
 Phone (919)569-6704 Fax (919)569-6703

4-Bedroom Septic Layout
 Lot 139, Birchwood Grove Subdivision
 Harnett County, North Carolina

Job# : 3753
Drawn By : LW
Date : 02/23/2024
Revision: