

Harnett County Environmental Health

File/Permit Number: SFD2501-0127

IMPROVEMENT PERMIT

County: Harnett

PIN/Lot Identifier: 9577-50-8503

Owner: Jaine Investments

Applicant: Jaine Investments

Property Location: 731 Bullard Rd

Subdivision (if applicable) _____ Lot #: _____ Block: _____ Section: _____

New ☒

Expansion ☐

System Relocation ☐

Change of Use ☐

Facility Type: 45'x40' SFD

Number of bedrooms: 3 Number of Occupants: 6 Other: _____

Design Wastewater Strength: ☒ Domestic

☐ High Strength

☐ Industrial Process Wastewater

Proposed Design Daily Flow: 360 GPD

Proposed LTAR (Initial): .4

Proposed LTAR (Repair): .4

Proposed Wastewater System Type*: 25% reduction (Initial) Pump Required: ☒ Yes ☐ No ☐ May be required

Proposed Wastewater System Type*: 25% reduction (Repair) Pump Required: ☒ Yes ☐ No ☐ May be required

*Please include system classification for proposed wastewater system types in accordance with Rule .1301 Table XXXII

Effluent Standard: ☒ DSE ☐ HSE ☐ NSF/ANSI 40 ☐ TS-I ☐ TS-II ☐ RCW

Saprolite System (Initial): ☐ Yes ☒ No

Saprolite System (Repair): ☐ Yes ☒ No

Fill System (Initial): ☐ Yes ☒ No If yes, specify: ☐ New ☐ Existing (when adding more than 6 inches of fill to system area provide a fill plan)

Fill System (Repair): ☐ Yes ☒ No If yes, specify: ☐ New ☐ Existing (when adding more than 6 inches of fill to system area provide a fill plan)

Usable Depth to LC (Initial)*: 26

Usable Depth to LC (Repair)*: 26 * Limiting Condition

Max. Trench Depth (Initial)*: 13 Max. Trench Depth (Repair)*: 13 * Measured on the downhill side of the trench

Artificial Drainage Required: ☐ Yes ☒ No If yes, please specify details: _____

Type of Water Supply: ☐ Private well ☐ Public well ☐ Shared well ☒ Municipal Supply ☐ Spring ☐ Other: _____

Drainfield location meets requirements of Rule .0508: Yes ☒ No ☐ Drainfield location meets requirements of Rule .0601: Yes ☒ No ☐

Permit valid for: ☒ Five years [site plan submitted pursuant to GS 130A-334(13a)] ☐ No expiration [plat submitted pursuant to GS 130A-334(7a)]

Permit conditions:

NO GUTTER OR FOUNDATION DRAINS SHALL EMPTY ONTO DRAIN FIELD

Must bring in 6" of Group II or III soil for cover over
Drain Field

Authorized Agent's Printed Name: Mark Osborne REHS

Expiration Date: 3-13-30

Authorized Agent's Signature: Mark Osborne REHS

Date: 3-13-25

See attached site sketch

The issuance of this permit in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This permit is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of 15A NCAC 18E and to the conditions of this permit.

Harnett County Environmental Health

File/Permit Number: SFD2501-0127

CONSTRUCTION AUTHORIZATION

County: Harnett PIN/Lot Identifier: 9577-50-8503
Owner: Jaime Investments Applicant: Jaime Investment
Property Location: 731 Bullard Rd
Facility Type: 45'x40' SFD
Number of bedrooms: 3 Number of Occupants: 6 Other: _____
☒ New ☐ Expansion ☐ Repair ☐ System Relocation ☐ Change of Use
Basement? ☐ Yes ☒ No Basement Fixtures? ☐ Yes ☒ No
Crawl Space? ☒ Yes ☐ No Slab Foundation? ☐ Yes ☒ No
Type of Wastewater System* 25% reduction (Initial) 25% reduction (Repair)

*Please include system classification for proposed wastewater system types in accordance with Rule .1301 Table XXXII

Design Daily Flow: 360 GPD Wastewater Strength: ☒ Domestic ☐ High Strength ☐ Industrial Process Wastewater

Rule .0403(e) Engineering Design Utilizing Low-flow Fixtures and Low-flow Technologies (S.L. 2013-413 and 2014-120)? ☐ Yes ☒ No
(if yes, please provide engineering documentation)

Effluent Standard: ☒ DSE ☐ HSE ☐ NSF/ANSI 40 ☐ TS-I ☐ TS-II ☐ RCW

Type of Water Supply: ☐ Private well ☐ Public well ☐ Shared well ☒ Municipal Supply ☐ Spring ☐ Other: _____

Installation Requirements/Conditions

Septic Tank Size: 1000 gallons Total Trench/Bed Length: 225 feet Trench/Bed Spacing: 9 feet on center
Trench/Bed Width: 36 inches LTAR: .4 gpd/ft² Usable Depth to LC (Initial)*: 26 *Limiting condition
Soil Cover: 6 inches Slope Corrected Maximum Trench/Bed Depth†: 13 inches *Measured on the downhill side of the trench

Pump Tank Size (if applicable): 1000 gallons Requires more than one pump? ☐ Yes ☒ No

Pump Requirements: _____ ft. TDH vs. _____ GPM Grease Trap Size (if applicable): _____ gallons

Distribution Method: ☒ Serial ☐ D-Box or Parallel ☐ Pressure Manifold(s) ☐ LPP ☐ Other: _____

Artificial Drainage Required: Yes ☐ No ☒ If yes, please specify details: _____

Legal Agreements (If the answer is "Yes" to any type of legal agreements, please attach a copy of the agreement.)

Multi-party Agreement Required [Rule .0204(g)]: ☐ Yes ☐ No

Easement, Right-of-Way, or Encroachment Agreement Required [Rule .0204(d)]: ☐ Yes ☐ No

Declaration of Restrictive Covenants: ☐ Yes ☐ No Pre-Construction Conference Required: Yes ☐ No ☐

Management Entity Required: ☐ Yes ☐ No Minimum O&M Requirements: _____

Conditions: _____

The requirements of 15A NCAC 18E are incorporated by reference into this permit and shall be met. Systems shall be installed in accordance with the attached site sketch. **This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes.** The Construction Authorization shall not be affected by a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of 15A NCAC 18E, or 15A NCAC 18A .1900, as applicable, and to the conditions of this permit.

Authorized Agent's Printed Name: Mark Osborne REHS

Expiration Date: 3-13-30

Authorized Agent's Signature: Mark Osborne REHS

Date: 3-13-25

See attached site sketch

Harnett County Environmental Health

SITE SKETCH

PIN 9577-50-8503

Permit Number SFD 2501-0127

Jaime Investments

Applicant's Name

Mark Osborne REHS


Authorized State Agent

Subdivision/Section/Lot Number

Date

System components represent approximate contours only. The contractor must flag the system prior to beginning the installation to ensure that the proper grade is maintained.

Scale = NTS

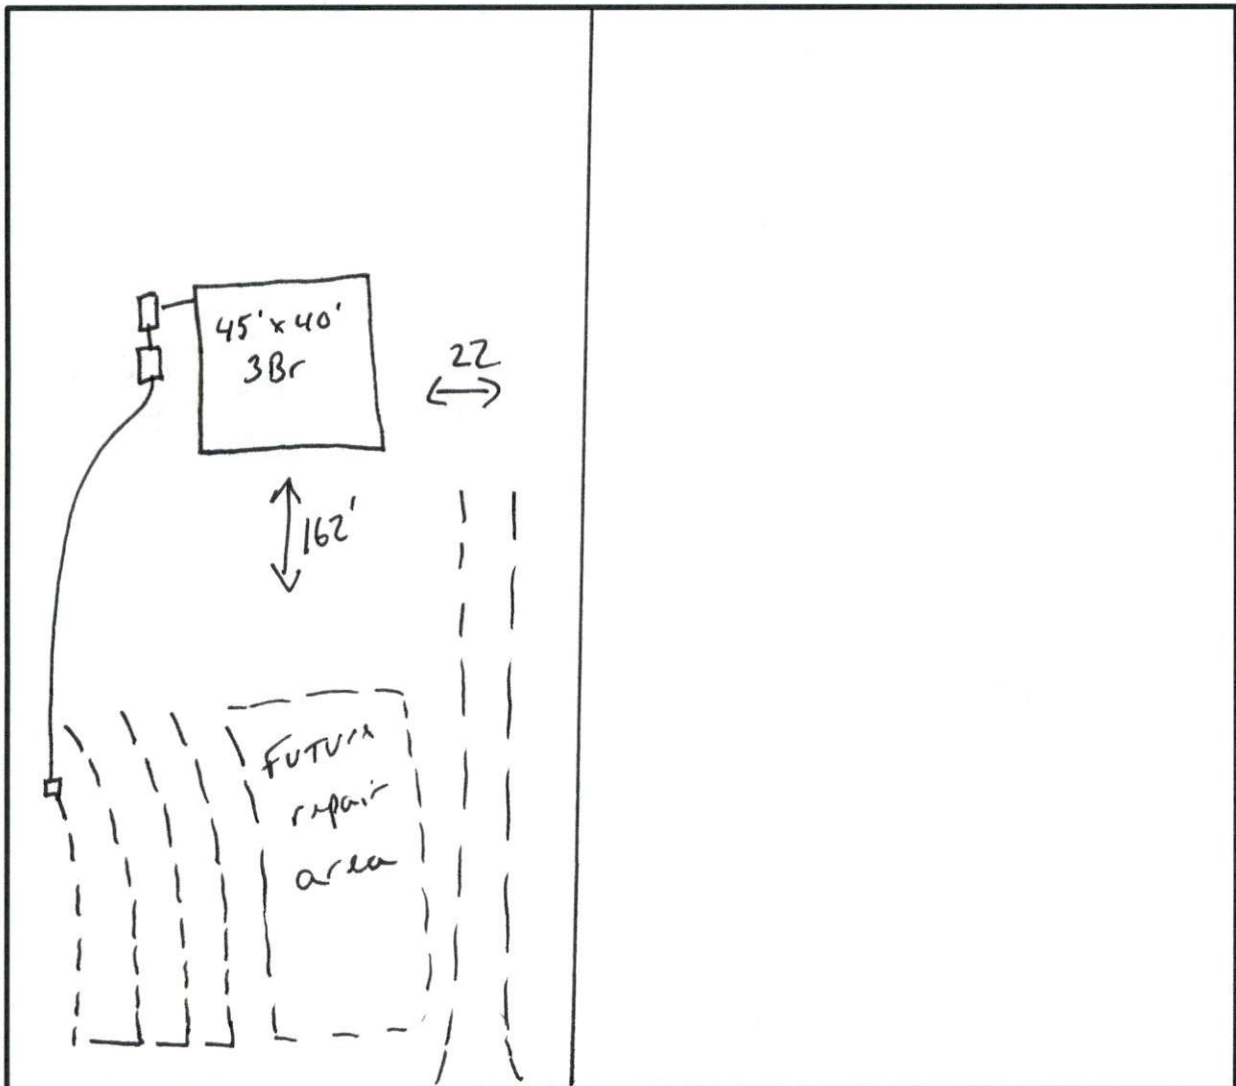

← Bullard Rd →