ENGINEERING BY TRENCO

A MiTek Affiliate

Trenco
818 Soundside Rd
Edenton, NC 27932

Re: 25010264-01
      49 Magnolia Acres-Roof-Taylor FA SP FL GRH

The truss drawing(s) referenced below have been prepared by Truss Engineering Co. under my direct supervision based on the parameters provided by   Carter Components (Sanford, NC)).

Pages or sheets covered by this seal: I74987342 thru I74987342

My license renewal date for the state of North Carolina is   December 31, 2025.

North Carolina COA: C-0844

NORTH CAROLINA
PROFESSIONAL
SEAL
036322
ERIC A. GILBERT
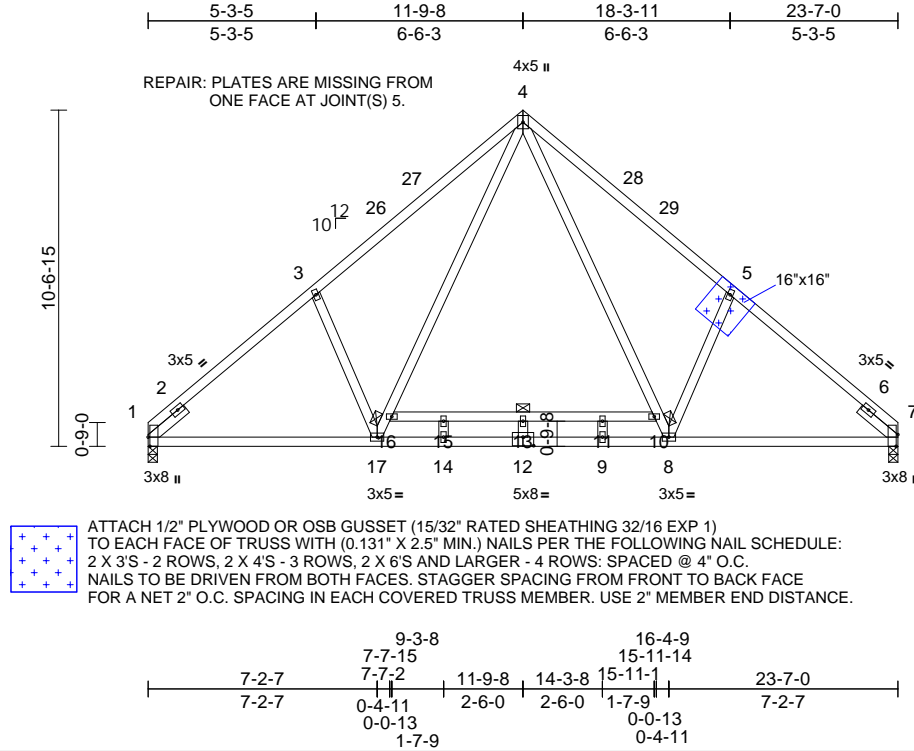ENGINEER

July 18,2025

Gilbert, Eric

IMPORTANT NOTE: The seal on these truss component designs is a certification
that the engineer named is licensed in the jurisdiction(s) identified and that the
designs comply with ANSI/TPI 1. These designs are based upon parameters
shown (e.g., loads, supports, dimensions, shapes and design codes), which were
given to MiTek or TRENCO.   Any project specific information included is for MiTek's or
TRENCO's customers file reference purpose only, and was not taken into account in the
preparation of these designs. MiTek or TRENCO has not independently verified the
applicability of the design parameters or the designs for any particular building. Before use,
the building designer should verify applicability of design parameters and properly
incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

Job	Truss	Truss Type	Qty	Ply	49 Magnolia Acres-Roof-Taylor FA SP FL GRH
					I74987342
25010264-01	B02	Common	7	1	Job Reference (optional)

Carter Components (Sanford, NC), Sanford, NC - 27332,   Run: 8.73 S Feb 19 2025 Print: 8.730 S Feb 19 2025 MiTek Industries, Inc. Thu Jul 17 12:28:54   Page: 1
ID:7AG8gTtMb5ckvlkYuSQ7VYzo4gk-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

REPAIR: PLATES ARE MISSING FROM ONE FACE AT JOINT(S) 5.

ATTACH 1/2" PLYWOOD OR OSB GUSSET (15/32" RATED SHEATHING 32/16 EXP 1)
TO EACH FACE OF TRUSS WITH (0.131" X 2.5" MIN.) NAILS PER THE FOLLOWING NAIL SCHEDULE:
2 X 3'S - 2 ROWS, 2 X 4'S - 3 ROWS, 2 X 6'S AND LARGER - 4 ROWS: SPACED @ 4" O.C.
NAILS TO BE DRIVEN FROM BOTH FACES. STAGGER SPACING FROM FRONT TO BACK FACE
FOR A NET 2" O.C. SPACING IN EACH COVERED TRUSS MEMBER. USE 2" MEMBER END DISTANCE.

Scale = 1:72.5

Plate Offsets (X, Y): [1:0-3-8,Edge], [7:0-4-7,Edge], [12:0-4-0,0-3-4]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.93	Vert(LL)	-0.39	13	>720	240	MT20	244/190
Snow (Pf)	20.0	Lumber DOL	1.15	BC	0.89	Vert(CT)	-0.75	13	>376	180		
TCDL	10.0	Rep Stress Incr	YES	WB	0.28	Horz(CT)	0.06	7	n/a	n/a		
BCLL	0.0 *	Code	IRC2021/TPI2014	Matrix-MSH								
BCDL	10.0										Weight: 148 lb	FT = 20%

LUMBER
TOP CHORD   2x4 SP No.1
BOT CHORD   2x4 SP No.1
WEBS   2x4 SP No.3 *Except* 8-4,17-4:2x4 SP No.2
SLIDER   Left 2x4 SP No.3 -- 1-6-0, Right 2x4 SP No.3 -- 1-6-0

BRACING
TOP CHORD   Structural wood sheathing directly applied.
BOT CHORD   Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS (size)   1=0-3-8, 7=0-3-8
Max Horiz 1=-231 (LC 12)
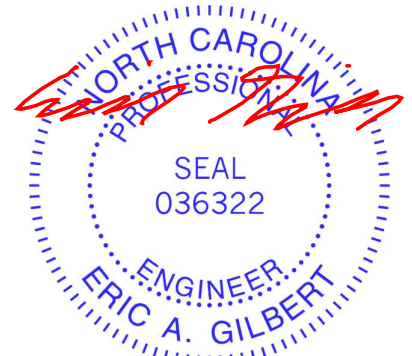Max Grav 1=1353 (LC 24), 7=1353 (LC 25)

FORCES   (lb) - Maximum Compression/Maximum Tension
TOP CHORD   1-3=-1948/6, 3-4=-1904/17, 4-5=-1905/17, 5-7=-1948/6
BOT CHORD   1-17=-107/1430, 14-17=0/1015, 9-14=0/1015, 8-9=0/1015, 7-8=0/1400, 15-16=-118/0, 13-15=-118/0, 11-13=-118/0, 10-11=-118/0
WEBS   4-10=-5/1030, 8-10=-83/832, 5-8=-333/288, 16-17=-83/832, 4-16=-5/1030, 3-17=-333/288, 14-15=-34/27, 12-13=-15/0, 9-11=-34/27

NOTES
1) Unbalanced roof live loads have been considered for this design.

2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior (1) 3-0-0 to 8-9-8, Exterior(2R) 8-9-8 to 14-9-8, Interior (1) 14-9-8 to 20-7-0, Exterior(2E) 20-7-0 to 23-7-0 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60

3) TCLL: ASCE 7-16; Pr=20.0 psf (roof LL: Lum DOL=1.15 Plate DOL=1.15); Pf=20.0 psf (Lum DOL=1.15 Plate DOL=1.15); Is=1.0; Rough Cat B; Fully Exp.; Ce=0.9; Cs=1.00; Ct=1.10

4) Unbalanced snow loads have been considered for this design.

5) 200.0lb AC unit load placed on the bottom chord, 11-9-8 from left end, supported at two points, 5-0-0 apart.

6) All plates are 2x4 MT20 unless otherwise indicated.

7) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.

8) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.

LOAD CASE(S)   Standard

July 18,2025

TRENCO
ENGINEERING BY
A MiTek Affiliate
818 Soundside Road
Edenton, NC 27932

Symbols

PLATE LOCATION AND ORIENTATION

½L

Center plate on joint unless x, y offsets are indicated.
Dimensions are in ft-in-sixteenths.
Apply plates to both sides of truss and fully embed teeth.

0-¹⁄₁₆"

For 4 x 2 orientation, locate plates 0- ¹⁄₁₆" from outside edge of truss.

═ This symbol indicates the required direction of slots in connector plates.

* Plate location details available in MiTek software or upon request.

PLATE SIZE

4 x 4

The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION

Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.
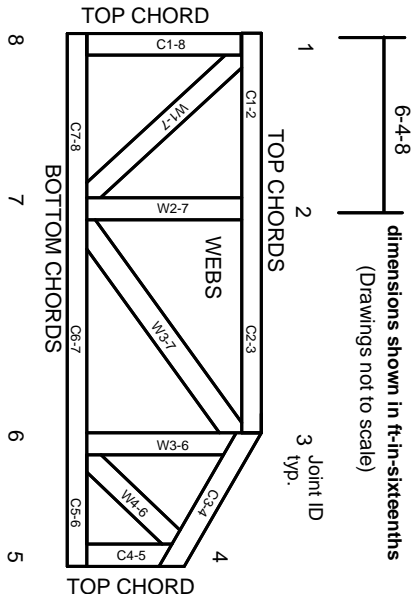
BEARING

Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number/letter where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TPI1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-22: Design Standard for Bracing.
BCSI: Building Component Safety Information, Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses.

ENGINEERING BY
MiTek®
TRENCO
A MiTek Affiliate

Numbering System

6-4-8 **dimensions shown in ft-in-sixteenths**
(Drawings not to scale)

TOP CHORD

1 2 TOP CHORDS 3 Joint ID typ.

C1-8 C1-2 W1-7 C2-3 C3-4 C4-5

C7-8 BOTTOM CHORDS W2-7 WEBS W3-7 C6-7 W3-6 W4-6 C5-6

8 7 6 5

TOP CHORD

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

Product Code Approvals

ICC-ES Reports:

ESR-1988, ESR-2362, ESR-2685, ESR-3282
ESR-4722, ESL-1388

Design General Notes

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TPI 1 section 6.3 These truss designs rely on lumber values established by others.

© 2023 MiTek® All Rights Reserved

⚠ General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.

2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative T or I bracing should be considered.

3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.

4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.

5. Cut members to bear tightly against each other.

6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TPI 1.

7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TPI 1.

8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.

9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.

10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.

11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.

12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.

13. Top chords must be sheathed or purlins provided at spacing indicated on design.

14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.

15. Connections not shown are the responsibility of others.

16. Do not cut or alter truss member or plate without prior approval of an engineer.

17. Install and load vertically unless indicated otherwise.

18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.

19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.

20. Design assumes manufacture in accordance with ANSI/TPI 1 Quality Criteria.

21. The design does not take into account any dynamic or other loads other than those expressly stated.