



UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:37 Page: 1
ID:ZY6_OyVT0eARXctegu5tnUyDyqr-eTdaA8THMOhWuTbIcaBDIOs1tSU5mlIhZPO_zlGxT



LUMBER		BRACING	
TOP CHORD	2x4 SP No.2 *Except* T1:2x6 SP No.1	TOP CHORD	Structural wood sheathing directly applied or 5-10-6 oc purlins, except 2-0-0 oc purlins (5-7-5 max.): 4-9. Rigid ceiling directly applied or 8-5-3 oc bracing.
BOT CHORD	2x6 SP No.2 *Except* B2:2x4 SP No.1, B4:2x4 SP No.3, B3:2x4 SP No.2	BOT CHORD	
WEBS	2x4 SP No.3		
WEDGE	Right: 2x4 SP No.2		

FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	2-3=-1999/1136, 3-32=-4195/2576, 32-33=-4145/2578, 33-34=-4102/2582, 4-34=-4058/2590, 4-5=-4051/2667, 5-35=-4031/2654, 6-35=-4031/2654, 6-36=-4104/2750, 7-36=-4104/2750, 7-37=-4104/2750, 8-37=-4104/2750, 8-38=-4104/2750, 38-39=-4104/2750, 9-39=-4104/2750, 9-40=-3456/2238, 40-41=-3482/2253, 10-41=-3519/2258, 10-42=-3602/2114, 42-43=-3624/2120, 11-43=-3714/2115
BOT CHORD	2-22=-696/1196, 3-21=-1660/2787, 21-44=-2338/3930, 44-45=-2338/3930, 45-46=-2338/3930, 20-46=-2338/3930, 19-20=-2351/3955, 18-47=-582/969, 17-47=-582/969, 17-48=-2634/4212, 48-49=-2634/4212, 16-49=-2634/4212, 16-50=-1978/3253, 15-50=-1978/3253, 14-15=-1895/3345, 14-51=-1895/3345, 51-52=-1895/3345, 13-52=-1895/3345, 13-53=-1895/3345, 53-54=-1895/3345, 11-54=-1895/3345, 21-22=-270/527
WEBS	9-14=-87/424, 6-17=-335/302, 4-19=-422/499, 8-16=-491/476, 9-16=-508/1164, 4-20=-327/676, 17-19=-2072/3275


- ### NOTES
- 1) 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Web connected as follows: 2x4 - 1 row at 0-9-0 oc.
 - 2) All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - 3) Unbalanced roof live loads have been considered for this design.
 - 4) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - 5) Provide adequate drainage to prevent water ponding.
 - 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 7) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 1047 lb uplift at joint 2 and 1042 lb uplift at joint 11.
 - 9) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - 11) "NAILED" indicates Girder: 3-10d (0.148" x 3") toe-nails per NDS guidelines.
- 

LOAD CASE(S) Standard
 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (lb/ft)
 Vert: 1-4=-60, 4-9=-60, 9-12=-60, 22-23=-20, 19-21=-20, 18-29=-20
 Concentrated Loads (lb)
 Vert: 4=-10 (F), 9=-25 (F), 22=-26 (F), 19=-16 (F), 5=-25 (F), 14=-16 (F), 15=-16 (F), 6=-25 (F), 17=-16 (F), 8=-25 (F), 16=-16 (F), 20=-31 (F), 27=-31 (F), 32=-18 (F), 33=-12 (F), 34=-9 (F), 35=-25 (F), 36=-25 (F), 37=-25 (F), 38=-25 (F), 39=-25 (F), 40=-25 (F), 41=-25 (F), 42=-27 (F), 43=-31 (F), 44=-25 (F), 45=-28 (F), 46=-33 (F), 47=-16 (F), 48=-16 (F), 49=-16 (F), 50=-16 (F), 51=-16 (F), 52=-15 (F), 53=-16 (F), 54=-26 (F)

This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCEA and Truss Plate Institute.



UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:38 Page: 1
ID: QJdp3upDaqn7UD8P?a1C9GyDyp9-brkKbqVYU0xE8nk8j?EhnpYPCGAzEd?_9tuV3uzlIGxR



LUMBER		BRACING	
TOP CHORD	2x4 SP SS *Except* T3:2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 2-9-12 oc purlins, except
BOT CHORD	2x4 SP No.2 *Except* B3,B6:2x4 SP No.1, B4:2x4 SP No.3, B1:2x8 SP No.2		2-0-0 oc purlins (3-9-11 max.); 6-8.
WEBS	2x4 SP No.3	BOT CHORD	Rigid ceiling directly applied or 2-2-0 oc bracing.
SLIDER	Right 2x4 SP No.3 -- 1-11-0	WEBS	1 Row at midpt 9-15

FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	2-3=-4853/859, 3-29=-3595/667, 4-29=-3592/689, 4-30=-2917/622, 5-30=-2856/641, 5-6=-2862/702, 6-7=-2120/552, 7-8=-2138/558, 8-31=-2304/552, 9-31=-2391/527, 9-32=-2899/585, 10-32=-2928/559, 10-11=-804/41
BOT CHORD	19-20=-725/4329, 18-19=-522/3281, 16-33=-327/2211, 33-34=-327/2211, 15-34=-327/2211, 14-15=-433/2629, 13-14=-433/2629, 11-13=-430/2630, 2-20=-731/4448
WEBS	7-16=-305/96, 7-15=-292/97, 8-15=-28/542, 4-19=0/364, 4-18=-753/194, 9-15=-581/245, 16-18=-232/1996, 6-18=-268/1168, 3-20=-29/614, 3-19=-1052/277

NOTES

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCFL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) -1-0-0 to 2-9-10, Interior (1) 2-9-10 to 9-3-7, Exterior (2) 9-3-7 to 28-8-9, Interior (1) 28-8-9 to 35-2-6, Exterior (2) 35-2-6 to 39-0-0 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) All plates are MT20 plates unless otherwise indicated.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 7) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 200 lb uplift at joint 11 and 200 lb uplift at joint 2.
- 9) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job 72500820	Truss A3	Truss Type Truss	Qty 1	Ply 1	MUNGO HOMES-RUSSELL B ROOF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:38

Page: 1

ID:ugPbpkT9Jw2gQG6kWr_KC9yDyn0-brkKbqVYU0xE8nk8j?EhnpYLvGADEgr_9tuV3uzlGxR




Plate Offsets (X, Y): [2:Edge,0-3-3], [12:Edge,0-3-3]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.95	Vert(LL)	-0.46	19	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.92	Vert(CT)	-0.91	19	>503	180	MT18HS	244/190
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.58	Horz(CT)	0.14	12	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 215 lb	FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2 *Except* T1:2x4 SP SS
BOT CHORD 2x4 SP No.1 *Except* B2:2x4 SP SS, B3:2x4 SP No.2
WEBS 2x4 SP No.3
SLIDER Left 2x4 SP No.3 -- 1-11-0, Right 2x4 SP No.3 -- 1-11-0

REACTIONS

(lb/size) 2=1672/0-3-8, (min. 0-2-0), 12=1672/0-3-8, (min. 0-2-0)
Max Horiz 2=145 (LC 11)
Max Uplift 2=180 (LC 10), 12=180 (LC 11)

FORCES

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-963/0, 3-32=-3106/298, 4-32=-3077/315, 4-5=-3004/335, 5-6=-2902/357, 6-33=-2703/321, 7-33=-2630/339, 7-34=-2630/339, 8-34=-2703/321, 8-9=-2902/357, 9-10=-3004/335, 10-35=-3077/315, 11-35=-3106/298, 11-12=-878/0
BOT CHORD 2-23=-323/2786, 22-23=-188/2574, 21-22=-188/2574, 21-36=-11/2023, 36-37=-11/2023, 17-37=-11/2023, 17-38=-11/2023, 16-38=-11/2023, 15-16=-113/2574, 14-15=-113/2574, 12-14=-185/2786
WEBS 20-21=-162/865, 7-20=-118/1011, 8-16=-557/289, 7-18=-118/1011, 16-18=-161/865, 8-14=-140/323, 6-21=-557/289, 6-23=-140/323

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) -1-0-0 to 2-9-10, Interior (1) 2-9-10 to 15-2-6, Exterior (2) 15-2-6 to 22-9-10, Interior (1) 22-9-10 to 35-2-6, Exterior (2) 35-2-6 to 39-0-0 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- All plates are MT20 plates unless otherwise indicated.
- All plates are 3x4 MT20 unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 180 lb uplift at joint 2 and 180 lb uplift at joint 12.
- This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

BRACING

TOP CHORD Structural wood sheathing directly applied.
BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	A3T	Truss	5	1	Job Reference (optional)




Plate Offsets (X, Y): [2:0-3-7,0-3-8], [2:0-3-0,0-1-13], [13:Edge,0-3-3], [24:0-2-8,Edge], [26:0-7-8,0-2-8]


Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.96	Vert(LL)	-0.46	18	>990	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.92	Vert(CT)	-0.94	20	>485	180	MT18HS	244/190
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.98	Horz(CT)	0.23	13	n/a	n/a	M18AHS	186/179
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 242 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2 *Except* T1:2x4 SP SS	TOP CHORD	Structural wood sheathing directly applied.
BOT CHORD	2x4 SP No.2 *Except* B3,B7:2x4 SP No.1, B4:2x4 SP No.3, B5:2x4 SP SS, B1:2x8 SP No.2	BOT CHORD	Rigid ceiling directly applied or 2-2-0 oc bracing.
WEBS	2x4 SP No.3 *Except* W6:2x4 SP No.2		
SLIDER	Right 2x4 SP No.3 -- 1-11-0		
REACTIONS	(lb/size)		
	2=1672/0-3-8, (min. 0-1-13), 13=1672/0-3-8, (min. 0-2-0)		
	Max Horiz 2=145 (LC 10)		
	Max Uplift 2=180 (LC 10), 13=180 (LC 11)		
FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.		
TOP CHORD	2-3=-5135/572, 3-35=-3967/352, 4-35=-3966/370, 4-5=-3186/308, 5-6=-3112/320, 6-7=-3093/347, 7-36=-2730/347, 8-36=-2683/365, 8-37=-2627/340, 9-37=-2701/323, 9-10=-2902/357, 10-11=-3003/334, 11-38=-3076/315, 12-38=-3105/298, 12-13=-901/0		
BOT CHORD	25-26=-615/4546, 24-25=-395/3649, 23-24=-291/0, 22-39=-2/1957, 18-39=-2/1957, 18-40=-2/1957, 17-40=-2/1957, 16-17=-114/2573, 15-16=-114/2573, 13-15=-184/2786, 2-26=-627/4680		
WEBS	4-25=0/379, 21-22=-208/985, 8-21=-157/1088, 9-17=-556/289, 8-19=-121/998, 17-19=-161/878, 9-15=-139/325, 7-22=-1313/355, 22-24=-12/2517, 7-24=-254/1319, 4-24=-848/217, 3-26=-60/688, 3-25=-912/224		

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) -1-0-0 to 2-9-10, Interior (1) 2-9-10 to 15-2-6, Exterior (2) 15-2-6 to 22-9-10, Interior (1) 22-9-10 to 35-2-6, Exterior (2) 35-2-6 to 39-0-0 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) All plates are MT20 plates unless otherwise indicated.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - 6) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 180 lb uplift at joint 13 and 180 lb uplift at joint 2.
 - 8) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:39 Page: 1
ID: ?iNao1eEMz0ZUCmmDKLc3vDvmH-31jjoAVaFJ35lwJKHilwK0UWHfvz7P80Xe2bKziGxQ



LUMBER		BRACING	
TOP CHORD	2x4 SP SS *Except* T2:2x4 SP No.2	TOP CHORD	2-0-0 oc purlins (2-5-3 max.)
BOT CHORD	2x4 SP SS *Except* B3:2x4 SP No.2		(Switched from sheeted: Spacing > 2-0-0).
WEBS	2x4 SP No.3	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing. Except:
SLIDER	Left 2x4 SP No.3 -- 1-11-0, Right 2x4 SP No.3 -- 1-11-0		6-0-0 oc bracing: 18-19,17-18.

FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	1-2=-1144/0, 2-31=-3376/353, 3-31=-3285/368, 3-4=-3268/392, 4-5=-3158/416, 5-32=-2924/352, 6-32=-2854/371, 6-33=-2853/368, 7-33=-2923/349, 7-8=-3149/395, 8-9=-3259/370, 9-34=-3336/348, 10-34=-3368/329, 10-11=-939/0
BOT CHORD	1-22=-354/3032, 21-22=-202/2785, 20-21=-202/2785, 20-35=-25/2205, 16-35=-25/2205, 16-36=-25/2205, 36-37=-25/2205, 15-37=-25/2205, 14-15=-123/2783, 13-14=-123/2783, 11-13=-207/3023
WEBS	5-22=-159/367, 5-20=-587/302, 19-20=-164/923, 6-19=-116/1081, 6-17=-116/1079, 15-17=-163/922, 7-15=-584/302, 7-13=-157/358

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) 0-0-0 to 3-9-10, Interior (1) 3-9-10 to 15-2-6, Exterior (2) 15-2-6 to 22-9-10, Interior (1) 22-9-10 to 35-2-6, Exterior (2) 35-2-6 to 39-0-0 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) All plates are MT20 plates unless otherwise indicated.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 170 lb uplift at joint 1 and 195 lb uplift at joint 11.
 - 7) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - 8) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plant Institute.

Job 72500820	Truss A5	Truss Type Truss	Qty 1	Ply 1	MUNGO HOMES-RUSSELL B ROOF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--




Plate Offsets (X, Y): [1:Edge,0-3-3], [3:0-3-0,0-3-0], [7:0-3-0,0-3-0], [9:Edge,0-3-3]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.67	Vert(LL)	-0.27	13-14	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.94	Vert(CT)	-0.52	13-14	>880	180	MT18HS	244/190
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.34	Horz(CT)	0.16	9	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 198 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP SS *Except* T3:2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 2-9-9 oc purlins, except 2-0-0 oc purlins (3-9-11 max.): 4-6.
BOT CHORD 2x4 SP No.1 *Except* B2:2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing.
WEBS 2x4 SP No.3	WEBS 1 Row at midpt
SLIDER Left 2x4 SP No.3 -- 1-11-0, Right 2x4 SP No.3 -- 1-11-0	
REACTIONS (lb/size) 1=1519/0-3-8, (min. 0-1-13), 9=1581/0-3-8, (min. 0-1-14) Max Horiz 1=121 (LC 15) Max Uplift 1=177 (LC 10), 9=199 (LC 11)	
FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.	
TOP CHORD 1-2=-957/72, 2-25=-2938/580, 3-25=-2820/606, 3-26=-2392/529, 4-26=-2306/560, 4-5=-2139/564, 5-6=-2138/562, 6-27=-2305/557, 7-27=-2391/532, 7-28=-2902/590, 8-28=-2931/563, 8-9=-801/42	
BOT CHORD 1-16=-452/2640, 15-16=-455/2638, 14-15=-455/2638, 14-29=-330/2212, 29-30=-330/2212, 13-30=-330/2212, 12-13=-437/2631, 11-12=-437/2631, 9-11=-434/2633	
WEBS 3-14=-591/246, 4-14=-30/539, 5-14=-291/92, 5-13=-292/92, 6-13=-27/538, 7-13=-583/244	

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) 0-0-0 to 3-9-10, Interior (1) 3-9-10 to 9-3-7, Exterior (2) 9-3-7 to 28-8-9, Interior (1) 28-8-9 to 35-2-6, Exterior (2) 35-2-6 to 39-0-0 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - All plates are MT20 plates unless otherwise indicated.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 177 lb uplift at joint 1 and 199 lb uplift at joint 9.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	A6	Truss	1	2	Job Reference (optional)

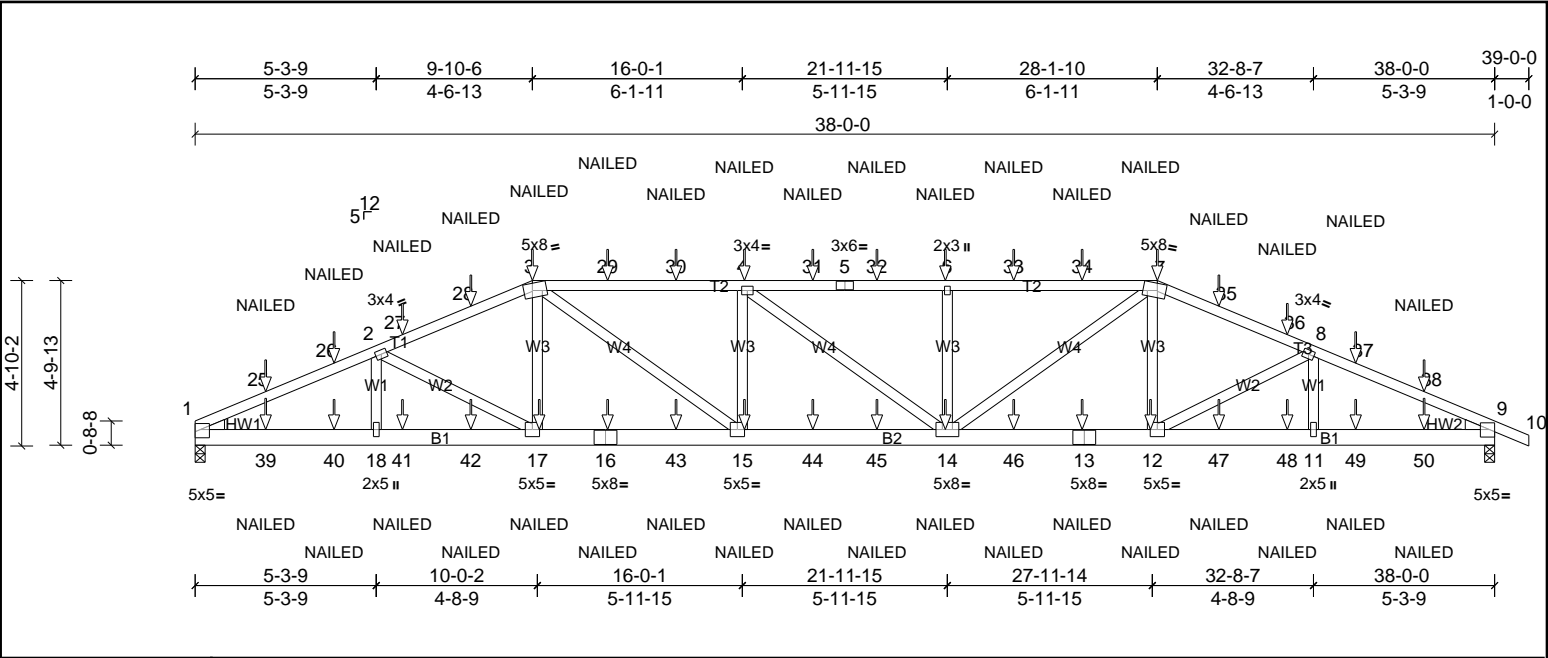


Plate Offsets (X, Y): [3:0-3-0,0-2-8], [7:0-3-0,0-2-8], [9:Edge,0-1-14]


Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.47	Vert(LL)	0.29	14-15	>999	240	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.66	Vert(CT)	-0.31	14-15	>999	180	
BCLL	0.0*	Rep Stress Incr	NO	WB	0.22	Horz(CT)	0.07	9	n/a	n/a	
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							
										Weight: 457 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except
BOT CHORD	2x6 SP No.2	BOT CHORD	2-0-0 oc purlins (5-9-4 max.): 3-7.
WEBS	2x4 SP No.3		Rigid ceiling directly applied or 9-11-3 oc bracing.
WEDGE	Left: 2x4 SP No.2 Right: 2x4 SP No.2		
REACTIONS			
(lb/size)	1=1905/0-3-8, (min. 0-1-8), 9=1967/0-3-8, (min. 0-1-8)		
Max Horiz	1=-86 (LC 13)		
Max Uplift	1=-1009 (LC 4), 9=-1040 (LC 5)		

FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	1-25=-3726/2116, 25-26=-3637/2121, 2-26=-3614/2115, 2-27=-3521/2253, 27-28=-3484/2248, 3-28=-3457/2233, 3-29=-4117/2753, 29-30=-4117/2753, 4-30=-4117/2753, 4-31=-4108/2745, 5-31=-4108/2745, 5-32=-4108/2745, 6-32=-4108/2745, 6-33=-4108/2745, 33-34=-4108/2745, 7-34=-4108/2745, 7-35=-3457/2233, 35-36=-3484/2247, 8-36=-3520/2253, 8-37=-3602/2109, 37-38=-3624/2115, 9-38=-3714/2110
BOT CHORD	1-39=-1910/3357, 39-40=-1910/3357, 18-40=-1910/3357, 18-41=-1910/3357, 41-42=-1910/3357, 17-42=-1910/3357, 16-17=-1981/3314, 16-43=-1981/3314, 15-43=-1981/3314, 15-44=-2634/4217, 44-45=-2634/4217, 14-45=-2634/4217, 14-46=-1974/3254, 13-46=-1974/3254, 12-13=-1974/3254, 12-47=-1890/3345, 47-48=-1890/3345, 11-48=-1890/3345, 11-49=-1890/3345, 49-50=-1890/3345, 9-50=-1890/3345
WEBS	3-17=-82/425, 7-14=-804/1161, 7-12=-86/428, 3-15=-812/1172, 4-15=-496/466, 6-14=-483/466

- NOTES**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
Web connected as follows: 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 1009 lb uplift at joint 1 and 1040 lb uplift at joint 9.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - "NAILED" indicates Girder: 3-10d (0.148" x 3") toe-nails per NDS guidelines.

LOAD CASE(S)	Standard
1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15	
Uniform Loads (lb/ft)	
Vert: 1-3=-60, 3-7=-60, 7-10=-60, 19-22=-20	
Concentrated Loads (lb)	
Vert: 3=-25 (B), 7=-25 (B), 16=-16 (B), 17=-16 (B), 14=-16 (B), 12=-16 (B), 15=-16 (B), 4=-25 (B), 6=-25 (B), 13=-16 (B), 25=-31 (B), 26=-27 (B), 27=-25 (B), 28=-25 (B), 29=-25 (B), 30=-25 (B), 31=-25 (B), 32=-25 (B), 33=-25 (B), 34=-25 (B), 35=-25 (B), 36=-25 (B), 37=-27 (B), 38=-31 (B), 39=-26 (B), 40=-16 (B), 41=-15 (B), 42=-16 (B), 43=-16 (B), 44=-16 (B), 45=-16 (B), 46=-16 (B), 47=-16 (B), 48=-15 (B), 49=-16 (B), 50=-26 (B)	



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	EJ1	Truss	19	1	Job Reference (optional)

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:41

Page: 1

ID:CnmhfAvUtPRzYwZ8rT?NiNyDzAG-?QQTDSXQBwJp?ETiO7nOPRa_zTLeRAfRrr79gDzlGxO




Plate Offsets (X, Y): [5:0-1-8,0-1-0]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.45	Vert(LL)	0.02	4-5	>999	240	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.30	Vert(CT)	-0.02	4-5	>999	180	
BCLL	0.0*	Rep Stress Incr	YES	WB	0.00	Horz(CT)	-0.05	3	n/a	n/a	
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR						Weight: 17 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 3-6-5 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x4 SP No.3		


REACTIONS	(lb/size)	3=85/ Mechanical, (min. 0-1-8), 4=36/ Mechanical, (min. 0-1-8), 5=213/0-3-8, (min. 0-1-8)
Max Horiz	5=159 (LC 10)	
Max Uplift	3=118 (LC 10), 4=19 (LC 10)	
Max Grav	3=110 (LC 17), 4=63 (LC 3), 5=213 (LC 1)	

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 118 lb uplift at joint 3 and 19 lb uplift at joint 4.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	EJ1T	Truss	1	1	Job Reference (optional)



Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.30	Vert(LL)	0.02	7	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.29	Vert(CT)	-0.02	7	>999	180		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horz(CT)	-0.03	4	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 21 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 3-6-5 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2 *Except* B2:2x4 SP No.3	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3	

REACTIONS	(lb/size)	4=70/ Mechanical, (min. 0-1-8), 5=51/ Mechanical, (min. 0-1-8), 8=213/0-3-8, (min. 0-1-8)
Max Horiz	8=159 (LC 10)	
Max Uplift	4=76 (LC 10), 5=61 (LC 10)	
Max Grav	4=86 (LC 17), 5=72 (LC 17), 8=213 (LC 1)	

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Bearing at joint(s) 8 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 76 lb uplift at joint 4 and 61 lb uplift at joint 5.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	EJ2	Truss	3	1	Job Reference (optional)

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:41

Page: 1

ID:YlZaitzdix4GehS6e0aYPQyDzAB-?QQTDsXQBwJp?ETiO7nOPRa_ZTL8RAfRrr79gDzlGxO




Plate Offsets (X, Y): [3:0-0-11,Edge], [6:0-2-0,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.41	Vert(LL)	0.02	5-6	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.27	Vert(CT)	-0.02	5-6	>999	180		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horz(CT)	-0.06	4	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 16 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 3-6-5 oc purlins, except end
BOT CHORD 2x4 SP No.2	verticals, and 2-0-0 oc purlins: 3-4.
WEBS 2x4 SP No.3	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS	(lb/size)	4=85/ Mechanical, (min. 0-1-8), 5=36/ Mechanical, (min. 0-1-8), 6=213/0-3-8, (min. 0-1-8)
Max Horiz	6=132 (LC 10)	
Max Uplift	4=80 (LC 10), 5=13 (LC 10)	
Max Grav	4=85 (LC 1), 5=63 (LC 3), 6=213 (LC 1)	

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 80 lb uplift at joint 4 and 13 lb uplift at joint 5.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/ TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	EJ2T	Truss	1	1	Job Reference (optional)

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:42

Page: 1

ID:YIZaitzdix4GehS6e0aYPQyDzAB-?QQTDsXQBwJp?ETiO7nOPRa0jTLERafrRrr79gDzlGxO




Plate Offsets (X, Y): [4:0-0-11,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.27	Vert(LL)	0.01	8	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.26	Vert(CT)	-0.02	8	>999	180		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horz(CT)	-0.03	5	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 20 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 3-6-5 oc purlins, except end
BOT CHORD	2x4 SP No.2 *Except* B2:2x4 SP No.3		verticals, and 2-0-0 oc purlins: 4-5.
WEBS	2x4 SP No.3	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS	(lb/size)	5=68/ Mechanical, (min. 0-1-8), 6=53/ Mechanical, (min. 0-1-8), 9=213/0-3-8, (min. 0-1-8) Max Horiz 9=132 (LC 10) Max Uplift 5=41 (LC 10), 6=53 (LC 10) Max Grav 5=68 (LC 1), 6=69 (LC 17), 9=213 (LC 1)
-----------	-----------	--

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Bearing at joint(s) 9 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 41 lb uplift at joint 5 and 53 lb uplift at joint 6.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	EJ3	Truss	3	1	Job Reference (optional)

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:42

Page: 1

ID:VPDIhNCYEnTZQcPmFVQ?hRyDz9u-Tc_rQBY2yERfdO2vyrldy6AMtiDAdva4VsiCfzlGxN




Plate Offsets (X, Y): [3:0-1-3,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.34	Vert(LL)	0.01	5-6	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.22	Vert(CT)	-0.02	5-6	>999	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.00	Horz(CT)	-0.05	4	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 16 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 3-6-5 oc purlins, except end
BOT CHORD	2x4 SP No.2		verticals, and 2-0-0 oc purlins: 3-4.
WEBS	2x4 SP No.3	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS	(lb/size)	4=85/ Mechanical, (min. 0-1-8), 5=35/ Mechanical, (min. 0-1-8), 6=213/0-3-8, (min. 0-1-8) Max Horiz 6=98 (LC 10) Max Uplift 4=-52 (LC 7), 5=-4 (LC 10), 6=-3 (LC 10) Max Grav 4=85 (LC 1), 5=63 (LC 3), 6=213 (LC 1)
-----------	-----------	--

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 3 lb uplift at joint 6, 52 lb uplift at joint 4 and 4 lb uplift at joint 5.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	EJ3T	Truss	1	1	Job Reference (optional)

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:42

Page: 1

ID:VPDIhNCYEnTZQcPmFVQ?hRyDz9u-Tc_rQBY2yERfdO2vyrldyf6CxtibAdva4VsiCfzlGxN




Plate Offsets (X, Y): [3:0-0-11,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.24	Vert(LL)	0.01	7	>999	240	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.19	Vert(CT)	-0.01	8	>999	180	
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horz(CT)	-0.02	5	n/a	n/a	
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR						Weight: 19 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 3-6-5 oc purlins, except end
BOT CHORD 2x4 SP No.2 *Except* B2:2x4 SP No.3	verticals, and 2-0-0 oc purlins: 3-5.
WEBS 2x4 SP No.3	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS	(lb/size)	5=72/ Mechanical, (min. 0-1-8), 6=48/ Mechanical, (min. 0-1-8), 9=213/0-3-8, (min. 0-1-8)
Max Horiz	9=98 (LC 10)	
Max Uplift	5=32 (LC 7), 6=26 (LC 10), 9=3 (LC 10)	
Max Grav	5=72 (LC 1), 6=52 (LC 3), 9=213 (LC 1)	

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Bearing at joint(s) 9 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 32 lb uplift at joint 5, 26 lb uplift at joint 6 and 3 lb uplift at joint 9.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/ TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	EJ4T	Truss	1	1	Job Reference (optional)

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:42

Page: 1

ID:o0gqjaUba8U9IIEFYsdfVyDz9W-Tc_rQBY2yERfdO2vyrlDy6CYtkAdva4VsiCfzGxN




Plate Offsets (X, Y): [3:0-0-11,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.20	Vert(LL)	0.01	7	>999	240	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.11	Vert(CT)	-0.01	7	>999	180	
BCLL	0.0*	Rep Stress Incr	YES	WB	0.00	Horz(CT)	-0.01	5	n/a	n/a	
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							
										Weight: 18 lb	FT = 20%

LUMBER			BRACING		
TOP CHORD	2x4 SP No.2		TOP CHORD	Structural wood sheathing directly applied or 3-6-5 oc purlins, except end verticals, and 2-0-0 oc purlins: 3-5. Rigid ceiling directly applied or 10-0-0 oc bracing.	
BOT CHORD	2x4 SP No.2 *Except* B2:2x4 SP No.3		BOT CHORD		
WEBS	2x4 SP No.3				
REACTIONS					
	(lb/size)	5=77/ Mechanical, (min. 0-1-8), 6=43/ Mechanical, (min. 0-1-8), 9=213/0-3-8, (min. 0-1-8)			
	Max Horiz	9=66 (LC 7)			
	Max Uplift	5=30 (LC 7), 6=-12 (LC 7), 9=-20 (LC 10)			
	Max Grav	5=78 (LC 22), 6=48 (LC 3), 9=213 (LC 1)			
FORCES					
(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.					

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) -1-0-0 to 3-5-9 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Bearing at joint(s) 9 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 30 lb uplift at joint 5, 12 lb uplift at joint 6 and 20 lb uplift at joint 9.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/ TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	EJ5	Truss	4	1	Job Reference (optional)

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:42

Page: 1

ID:GULEVkiuLgmcT3cqjKArOlyDz9E-Tc_rQBY2yERfdO2vyrlDyf6CftjZAdva4VsiCfzlGxN




Plate Offsets (X, Y): [2:0-1-11,0-1-10]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.19	Vert(LL)	0.01	4-5	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.13	Vert(CT)	-0.01	4-5	>999	180		
BCLL	0.0*	Rep Stress Incr	NO	WB	0.00	Horz(CT)	0.02	3	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 14 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 3-6-5 oc purlins, except end
BOT CHORD	2x4 SP No.2		verticals, and 2-0-0 oc purlins: 2-3.
WEBS	2x4 SP No.3	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS	(lb/size)	3=85/ Mechanical, (min. 0-1-8), 4=43/ Mechanical, (min. 0-1-8), 5=238/0-3-8, (min. 0-1-8) Max Horiz 5=74 (LC 5) Max Uplift 3=-43 (LC 5), 4=-1 (LC 5), 5=63 (LC 5) Max Grav 3=91 (LC 20), 4=65 (LC 3), 5=238 (LC 1)
-----------	-----------	--

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 63 lb uplift at joint 5, 43 lb uplift at joint 3 and 1 lb uplift at joint 4.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - "NAILED" indicates Girder: 3-10d (0.148" x 3") toe-nails per NDS guidelines.
 - In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S)	Standard
1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15	
Uniform Loads (lb/ft)	
Vert: 1-2=-60, 2-3=-60, 4-5=-20	
Concentrated Loads (lb)	
Vert: 5=-20 (F), 7=-12 (F)	



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job 72500820	Truss P1	Truss Type Truss	Qty 1	Ply 1	MUNGO HOMES-RUSSELL B ROOF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:43

Page: 1

ID:6_l1brpzveDht24KYxJBaUyDz7p-Tc_rQBY2yERfdO2vyrlDyf6EdtljAdEa4VsiCfzlGxN




Plate Offsets (X, Y): [6:Edge,0-5-5]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.07	Vert(LL)	0.00	7-10	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.06	Vert(CT)	0.00	7-10	>999	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.04	Horz(CT)	0.00	6	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 35 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD	2x6 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x4 SP No.3		
SLIDER	Left 2x4 SP No.3 -- 1-11-0, Right 2x4 SP No.3 -- 1-11-0		
REACTIONS	(lb/size) 2=308/0-3-0, (min. 0-1-8), 6=238/ Mechanical, (min. 0-1-8)		
	Max Horiz 2=56 (LC 9)		
	Max Uplift 2=53 (LC 10), 6=30 (LC 11)		
FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.		

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 30 lb uplift at joint 6 and 53 lb uplift at joint 2.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/ TPI 1.



Job 72500820	Truss P1G	Truss Type Truss	Qty 1	Ply 1	MUNGO HOMES-RUSSELL B ROOF Job Reference (optional)
-----------------	--------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:43

Page: 1

ID:xhA9?XI3UwG0gC70uK1ZBwyDz7B-xpYDeXYgjYZWEYd5WYpsUsfPCH5_v4jil9cGk6zlGxM




Plate Offsets (X, Y):		[5:0-2-0,Edge]										
Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.08	Vert(LL)	0.00	9	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.05	Vert(CT)	-0.01	9-10	>999	180		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.03	Horz(CT)	0.00	2	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 37 lb	FT = 20%

LUMBER			BRACING	
TOP CHORD	2x4	SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins. Rigid ceiling directly applied or 10-0-0 oc bracing.
BOT CHORD	2x6	SP No.2	BOT CHORD	
OTHERS	2x4	SP No.3		
SLIDER	Left 2x4 SP No.3 -- 1-11-0, Right 2x4 SP No.3 -- 1-11-0			
REACTIONS	(lb/size)	2=308/0-3-0, (min. 0-1-8), 8=238/ Mechanical, (min. 0-1-8)		
	Max Horiz	2=56 (LC 9)		
	Max Uplift	2=53 (LC 10), 8=30 (LC 11)		
FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.			

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Truss designed for wind loads in the plane of the truss only.
 - Gable studs spaced at 2-0-0 oc.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 30 lb uplift at joint 8 and 53 lb uplift at joint 2.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/ TPI 1.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	P2	Truss	7	1	Job Reference (optional)

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:43

Page: 1

ID:bmMgYWRp49QF4L__4SERd?yDz_k-xpYDeXYgjYZWEYd5WYpsUfOdH4sv49jI9cGk6zIGxM




Plate Offsets (X, Y): [2-0-3-3,0-0-6]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.18	Vert(LL)	0.01	5-8	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.13	Vert(CT)	-0.02	5-8	>999	180		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horz(CT)	0.01	2	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MP							Weight: 19 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 3-10-0 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x4 SP No.3		
SLIDER	Left 2x4 SP No.3 -- 1-11-0		


REACTIONS	(lb/size)	2=216/0-3-0, (min. 0-1-8), 5=139/0-1-8, (min. 0-1-8)
	Max Horiz	2=87 (LC 9)
	Max Uplift	2=45 (LC 10), 5=38 (LC 10)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate at joint(s) 5.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 45 lb uplift at joint 2 and 38 lb uplift at joint 5.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	P3	Truss	1	1	Job Reference (optional)



Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.22	Vert(LL)	0.01	3-6	>999	240	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.29	Vert(CT)	-0.02	3-6	>999	180	
BCLL	0.0*	Rep Stress Incr	NO	WB	0.00	Horz(CT)	0.01	1	n/a	n/a	
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MP							
										Weight: 18 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 3-10-0 oc purlins, except end verticals.
BOT CHORD 2x6 SP No.2	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
WEBS 2x4 SP No.3	

REACTIONS	(lb/size)	1=471/0-3-0, (min. 0-1-8), 3=269/0-1-8, (min. 0-1-8)
Max Horiz	1=71 (LC 7)	
Max Uplift	1=75 (LC 8), 3=62 (LC 8)	


FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Bearing at joint(s) 3 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate at joint(s) 3.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 75 lb uplift at joint 1 and 62 lb uplift at joint 3.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 228 lb down and 36 lb up at 0-0-0, and 218 lb down and 42 lb up at 2-0-0 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
 - In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S)	Standard
1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15	
Uniform Loads (lb/ft)	
Vert: 1-2=60, 3-4=20	
Concentrated Loads (lb)	
Vert: 4=228 (F), 7=218 (F)	



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	SJ2	Truss	2	1	Job Reference (optional)



Loading	(psf)	Spacing	2'-0'-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.04	Vert(LL)	0.00	3-6	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.02	Vert(CT)	0.00	3-6	>999	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.00	Horz(CT)	0.00	2	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MP							Weight: 8 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 2'-0'-0 oc purlins.
BOT CHORD	2x6 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10'-0'-0 oc bracing.
REACTIONS	(lb/size)		
	1=79/0-3-8, (min. 0-1-8), 2=47/ Mechanical, (min. 0-1-8), 3=32/ Mechanical, (min. 0-1-8)		
	Max Horiz 1=33 (LC 10)		
	Max Uplift 1=4 (LC 10), 2=-28 (LC 10), 3=-1 (LC 10)		
	Max Grav 1=79 (LC 1), 2=47 (LC 1), 3=42 (LC 3)		

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-0"-0 tall by 2'-0"-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 4 lb uplift at joint 1, 28 lb uplift at joint 2 and 1 lb uplift at joint 3.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/ TPI 1.



Job 72500820	Truss V1	Truss Type Truss	Qty 1	Ply 1	MUNGO HOMES-RUSSELL B ROOF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:43

Page: 1

ID:CWEG4MiquAIN?JmtMOBNWnyDzAX-xpYDeXYgjYZWEYd5WYpsUfPoH41v36jl9cGk6zlGxM




Plate Offsets (X, Y): [6'-0"-3'-0,Edge], [7'-0"-0'-0,Edge], [8'-0"-0'-0,Edge], [9'-0"-0'-0,Edge], [10'-0"-0'-0,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.11	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.12	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.07	Horiz(TL)	0.00	11	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 102 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 6'-0"-0 oc purlins.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 6'-0"-0 oc bracing.
OTHERS 2x4 SP No.3	

REACTIONS	All bearings 20-8-3. (lb) - Max Horiz 1=151 (LC 7) Max Uplift All uplift 100 (lb) or less at joint(s) 12, 13, 14, 17, 18, 19, 20 Max Grav All reactions 250 (lb) or less at joint(s) 1, 11, 12, 13, 14, 16, 17, 18, 19 except 20=282 (LC 17)
FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Corner (3) 0-0-0 to 3-0-0, Exterior (2) 3-0-0 to 7-4-2, Corner (3) 7-4-2 to 13-4-2, Exterior (2) 13-4-2 to 17-1-12, Corner (3) 17-1-12 to 20-1-12 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Truss designed for wind loads in the plane of the truss only.
 - All plates are 1.5x3 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Gable studs spaced at 2'-0"-0 oc.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-06"-00 tall by 2'-00"-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 17, 18, 19, 20, 14, 13, 12.
 - Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 1.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.




Job 72500820	Truss V2	Truss Type Truss	Qty 1	Ply 1	MUNGO HOMES-RUSSELL B ROOF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:44

Page: 1

ID:40yLMvYgyBfEyJHN59SKV2yDzAk-P?6crtZIUrhNsiCH4FK614CVagPGeTJtXpLpHYzIGxL



Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.36	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.18	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.26	Horiz(TL)	-0.01	14	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 69 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 10-0-0 oc purlins.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing.
OTHERS	2x4 SP No.3		
REACTIONS	All bearings 17-9-1.		
	(lb) - Max Horiz 1=130 (LC 9)		
	Max Uplift All uplift 100 (lb) or less at joint(s) 1, 5, 14 except 6=157 (LC 11), 9=161 (LC 10)		
	Max Grav All reactions 250 (lb) or less at joint(s) 1, 5, 14 except 6=437 (LC 18), 8=603 (LC 1), 9=433 (LC 17)		
FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.		
TOP CHORD	1-15=-77/354, 2-15=-53/421, 2-16=0/327, 3-16=0/398, 3-17=0/397, 4-17=0/288, 4-18=-50/422, 5-18=-71/350		
BOT CHORD	1-9=-316/109, 8-9=-316/109, 7-8=-316/109, 6-7=-316/109, 5-6=-316/109		
WEBS	3-8=-547/37, 2-9=-312/193, 4-6=-315/193		

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) 0-0-7 to 3-0-7, Interior (1) 3-0-7 to 5-10-15, Exterior (2) 5-10-15 to 11-10-15, Interior (1) 11-10-15 to 14-9-8, Exterior (2) 14-9-8 to 17-9-8 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Gable requires continuous bottom chord bearing.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1 except (jt=lb) 9=161, 6=156.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.




Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	V3	Truss	1	1	Job Reference (optional)

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:44

Page: 1

ID:jnd1kOHT7QuLJxb9oY3AcPyDzB4-P?6crtZIUrhNsiCH4FK614CXzgQNeW1tXpLpHYzIGxL



Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.21	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.11	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.09	Horiz(TL)	0.00	5	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 56 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
OTHERS 2x4 SP No.3	

REACTIONS	All bearings 14-10-13.
(lb) - Max Horiz	1=108 (LC 9)
Max Uplift	All uplift 100 (lb) or less at joint(s) 1, 5 except 6=130 (LC 11), 8=132 (LC 10)
Max Grav	All reactions 250 (lb) or less at joint(s) 1, 5 except 6=365 (LC 18), 7=325 (LC 1), 8=366 (LC 17)

FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS	3-7=250/30, 2-8=271/168, 4-6=271/167

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) 0-0-7 to 3-0-7, Interior (1) 3-0-7 to 4-5-13, Exterior (2) 4-5-13 to 10-5-13, Interior (1) 10-5-13 to 11-11-3, Exterior (2) 11-11-3 to 14-11-3 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Gable requires continuous bottom chord bearing.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 5 except (jt=lb) 8=131, 6=130.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.




Job 72500820	Truss V4	Truss Type Truss	Qty 1	Ply 1	MUNGO HOMES-RUSSELL B ROOF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Joy Perry

Run: 8.81 S Sep 13 2024 Print: 8.810 S Sep 13 2024 MiTek Industries, Inc. Fri Feb 14 09:41:44

Page: 1

ID:nOVGJfFdbped3dRmh71iW_yDzB6-P?6crtZIUrhNsiCH4FK614CUMgMCeUKtXpLpHYzlGxL



Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.44	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.38	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.20	Horiz(TL)	0.00	4	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 41 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
OTHERS 2x4 SP No.3	


REACTIONS	(lb/size)	1=8/12-0-8, (min. 0-1-8), 3=8/12-0-8, (min. 0-1-8), 4=948/12-0-8, (min. 0-1-8)
Max Horiz	1=87 (LC 9)	
Max Uplift	1=54 (LC 22), 3=54 (LC 21), 4=140 (LC 10)	
Max Grav	1=66 (LC 21), 3=66 (LC 22), 4=948 (LC 1)	

FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	1-2=-133/500, 2-3=-133/500
BOT CHORD	1-4=-409/178, 3-4=-409/178
WEBS	2-4=-746/259

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Gable requires continuous bottom chord bearing.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 54 lb uplift at joint 1, 54 lb uplift at joint 3 and 140 lb uplift at joint 4.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/ TPI 1.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	V5	Truss	1	1	Job Reference (optional)



Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.23	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.22	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.11	Horiz(TL)	0.00	4	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 31 lb	FT = 20%

LUMBER			BRACING		
TOP CHORD	2x4 SP No.2		TOP CHORD	Structural wood sheathing directly applied or 9-2-3 oc purlins.	
BOT CHORD	2x4 SP No.2		BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing.	
OTHERS	2x4 SP No.3				
REACTIONS	(lb/size)	1=45/9-2-3, (min. 0-1-8), 3=45/9-2-3, (min. 0-1-8), 4=645/9-2-3, (min. 0-1-8)			
	Max Horiz	1=65 (LC 9)			
	Max Uplift	1=12 (LC 22), 3=18 (LC 6), 4=87 (LC 10)			
	Max Grav	1=80 (LC 21), 3=80 (LC 22), 4=645 (LC 1)			
FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.				
TOP CHORD	1-2=-78/300, 2-3=-72/300				
WEBS	2-4=-483/170				

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) Gable requires continuous bottom chord bearing.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 12 lb uplift at joint 1, 18 lb uplift at joint 3 and 87 lb uplift at joint 4.
 - 7) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/ TPI 1.



Job 72500820	Truss V6	Truss Type Truss	Qty 1	Ply 1	MUNGO HOMES-RUSSELL B ROOF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--




Plate Offsets (X, Y): [2:0-2-0,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.28	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.22	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horiz(TL)	0.01	3	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 19 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
REACTIONS	(lb/size)		
	1=253/6-3-15, (min. 0-1-8), 3=253/6-3-15, (min. 0-1-8)		
	Max Horiz 1=44 (LC 7)		
	Max Uplift 1=34 (LC 10), 3=34 (LC 11)		
FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.		
TOP CHORD	1-2=-442/106, 2-3=-290/96		
BOT CHORD	1-3=-82/369		

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) Gable requires continuous bottom chord bearing.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 34 lb uplift at joint 1 and 34 lb uplift at joint 3.
 - 7) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/ TPI 1.



Job	Truss	Truss Type	Qty	Ply	MUNGO HOMES-RUSSELL B ROOF
72500820	V7	Truss	1	1	Job Reference (optional)




Plate Offsets (X, Y): [2:0-2-0,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.09	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.09	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horiz(TL)	0.00	3	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MP							Weight: 9 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 3-5-10 oc purlins.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
REACTIONS	(lb/size)		
	1=139/3-5-10, (min. 0-1-8), 3=139/3-5-10, (min. 0-1-8)		
	Max Horiz 1=22 (LC 8)		
	Max Uplift 1=19 (LC 10), 3=19 (LC 11)		

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Gable requires continuous bottom chord bearing.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 19 lb uplift at joint 1 and 19 lb uplift at joint 3.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/ TPI 1.

