

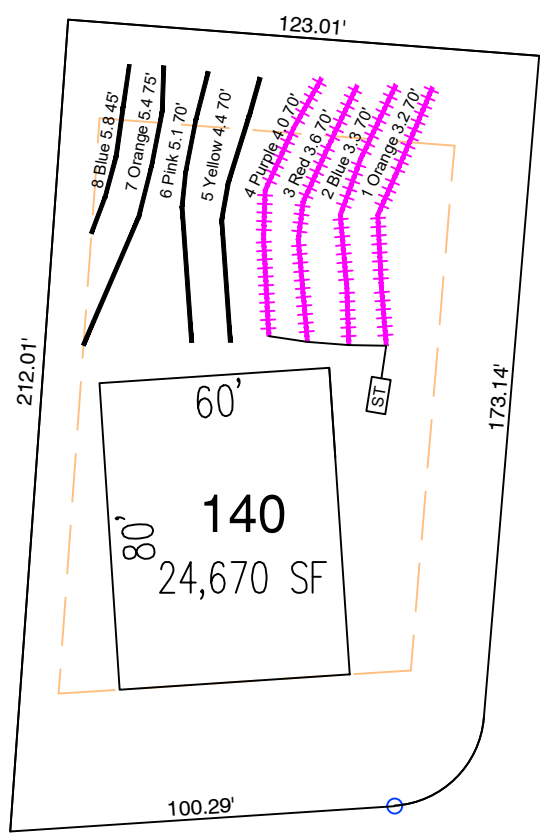





- *Keep tanks and drain lines 10' from property lines.
- *Not a survey.
- *Not a guarantee of a septic permit.
- *Keep supply lines >5' from property lines.
- *Some lines are flagged longer in the field than lengths indicate.
- *No grading septic area.

System: Gravity to D-Box
Lines: 1-4, (280')
Accepted Status System
0.35 Soil LTAR
24" Trench Bottom

Repair: Gravity to Serial Dist.
Lines: 5-8, (260')
Accepted Status System
0.35 Soil LTAR
24" Trench Bottom

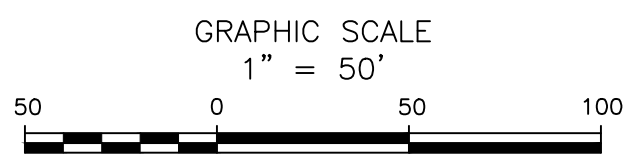

Central Carolina Soil Consulting, PLLC 1900 South Main Street, Suite 110 Wake Forest, North Carolina 27587 Phone (919)569-6704 Fax (919)569-6703	3-Bedroom Septic Layout Lot 140, Birchwood Grove Subdivision Harnett County, North Carolina	Job# : 3753
		Drawn By : LW
		Date : 01/09/2024
		Revision: