


- NOTES:
1. ALL FINAL MATERIALS ARE TO BE CHOSEN BY HOME OWNER AND 7 OR BUILDER.
 2. FINAL NUMBER OF EXTERIOR STEPS WILL BE DETERMINED ON SITE BY GRADE
 3. CONTRACTOR MUST MEET OR EXCEED ALL LOCAL BUILDING CODES (NC 2018)
 4. DESIGNER ASSUMES NO RESPONSIBILITY FOR CHANGES TO DRAWINGS BY OTHERS DURING CONSTRUCTION
 5. ALL STRUCTURAL INFO SHOWN ON PLANS ARE FOR REFERENCE PURPOSES ONLY. CONTRACTOR SHALL HAVE STRUCTURAL ENG. REVIEW AND DESIGN ALL STRUCTURAL ELEMENTS



GCP Designs Group LLC
Designs You Can Trust

DATE: 6-4-2021

SUBDIVISION:

BUILDER:

BRIDGEPORT DEVELOPMENT

FAYETTEVILLE, NORTH CAROLINA

NOTE:
BUILDING CONTRACTOR TO MEET LOCAL WIND LOADS PER LOCAL CODE AS IT PERTAINS TO LOCATION OF HOUSE
100, 110, 120, 130, 140, 150, MPH




ATTIC VENTILATION - $3609 \text{ S/F} / 300 = 12.03 \text{ S/F REQUIRED}$

FRONT ELEVATION


SCALE: $1/4" = 1'0"$

9'0" FINISHED CEILING HEIGHT ON FIRST FLOOR
1'4" WINDOW HEADER HEIGHT ON FIRST FLOOR
8'0" FINISHED CEILING HEIGHT ON SECOND FLOOR
6'8" WINDOW HEADER HEIGHT ON SECOND FLOOR
CANTILEVER ALL ROOF TRUSSES

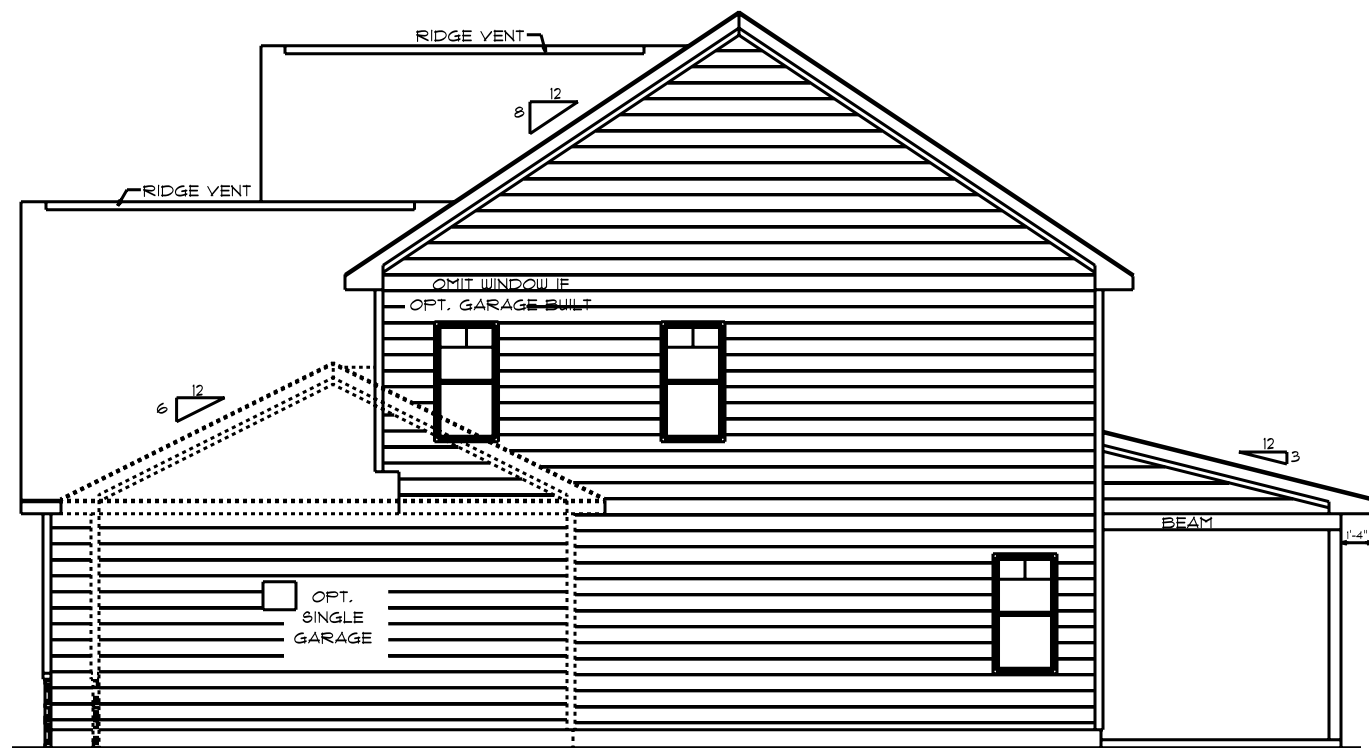


RIGHT ELEVATION

SCALE: $1/8" = 1'0"$

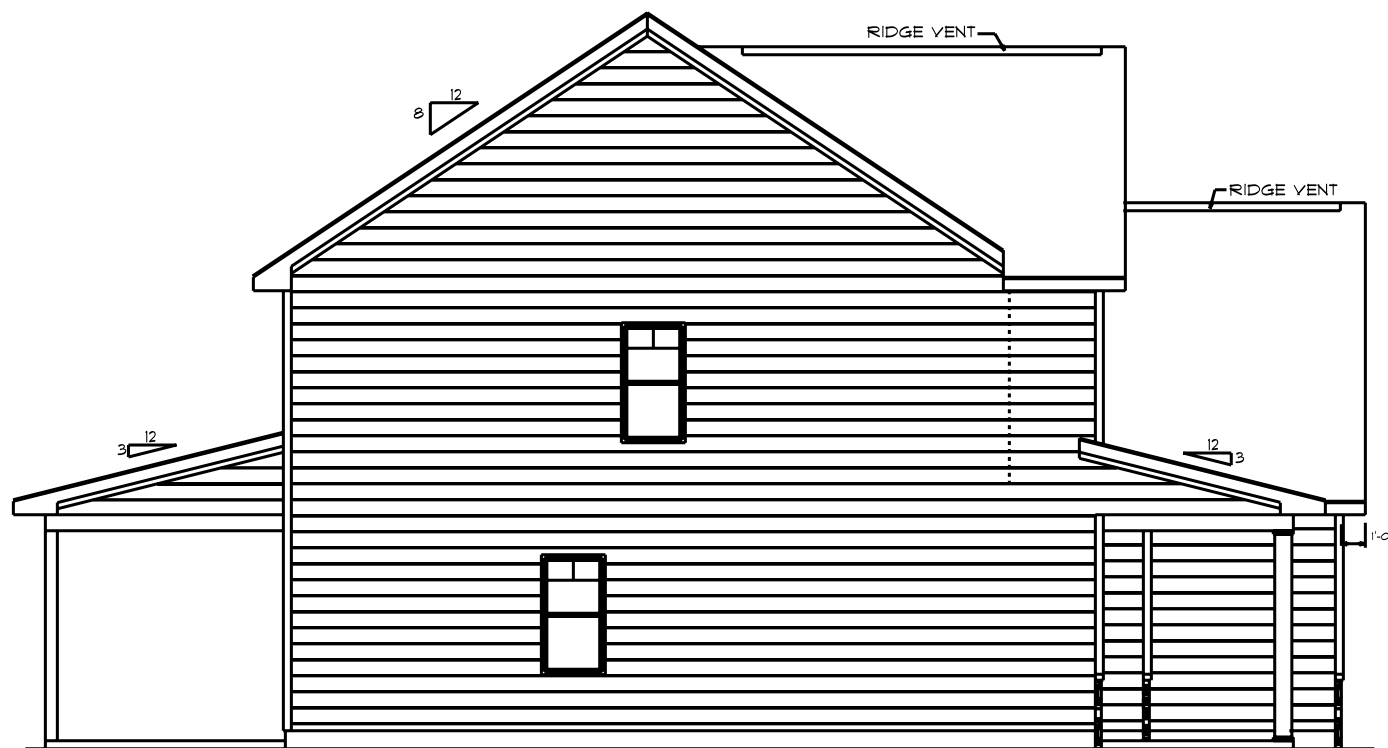

LEFT ELEVATION

SCALE: $1/8" = 1'0"$

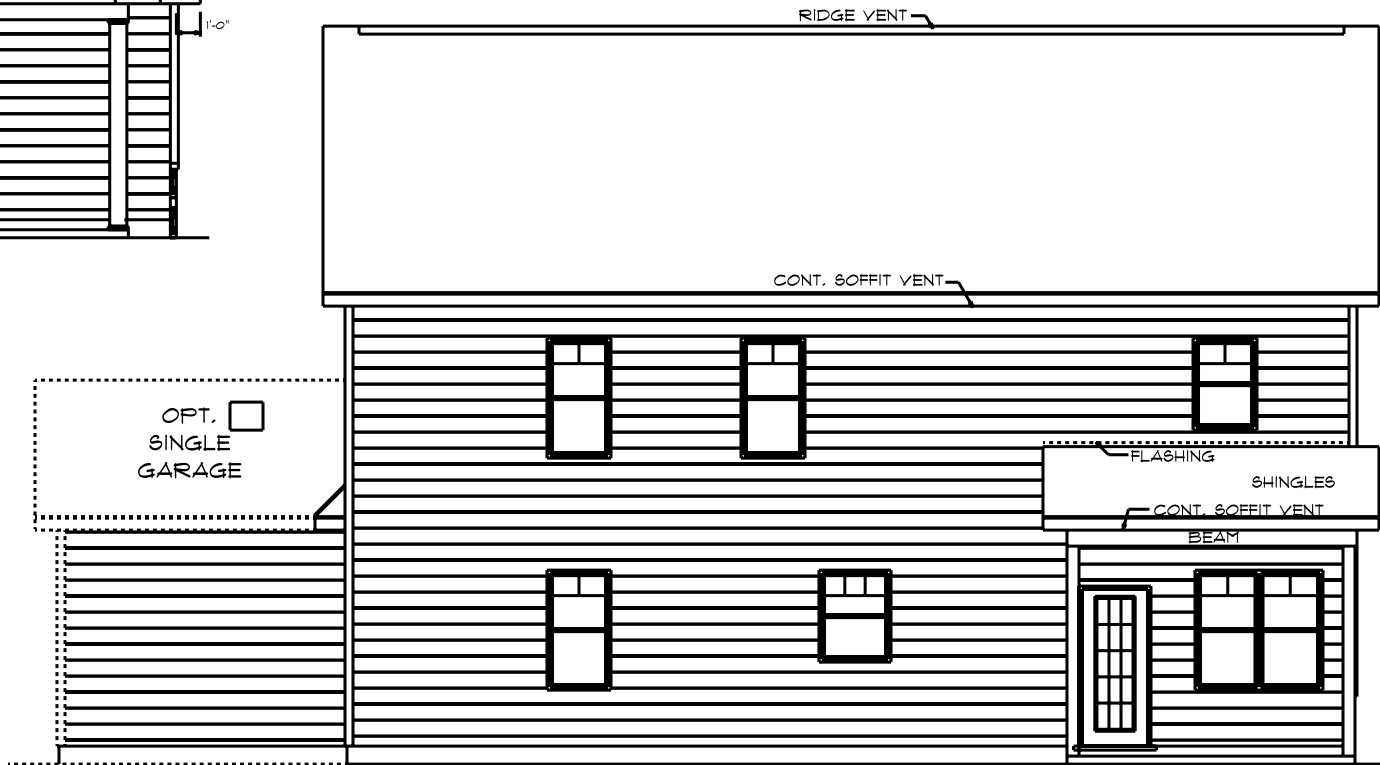

REAR ELEVATION

SCALE: $1/8" = 1'0"$