


Carolina Seasons - Phase 3 - Lot #2
4-Bedroom - Septic Design
67 Fern Ridge Dr

Harnett County PIN: 9556-89-8948

*Not a Survey

Sketched from a plot plan supplied by owner

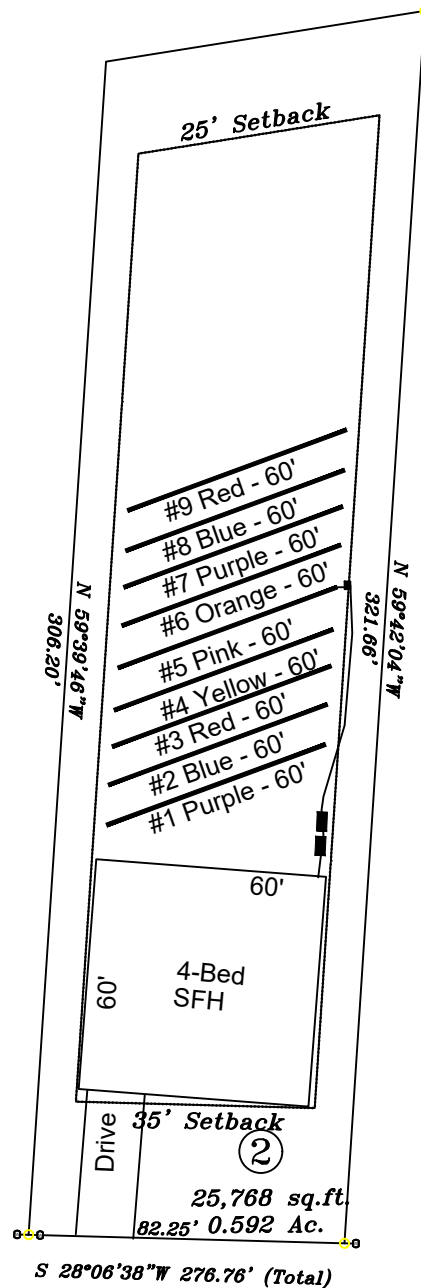

System: Pump to Serial Dist.

Lines: 1-5 (300')

0.6-0.8 LTAR

22" Max Trench Bottom

Accepted Status System

Repair: Pressure Manifold

Lines: 6-9 (240')

0.6-0.8 LTAR

22" Max Trench Bottom

Accepted Status System

**1000 Gallon Septic and Pump Tanks

Tank and trenches to be located minimum of 10'
from any property line and minimum of 5'
from any building foundation.

*Do Not Cut, Fill, or Alter Drainfield or Repair Area

*Comply with all setbacks

*Contact local health dept. and/or Alex Adams prior to
or during installation with any questions or concerns.

SR 1375 Fern Ridge Existing 60' Public R/W

Adams
Soil Consulting
919-414-6761
Job #1730
3-23-24

GRAPHIC SCALE

1" = 50'

