



NC DEPARTMENT OF HEALTH AND HUMAN SERVICES

ROY COOPER • Governor

KODY H. KINSLEY • Secretary

MARK BENTON • Chief Deputy Secretary for Health

SUSAN KANSAGRA • Assistant Secretary for Public Health

Division of Public Health

 Submittal Includes: ☒ (a2) Improvement Permit ☒ (a2) Construction Authorization ☐ Fee \$ _____

IMPROVEMENT PERMIT FOR G.S. 130A-335(a2)

County: HarnettPIN/Lot Identifier: 0681-44-0643.000Issued To: Clayton Properties Group, 2521 Schieffelin Rd., Suite 116, Apex, NC 27502Property Location: 79 Osgood St., Angier, NC 27501Subdivision (if applicable) Cambridge Reserve Lot #: 19 Block: _____ Section: _____LSS Report Provided: Yes ☒ No ☐If yes, name and license number of LSS: Michael D. Eaker, 1030
 New ☒ Expansion ☐ System Relocation ☐ Change of Use ☐
Facility Type: Single Family DwellingNumber of bedrooms: 3 Number of Occupants: 8 or less Other: _____
 Design Wastewater Strength: ☒ Domestic ☐ High Strength ☐ Industrial Process Wastewater
 Proposed Design Daily Flow: 360 GPD Proposed LTAR (Initial): 0.30 gpd/ft2 Proposed LTAR (Repair): 0.30 gpd/ft2
Proposed Wastewater System Type*: Accepted (25% reduction) (Initial) Pump Required: ☐ Yes ☒ No ☐ May be requiredProposed Wastewater System Type*: Accepted (25% reduction) (Repair) Pump Required: ☐ Yes ☒ No ☐ May be required

*Please include system classification for proposed wastewater system types in accordance with Rule .1301 Table XXXII


Effluent Standard: ☒ DSE ☐ HSE ☐ NSF/ANSI 40 ☐ TS-I ☐ TS-II ☐ RCWSaprolite System (Initial): ☐ Yes ☒ No Saprolite System (Repair): ☐ Yes ☒ NoFill System (Initial): ☐ Yes ☒ No If yes, specify: ☐ New ☐ Existing (when adding more than 6 inches of fill to system area provide a fill plan)Fill System (Repair): ☐ Yes ☒ No If yes, specify: ☐ New ☐ Existing (when adding more than 6 inches of fill to system area provide a fill plan)Usable Depth to LC (Initial)*: >48" Usable Depth to LC (Repair)*: >48" * Limiting ConditionMax. Trench Depth (Initial)*: 24" Max. Trench Depth (Repair)*: 24" * Measured on the downhill side of the trenchArtificial Drainage Required: ☐ Yes ☒ No If yes, please specify details: _____Type of Water Supply: ☐ Private well ☐ Public well ☐ Shared well ☒ Municipal Supply ☐ Spring ☐ Other: _____Drainfield location meets requirements of Rule .0508: Yes ☒ No ☐ Drainfield location meets requirements of Rule .0601: Yes ☒ No ☐Permit valid for: ☒ Five years [site plan submitted pursuant to GS 130A-334(13a)] ☐ No expiration [plat submitted pursuant to GS 130A-334(7a)]

Permit conditions:

 Install as per detail sheet and map. Do not disturb, compact, rut or cut any soil within the septic drainfield area.
 Ensure 6 inches approved fill cover is maintained over system after installation.
Licensed Soil Scientist Print Name: Michael D. EakerLicensed Soil Scientist Signature: [Signature]Date: 05/2/2025

The LSS evaluation is being submitted pursuant to and meets the requirements of G.S. 130A-335(a2).

*See attached site sketch

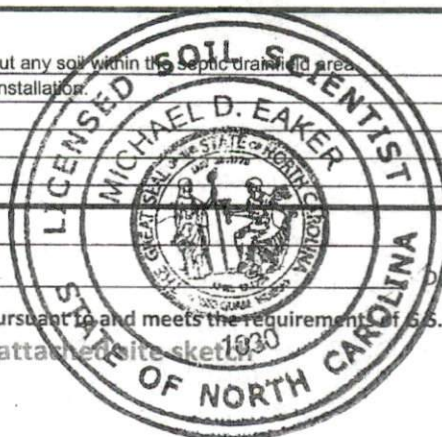

This Section for Local Health Department Use Only

Initial submittal received: 5-9-25 by RL
Date Initials

G.S. 130A-335(a3) states the following:

When an applicant for an Improvement Permit submits to a local health department an Improvement Permit application, the permit fee charged by the local health department, the common form developed by the Department, and a soil evaluation pursuant to subsection (a2) of this section, the local health department shall, within five business days of receiving the application, conduct a completeness review of the submittal. A determination of completeness means that the Improvement Permit includes all of the required components. If the local health department determines that the Improvement Permit is incomplete, the local health department shall notify the applicant of the components needed to complete the Improvement Permit. The applicant may submit additional information to the local health department to cure the deficiencies in the Improvement Permit. The local health department shall make a final determination as to whether the Improvement Permit is complete within five business days after the local health department receives the additional information from the applicant. If the local health department fails to act within any period set out in this subsection, the applicant may treat the failure to act as a determination of completeness. The Department shall develop a common form for use as the Improvement Permit.

The review for completeness of this Improvement Permit was conducted in accordance with G.S. 130A-335(a3). This Improvement Permit is determined to be:

☐ Incomplete (If box is checked, information in this section is required.)

The following items are missing:

Copies of this were sent to the LSS and the Applicant on _____
Date

State Authorized Agent: _____ Date: _____

☒ Complete

State Authorized Agent: [Signature] DEHS Date: 5-14-25

This Improvement Permit is issued pursuant to G.S. 130A-335 (a2) and (a3) using the signed and sealed LSS/LG evaluation(s) attached here. The issuance of this permit in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This permit is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of 15A NCAC 18E and to the conditions of this permit.

The Department, the Department's authorized agents, and the local health departments shall be discharged and released from any liabilities, duties, and responsibilities imposed by statute or in common law from any claim arising out of or attributed to evaluations, submittals, or actions from a licensed soil scientist or licensed geologist pursuant to GS 130A-335(a2).

Improvement Permit Expiration Date: 5-14-30

See attached site sketch

CONSTRUCTION AUTHORIZATION FOR G.S. 130A-335(a2)

County: Harnett Pre-Construction Conference Required: Yes ☐ No ☒

PIN/Lot Identifier: 0681-44-0643.000 - Cambridge Reserve, Lot 19

Issued To: Clayton Properties Group, 2521 Schieffelin Rd., Suite 116, Apex, NC 27502

Property Location: 79 Osgood St., Angier, NC 27501

AOWE/PE Plans/Evaluations Provided: Yes ☒ No ☐ If yes, name and license number of AOWE/PE: Michael D. Eaker 10013E

Facility Type: Single Family Dwelling

Number of bedrooms: 3 Number of Occupants: 6 or less Other: _____

☒ New ☐ Expansion ☐ Repair ☐ System Relocation ☐ Change of Use

Basement? ☐ Yes ☒ No Basement Fixtures? ☐ Yes ☐ No

Crawl Space? ☒ Yes ☐ No Slab Foundation? ☒ Yes ☐ No

Type of Wastewater System* Accepted (25% reduction) (Initial) Accepted (25% reduction) (Repair)

**Please include system classification for proposed wastewater system types in accordance with Rule .1301 Table XXXII*

Design Daily Flow: 360 GPD Wastewater Strength: ☒ Domestic ☐ High Strength ☐ Industrial Process WW

Session Law 2014-120 Section 53, Engineering Design Utilizing Low-flow Fixtures and Low-flow Technologies? ☐ Yes ☐ No
(if yes, please provide engineering documentation)

Effluent Standard: ☒ DSE ☐ HSE ☐ NSF/ANSI 40 ☐ TS-I ☐ TS-II ☐ RCW

Type of Water Supply: ☐ Private well ☐ Public well ☐ Shared well ☒ Municipal Supply ☐ Spring ☐ Other: _____

Installation Requirements/Conditions

Septic Tank Size: 1000 gallons Total Trench/Bed Length: 325 feet Trench/Bed Spacing: 9 feet on center

Trench/Bed Width: 36 inches LTAR: 0.30 gpd/ft² Usable Depth to LC (Initial)*: >48" **Limiting condition*

Soil Cover: 6+ inches Slope Corrected Maximum Trench/Bed Depth*: 24 inches ** Measured on the downhill side of the trench*

Pump Tank Size (if applicable): NA gallons Requires more than 1 pump? ☐ Yes ☐ No

Pump Requirements: _____ ft. TDH vs. _____ GPM Grease Trap Size (if applicable): _____ gallons

Distribution Method: ☒ Serial ☐ D-Box or Parallel ☐ Pressure Manifold(s) ☐ LPP ☐ Other: _____

Artificial Drainage Required: Yes ☐ No ☒ If yes, please specify details: _____

Legal Agreements (If the answer is "Yes" to any type of legal agreements, please attach a copy of the agreement.)

Multi-party Agreement Required [.0204(g)]: ☐ Yes ☒ No Declaration of Restrictive Covenants: ☐ Yes ☒ No

Easement, Right-of-Way, or Encroachment Agreement Required [.0301(b)]: ☐ Yes ☒ No

Management Entity Required: ☐ Yes ☒ No Minimum O&M Requirements: _____

Permit conditions:

Install as per detail sheet and map. Do not disturb, compact, rut or cut any soil within the septic drainfield area.

Ensure 6 inches approved fill cover is maintained over system after installation.



The requirements of 15A NCAC 18E are incorporated by reference into this permit and shall be met. Systems shall be installed in accordance with the attached site sketch. ***This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes.*** The Construction Authorization shall not be affected by a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of 15A NCAC 18E, or 15A NCAC 18A .1900, as applicable, and to the conditions of this permit.

AOWE/PE Print Name: Michael D. Eaker

AOWE/PE Signature: [Signature]

Date: 04/11/2025

This AOWE/PE submittal is pursuant to and meets the requirements of G.S. 130A-335(a2) and (a5).

See attached site sketch



This Section for Local Health Department Use Only

Initial submittal received: 5-9-25 by RL
Date Initials

G.S. 130A-335(a5) states the following:

When an applicant for a Construction Authorization, or an Improvement Permit and Construction Authorization together, submits a Construction Authorization, or an Improvement Permit and Construction Authorization application together, the permit fee charged by the local health department, the common form developed by the Department, and any necessary signed and sealed plans or evaluations conducted by a person licensed pursuant to Chapter 89C of the General Statutes as a licensed engineer or a person certified pursuant to Article 5 of Chapter 90A of the General Statutes as an Authorized On-Site Wastewater Evaluator, the local health department shall, within five business days of receiving the application, conduct a completeness review of the submittal. A determination of completeness means that the Construction Authorization or Improvement Permit and Construction Authorization includes all of the required components. If the local health department determines that the Construction Authorization or Improvement Permit and Construction Authorization is incomplete, the local health department shall notify the applicant of the components needed to complete the Construction Authorization or Improvement Permit and Construction Authorization. The applicant may submit additional information to the local health department to cure the deficiencies in the Construction Authorization or Improvement Permit and Construction Authorization. The local health department shall make a final determination as to whether the Construction Authorization or Improvement Permit and Construction Authorization is complete within five business days after the local health department receives the additional information from the applicant. If the local health department fails to act within any period set out in this subsection, the applicant may treat the failure to act as a determination of completeness. The applicant may apply for the building permit for the project upon the decision of completeness of the Construction Authorization or Improvement Permit and Construction Authorization by the local health department or if the local health department fails to act within five business days. The Authorized On-Site Wastewater Evaluator or licensed engineer submitting the evaluation pursuant to this subsection may request that the local health department revoke or suspend the Construction Authorization or Improvement Permit and Construction Authorization for cause. Upon written request of the Authorized On-Site Wastewater Evaluator or licensed engineer, the local health department shall suspend or revoke the Construction Authorization or Improvement Permit and Construction Authorization pursuant to G.S. 130A-23. The Department shall develop a common form for use as the Construction Authorization.

The review for completeness of this Construction Authorization was conducted in accordance with G.S. 130A-335(a5). This Construction Authorization is determined to be:

☐ Incomplete (If box is checked, information in this section is required.)

The following items are missing: _____

Copies of this were sent to the AOWE/PE and the Applicant on _____
Date

State Authorized Agent: _____ Date: _____

☒ Complete

State Authorized Agent: Alan W. RENS Date of Issuance: 5-14-25

This Construction Authorization is issued pursuant to G.S. 130A-335(a2) and (a5) using the signed and sealed plans or evaluations attached here. This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be affected by a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

The Department, the Department's authorized agents, and the local health departments shall be discharged and released from any liabilities, duties, and responsibilities imposed by statute or in common law from any claim arising out of or attributed to plans, evaluations, preconstruction conference findings, submittals, or actions from a person licensed pursuant to Chapter 89C of the General Statutes as a licensed engineer or a person certified pursuant to Article 5 of Chapter 90A of the General Statutes as an Authorized On-Site Wastewater Evaluator in GS 130A-335(a2), (a5), and (a7). The Department, the Department's authorized agents, and the local health departments shall be responsible and bear liability for their actions and evaluations and other obligations under State law or rule, including the issuance of the operations permit pursuant to GS 130A-337.

Construction Authorization Expiration Date: 5-14-30

See attached site sketch

PRELIMINARY PLOT PLAN FOR

MUNGO HOMES

LOT 19, CAMBRIDGE SUBDIVISION

79 OSGOOD STREET

REF: P.B. 2025, PG.7

NEILL'S CREEK TOWNSHIP



HARNETT COUNTY, NORTH CAROLINA

FEBRUARY 25, 2025

ZONED RA-30

50 25 0 50 100

SCALE 1"=50'

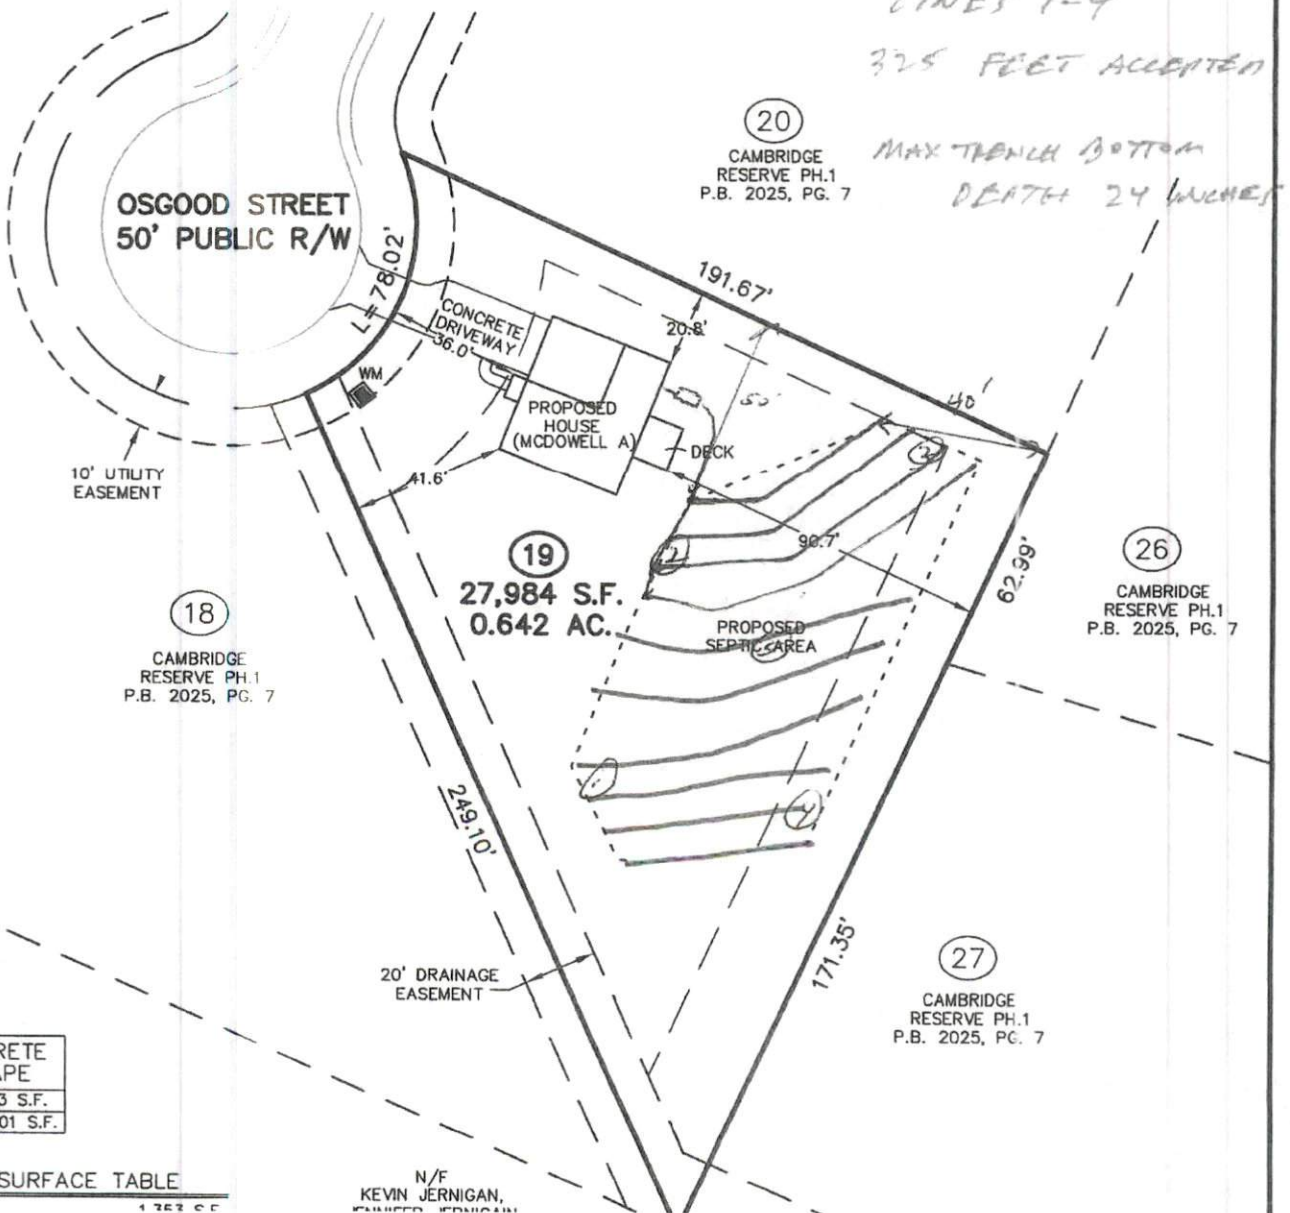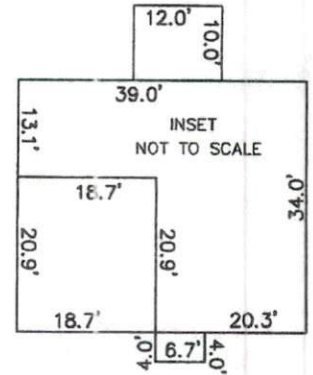

TOTAL CONCRETE & LANDSCAPE	
CONCRETE	783 S.F.
LANDSCAPE	26,601 S.F.

IMPERVIOUS SURFACE TABLE

N/F
KEVIN JERNIGAN,
REGISTERED ENGINEER