

SOUTHEASTERN SOIL & ENVIRONMENTAL ASSOC., INC.

PROPOSED SUBSURFACE WASTE DISPOSAL SYSTEM DETAIL SHEET

SUBDIVISION: BRAYDEN PRESERVE

LOT 51

^{Pump}
INITIAL SYSTEM: Approved 25% Reduction

^{Pump}
REPAIR: Approved 25% Reduction

DISTRIBUTION: D-Box

DISTRIBUTION D-Box

BENCHMARK: 100.0

LOCATION ToS FC 54/55

NO. BEDROOMS: 3

LTAR 0.4 gpd/ft²

SEPTIC TANK SIZE 1000

PUMP TANK SIZE 1,000

LINE	FLAG COLOR	ELEVATION	LENGTH
I { 1	L	96.09	75
2	P	95.58	75
3	L	95.17	75
			225
R { 4	P	94.67	75
5	L	94.08	75
6	P	93.67	75
			225

BY B.C. RAYNOR

DATE 01/30/2024

TYPICAL PROFILE

THERE SHALL BE NO GRADING,

0-10 LS YFR GR

CUTTING, LOGGING OR OTHER SOIL

10-36 SCL Fi SBK

DISTURBANCE IN SEPTIC AREA


CR2 / PM ≥ 36"

HEALTH DEPARTMENT USE ONLY.

DESIGNS DO NOT GURANTEE FUNCTIONALITY

Southeastern Soil & Environmental Associates, Inc.

P.O. Box 9321
Fayetteville, NC 28311
Phone/Fax (910) 822-4540
Email mike@southeasternsoil.com

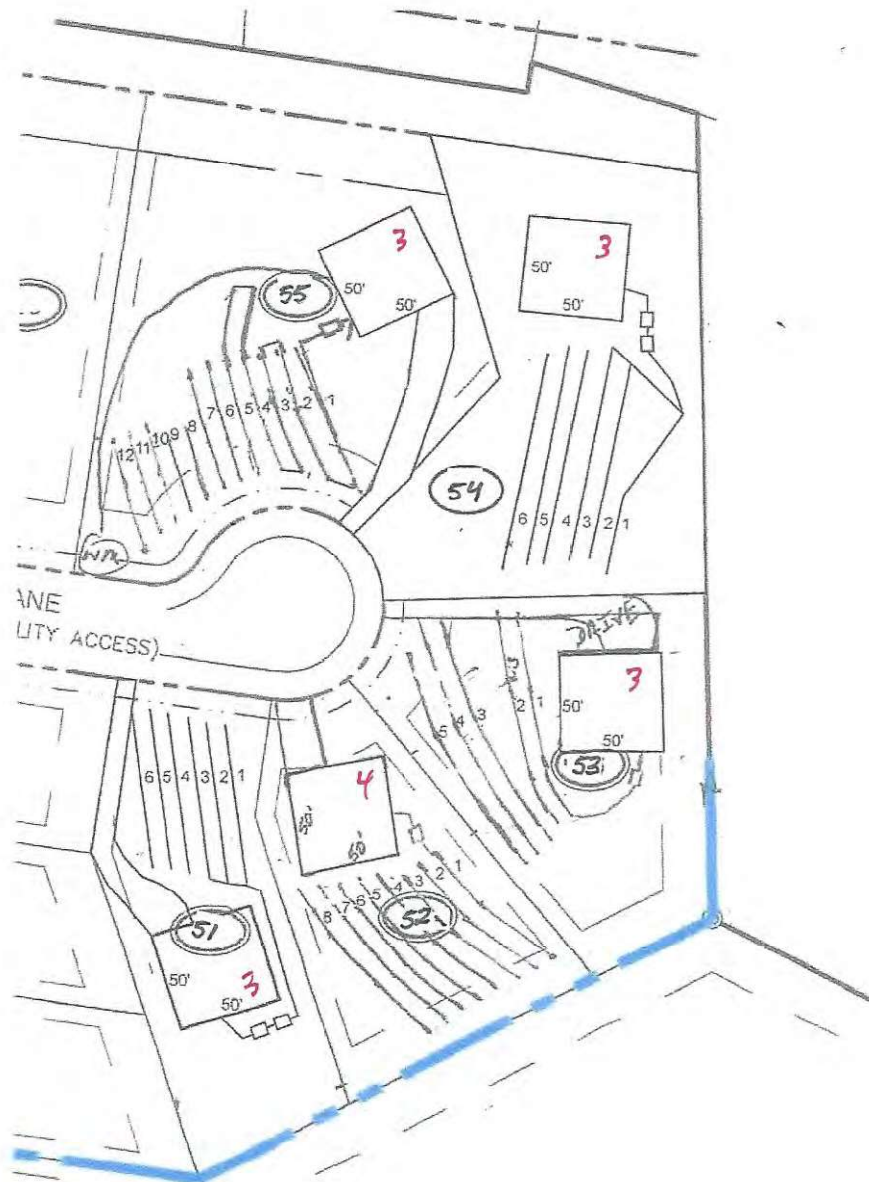

1" = 100'