

Client:

Signature Homes

Project:

Address: 138 Turlington Landing Road, Dunn

Date: 7/8/2025

Input by: Johnnie Baggett Job Name: Lot 4 Turlington Landing

Project #: J0225-0849

**Kerto-S LVL** 2-Ply - PASSED 1.750" X 11.875" **GDH** 

Application:


Design Method:

**Building Code:** 

Load Sharing:

Deck:

Level: Level

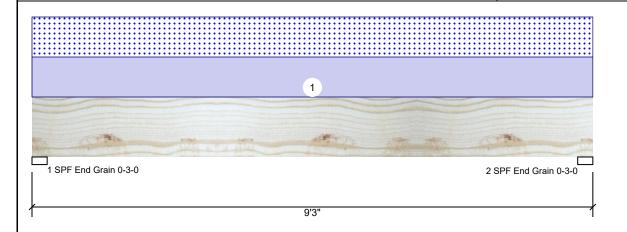

Floor

ASD

No

**IBC/IRC 2015** 

Not Checked



Ld. Comb.

3 1/2

Total Ld. Case

Page 1 of 1

### **Member Information**

Type: Plies: 2 Moisture Condition: Dry Deflection LL: 480 Deflection TL: 360 Importance: Normal - II

Temperature: Temp <= 100°F

### Reactions UNPATTERNED Ib (Uplift)

Dir.

Brg	Direction	Live	Dead	Snow	Wind	Const
1	Vertical	0	1254	1212	0	0
2	Vertical	0	1254	1212	0	0

## **Bearings** Bearing Length

1-SPF 3.000" 1254 / 1212 Vert 2466 L End Grain 1254 / 1212 2466 L D+S 2 - SPF 3.000" Vert End Grain

Cap. React D/L lb

### **Analysis Results**

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	5250 ft-lb	4'7 1/2"	22897 ft-lb	23%	D+S	L
Unbraced	5250 ft-lb	4'7 1/2"	10288 ft-lb	51%	D+S	L
Shear	1805 lb	1'2 7/8"	10197 lb	18%	D+S	L
LL Defl inch	0.045 (L/2388)	4'7 1/2"	0.222 (L/480)	20%	S	L
TL Defl inch	0.091 (L/1174)	4'7 1/2"	0.296 (L/360)	31%	D+S	L

### **Design Notes**

- 1 Provide support to prevent lateral movement and rotation at the end bearings
- 2 Girders are designed to be supported on bottom edge only and across their full width.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top must be laterally braced at end bearings.
- 6 Bottom must be laterally braced at end bearings.
- 7 Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Тор	262 PLF	0 PLF	262 PLF	0 PLF	0 PLF	D2
	Self Weight				9 PLF					

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

# Handling & Installation

LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals Damaged Beams must not be used

Design assumes top edge is laterally restrained
Provide lateral support at bearing points to avoid
lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 2/28/2028

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

**Manufacturer Info** 

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



