



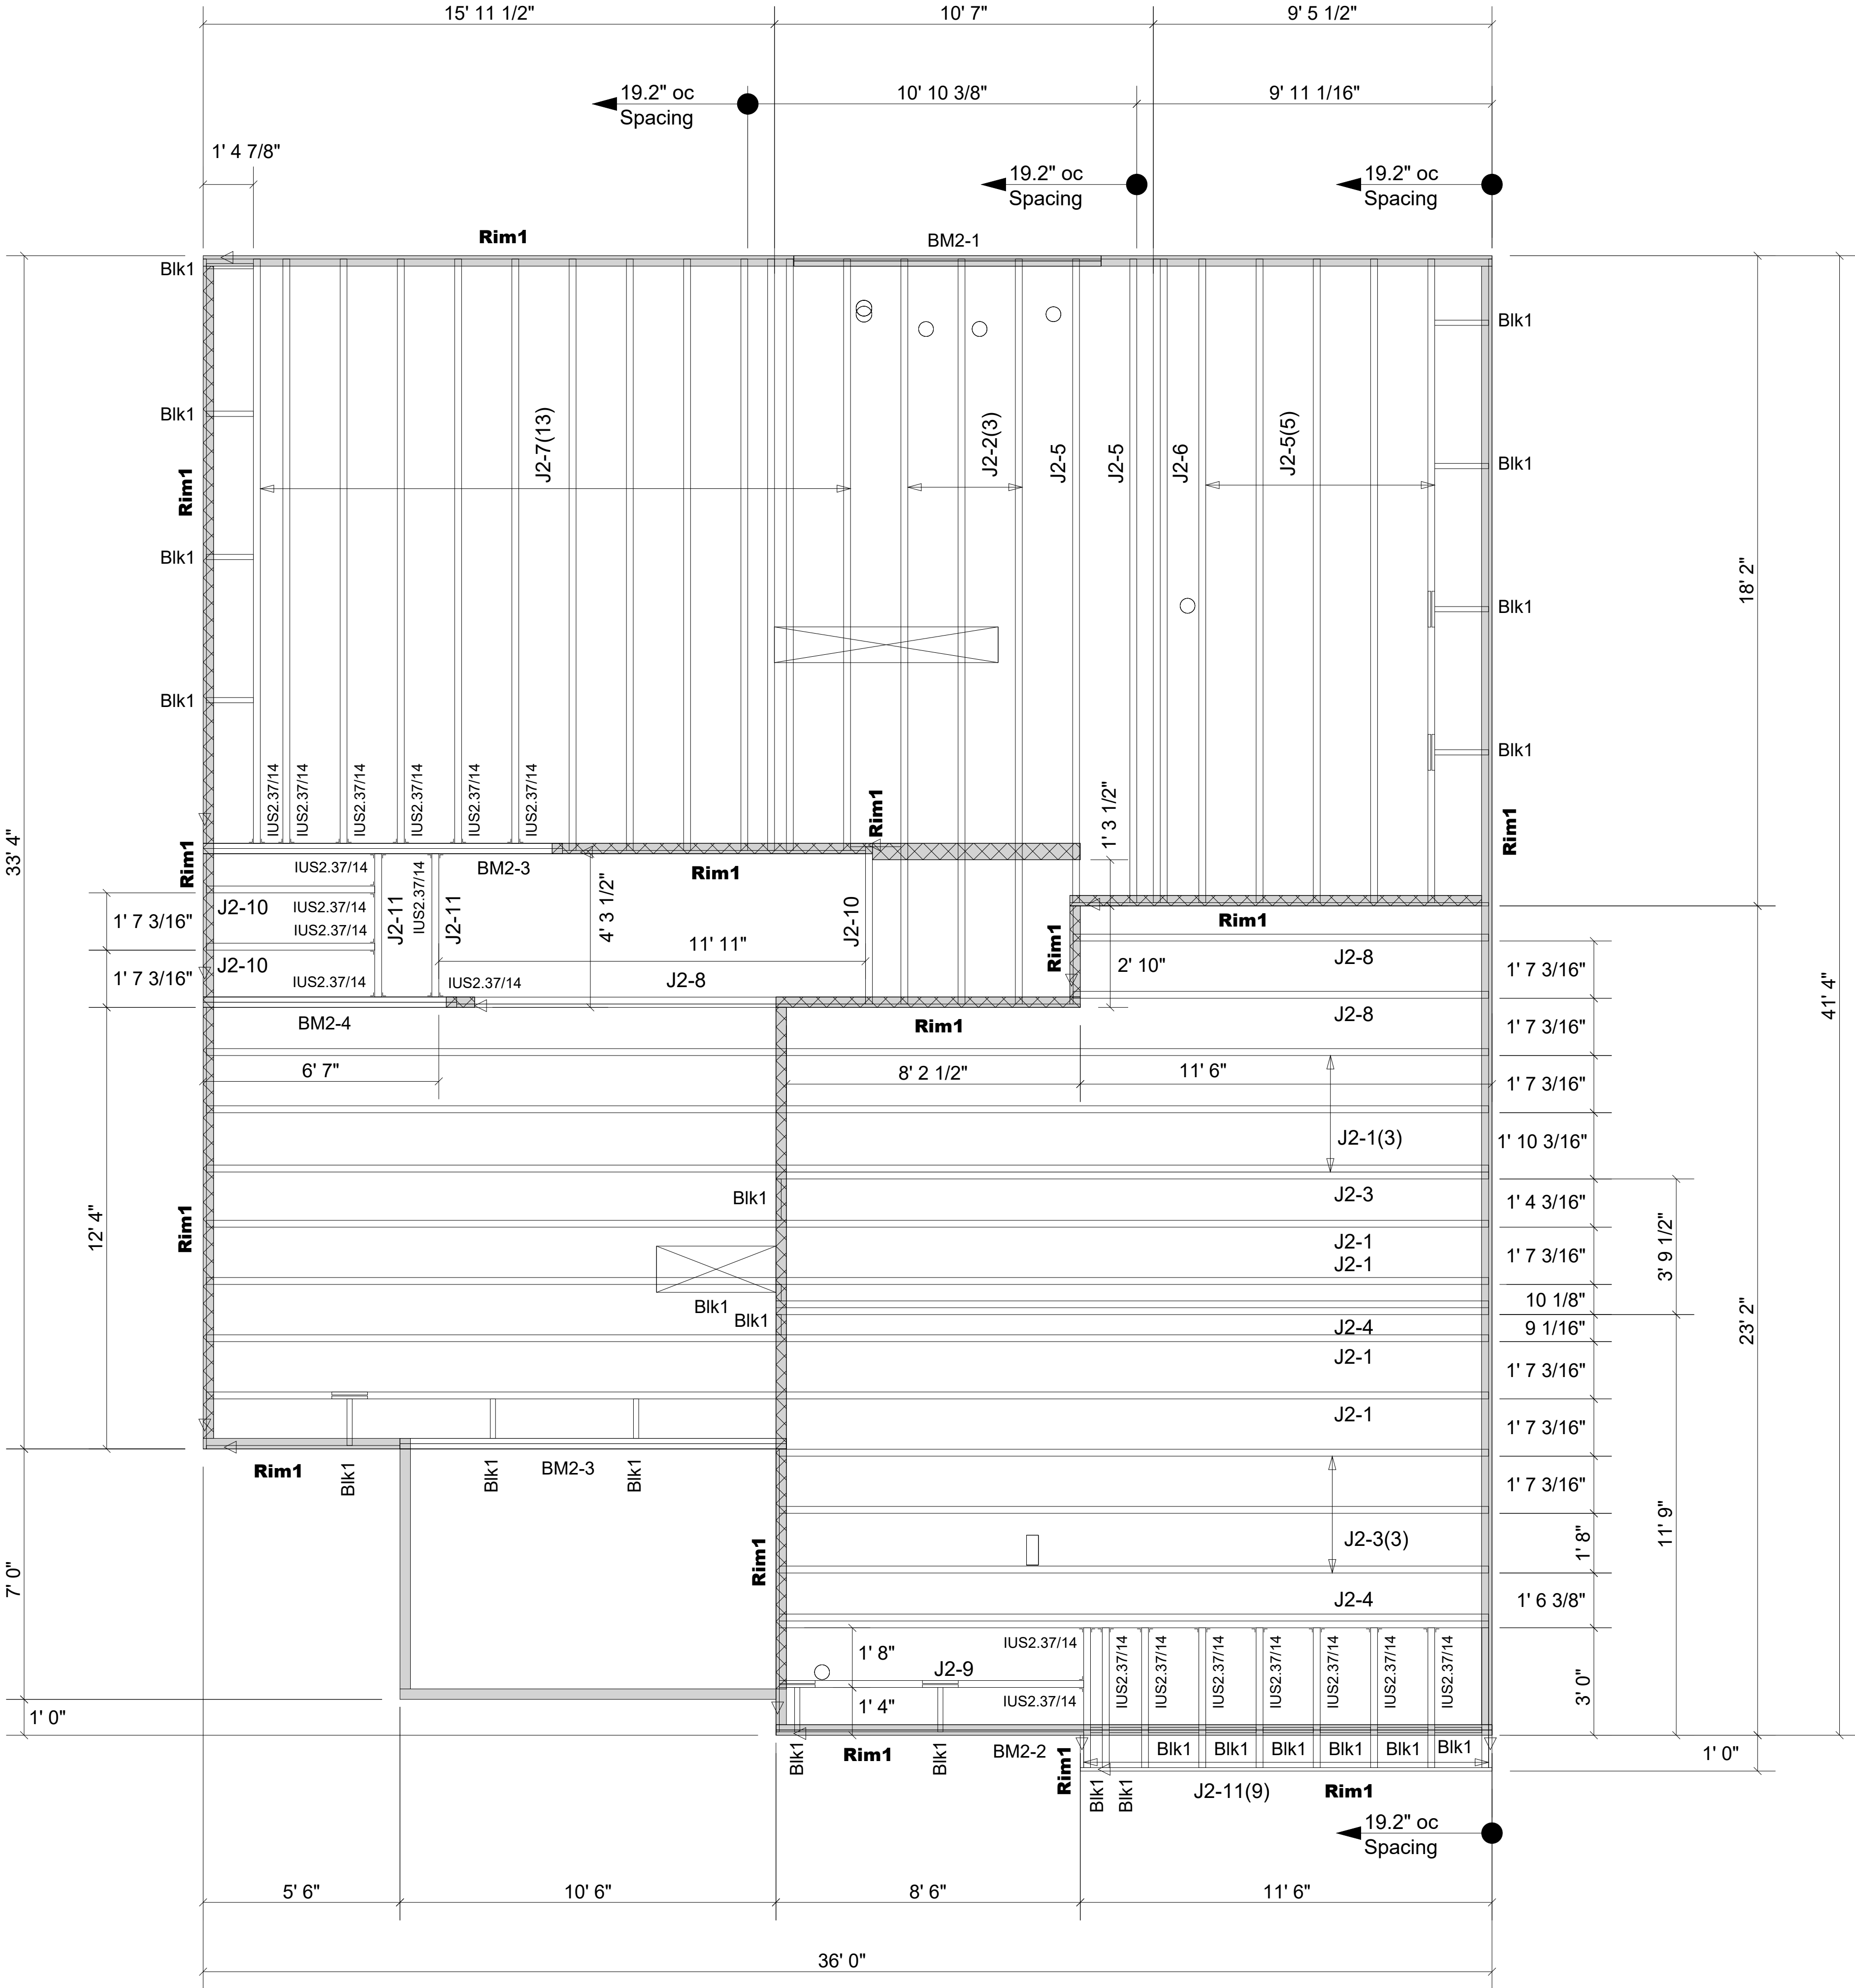

Products				
PlotID	Length	Product	Plies	Net Qty
J2-1	36' 0"	14" BCI® 6000s-1.8	1	7
J2-2	21' 0"	14" BCI® 6000s-1.8	1	3
J2-3	20' 0"	14" BCI® 6000s-1.8	1	4
J2-4	20' 0"	14" BCI® 6000s-1.8	2	4
J2-5	18' 0"	14" BCI® 6000s-1.8	1	7
J2-6	18' 0"	14" BCI® 6000s-1.8	2	2
J2-7	17' 0"	14" BCI® 6000s-1.8	1	13
J2-8	12' 0"	14" BCI® 6000s-1.8	1	3
J2-9	9' 0"	14" BCI® 6000s-1.8	1	1
J2-10	5' 0"	14" BCI® 6000s-1.8	1	3
J2-11	4' 0"	14" BCI® 6000s-1.8	1	11
BM2-1	10' 0"	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2
BM2-2	20' 0"	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	2	2
BM2-3	12' 0"	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	2	4
BM2-4	8' 0"	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	2	2
Rim1	12' 0"	1-1/8" x 14" BC RIM BOARD OSB	1	16
Blk1	2' 0"	14" BLOCKING	1	24

Connector Summary			
Qty	Manuf	Product	Flange
21	Simpson	IUS2.37/14	None

Backer blocks are required for all hangers supported by I-Joists.

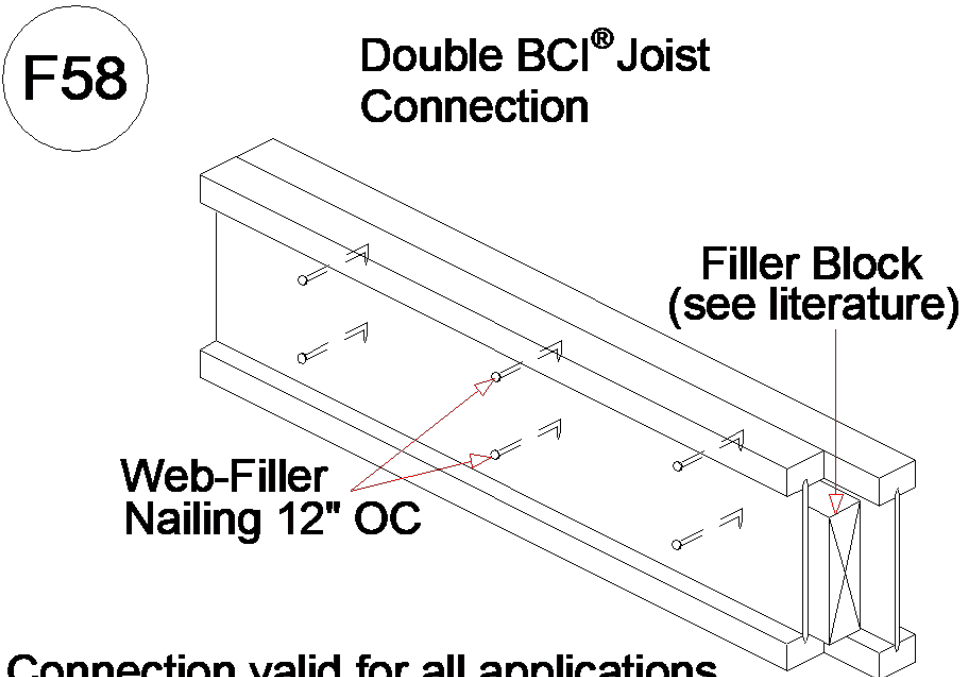

Connection valid for all applications.
Contact Boise EWP Engineering for specific conditions.

▲ = LEFT END OF TRUSS

FOR PERMIT

REVISIONS:



Moncks Corner/Easley, SC (800) 475-3999
Sparta, NC (336) 372-2226

Client: MATTAMY HOMES-RALEIGH

Job: LOT 125 PROVIDENCE CREEK

Plan Information: REDWOOD-CR

NOT TO SCALE

Drawn By: MBB

Date: 06/12/25

Job #: Sales Rep: KYLE GIBSON

25-5443-J02 Phone: 843-729-3249