

**Fire-Rated, Impact Safety-Rated Glass Ceramic  
With Surface-Applied Film  
Fire-Rating: 20-180 Minutes**

FireLite NT is a 3/16" (5 mm) thick fire-rated and impact safety-rated glazing material, composed of FireLite and fire-rated surface-applied film. It is listed for use in doors, sidelites, transoms and borrowed lites.

**FEATURES**

- ultraHD<sup>®</sup> Technology for improved surface quality, clarity and color
- Fire-rated for up to 180 minutes with required hose stream test
- Available in two surface grades: Premium and Standard
- Wireless glass ceramic with high performance surface-applied approved fire-rated film
- Impact safety-rated-meets ANSI Z97.1 and CPSC 16 CFR1201 (Cat. I and II)
- Fits in Fireframes<sup>®</sup> Designer Series from TGP, or standard fire-rated frames
- Withstands thermal shock
- Large sizes available
- May be lightly sandblasted or etched on the unfilmed side without affecting fire rating
- Protects from fire and impact on both sides of the glass
- May be insulated (see FireLite IGU fact sheet)
- 3-year limited warranty

**Note:** This product is not a barrier to radiant heat, as it does not meet test standards ASTM E119 or UL 263. If your jurisdiction requires a "barrier to heat" product, please contact TGP regarding Pilkington Pyrostop<sup>®</sup>.

**SURFACE GRADES**

**Standard Grade** - Polished for a surface quality that is comparable to alternative fire-rated ceramics marketed as having a premium finish.

**Premium Grade** - Finish ground and polished on both surfaces to provide superior surface quality, improving overall clarity and providing a surface that is unmatched by alternative products.

**LISTINGS/STANDARDS**

Classified and labeled by Underwriters Laboratories, Inc.<sup>®</sup> and Underwriters Laboratories of Canada. File number for labeled fire-rated assemblies is R13377. Tests performed in accordance with:

UL 9	NFPA 80	CAN4 S-104	MEA 290-90-M-6
UL 10B	NFPA 252	CAN4 S-106	LARR 25798
UL 10C	NFPA 257		



BIM 3D Model Available

**ultraHD<sup>®</sup>**  
TECHNOLOGY



UL Classified & Labeled



Fire-Rated



Hose Stream Tested



Impact-Rated



Positive Pressure Tested

## MAXIMUM EXPOSED AREA

RATING	ASSEMBLY	MAX. EXPOSED AREA	MAX. WIDTH OF EXPOSED GLAZING	OR	MAX. HEIGHT OF EXPOSED GLAZING
20 to 60 min.	DOORS (non-temp rise)	3,204 in <sup>2</sup> / 22.25 ft <sup>2</sup> (2.07 m <sup>2</sup> )	36" (914 mm)		89" (2,260 mm)
	DOORS (temp rise)	100 in <sup>2</sup> / 0.69 ft <sup>2</sup> (.06 m <sup>2</sup> )	12" (304 mm)		33" (838 mm)
	OTHER THAN DOORS	3,325 in <sup>2</sup> / 23.09 ft <sup>2</sup> (2.15 m <sup>2</sup> )	95" (2,413 mm)		95" (2,413 mm)
90 min.	DOORS (non-temp rise)	2,034 in <sup>2</sup> / 14.13 ft <sup>2</sup> (1.31 m <sup>2</sup> )	36" (914 mm)		56-1/2" (1,435 mm)
	DOORS (temp rise)	100 in <sup>2</sup> / 0.69 ft <sup>2</sup> (.06 m <sup>2</sup> )	12" (304 mm)		33" (838 mm)
	OTHER THAN DOORS	2,627 in <sup>2</sup> / 18.24 ft <sup>2</sup> (1.69 m <sup>2</sup> )	56-1/2" (1,435 mm)		56-1/2" (1,435 mm)
180 min.	DOORS	100 in <sup>2</sup> / 0.69 ft <sup>2</sup> (.06 m <sup>2</sup> )	12" (304 mm)		33" (838 mm)

Check with frame manufacturer for maximum tested glass sizes and required stop height.

Note: Individual lite sizes cannot exceed "Max. Exposed Area" shown above.

## MAXIMUM SHEET SIZE

SURFACE FINISH	Premium	Standard	Obscure
	48" x 96" (1.21 m x 2.43 m)	48" x 96" (1.21 m x 2.43 m)	36" x 96" (.91 m x 2.43m)

## GENERAL CHARACTERISTICS


THICKNESS:	3/16" (5 mm) overall
WEIGHT:	2.56 lb / ft <sup>2</sup> (12.5 kg / m <sup>2</sup> )
APPROX. VISIBLE TRANSMISSION:	88%
APPROX. VISIBLE REFLECTION:	9%
HARDNESS (VICKER'S SCALE):	700
FIRE RATING:	20 minutes to 3 hours
IMPACT SAFETY RATING:	Meets ANSI Z97.1 and CPSC 16FR1201 (Cat. I and II)
STC RATING:	35

## LABELING

Each piece of FireLite NT shall be permanently labeled with the FireLite NT logo, UL logo and fire rating.

### Detail based on use of Fireframes Designer Series narrow profile framing

Glazing Thickness:	3/16" – 1" (5 mm - 25.4 mm)
a. Frame width:	2" (51 mm)
b. Frame height:	2-3/4" (70 mm)
c. Stop height:	3/4" (19 mm)
d. Pocket width:	1/2" – 1-1/4" (12.7 mm x 31.8 mm)
e. Edge clearance:	1/4" (6.4 mm)
f. Bite:	1/2" (12.7 mm)

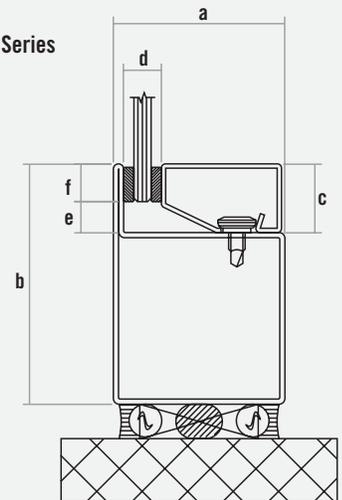

## INSTALLATION

FireLite NT shall be glazed into the appropriate fire-rated framing with an approved glazing compound (closed cell PVC tape or DAP 33 putty) as supplied by the installer. For 90 minute ratings that exceed 1,393 in<sup>2</sup> (.8987 m<sup>2</sup>), FireLite NT shall be glazed with fire-rated glazing tape as supplied by TGP.

Inspect each piece of FireLite NT immediately before installation and eliminate any with observable edge damage or face imperfections. As with any glass produced by the “roll out” method, individual pieces of FireLite NT may contain minimal variations in thickness. Occasionally, process marks and small occlusions or seeds (bubbles, knots or crystals) may be apparent. However, since they do not generally impair the transparency or affect the technical performance of the glass, they do not represent cause for rejection.

## STORAGE & HANDLING

FireLiteNT must be handled with care during transportation, storage, inspection and installation. Store in a dry place.

## FAMILY OF PRODUCTS

TGP offers a complete family of products for all your fire-rated glazing needs, ranging from 20 minute to 3 hour applications. More information is available online at [fireglass.com](http://fireglass.com), or by calling 800.426.0279.

### **Fireglass<sup>®</sup>20**

Fire-rated, impact safety-rated glass

### **FireLite<sup>®</sup>**

Fire-rated glass ceramic

### **FireLite<sup>®</sup> NT**

Fire-rated, impact safety-rated glass ceramic with surface-applied film

### **FireLite Plus<sup>®</sup>**

Fire-rated, impact safety-rated glass ceramic

### **FireLite<sup>®</sup> IGU**

Fire-rated or fire/impact safety-rated insulated glass units

### **Pilkington Pyrostop<sup>®</sup>**

Fire-rated, impact safety-rated transparent wall panels

### **WireLite<sup>®</sup>**

Fire-rated, wired glass

### **WireLite<sup>®</sup> NT**

Fire-rated, impact safety-rated wired glass with surface-applied film

### **Fireframes<sup>®</sup>**

Fire-rated framing & doors for use with all TGP glass products