


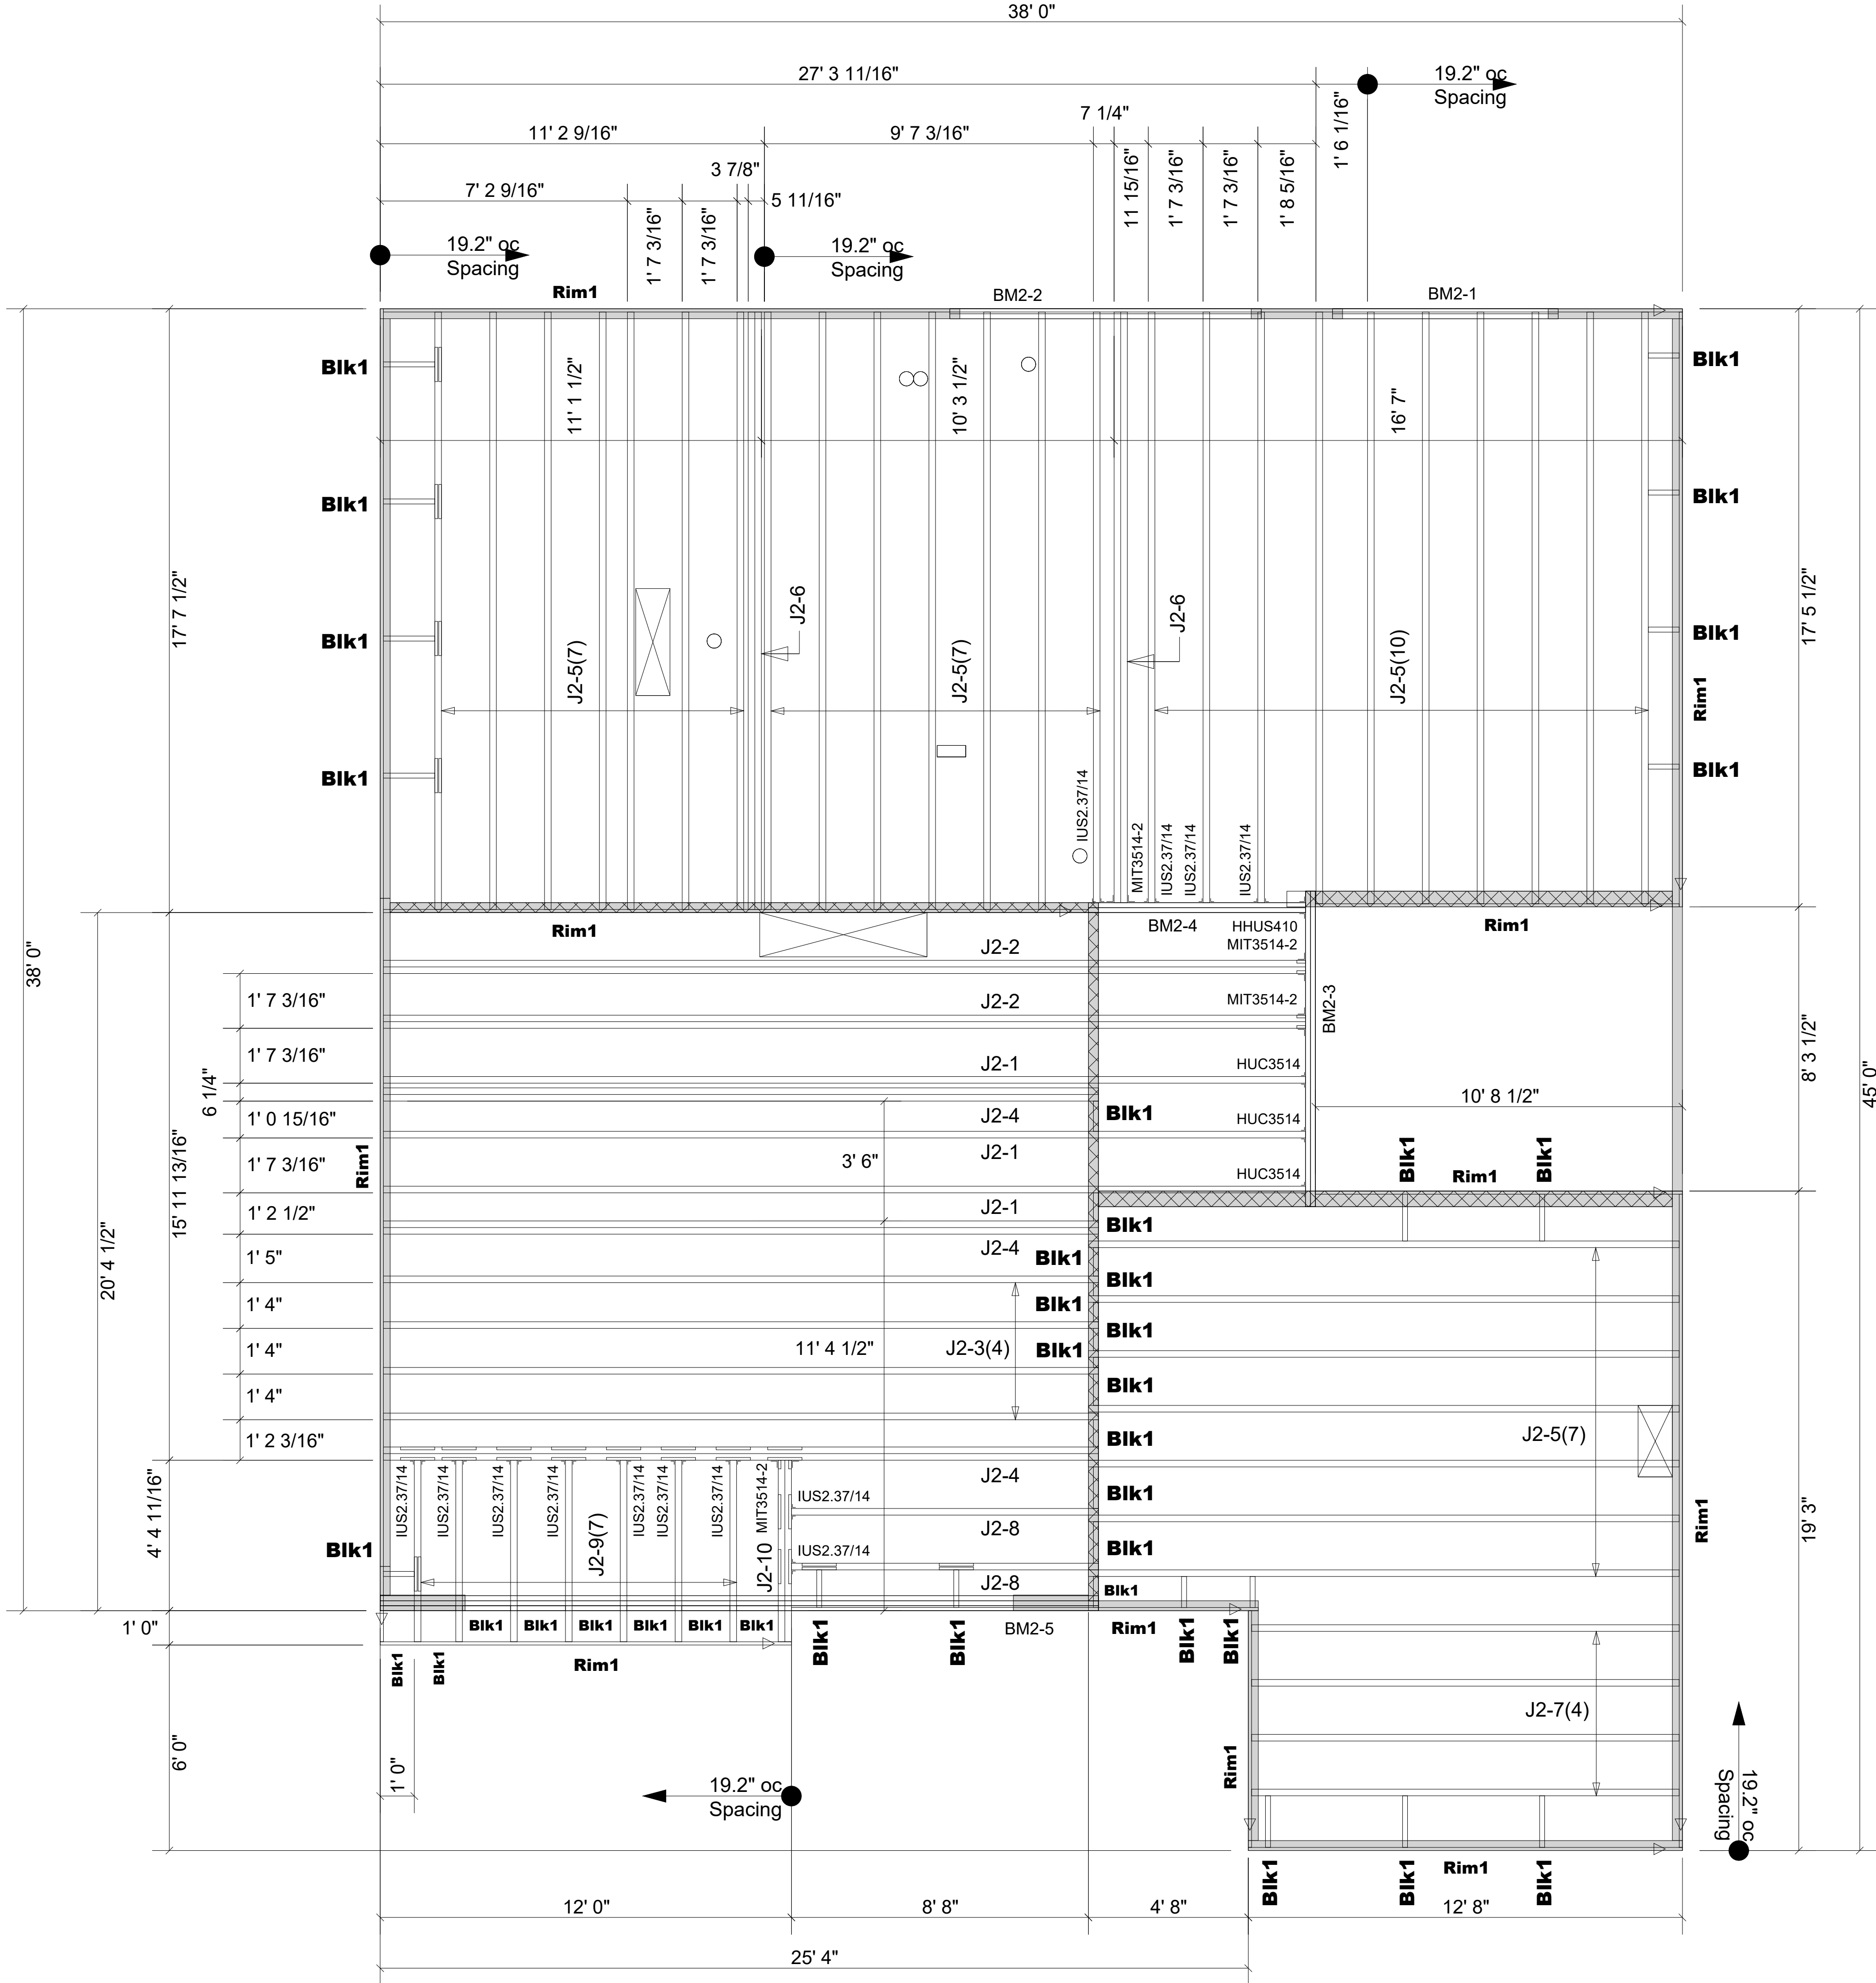


Backer blocks are required for all hangers supported by I-Joists.

Connector Summary			
Flange	Product	Manuf	Qty
None	HHUS410	Simpson	1
None	HUC3514		3
None	IUS2.37/14	Simpson	13
None	MIT3514-2	Simpson	4

Products				
Net Qty	Plies	Product	Length	PlotID
3	1	14" BCI® 6000s-1.8	27' 0"	J2-1
4	2	14" BCI® 6000s-1.8	27' 0"	J2-2
4	1	14" BCI® 6000s-1.8	21' 0"	J2-3
6	2	14" BCI® 6000s-1.8	21' 0"	J2-4
31	1	14" BCI® 6000s-1.8	18' 0"	J2-5
4	2	14" BCI® 6000s-1.8	18' 0"	J2-6
4	1	14" BCI® 6000s-1.8	13' 0"	J2-7
2	1	14" BCI® 6000s-1.8	9' 0"	J2-8
7	1	14" BCI® 6000s-1.8	6' 0"	J2-9
2	2	14" BCI® 6000s-1.8	6' 0"	J2-10
2	2	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	8' 0"	BM2-1
2	2	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	10' 0"	BM2-2
2	2	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	10' 0"	BM2-3
2	2	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	8' 0"	BM2-4
3	3	1-3/4" x 18" VERSA-LAM® 2.0 3100 SP	22' 0"	BM2-5
17	1	1-1/8" x 14" BC RIM BOARD OSB	12' 0"	Rim1
38	1	14" BLOCKING	2' 0"	Blk1

Connect all 2-ply joists in the field per detail F58.

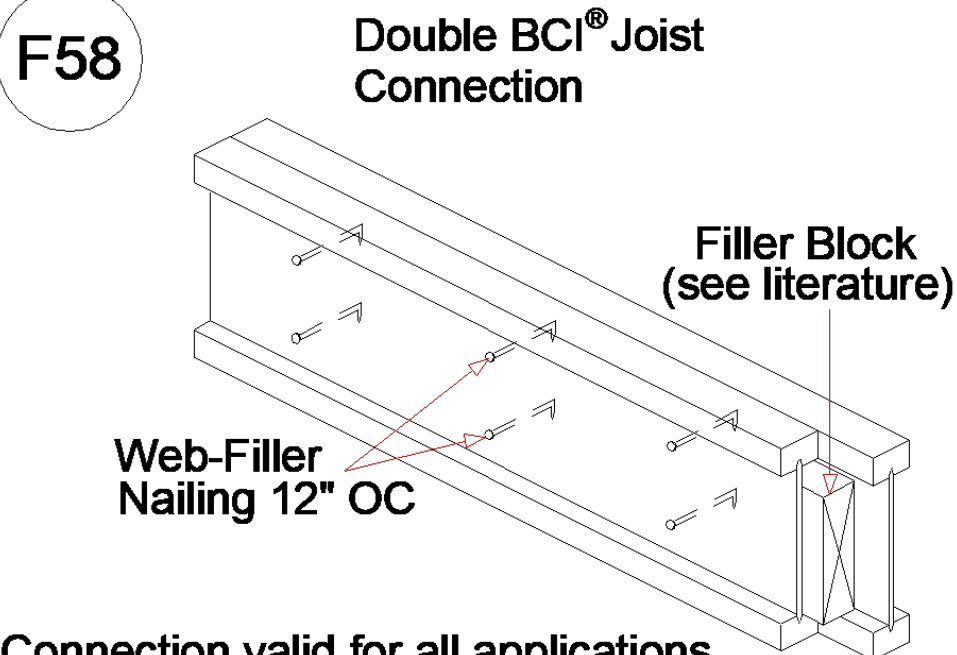

Connection valid for all applications. Contact Boise EWP Engineering for specific conditions.

▲ = LEFT END OF TRUSS

FOR PERMIT

REVISIONS:



Moncks Corner/Easley, SC (800) 475-3999
Sparta, NC (336) 372-2226

Cilent:

Job:

Plan Information:

MATTAMY HOMES-RALEIGH
LOT 137 PROVIDENCE CREEK
SHENANDOAH-FH

NOT TO SCALE
Drawn By: MBB

Date: / /
Job #:
Sales Rep: KYLE GIBSON
Phone: 843-729-3249

I-JOISTS