


Lane Farms - Lot #1
 4-Bedroom - Septic Proposal
 Farms Way - Holly Springsn, NC
 Stephenson Builders
 Harnett County PIN: 0635-07-8393

*Not a Survey
 Sketched from a plot plan supplied by owner

LANE FARMS WAY
 50' PUBLIC R/W & UTILITY

**1000 Gallon Septic
 Tank and trenches to be located minimum of 10'
 from any property line and minimum of 5'
 from any building foundation.
 *Do Not Cut, Fill, or Alter Drainfield or Repair Area
 *Comply with all setbacks
 *Contact local health dept. and/or Alex Adams prior to
 or during installation with any questions or concerns.

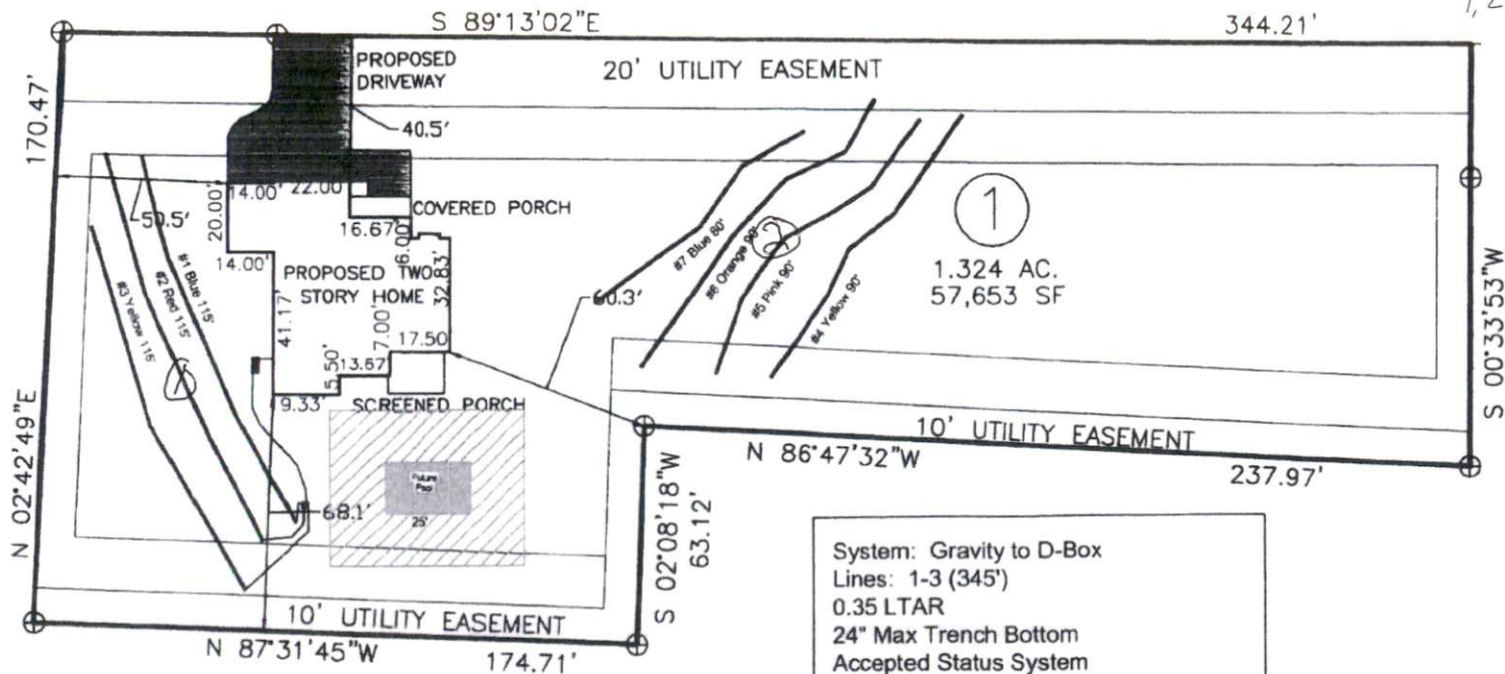

Adams
 Soil Consulting
 919-414-6761
 Job #1869
 9-12-25

System: Gravity to D-Box
 Lines: 1-3 (345')
 0.35 LTAR
 24" Max Trench Bottom
 Accepted Status System
 Repair: Pressure Manifold
 Lines: 4-7 (350')
 0.35 LTAR
 18" Max Trench Bottom
 Accepted Status System

GRAPHIC SCALE
 1" = 50'



1, 2 L-290-0-15 SLACK
 NSND
 15-40 SL
 1-OUTAT 384.5' 1.5 ft 2.1
 2 OUTAT 32 7.5 ft 2.4
 Soil Notes
 JM