


Job	Truss	Truss Type	Qty	Ply	The Ann Job - Fisher Building Corp
2505794-31161	F1	Floor Supported Gable	1	1	Job Reference (optional)

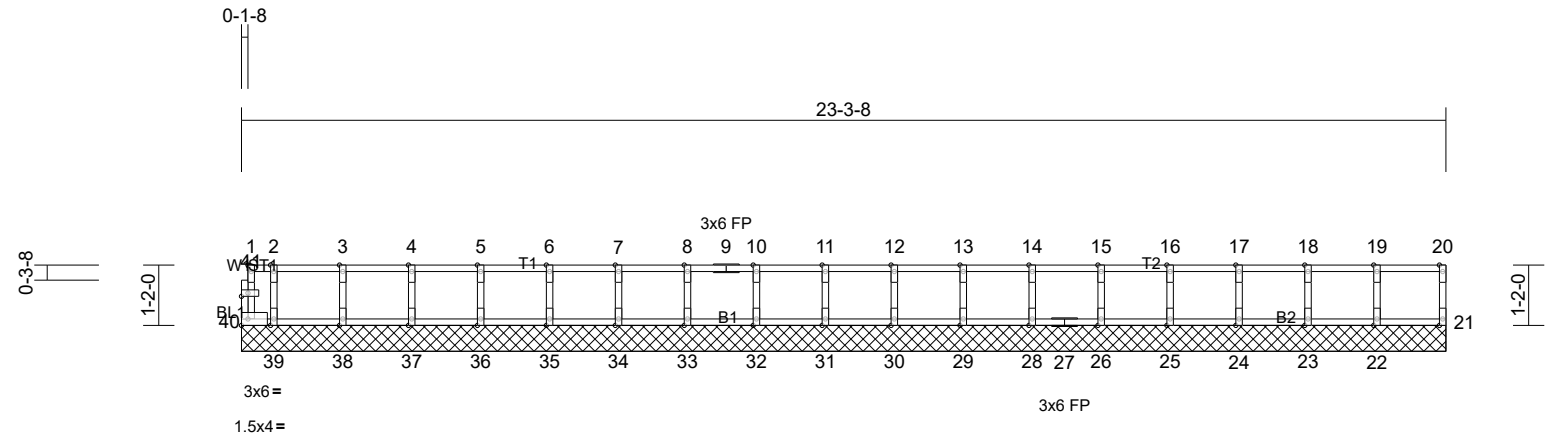

Scale = 1:43.7

Plate Offsets (X, Y): [1:Edge,0-0-12], [41:0-1-8,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.09	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	15.0	Lumber DOL	1.00	BC	0.02	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0	Rep Stress Incr	YES	WB	0.02	Horiz(TL)	n/a	-	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-R							Weight: 96 lb	FT = 20%F, 11%E

LUMBER
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.2(flat)
OTHERS 2x4 SP No.2(flat) *Except* BL1:2x4 SP No.3 (flat)

BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS All bearings 23-3-8.
(lb) - Max Grav All reactions 250 (lb) or less at joint
(s) 21, 22, 23, 24, 25, 26, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES
1) All plates are 1.5x4 (||) MT20 unless otherwise indicated.
2) Gable requires continuous bottom chord bearing.
3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
4) Gable studs spaced at 1-4-0 oc.
5) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
6) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

84 Components, Dunn, NC 28334 Run: 8.82 S Oct 31 2024 Print: 8.820 S Oct 31 2024 MiTek Industries, Inc. Thu Oct 30 16:02:10 Page: ID:TpKioLBpiMW KBUTg4xBs?yOVIA-lhO YHltqGeQq 8pHfT8Q 4OY7mQ4pdJ0cly59yOBUX



LUMBER	
TOP CHORD	2x4 SP No.1(flat)
BOT CHORD	2x4 SP No.2(flat) *Except* B3,B2:2x4 SP No.1(flat)
WEBS	2x4 SP No.2(flat)
OTHERS	2x4 SP No.2(flat)

TOP CHORD	Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2913/0, 3-4=-4960/0, 4-5=-6151/0,
5-6=-6572/0, 6-7=-6572/0, 7-8=-6171/0,
8-9=-6171/0, 9-10=-4955/0, 10-11=-2914/0


BOT CHORD 23-24=0/1759, 22-23=0/4115, 21-22=0/5736,
20-21=0/6572, 19-20=0/6572, 18-19=0/6572,
17-18=0/6530, 16-17=0/6530, 15-16=0/5740,
14-15=0/4114, 13-14=0/1647

WEBS 11-13=-2055/0, 2-24=-2095/0, 11-14=0/1609,
2-23=0/1470, 10-14=-1524/0, 3-23=-1527/0,
10-15=0/1068, 3-22=0/1073, 9-15=-997/0,
4-22=-986/0, 9-16=0/548, 4-21=0/627,
7-16=-514/0, 5-21=-769/0, 7-18=-284/437,
5-19=-191/302

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 4) CAUTION. Do not erect truss backwards.

LOAD CASE(S) Standard

84 Components, Dunn, NC 28334 Run: 8.82 S Oct 31 2024 Print: 8.820 S Oct 31 2024 MiTek Industries, Inc. Thu Oct 30 16:02:11 Page: 1
ID:HCHs2txvZeyngk D?3yANPyOVku-nuyMdiVbZmGS8j0rM NyCdZIX7IpGsSEGVVdbYObUw



LUMBER	
TOP CHORD	2x4 SP No.2(flat) *Except* T2:2x4 SP No.1 (flat)
BOT CHORD	2x4 SP No.1(flat) *Except* B1,B4:2x4 SP No.2(flat)
WEBS	2x4 SP No.2(flat)
OTHERS	2x4 SP No.2(flat)

BRACING	
TOP CHORD	Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD	3-4=-2934/0, 4-5=-4984/0, 5-6=-4984/0, 6-7=-6193/0, 7-8=-6591/0, 8-9=-6591/0, 9-10=-6162/0, 10-11=-4971/0, 11-12=-2917/0
BOT CHORD	24-25=0/1694, 23-24=0/4139, 22-23=0/4139, 21-22=0/5765, 20-21=0/6551, 19-20=0/6591, 18-19=0/6591, 17-18=0/5747, 16-17=0/5747, 15-16=0/4123, 14-15=0/1649
WEBS	3-25=-2052/0, 12-14=-2057/0, 3-24=0/1578, 12-15=0/1611, 4-24=-1534/0, 11-15=-1531/0, 4-22=0/1076, 11-16=0/1077, 6-22=-995/0, 10-16=-986/0, 6-21=0/546, 10-18=0/628, 7-21=-518/0, 9-18=-776/0, 7-20=-286/442, 9-19=-191/306

NOTES

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 4) CAUTION. Do not erect truss backwards.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	The Ann Job - Fisher Building Corp
2505794-31161	F4	Floor Supported Gable	1	1	Job Reference (optional)

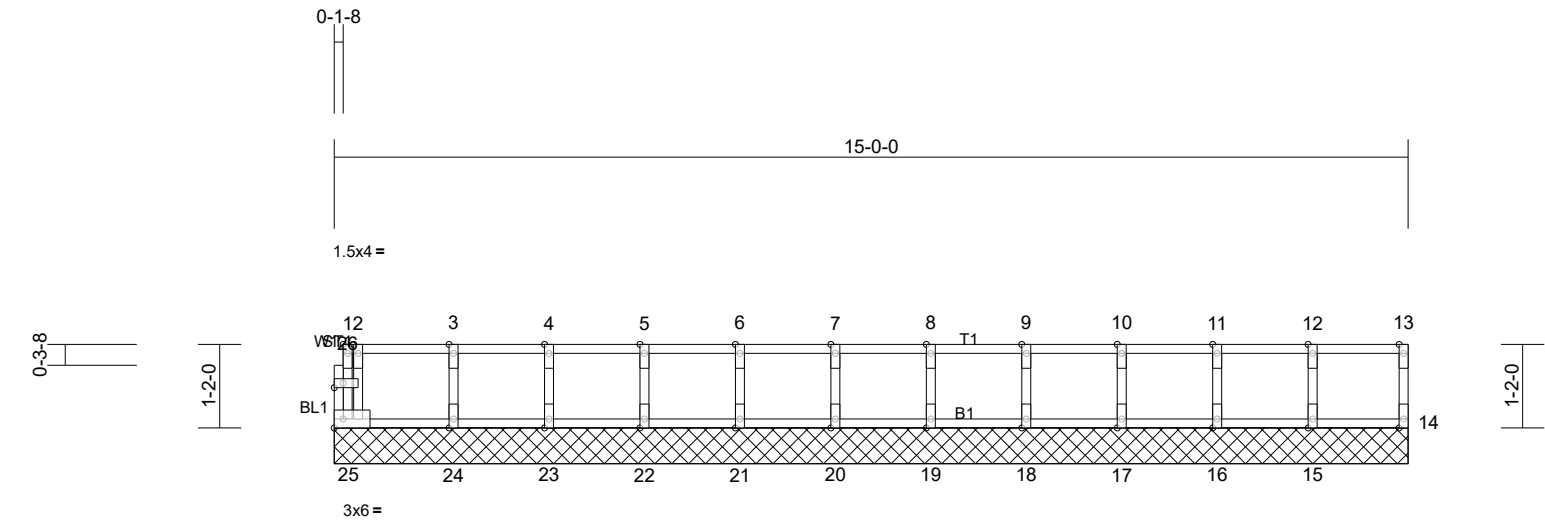

Scale = 1:31.4

Plate Offsets (X, Y): [1:Edge,0-0-12], [26:0-1-8,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.10	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	15.0	Lumber DOL	1.00	BC	0.03	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0	Rep Stress Incr	YES	WB	0.02	Horiz(TL)	0.00	14	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-R							Weight: 63 lb	FT = 20%F, 11%E

LUMBER
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.2(flat)
OTHERS 2x4 SP No.2(flat) *Except* BL1:2x4 SP No.3 (flat)

BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS All bearings 15-0-0.
(lb) - Max Grav All reactions 250 (lb) or less at joint (s) 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES**
- 1) All plates are 1.5x4 (||) MT20 unless otherwise indicated.
 - 2) Gable requires continuous bottom chord bearing.
 - 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - 4) Gable studs spaced at 1-4-0 oc.
 - 5) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 6) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	The Ann Job - Fisher Building Corp
2505794-31161	F5	Floor Supported Gable	1	1	Job Reference (optional)

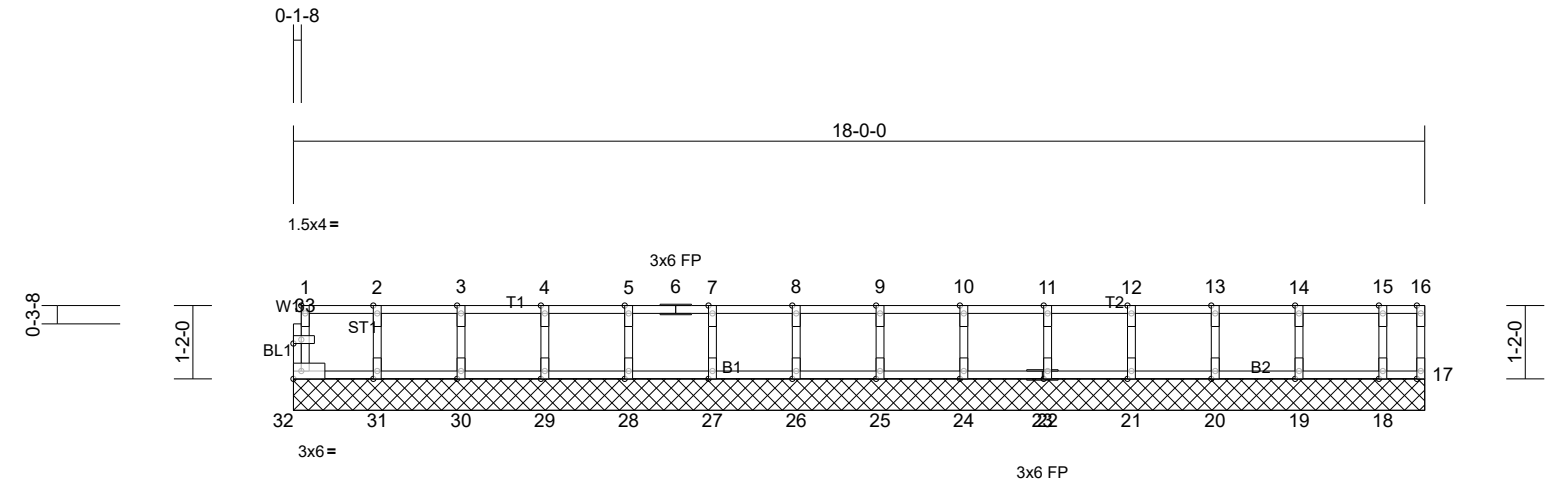

Scale = 1:35.8

Plate Offsets (X, Y): [1:Edge,0-0-12], [33:0-1-8,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.09	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	15.0	Lumber DOL	1.00	BC	0.02	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0	Rep Stress Incr	YES	WB	0.02	Horiz(TL)	0.00	17	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-R							Weight: 75 lb	FT = 20%F, 11%E

LUMBER Vert: 16=-141 (F)

- TOP CHORD 2x4 SP No.2(flat)
- BOT CHORD 2x4 SP No.2(flat)
- WEBS 2x4 SP No.2(flat)
- OTHERS 2x4 SP No.2(flat)

BRACING

- TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
- BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS All bearings 18-0-0.
(lb) - Max Grav All reactions 250 (lb) or less at joint
(s) 18, 19, 20, 21, 22, 24, 25, 26, 27, 28, 29, 30, 31, 32 except 17=304 (LC 3)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 16-17=-299/0


NOTES

- Unbalanced floor live loads have been considered for this design.
- All plates are 1.5x4 (||) MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- Gable studs spaced at 1-4-0 oc.
- Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 296 lb down at 17-11-4 on top chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 17-32=-20, 1-16=-110
Concentrated Loads (lb)


84 Components, Dunn, NC 28334 Run: 8.82 S Oct 31 2024 Print: 8.820 S Oct 31 2024 MiTek Industries, Inc. Thu Oct 30 16:02:12 Page: 1
ID:XeQdQBQtuERT6mFXYGp1dceyOHad-F4Wkyyj7Mtu74ILCP4WcVP9n9xSHYlLcTwE391yOBUv



Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.75	Vert(LL)	-0.28	16-17	>753	480	M18AHS	186/179
TCDL	15.0	Lumber DOL	1.00	BC	0.96	Vert(CT)	-0.46	16-17	>465	360	MT20	244/190
BCLL	0.0	Rep Stress Incr	YES	WB	0.37	Horz(CT)	0.08	12	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S							Weight: 91 lb	FT = 20%F, 11%E

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	The Ann Job - Fisher Building Corp
2505794-31161	F7	Floor	2	1	Job Reference (optional)

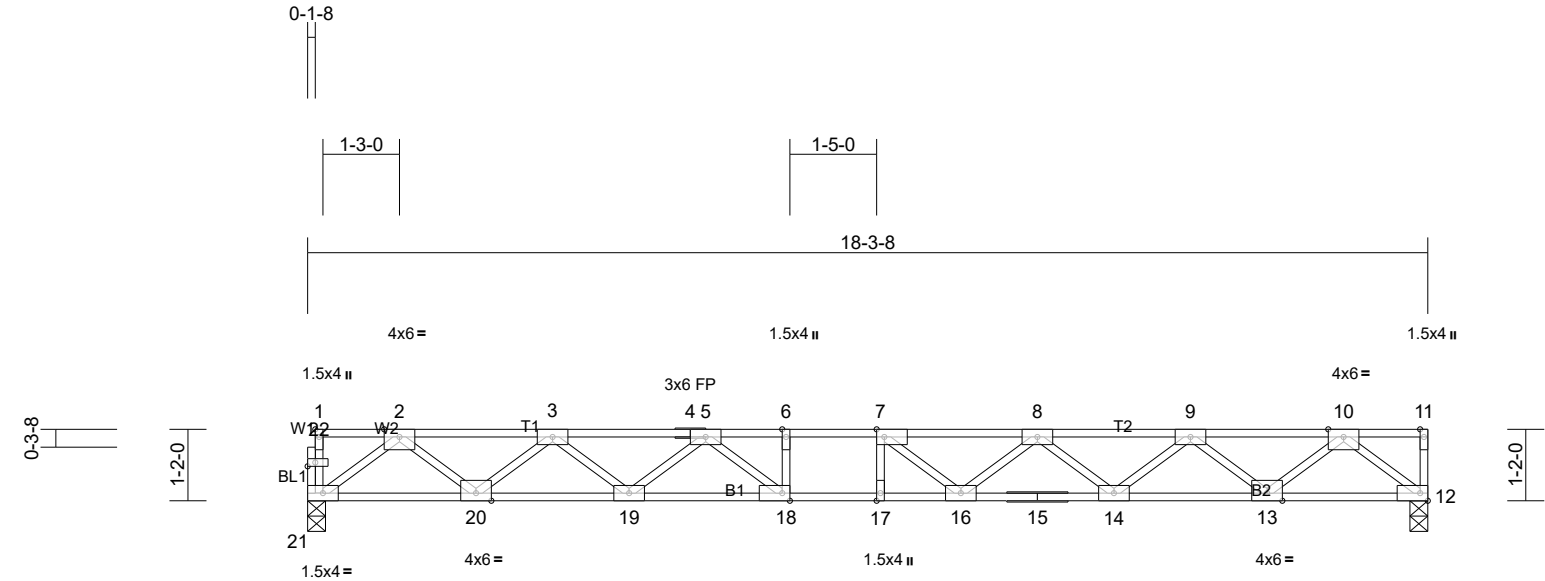

Scale = 1:36.8

M18AHS 3x12 FP

Plate Offsets (X, Y): [1:Edge,0-0-12], [7:0-1-8,Edge], [18:0-1-8,Edge], [22:0-1-8,0-0-12]												
Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.81	Vert(LL)	-0.31	16-17	>690	480	M18AHS	186/179
TCDL	15.0	Lumber DOL	1.00	BC	0.89	Vert(CT)	-0.51	16-17	>426	360	MT20	244/190
BCLL	0.0	Rep Stress Incr	YES	WB	0.39	Horz(CT)	0.08	12	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S							Weight: 91 lb	FT = 20%F, 11%E

LUMBER

TOP CHORD 2x4 SP No.2(flat) *Except* T2:2x4 SP No.1 (flat)

BOT CHORD 2x4 SP DSS(flat) *Except* B2:2x4 SP No.1 (flat)

WEBS 2x4 SP No.2(flat)

OTHERS 2x4 SP No.2(flat)

BRACING

TOP CHORD Structural wood sheathing directly applied or 3-1-0 oc purlins, except end verticals.

BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 12=1177/0-3-8, (min. 0-1-8), 21=1170/0-3-8, (min. 0-1-8)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2506/0, 3-4=-4097/0, 4-5=-4097/0, 5-6=-5058/0, 6-7=-5058/0, 7-8=-4920/0, 8-9=-4085/0, 9-10=-2452/0

BOT CHORD 20-21=0/1459, 19-20=0/3478, 18-19=0/4684, 17-18=0/5058, 16-17=0/5058, 15-16=0/4684, 14-15=0/4684, 13-14=0/3433, 12-13=0/1402

WEBS 10-12=-1790/0, 2-21=-1827/0, 10-13=0/1366, 2-20=0/1363, 9-13=-1277/0, 3-20=-1266/0, 9-14=0/849, 3-19=0/805, 8-14=-780/0, 5-19=-765/0, 8-16=0/464, 5-18=0/752, 7-16=-482/154, 6-18=-255/0

- NOTES**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are MT20 plates unless otherwise indicated.
 - 3) All plates are 3x6 (=) MT20 unless otherwise indicated.
 - 4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 5) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	The Ann Job - Fisher Building Corp
2505794-31161	F8	Floor Girder	1	1	Job Reference (optional)

84 Components, Dunn, NC 28334

Run: 8.82 S Oct 31 2024 Print: 8.820 S Oct 31 2024 MiTek Industries, Inc. Thu Oct 30 16:02:12

Page: 1

ID: IYzmRZu4byqn7W3PMb?0C9yOHWk-F4Wkyj7Mtu74IICP4WcVP9s9xZxYqgcTwE391yOBUv

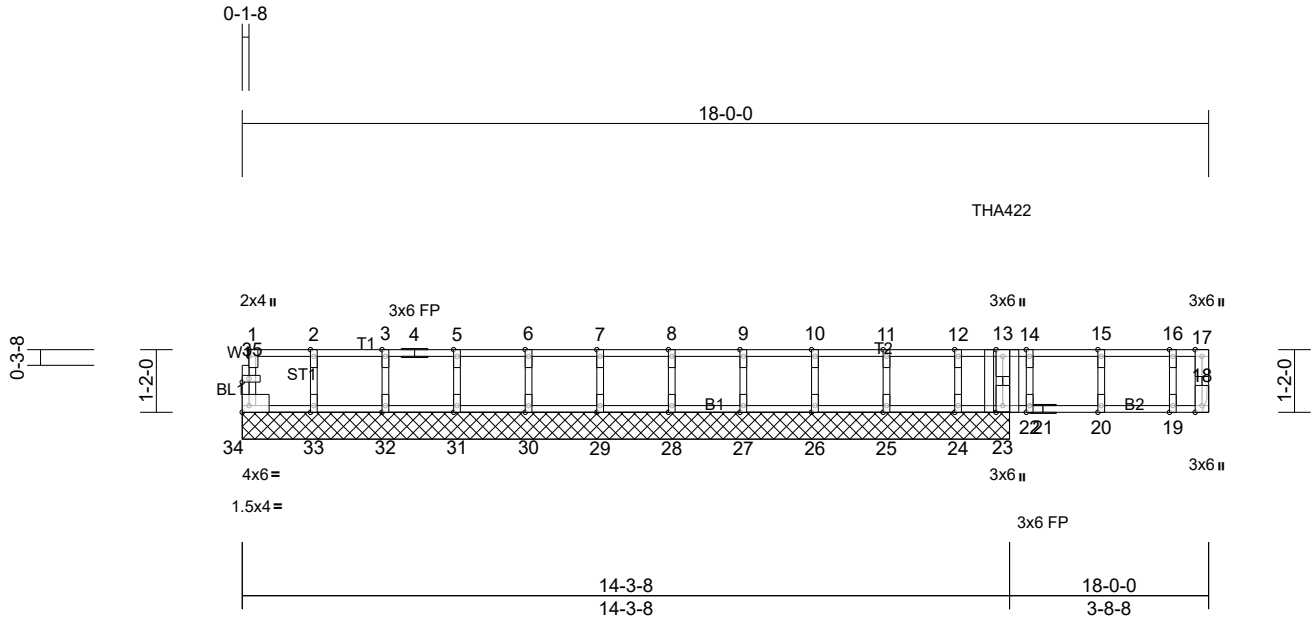


Plate Offsets (X, Y): [34:Edge,0-1-8], [35:0-1-8,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.43	Vert(LL)	-0.04	20	>999	480	MT20	244/190
TCDL	15.0	Lumber DOL	1.00	BC	0.47	Vert(CT)	-0.07	19-20	>674	360		
BCLL	0.0	Rep Stress Incr	NO	WB	0.03	Horz(CT)	0.00	18	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-R							Weight: 79 lb	FT = 20%F, 11%E

LUMBER Uniform Loads (lb/ft)
TOP CHORD 2x4 SP No.2(flat) Vert: 18-34=-20, 1-17=-110
BOT CHORD 2x4 SP No.2(flat) Concentrated Loads (lb)
WEBS 2x4 SP No.2(flat) Vert: 13=-154
OTHERS 2x4 SP No.2(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS All bearings 14-3-8. except 18= Mechanical
(lb) - Max Uplift All uplift 100 (lb) or less at joint(s)
33 except 24=-171 (LC 4)
Max Grav All reactions 250 (lb) or less at joint
(s) 18, 24, 25, 26, 27, 28, 29, 30,
31, 32, 33, 34 except 23=641 (LC
1)


FORCES (lb) - Max. Comp./Max. Ten. - All forces 250
(lb) or less except when shown.
WEBS 13-23=-407/0

- NOTES**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are 1.5x4 (||) MT20 unless otherwise indicated.
 - 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - 4) Gable studs spaced at 1-4-0 oc.
 - 5) Refer to girder(s) for truss to truss connections.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint (s) 33 except (jt=lb) 24=170.
 - 7) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 8) CAUTION, Do not erect truss backwards.
 - 9) Use Simpson Strong-Tie THA422 (Single Chord Girder) or equivalent at 14-1-12 from the left end to connect truss(es) F9 (1 ply 2x4 SP) to back face of top chord.
 - 10) Fill all nail holes where hanger is in contact with lumber.

LOAD CASE(S) Standard

- 1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00

84 Components, Dunn, NC 28334 Run: 8.82 S Oct 31 2024 Print: 8.820 S Oct 31 2024 MiTek Industries, Inc. Thu Oct 30 16:02:12 Page: ID: SxWhPMB1fApBFqEoyZaOE5yOHX6-F4Wkyvj7Mtu74ILCP4WcVP9vwxdgYqLcTwE391yOBu




LUMBER	
TOP CHORD	2x4 SP No.2(flat)
BOT CHORD	2x4 SP No.2(flat)
WEBS	2x4 SP No.2(flat)
BRACING	
TOP CHORD	Structural wood sheathing directly applied or 3-3-8 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
REACTIONS (lb/size) 5=266/0-3-8, (min. 0-1-8), 8=253/ Mechanical, (min. 0-1-8)	
	Max Grav 5=295 (LC 4), 8=264 (LC 3)
FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.	
WEBS	3-5=-309/0. 2-8=-339/0

- 1) Unbalanced floor live loads have been considered for this design.
- 2) Refer to girder(s) for truss to truss connections.
- 3) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 4) Use Simpson Strong-Tie THA422 (Single Chord Girder) or equivalent at 1-10-4 from the left end to connect truss (es) F10 (1 ply 2x4 SP) to front face of top chord.
- 5) Fill all nail holes where hanger is in contact with lumber.

1) Dead + Floor Live (balanced): Lumber Increase=1.00,
Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 5-8=-20, 1-4=-110
Concentrated Loads (lb)
Vert: 3=-115

Job	Truss	Truss Type	Qty	Ply	The Ann Job - Fisher Building Corp
2505794-31161	F10	Floor	1	1	Job Reference (optional)

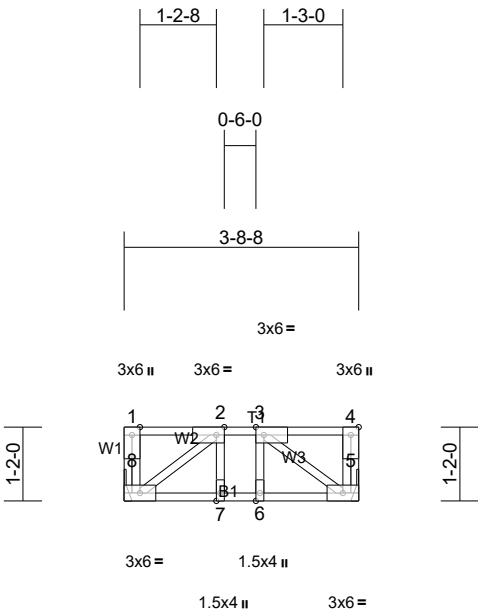

Scale = 1:24.5

Plate Offsets (X, Y): [2:0-1-8,Edge], [3:0-1-8,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.14	Vert(LL)	0.00	7-8	>999	480	MT20	244/190
TCDL	15.0	Lumber DOL	1.00	BC	0.09	Vert(CT)	0.00	7-8	>999	360		
BCLL	0.0	Rep Stress Incr	YES	WB	0.04	Horz(CT)	0.00	5	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S							Weight: 24 lb	FT = 20%F, 11%E

LUMBER
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.2(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied or 3-8-8 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS (lb/size) 5=225/ Mechanical, (min. 0-1-8),
8=225/ Mechanical, (min. 0-1-8)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250
(lb) or less except when shown.

NOTES
1) Unbalanced floor live loads have been considered for this design.
2) Refer to girder(s) for truss to truss connections.
3) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

84 Components, Dunn, NC 28334 Run: 8.82 S Oct 31 2024 Print: 8.820 S Oct 31 2024 MiTek Industries, Inc. Thu Oct 30 16:02:13 Page: 1
ID: Y7HmzlX1nbWDGIB5k2iPx6yOHfi-jG46Alkm7B0 iStOzn1s1di14L0uHHmlia_cilYU0BUu



LUMBER		9) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 281 lb down and 94 lb up at 10-0-12, 281 lb down and 94 lb up at 12-0-12, and 281 lb down and 94 lb up at 14-0-12, and 281 lb down and 94 lb up at 16-0-12 on top chord. The design/selection of such connection device(s) is the responsibility of others.
TOP CHORD	2x4 SP No.2(flat)	
BOT CHORD	2x4 SP No.2(flat)	
WEBS	2x4 SP No.2(flat)	
OTHERS	2x4 SP No.2(flat)	
BRACING		LOAD CASE(S) Standard
TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.	1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing, Except: 10-0-0 oc bracing: 19-20,18-19,17-18.	Uniform Loads (lb/ft) Vert: 17-31=-20, 1-16=-110
REACTIONS	All bearings 17-8-8.	Concentrated Loads (lb) Vert: 11=-126, 14=-126, 33=-126, 34=-126
	(lb) - Max Uplift All uplift 100 (lb) or less at joint(s) 19, 20, 21, 22, 23, 24	
	Max Grav All reactions 250 (lb) or less at joint (s) 17, 18, 25, 26, 27, 28, 29, 30, 31 except 19=363 (LC 5), 20=304 (LC 5), 21=287 (LC 5), 22=328 (LC 5), 23=315 (LC 5), 24=275 (LC 5)	
FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.	
WEBS	10-23=-288/41, 11-22=-301/47, 12-21=-260/30, 13-20=-277/38, 14-19=-334/56	

- ## NOTES
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are 1.5x4 (||) MT20 unless otherwise indicated.
 - 3) Gable requires continuous bottom chord bearing.
 - 4) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - 5) Gable studs spaced at 1-4-0 oc.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint (s) 24, 23, 22, 21, 20, 19.
 - 7) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 8) CAUTION, Do not erect truss backwards.

Job	Truss	Truss Type	Qty	Ply	The Ann Job - Fisher Building Corp
2505794-31161	F12	Floor	9	1	Job Reference (optional)

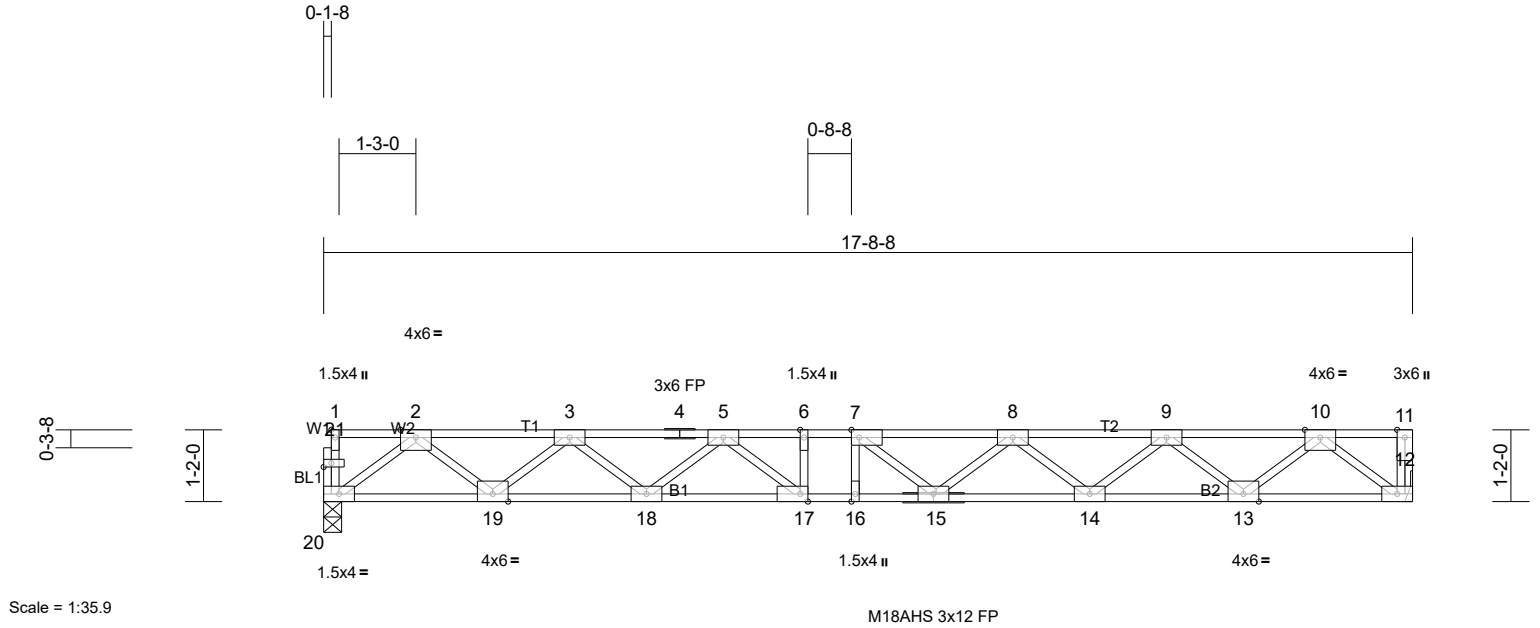



Plate Offsets (X, Y): [1:Edge,0-0-12], [7:0-1-8,Edge], [17:0-1-8,Edge], [21:0-1-8,0-0-12]												
Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.93	Vert(LL)	-0.28	15-16	>735	480	MT20	244/190
TCDL	15.0	Lumber DOL	1.00	BC	0.85	Vert(CT)	-0.46	15-16	>453	360	M18AHS	186/179
BCLL	0.0	Rep Stress Incr	YES	WB	0.37	Horz(CT)	0.07	12	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S							Weight: 90 lb	FT = 20%F, 11%E

- LUMBER**
- TOP CHORD 2x4 SP No.2(flat)
- BOT CHORD 2x4 SP DSS(flat) *Except* B2:2x4 SP No.1 (flat)
- WEBS 2x4 SP No.2(flat)
- OTHERS 2x4 SP No.2(flat)
- BRACING**
- TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals.
- BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
- REACTIONS** (lb/size) 12=1135/ Mechanical, (min. 0-1-8), 20=1128/0-3-8, (min. 0-1-8)
- FORCES** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
- TOP CHORD 2-3=-2400/0, 3-4=-3895/0, 4-5=-3895/0, 5-6=-4718/0, 6-7=-4718/0, 7-8=-4628/0, 8-9=-3909/0, 9-10=-2397/0
- BOT CHORD 19-20=0/1404, 18-19=0/3323, 17-18=0/4427, 16-17=0/4718, 15-16=0/4718, 14-15=0/4446, 13-14=0/3319, 12-13=0/1407
- WEBS 10-12=-1765/0, 2-20=-1758/0, 10-13=0/1290, 2-19=0/1296, 9-13=-1200/0, 3-19=-1202/0, 9-14=0/769, 3-18=0/744, 8-14=-698/0, 5-18=-693/0, 8-15=0/387, 5-17=-17/603, 7-15=-369/171

- NOTES**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are MT20 plates unless otherwise indicated.
 - 3) All plates are 3x6 (=) MT20 unless otherwise indicated.
 - 4) Refer to girder(s) for truss to truss connections.
 - 5) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 6) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

84 Components, Dunn, NC 28334 Run: 8.82 S Oct 31 2024 Print: 8.820 S Oct 31 2024 MiTek Industries, Inc. Thu Oct 30 16:02:14 Page: 1
ID:Sg18rvUWxJ?BS7Powpg1FCyOHRw-BTeUNelOuU8JcRbWVY5aqF7Vl7W0fivwEjAEwyOBUT



Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.76	Vert(LL)	-0.29	16-17	>747	480	M18AHS	186/179
TCDL	15.0	Lumber DOL	1.00	BC	0.91	Vert(CT)	-0.46	16-17	>462	360	MT20	244/190
BCLL	0.0	Rep Stress Incr	YES	WB	0.38	Horz(CT)	0.07	12	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S							Weight: 90 lb	FT = 20%F, 11%E

TOP CHORD	2x4 SP No.2(flat) *Except* T2:2x4 SP No.1 (flat)
BOT CHORD	2x4 SP DSS(flat) *Except* B2:2x4 SP No.2 (flat)
WEBS	2x4 SP No.2(flat)
OTHERS	2x4 SP No.3(flat)

TOP CHORD	Structural wood sheathing directly applied or 4-6-4 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2458/0, 3-4=-2458/0, 4-5=-4006/0,
5-6=-4904/0, 6-7=-4904/0, 7-8=-4784/0,
8-9=-3992/0, 9-10=-2406/0

BOT CHORD 20-21=0/1434, 19-20=0/3410, 18-19=0/4567,
17-18=0/4904, 16-17=0/4904, 15-16=0/4569,
14-15=0/3364, 13-14=0/3364, 12-13=0/1378

WEBS 10-12=-1759/0, 2-21=-1796/0, 10-13=0/1338,
2-20=0/1333, 9-13=-1247/0, 4-20=-1239/0,
9-15=0/818, 4-19=0/776, 8-15=-751/0,
5-19=-729/0, 8-16=0/433, 5-18=0/689,
7-16=-436/160

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) All plates are 3x6 (=) MT20 unless otherwise indicated.
- 4) The Fabrication Tolerance at joint 14 = 11%
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	The Ann Job - Fisher Building Corp
2505794-31161	F14	Floor	2	1	Job Reference (optional)

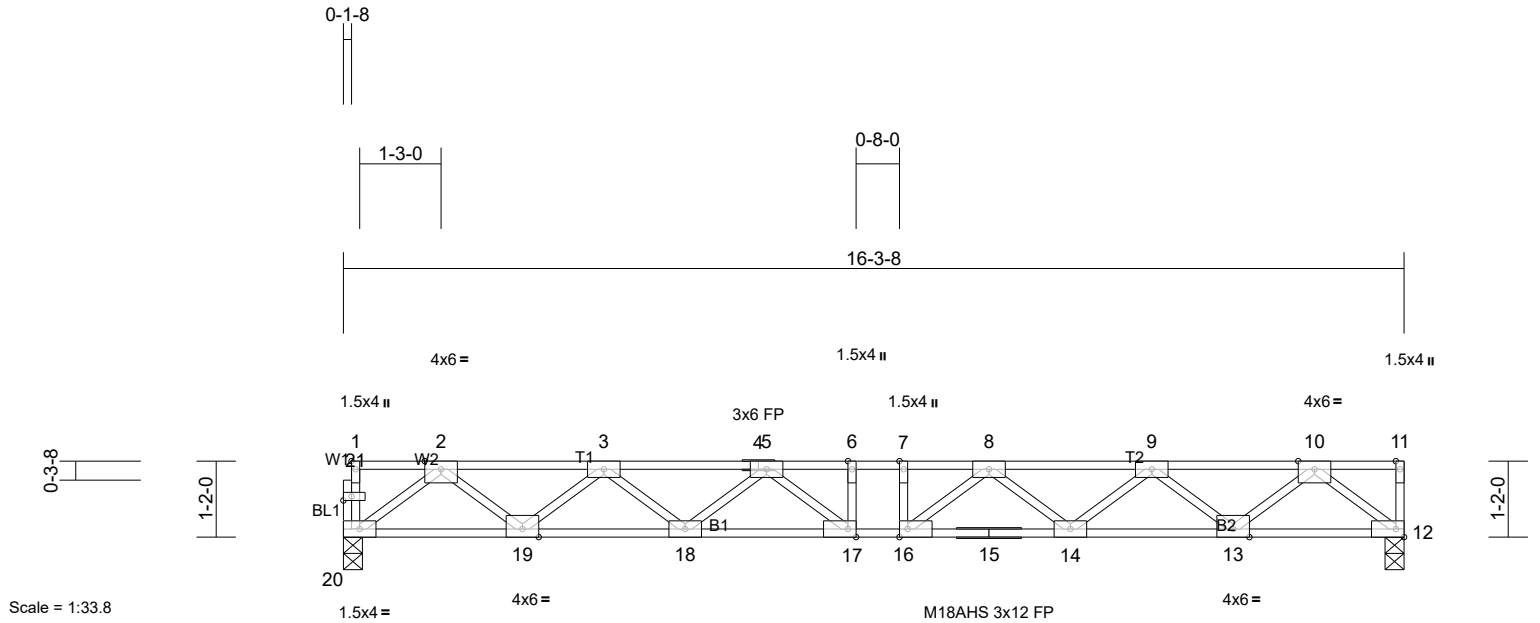


Plate Offsets (X, Y): [1:Edge,0-0-12], [16:0-1-8,Edge], [17:0-1-8,Edge], [21:0-1-8,0-0-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.52	Vert(LL)	-0.21	17	>912	480	M18AHS	186/179
TCDL	15.0	Lumber DOL	1.00	BC	0.76	Vert(CT)	-0.34	17	>560	360	MT20	244/190
BCLL	0.0	Rep Stress Incr	YES	WB	0.33	Horz(CT)	0.06	12	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S							Weight: 82 lb	FT = 20%F, 11%E

LUMBER
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.2(flat)
OTHERS 2x4 SP No.2(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied or 6'-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10'-0-0 oc bracing.


REACTIONS (lb/size) 12=1047/0-3-8, (min. 0-1-8),
20=1040/0-3-8, (min. 0-1-8)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-2178/0, 3-4=-3473/0, 4-5=-3473/0, 5-6=-4026/0, 6-7=-4026/0, 7-8=-4026/0, 8-9=-3449/0, 9-10=-2135/0
BOT CHORD 19-20=0/1288, 18-19=0/3000, 17-18=0/3885, 16-17=0/4026, 15-16=0/3872, 14-15=0/3872, 13-14=0/2967, 12-13=0/1237
WEBS 10-12=-1579/0, 2-20=-1613/0, 10-13=0/1169, 2-19=0/1158, 9-13=-1083/0, 3-19=-1070/0, 9-14=0/628, 3-18=0/615, 8-14=-550/0, 5-18=-537/0, 8-16=-106/448, 5-17=-118/436

NOTES
1) Unbalanced floor live loads have been considered for this design.
2) All plates are MT20 plates unless otherwise indicated.
3) All plates are 3x6 (=) MT20 unless otherwise indicated.
4) Recommend 2x6 strongbacks, on edge, spaced at 10'-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
5) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	The Ann Job - Fisher Building Corp
2505794-31161	F15	Floor Supported Gable	1	1	Job Reference (optional)

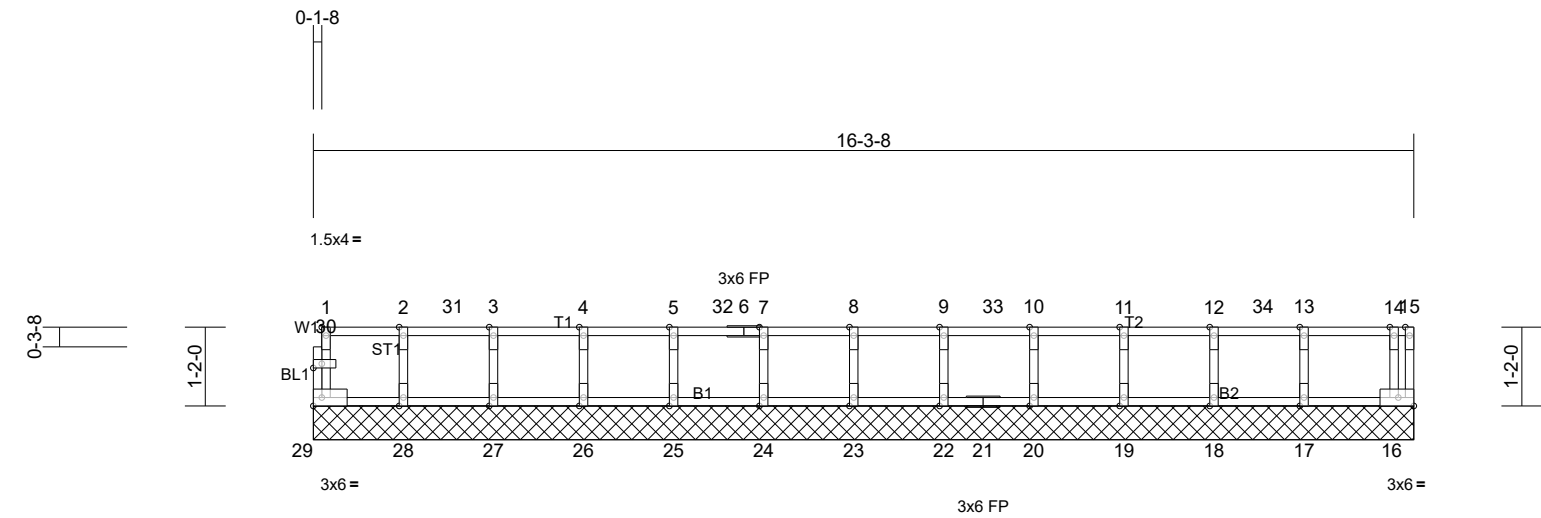

Scale = 1:33.3

Plate Offsets (X, Y): [1:Edge,0-0-12], [30:0-1-8,0-0-12]												
Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.30	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	15.0	Lumber DOL	1.00	BC	0.02	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0	Rep Stress Incr	YES	WB	0.03	Horiz(TL)	0.00	16	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-R							Weight: 68 lb	FT = 20%F, 11%E

- LUMBER**
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.2(flat)
OTHERS 2x4 SP No.2(flat)
- BRACING**
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
- REACTIONS** All bearings 16-3-8.
(lb) - Max Grav All reactions 250 (lb) or less at joint
(s) 16, 18, 22, 25, 28, 29 except
17=271 (LC 4), 19=277 (LC 4),
20=264 (LC 4), 23=276 (LC 4),
24=264 (LC 4), 26=276 (LC 4),
27=266 (LC 4)
- FORCES** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
- NOTES**
1) Unbalanced floor live loads have been considered for this design.
2) All plates are 1.5x4 (||) MT20 unless otherwise indicated.
3) Gable requires continuous bottom chord bearing.
4) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
5) Gable studs spaced at 1-4-0 oc.
6) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
7) CAUTION, Do not erect truss backwards.
8) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 200 lb down at 2-0-12, 200 lb down at 4-0-12, 200 lb down at 6-0-12, 200 lb down at 8-0-12, 200 lb down at 10-0-12, and 200 lb down at 12-0-12, and 200 lb down at 14-0-12 on top chord. The design/selection of such connection device(s) is the responsibility of others.
9) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

84 Components, Dunn, NC 28334 Run: 8.82 S Oct 31 2024 Print: 8.820 S Oct 31 2024 MiTek Industries, Inc. Thu Oct 30 16:02:14 Page: ID:QR84 uakedNQsA7XITiOyyOHU9-BTeUnelOuU8rJcRbWVY5agFF5IL70kdwEjAEWYOBu



LUMBER
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.2(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied or 1-8-8 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 3=103/1-8-8, (min. 0-1-8),
4=103/1-8-8, (min. 0-1-8)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250
(lb) or less except when shown.

NOTES
1) Gable requires continuous bottom chord bearing.
2) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
3) Gable studs spaced at 1-4-0 oc.
4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard