



Preliminary Soil/Site Evaluation

~2.0 acres - South River Road

Harnett County, NC

PIN # 0631-35-8977

*Not a Survey
(sketched from public records)

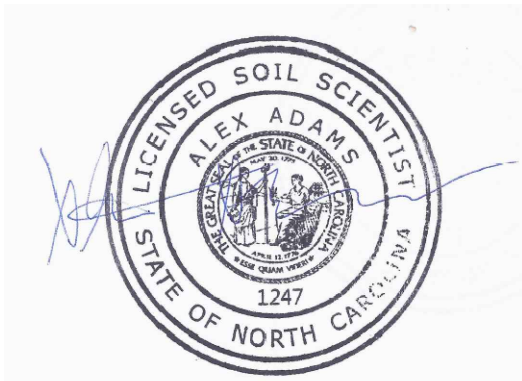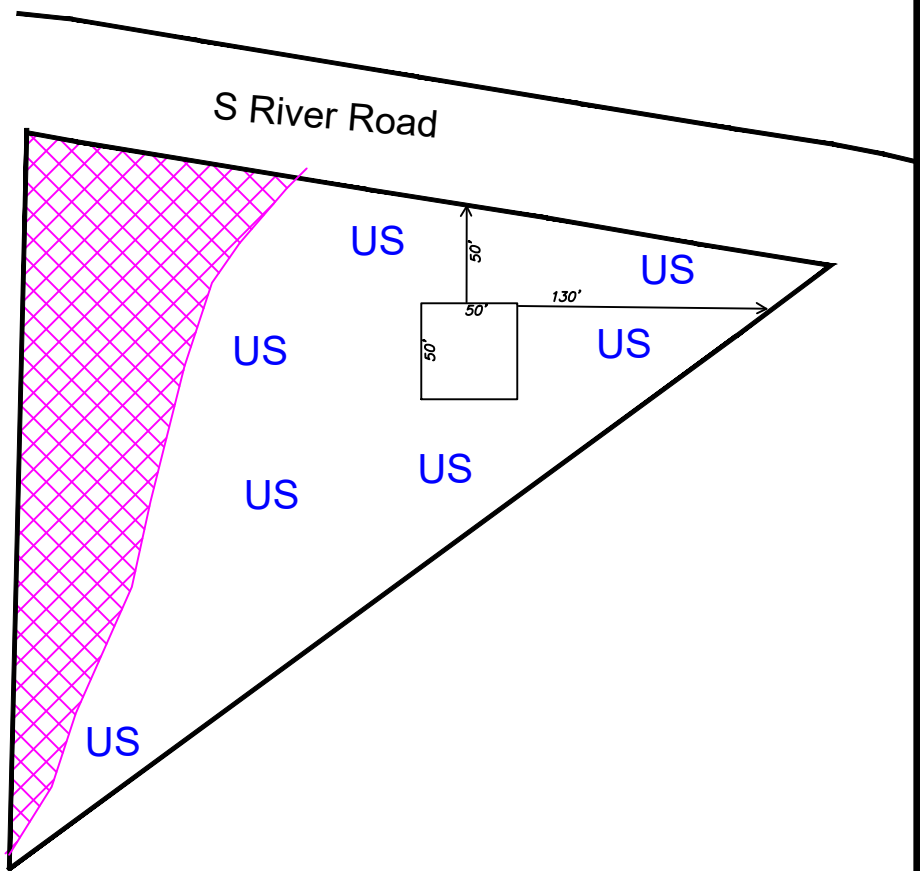

*Preliminary Soils Evaluation

*Soil boundary was sketched onto a preliminary map of the property taken from public records.

*Not a Survey.

*Septic system setbacks listed below for new lots.

- 1) 10' from property lines.
- 2) 100' from wells for primary systems.
- 3) 50' from surface waters (streams, ponds, lakes).

*Any mechanical disturbances such as grading, cutting and filling of the suitable soil areas can render areas unsuitable for future septic systems.

*See accompanying report for additional information.

*Due to Soil Variability, Adams soil consulting cannot guarantee that the areas shown as suitable will be permitted by the local Health Department.

Legend



Areas contain soils with 30 inches or more of useable soil material and have potential for conventional, modified conventional, LPP or ultra-shallow conventional septic systems. There may be inclusion of soils 24-29 inches to a restrictive horizon that will have potential for LPP septic systems.

US

Unsuitable Areas/ or areas Not Evaluated

GRAPHIC SCALE
1" = 100'



Adams
Soil Consulting
919-414-6761
Project #1187