

RE: 252130-A
Lot 50 Magnolia Hills

Trenco
818 Soundside Rd
Edenton, NC 27932

Site Information:

Customer: Precision Custom Homes and Renovations Project Name: 252130-A
Lot/Block: 50 Model:
Address: 223 Myrtle Oak Drive Subdivision: Magnolia Hills
City: Cameron State: NC

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: IRC2021/TPI2014 Design Program: MiTek 20/20 25.3
Wind Code: ASCE 7-16 Wind Speed: 130 mph
Roof Load: 40.0 psf Floor Load: N/A psf

This package includes 27 individual, dated Truss Design Drawings and 0 Additional Drawings.

No.	Seal#	Truss Name	Date	No.	Seal#	Truss Name	Date
1	I76525545	A1	9/23/2025	21	I76525565	G1	9/23/2025
2	I76525546	A1GE	9/23/2025	22	I76525566	G1GE	9/23/2025
3	I76525547	A2	9/23/2025	23	I76525567	M1	9/23/2025
4	I76525548	A2-GR	9/23/2025	24	I76525568	M2	9/23/2025
5	I76525549	A2SG	9/23/2025	25	I76525569	PB1	9/23/2025
6	I76525550	A3	9/23/2025	26	I76525570	PB1GE	9/23/2025
7	I76525551	A4	9/23/2025	27	I76525571	PB2	9/23/2025
8	I76525552	A4A	9/23/2025				
9	I76525553	A4SG	9/23/2025				
10	I76525554	A5	9/23/2025				
11	I76525555	A6	9/23/2025				
12	I76525556	A6GE	9/23/2025				
13	I76525557	B1	9/23/2025				
14	I76525558	B1GE	9/23/2025				
15	I76525559	B2	9/23/2025				
16	I76525560	B2-GR	9/23/2025				
17	I76525561	C1	9/23/2025				
18	I76525562	C1GE	9/23/2025				
19	I76525563	D1	9/23/2025				
20	I76525564	D1GE	9/23/2025				

The truss drawing(s) referenced above have been prepared by
Truss Engineering Co. under my direct supervision
based on the parameters provided by Comtech, Inc - Fayetteville.

Truss Design Engineer's Name: Gilbert, Eric


My license renewal date for the state of North Carolina is December 31, 2025.

North Carolina COA: C-0844

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to TRENCO. Any project specific information included is for TRENCO customers file reference purpose only, and was not taken into account in the preparation of these designs. TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.



Comtech, Inc, Fayetteville, NC - 28314, Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:02 Page: 1
ID:oZsdJhAH7sgso7cS4ggLwVvyqezV-RfC?PsB70Hq3NSgPqnL8w3uiTXbGKWRcD0i7J4JcZ?f



LUMBER		2) Wind: ASCE 7-16; Vult=130mph (5-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) -1-3-0 to 3-1-13, Interior (1) 3-1-13 to 20-0-15, Exterior(2R) 20-0-15 to 24-7-8, Interior (1) 24-7-8 to 29-2-1, Exterior(2R) 29-2-1 to 33-6-14, Interior (1) 33-6-14 to 41-3-0 zone; cantilever left exposed ;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
TOP CHORD	2x6 SP No.1 *Except* 3-6:2x10 SP No.1	
BOT CHORD	2x10 SP No.1 *Except* 17-14:2x6 SP No.1	
WEBS	2x4 SP No.2 *Except* 4-17,9-14:2x6 SP No.1, 5-20:2x6 SP No.2	
SLIDER	Right 2x6 SP No.2 -- 3-8-9	
BRACING		
TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except 2-0-0 oc purlins (6-0-0 max.): 6-8.	3) N/A
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 2-19.	4) Provide adequate drainage to prevent water ponding. 5) All plates are MT20 plates unless otherwise indicated.
WEBS	1 Row at midpt 4-17	6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
JOINTS	1 Brace at Jt(s): 21 This truss requires both edges of the bottom chord be sheathed in the room area.	7) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
REACTIONS	(size) 2=0-3-0, 13=0-5-8, 16=0-3-8, 19=0-5-8 Max Horiz 2=294 (LC 11) Max Uplift 2=330 (LC 8) Max Grav 2=151 (LC 25), 13=1360 (LC 2), 16=1508 (LC 25), 19=2483 (LC 32)	8) Ceiling dead load (10.0 psf) on member(s). 3-4, 4-5, 5-21, 20-21; Wall dead load (5.0psf) on member (s).4-17, 14-20 9) Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 16-17, 14-16 10) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 330 lb uplift at joint 2.
FORCES	(lb) - Maximum Compression/Maximum Tension	11) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
TOP CHORD	1-2=0/16, 2-3=-328/1451, 3-4=-1445/143, 4-5=-1046/293, 5-6=-792/263, 6-7=-606/248, 7-8=-606/248, 8-9=-734/269, 9-10=-1293/261, 10-13=-1477/219	12) Attic room checked for L/360 deflection.
BOT CHORD	2-19=-1176/190, 17-19=-232/414, 16-17=0/996, 14-16=0/1094, 13-14=0/965 3-19=-2243/277, 3-17=-34/1003, 4-17=-255/259, 14-20=-53/336, 9-20=0/389, 10-14=-243/324, 5-21=-371/111, 20-21=-370/111, 7-21=0/168	LOAD CASE(S) Standard

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPH Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	176525546
252130-A	A1GE	Attic	1	1	Job Reference (optional)	

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:03
ID:oZsdJhAH7sgso7cS4ggLwVvqezV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

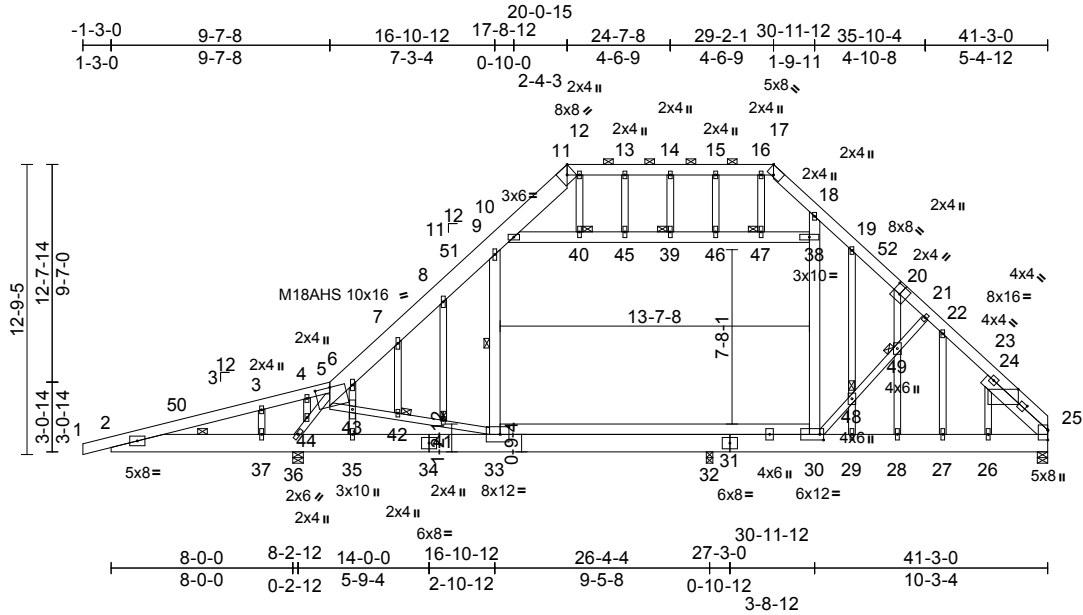

Scale = 1:101.5

Plate Offsets (X, Y): [5:0-8-0,Edge], [11:0-3-11,Edge], [17:Edge,0-4-1], [20:0-4-0,0-4-8], [24:1-3-10,1-9-9], [25:1-4-8,0-2-0], [30:0-2-0,0-3-0], [33:0-4-12,0-4-0]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.49	Vert(LL)	-0.27	30-33	>829	360	M18AHS 186/179
TCDL	10.0	Lumber DOL	1.15	BC	0.75	Vert(CT)	-0.39	30-33	>563	240	MT20 244/190
BCLL	0.0*	Rep Stress Incr	YES	WB	0.72	Horz(CT)	0.01	25	n/a	n/a	
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	-0.10	33-35	>999	240	Weight: 515 lb FT = 20%

LUMBER	
TOP CHORD	2x6 SP No.1 *Except* 5-11:2x10 SP No.1
BOT CHORD	2x10 SP No.1 *Except* 33-30:2x6 SP 2400F 2.0E
WEBS	2x4 SP No.2 *Except* 9-33,18-30:2x6 SP No.1, 10-38:2x6 SP No.2
OTHERS	2x4 SP No.2
SLIDER	Right 2x6 SP No.2 -- 3-8-9
BRACING	
TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except 2-0-0 oc purlins (6-0-0 max.): 11-17.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 2-37,36-37 9-5-9 oc bracing: 29-30.
WEBS	1 Row at midpt 9-33
JOINTS	1 Brace at Jt(s): 39, 40, 41, 42, 47, 48, 49 This truss requires both edges of the bottom chord be sheathed in the room area.
REACTIONS	(size) 25=0-5-8, 32=0-3-8, 36=0-5-8 Max Horiz 36=294 (LC 9) Max Uplift 36=89 (LC 12) Max Grav 25=1378 (LC 24), 32=1808 (LC 18), 36=2226 (LC 2)
FORCES	(lb) - Maximum Compression/Maximum Tension

TOP CHORD	1-2=0/16, 2-3=-743/958, 3-4=-673/896, 4-5=-671/931, 5-6=-1447/0, 6-7=-1845/0, 7-8=-1778/0, 8-9=-1670/0, 9-10=-1211/244, 10-11=-940/272, 11-12=-751/251, 12-13=-751/251, 13-14=-751/251, 14-15=-751/251, 15-16=-751/251, 16-17=-751/251, 17-18=-943/268, 18-19=-1696/245, 19-21=-1661/163, 21-22=-1584/152, 22-24=-1479/269, 24-25=-1691/124
BOT CHORD	2-37=-879/771, 36-37=-879/771, 35-36=-25/866, 33-35=-25/866, 32-33=0/763, 30-33=0/1330, 29-30=0/1057, 28-29=0/1057, 27-28=0/1057, 26-27=0/1058, 25-26=0/1046
WEBS	36-44=-1850/248, 5-44=-1982/261, 5-43=-424/1249, 42-43=-307/900, 41-42=-304/897, 33-41=-321/941, 9-33=-86/824, 30-38=-56/713, 18-38=0/584, 30-48=-294/477, 48-49=-276/443, 21-49=-277/451, 10-40=-537/53, 40-45=-536/53, 39-45=-536/53, 39-46=-536/53, 46-47=-536/53, 38-47=-536/53, 14-39=-17/45, 12-40=-53/262, 8-41=-79/161, 7-42=-15/13, 6-43=-904/325, 35-43=-322/119, 4-44=-37/214, 3-37=-359/203, 13-45=-66/65, 15-46=-133/71, 16-47=-37/400, 19-48=-165/111, 29-48=-220/70, 20-49=-227/47, 28-49=-184/42, 22-27=-288/185, 24-26=0/210

NOTES

- 1) Unbalanced roof live loads have been considered for this design.

- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) -1-3-0 to 3-1-13, Interior (1) 3-1-13 to 20-0-15, Exterior(2R) 20-0-15 to 24-7-8, Interior (1) 24-7-8 to 29-2-1, Exterior(2R) 29-2-1 to 33-6-14, Interior (1) 33-6-14 to 41-3-0 zone; cantilever left exposed ;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 4) Provide adequate drainage to prevent water ponding.
- 5) All plates are MT20 plates unless otherwise indicated.
- 6) All plates are 2x6 (I) MT20 unless otherwise indicated.
- 7) Gable studs spaced at 2-0-0 oc.
- 8) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 9) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.



September 23,2025

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacompnents.com)



818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-A	A1GE	Attic	1	1	I76525546
					Job Reference (optional)

- 10) Ceiling dead load (10.0 psf) on member(s). 9-10, 10-40, 40-45, 39-45, 39-46, 46-47, 38-47; Wall dead load (5.0psf) on member(s).9-33, 30-38
- 11) Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 32-33, 30-33
- 12) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 89 lb uplift at joint 36.
- 13) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- 14) Attic room checked for L/360 deflection.

LOAD CASE(S) Standard

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	
252130-A	A2	ROOF SPECIAL	6	1	Job Reference (optional)	176525547

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 E Sep 7 2025 Print: 25.3.0 E Sep 7 2025 MiTek Industries, Inc. Tue Sep 23 14:55:57
ID:oZsdJhAH7sgso7cS4ggLwVyrqezV-xKdyYQirnt6EVF75W3UmJMAVcKgQJ6WHVFnM_0yathn

Page: 1

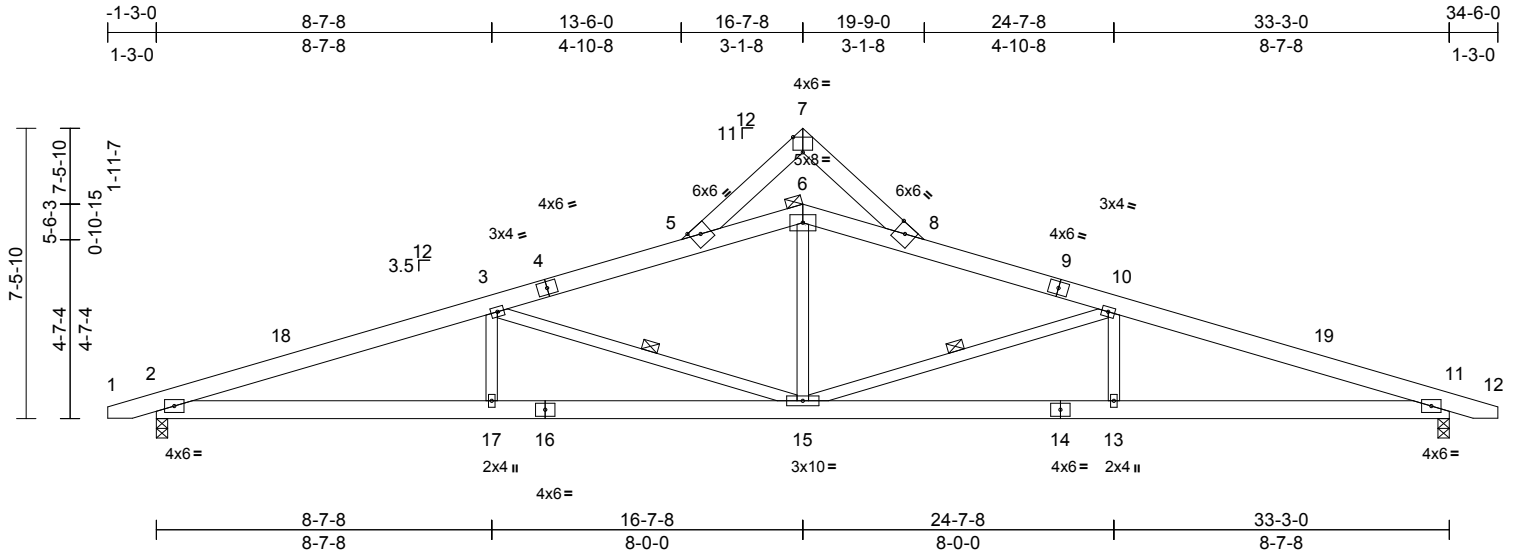

Scale = 1:59.3

Plate Offsets (X, Y): [7:0-3-0,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.39	Vert(LL)	-0.15	15-17	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.53	Vert(CT)	-0.32	15-17	>999	240		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.36	Horz(CT)	0.10	11	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.12	15-17	>999	240	Weight: 222 lb	FT = 20%

LUMBER

TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
WEBS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 3-9-5 oc purlins.
BOT CHORD Rigid ceiling directly applied or 8-8-1 oc bracing.
WEBS 1 Row at midpt 3-15, 10-15
JOINTS 1 Brace at Jt(s): 6

REACTIONS (lb/size) 2=1383/0-3-8, 11=1383/0-3-8
Max Horiz 2=-84 (LC 17)
Max Uplift 2=-99 (LC 12), 11=-99 (LC 13)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-18=-3408/895, 3-18=-3339/913,
3-4=-2368/663, 4-5=-2295/677,
5-6=-2122/657, 6-8=-2122/659,
8-9=-2295/707, 9-10=-2368/693,
10-19=-3339/934, 11-19=-3408/916

BOT CHORD 2-17=-821/3180, 16-17=-821/3180,
15-16=-821/3180, 14-15=-810/3180,
13-14=-810/3180, 11-13=-810/3180

WEBS 6-15=-137/848, 3-15=-1084/349, 3-17=0/341,
10-15=-1084/343, 10-13=0/341

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust)
Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) -0-11-3 to 3-5-10, Interior (1) 3-5-10 to 16-7-8, Exterior(2E) 16-7-8 to 19-7-10, Interior (1) 19-7-10 to 34-2-3 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60

- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 99 lb uplift at joint 2 and 99 lb uplift at joint 11.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

LOAD CASE(S) Standard



September 23, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	
252130-A	A2-GR	ROOF SPECIAL	1	2	Job Reference (optional)	I76525548

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 E Sep 7 2025 Print: 25.3.0 E Sep 7 2025 MiTek Industries, Inc. Tue Sep 23 14:57:37
ID:oZsdJhAH7sgso7cS4ggLwVyrqezV-UID8lywC?vrv6nLVwnoSVfsnP17MUjW9kSkC2gyatgC

Page: 1

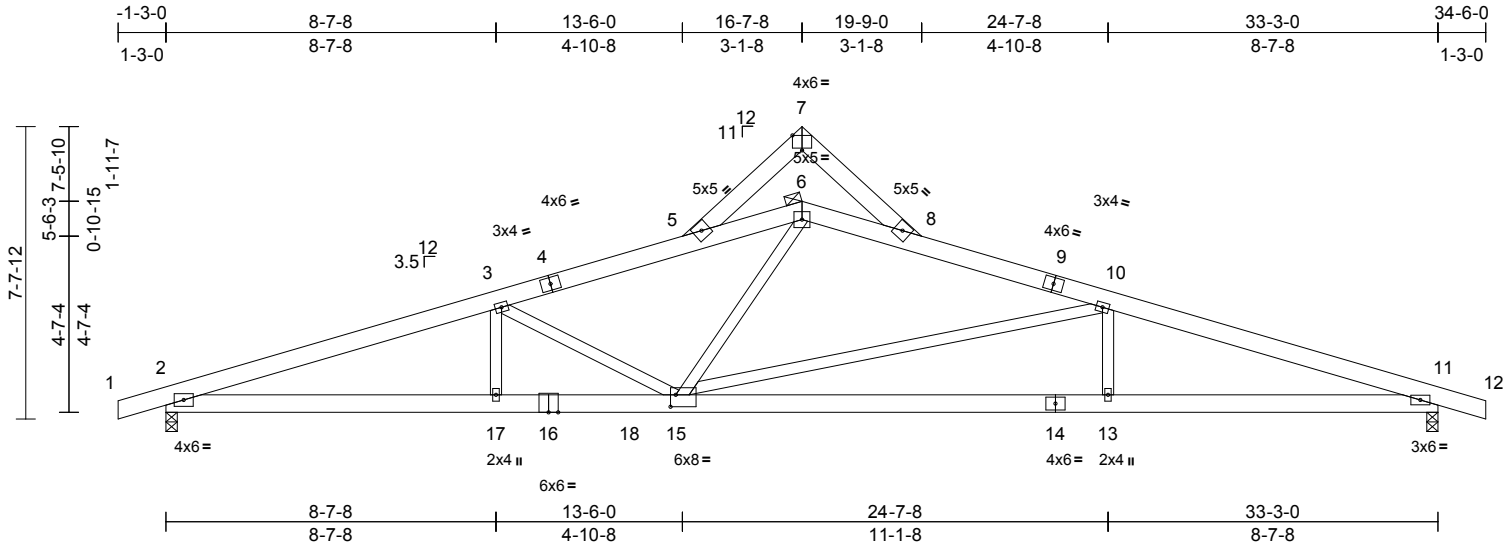

Scale = 1:60.2

Plate Offsets (X, Y): [7:0-3-0,Edge], [15:0-1-10,0-3-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.30	Vert(LL)	-0.17	15-17	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.64	Vert(CT)	-0.34	15-17	>999	240		
BCLL	0.0*	Rep Stress Incr	NO	WB	0.62	Horz(CT)	0.08	11	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.13	15-17	>999	240	Weight: 449 lb	FT = 20%

LUMBER

TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1 *Except* 14-16:2x6 SP 2400F
2.0E
WEBS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or
5-9-13 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc
bracing.

JOINTS 1 Brace at Jt(s): 6

REACTIONS (lb/size) 2=2675/0-3-8, 11=2129/0-3-8
Max Horiz 2=-85 (LC 9)
Max Uplift 2=-238 (LC 4), 11=-183 (LC 5)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250
(lb) or less except when shown.

TOP CHORD 2-3=-7577/631, 3-4=-6460/476,
4-5=-6393/490, 5-6=-6196/501,
6-8=-4429/400, 8-9=-4625/421,
9-10=-4693/407, 10-11=-5705/414

BOT CHORD 2-17=-624/7144, 16-17=-624/7144,
16-18=-624/7144, 15-18=-624/7144,
14-15=-333/5363, 13-14=-333/5363,
11-13=-333/5363

WEBS 3-17=0/578, 10-13=0/365, 6-15=-185/3114,
3-15=-1161/237, 10-15=-1304/137


NOTES

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 3 rows staggered at 0-8-0 oc.
Web connected as follows: 2x4 - 1 row at 0-9-0 oc.

- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 238 lb uplift at joint 2 and 183 lb uplift at joint 11.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 2000 lb down and 204 lb up at 12-1-8 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S)

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (lb/ft)
Vert: 1-5=-60, 5-7=-60, 7-8=-60, 8-12=-60, 2-11=-20
Concentrated Loads (lb)
Vert: 18=-2000 (F)

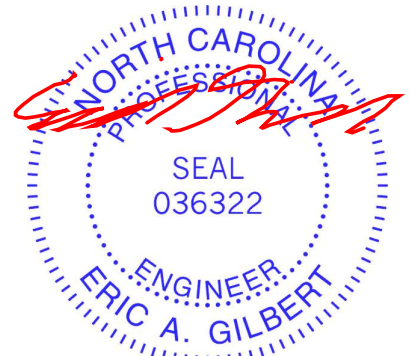

September 23, 2025


WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932

Comtech, Inc, Fayetteville, NC - 28314, Run: 25.30 E Sep 7 2025 Print: 25.3.0 E Sep 7 2025 MiTek Industries, Inc. Tue Sep 23 14:59:39 Page: 1
ID:oZsdJhAH7sqs07cS4qgLvVvqezV-vDbFmQpKGOcbIXqv4Q0 3rNvfkDnH3?a6nRlfkbyateI



LUMBER		WEBS	12-29=266/986, 5-33=39/253, 18-25=38/253, 5-38=1028/325, 37-38=1006/318, 36-37=1017/321, 29-36=1036/329, 29-39=1036/324, 39-40=1017/316, 40-41=1006/314, 18-41=1028/320
TOP CHORD	2x6 SP No.1		
BOT CHORD	2x6 SP No.1		
WEBS	2x4 SP No.2		
OTHERS	2x4 SP No.2		
BRACING		NOTES	
TOP CHORD	Structural wood sheathing directly applied or 4-1-10 oc purlins.	1)	Unbalanced roof live loads have been considered for this design.
BOT CHORD	Rigid ceiling directly applied or 8-9-4 oc bracing.	2)	Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TC DL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) -1-3-0 to 3-1-13, Interior (1) 3-1-13 to 16-7-8, Exterior(2E) 16-7-8 to 19-7-10, Interior (1) 19-7-10 to 34-6-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
JOINTS	1 Brace at Jt(s): 12, 36, 37, 38, 39, 40, 41	3)	Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TP1 1.
REACTIONS	(lb/size) 2=1402/0-3-8, 21=1402/0-3-8 Max Horiz 2=85 (LC 12) Max Uplift 2=-109 (LC 8), 21=-109 (LC 9)	4)	All plates are 2x4 () MT20 unless otherwise indicated.
FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.	5)	Gable studs spaced at 2-0-0 oc.
TOP CHORD	2-42=-3348/862, 3-42=-3289/868, 3-4=-3258/899, 4-5=-3230/913, 5-6=-2355/640, 6-7=-2325/646, 7-8=-2315/656, 8-9=-2312/691, 9-10=-2144/672, 10-12=-2157/679, 12-13=-2157/680, 13-14=-2144/675, 14-15=-2312/721, 15-16=-2315/688, 16-17=-2325/677, 17-18=-2355/671, 18-19=-3230/928, 19-20=-3258/914, 20-43=-3289/883, 21-43=-3348/878	6)	This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
BOT CHORD	2-35=-790/3113, 34-35=-790/3113, 33-34=-790/3113, 32-33=-790/3113, 31-32=-790/3113, 30-31=-790/3113, 29-30=-790/3113, 28-29=-773/3113, 27-28=-773/3113, 26-27=-773/3113, 25-26=-773/3113, 24-25=-773/3113, 23-24=-773/3113, 21-23=-773/3113	7)	* This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
		8)	Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 109 lb uplift at joint 2 and 109 lb uplift at joint 21.
		9)	Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
		LOAD CASE(S)	Standard




Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	
252130-A	A3	Roof Special	3	1	Job Reference (optional)	I76525550

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:04
ID:oZsdJhAH7sgso7cS4ggLwVyzqzV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

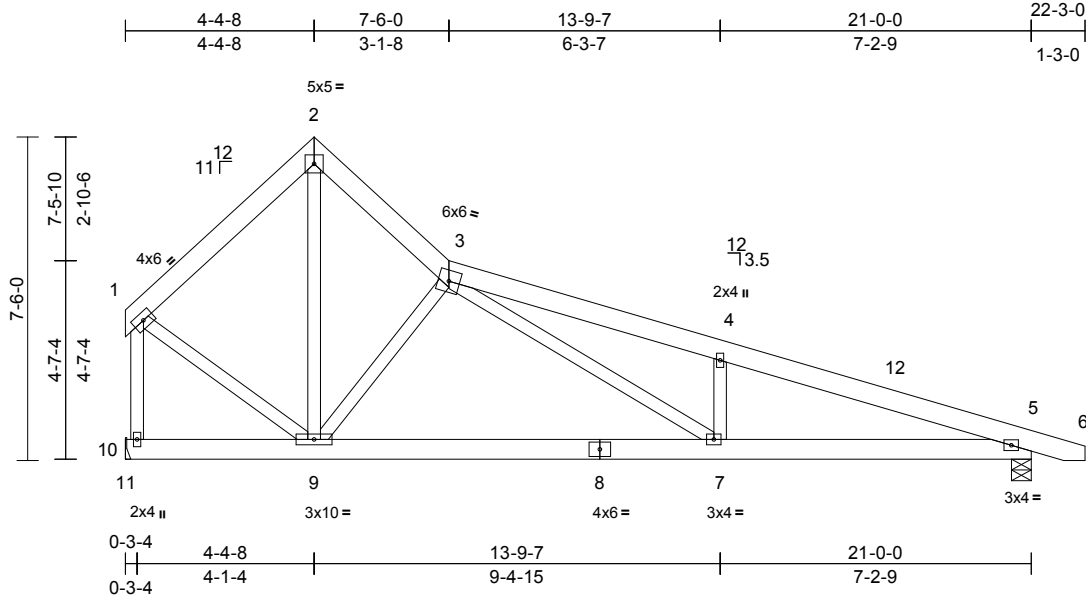

Scale = 1:53.4

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.21	Vert(LL)	-0.06	7-9	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.29	Vert(CT)	-0.14	7-9	>999	240		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.36	Horz(CT)	0.02	5	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.04	7-9	>999	240	Weight: 152 lb	FT = 20%

LUMBER

TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
WEBS 2x4 SP No.2

6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 59 lb uplift at joint 10 and 109 lb uplift at joint 5.

LOAD CASE(S) Standard

BRACING

TOP CHORD Structural wood sheathing directly applied or 5-4-11 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
6-0-0 oc bracing: 9-10.

REACTIONS

(size) 5=0-5-8, 10= Mechanical
Max Horiz 10=168 (LC 8)
Max Uplift 5=-109 (LC 9), 10=-59 (LC 13)
Max Grav 5=896 (LC 1), 10=824 (LC 1)

FORCES

(lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=-621/229, 2-3=-618/290, 3-4=-1878/592,
4-5=-1900/496, 5-6=0/6, 1-10=-806/265
BOT CHORD 10-11=0/0, 9-10=-53/169, 7-9=-179/921,
5-7=-397/1747
WEBS 2-9=-165/541, 3-7=-262/991, 4-7=-368/251,
1-9=-72/514, 3-9=-839/371

NOTES

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust)
Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) 2-3-11 to 9-6-12, Interior (1) 9-6-12 to 24-0-9 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.



September 23,2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	176525551
252130-A	A4	ROOF SPECIAL	1	1	Job Reference (optional)	

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:04
ID:oZsdJhAH7sgso7cS4ggLwVyzqzV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

Page: 1

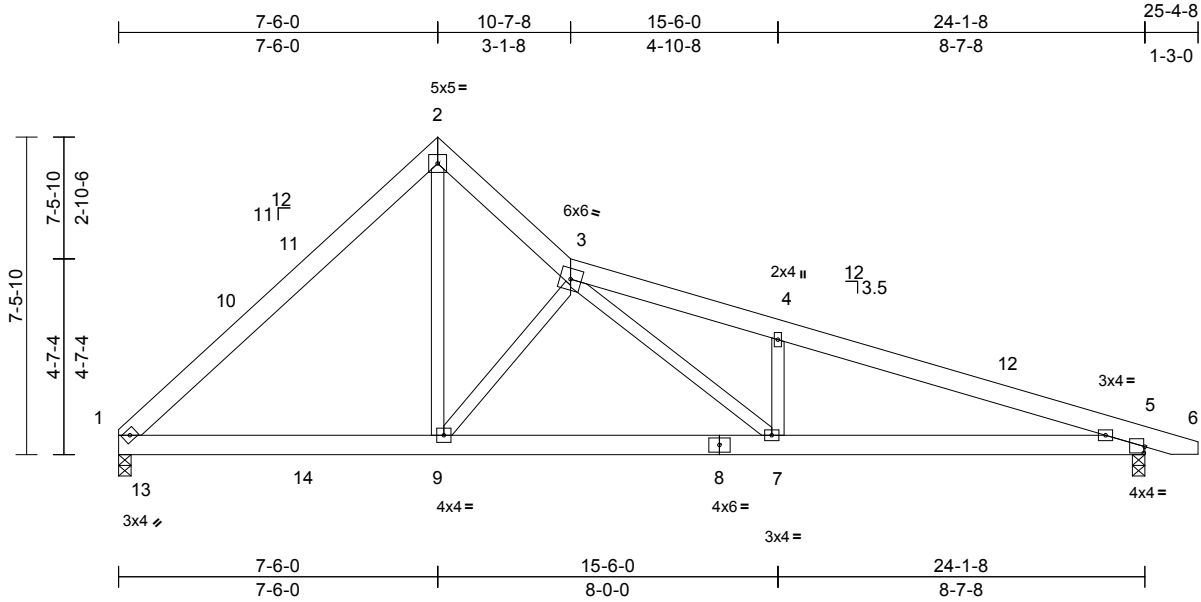

Scale = 1:54.2

Plate Offsets (X, Y): [5:0-0-5,0-1-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.35	Vert(LL)	-0.10	5-7	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.66	Vert(CT)	-0.19	5-7	>999	240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.46	Horz(CT)	0.04	5	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.06	5-7	>999	240	Weight: 156 lb	FT = 20%

LUMBER

TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.2
WEBS 2x4 SP No.2

- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 40 lb uplift at joint 1 and 104 lb uplift at joint 5.

LOAD CASE(S) Standard

BRACING

TOP CHORD Structural wood sheathing directly applied or 4-6-15 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS (size) 1=0-3-8, 5=0-3-8
Max Horiz 1=-171 (LC 8)
Max Uplift 1=-40 (LC 13), 5=-104 (LC 9)
Max Grav 1=1085 (LC 19), 5=1091 (LC 2)

FORCES

(lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=-1261/326, 2-3=-1183/427, 3-4=-2386/717, 4-5=-2407/625, 5-6=0/4
BOT CHORD 1-9=-90/917, 7-9=-317/1520, 5-7=-513/2249
WEBS 2-9=-230/1243, 3-9=-1073/375, 3-7=-257/982, 4-7=-412/269

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) 0-1-12 to 4-6-9, Interior (1) 4-6-9 to 7-6-0, Exterior(2E) 7-6-0 to 10-7-8, Interior (1) 10-7-8 to 25-0-11 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.

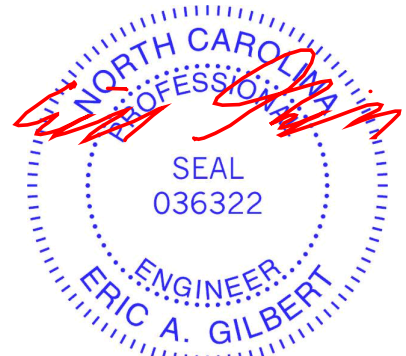


September 23, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932

Page: 1


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-A	A4SG	GABLE	1	1	176525553
Job Reference (optional)					

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:04
ID:oZsdJhAH7sgso7cS4ggLwVyzqzV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

Page: 1

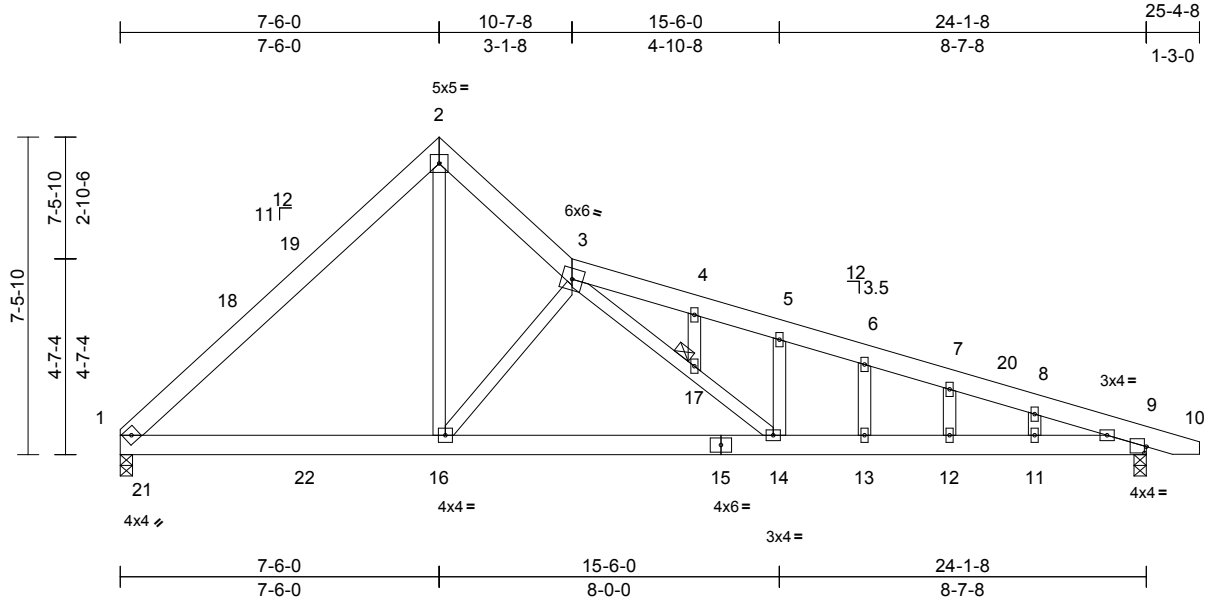

Scale = 1:54.2

Plate Offsets (X, Y): [9:0-0-9,0-1-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.28	Vert(LL)	-0.08	12-13	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.39	Vert(CT)	-0.15	12-13	>999	240		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.46	Horz(CT)	0.03	9	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.06	12-13	>999	240	Weight: 163 lb	FT = 20%

LUMBER

TOP CHORD	2x6 SP No.1
BOT CHORD	2x6 SP No.1
WEBS	2x4 SP No.2
OTHERS	2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 5-0-4 oc purlins.

BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

JOINTS 1 Brace at Jt(s): 17

REACTIONS (size) 1=0-3-8, 9=0-3-8

Max Horiz 1=-171 (LC 8)

Max Uplift 1=-40 (LC 13), 9=-104 (LC 9)

Max Grav 1=1085 (LC 19), 9=1091 (LC 2)

FORCES

(lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=-1263/324, 2-3=-1185/427, 3-4=-2291/695, 4-5=-2318/685, 5-6=-2270/621, 6-7=-2285/612, 7-8=-2311/591, 8-9=-2389/574, 9-10=0/4

BOT CHORD 1-16=-88/918, 14-16=-322/1518, 13-14=-494/2194, 12-13=-494/2194, 11-12=-494/2194, 9-11=-494/2194


WEBS 2-16=-232/1248, 3-16=-1072/387, 3-17=-231/917, 14-17=-226/906, 5-14=-322/202, 4-17=-19/9, 6-13=-44/6, 7-12=-34/54, 8-11=0/93

NOTES

1) Unbalanced roof live loads have been considered for this design.

- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) 0-1-12 to 4-6-9, Interior (1) 4-6-9 to 7-6-0, Exterior(2E) 7-6-0 to 10-7-8, Interior (1) 10-7-8 to 25-0-11 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 4) All plates are 2x4 (||) MT20 unless otherwise indicated.
- 5) Gable studs spaced at 2-0-0 oc.
- 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 7) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 40 lb uplift at joint 1 and 104 lb uplift at joint 9.

LOAD CASE(S) Standard

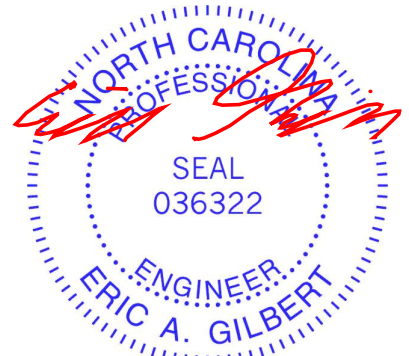

September 23, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	
252130-A	A5	COMMON	2	1	Job Reference (optional)	I76525554

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 E Sep 7 2025 Print: 25.3.0 E Sep 7 2025 MiTek Industries, Inc. Tue Sep 23 14:51:19
ID:oZsdJhAH7sgso7cS4ggLwVyrqezV-cfGU?1KrV9ypXNITgz_KVW6scsQNSzNDLLh5ihyatm8

Page: 1

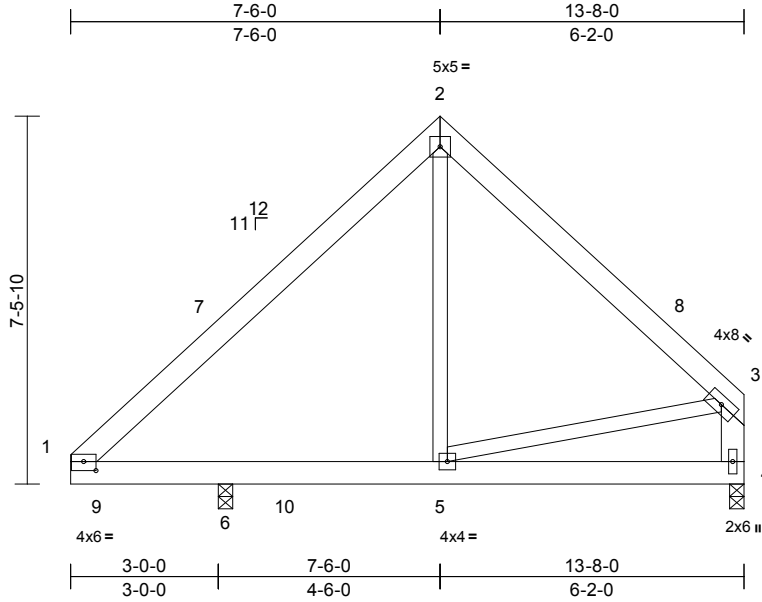

Scale = 1:46.8

Plate Offsets (X, Y): [1:0-3-0,0-2-3]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.22	Vert(LL)	-0.06	4-5	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.64	Vert(CT)	-0.10	4-5	>999	240		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.17	Horz(CT)	0.00	4	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.05	4-5	>999	240	Weight: 97 lb	FT = 20%

LUMBER

TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
WEBS 2x4 SP No.2 *Except* 4-3:2x6 SP No.1

BRACING

TOP CHORD Structural wood sheathing directly applied or
6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc
bracing.

REACTIONS (lb/size) 4=373/0-3-8, 6=702/0-3-8
Max Horiz 6=164 (LC 9)
Max Uplift 4=-20 (LC 12), 6=-25 (LC 12)
Max Grav 4=449 (LC 19), 6=814 (LC 20)


FORCES (lb) - Max. Comp./Max. Ten. - All forces 250
(lb) or less except when shown.

TOP CHORD 1-7=-354/39, 3-8=-315/69, 3-4=-280/108

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust)
Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) 0-0-0 to 4-4-13, Interior (1) 4-4-13 to 7-6-0, Exterior(2R) 7-6-0 to 11-10-13, Interior (1) 11-10-13 to 13-5-4 zone; cantilever left exposed ;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 20 lb uplift at joint 4 and 25 lb uplift at joint 6.

LOAD CASE(S) Standard

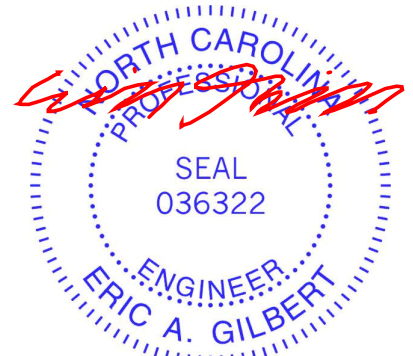

September 23,2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	
252130-A	A6	COMMON	7	1	Job Reference (optional)	I76525555

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:04
ID:oZsdJhAH7sgso7cS4gglwVYqezV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

Page: 1

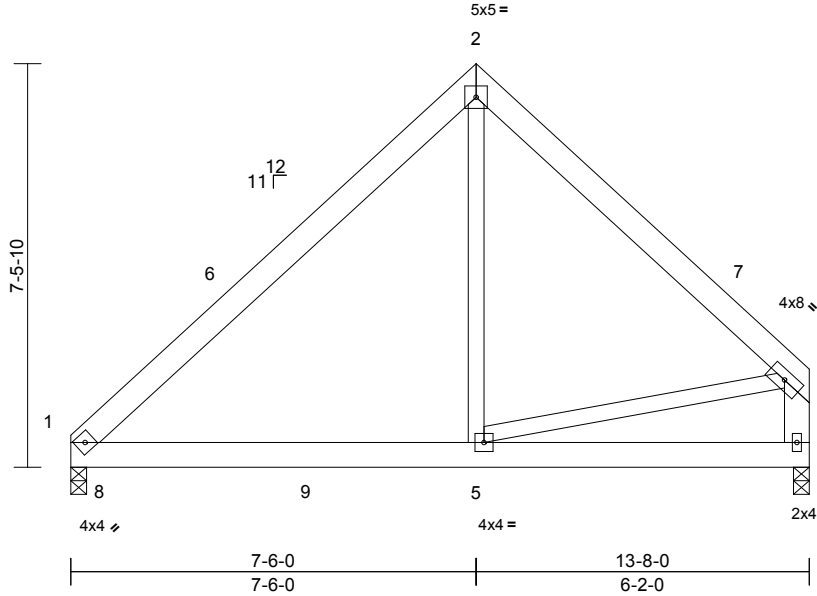

Scale = 1:42.6

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.27	Vert(LL)	-0.04	1-5	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.23	Vert(CT)	-0.06	1-5	>999	240		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.09	Horz(CT)	0.00	4	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.02	1-5	>999	240	Weight: 97 lb	FT = 20%

LUMBER

TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
WEBS 2x4 SP No.2 *Except* 4-3:2x6 SP No.1

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size) 1=0-3-8, 4=0-3-8
Max Horiz 1=164 (LC 9)
Max Uplift 1=-18 (LC 12), 4=-25 (LC 12)
Max Grav 1=630 (LC 19), 4=628 (LC 19)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=-629/178, 2-3=-624/208, 3-4=-562/202
BOT CHORD 1-5=-25/416, 4-5=-72/99
WEBS 2-5=0/378, 3-5=-40/380

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust)
Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) 0-1-12 to 4-6-9, Interior (1) 4-6-9 to 7-6-0, Exterior(2R) 7-6-0 to 11-10-13, Interior (1) 11-10-13 to 13-5-4 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 18 lb uplift at joint 1 and 25 lb uplift at joint 4.

LOAD CASE(S) Standard



September 23,2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-A	A6GE	COMMON SUPPORTED GAB	1	1	176525556
Job Reference (optional)					

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:05
ID:oZsdJhAH7sgso7cS4ggLwVyrqezV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

Page: 1

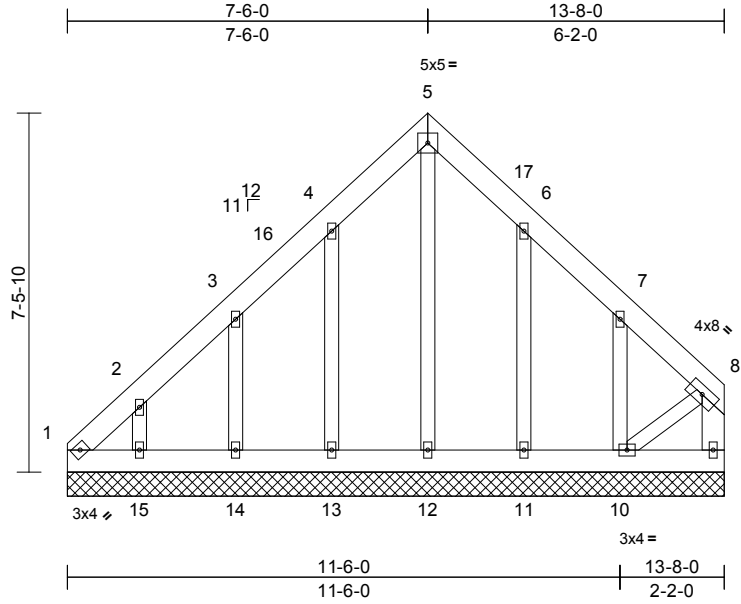

Scale = 1:47.9

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.04	Vert(LL)	n/a	-	n/a	999	MT20
TCDL	10.0	Lumber DOL	1.15	BC	0.02	Vert(TL)	n/a	-	n/a	999	244/190
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.12	Horiz(TL)	0.00	9	n/a	n/a	
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S							
Weight: 115 lb FT = 20%											

LUMBER

TOP CHORD	2x6 SP No.1
BOT CHORD	2x6 SP No.1
WEBS	2x6 SP No.1 *Except* 10-8:2x4 SP No.2
OTHERS	2x4 SP No.2

BRACING

TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size)	1=13-8-0, 9=13-8-0, 10=13-8-0, 11=13-8-0, 12=13-8-0, 13=13-8-0, 14=13-8-0, 15=13-8-0
	Max Horiz 1=186 (LC 11)
Max Uplift	1=-67 (LC 10), 9=-36 (LC 11), 10=-147 (LC 13), 11=-60 (LC 13), 13=-61 (LC 12), 14=-79 (LC 12), 15=-84 (LC 12)
	Max Grav 1=137 (LC 9), 9=145 (LC 19), 10=221 (LC 20), 11=179 (LC 20), 12=115 (LC 22), 13=184 (LC 19), 14=184 (LC 19), 15=174 (LC 19)

FORCES

TOP CHORD	(lb) - Maximum Compression/Maximum Tension
	1-2=-300/139, 2-3=-136/100, 3-4=-120/78, 4-5=-128/204, 5-6=-128/203, 6-7=-86/77, 7-8=-164/70, 8-9=-174/49
BOT CHORD	1-15=-105/199, 14-15=-106/200, 13-14=-106/201, 12-13=-107/201, 11-12=-107/201, 10-11=-106/201, 9-10=-28/43
	WEBS 5-12=-151/48, 4-13=-144/167, 3-14=-155/249, 2-15=-140/235, 6-11=-140/194, 7-10=-156/257, 8-10=-99/199

NOTES

- Unbalanced roof live loads have been considered for this design.

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Corner(3E) 0-1-12 to 4-6-9, Exterior(2N) 4-6-9 to 7-6-0, Corner(3R) 7-6-0 to 11-10-13, Exterior(2N) 11-10-13 to 13-5-4 zone; end vertical right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- All plates are 2x4 (||) MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 67 lb uplift at joint 1, 36 lb uplift at joint 9, 61 lb uplift at joint 13, 79 lb uplift at joint 14, 84 lb uplift at joint 15, 60 lb uplift at joint 11 and 147 lb uplift at joint 10.

LOAD CASE(S) Standard



September 23, 2025


WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-A	B1	ATTIC	3	1	176525557
Job Reference (optional)					

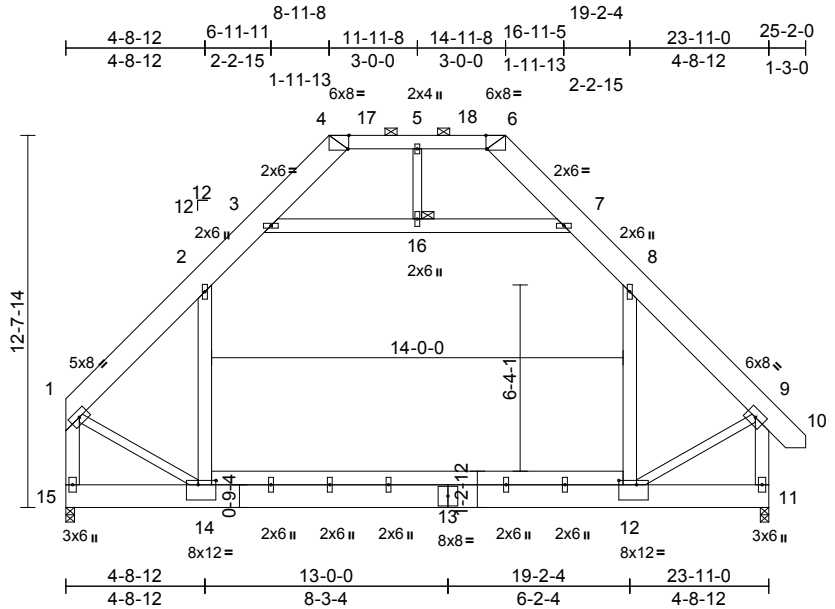

Scale = 1:78.4

Plate Offsets (X, Y): [4:0-0-7,Edge], [6:0-0-7,Edge], [12:0-7-4,0-1-12], [14:0-7-4,0-1-12]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.26	Vert(LL)	-0.20	12-14	>999	360	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.79	Vert(CT)	-0.31	12-14	>903	240	
BCLL	0.0*	Rep Stress Incr	YES	WB	0.32	Horz(CT)	0.01	11	n/a	n/a	
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.06	12-14	>999	240	Weight: 337 lb FT = 20%

LUMBER		2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TC DL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) 0-2-4 to 4-8-4, Interior (1) 4-8-4 to 9-3-5, Exterior(2R) 9-3-5 to 13-8-1, Interior (1) 13-8-1 to 14-7-11, Exterior(2R) 14-7-11 to 19-2-12, Interior (1) 19-2-12 to 24-9-15 zone; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
TOP CHORD	2x10 SP No.1 *Except* 4-6:2x6 SP No.1	
BOT CHORD	2x10 SP No.1 *Except* 14-12:2x6 SP No.1	
WEBS	2x6 SP No.1 *Except* 5-16:2x4 SP No.3, 14-1,12-9:2x4 SP No.2	
BRACING		
TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-6.	
BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing.	
JOINTS	1 Brace at Jt(s): 16	
REACTIONS	(size)	11=0-3-8, 15=0-3-8
	Max Horiz	15=-338 (LC 10)
FORCES	Max Grav	11=1678 (LC 2), 15=1620 (LC 2)
	(lb) - Maximum Compression/Maximum Tension	
TOP CHORD	1-2=-1627/0, 2-3=-1068/159, 3-4=-484/140, 6-7=-484/137, 7-8=-1067/159, 8-9=-1626/0, 9-10=0/47, 1-15=-1949/0, 9-11=-1998/0, 4-5=-292/134, 5-6=-292/134	
BOT CHORD	14-15=-337/333, 12-14=0/1088, 11-12=-49/60	
WEBS	8-12=-35/747, 2-14=-40/742, 3-16=-954/89, 7-16=-954/89, 5-16=0/142, 1-14=0/1296, 9-12=0/1309	
NOTES		
1) Unbalanced roof live loads have been considered for this design.		
3) N/A		
4) Provide adequate drainage to prevent water ponding.		
5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.		
6) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.		
7) Ceiling dead load (10.0 psf) on member(s). 2-3, 7-8, 3-16, 7-16; Wall dead load (5.0psf) on member(s).8-12, 2-14		
8) Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 12-14		
9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.		
10) Attic room checked for L/360 deflection.		
LOAD CASE(S) Standard		






September 23,2025

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-A	B1GE	GABLE	1	1	176525558
Job Reference (optional)					

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:05
ID:oZsdJhAH7sgso7cS4ggLwVyqezV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKwRCDoi7J4zJC?f

Page: 1

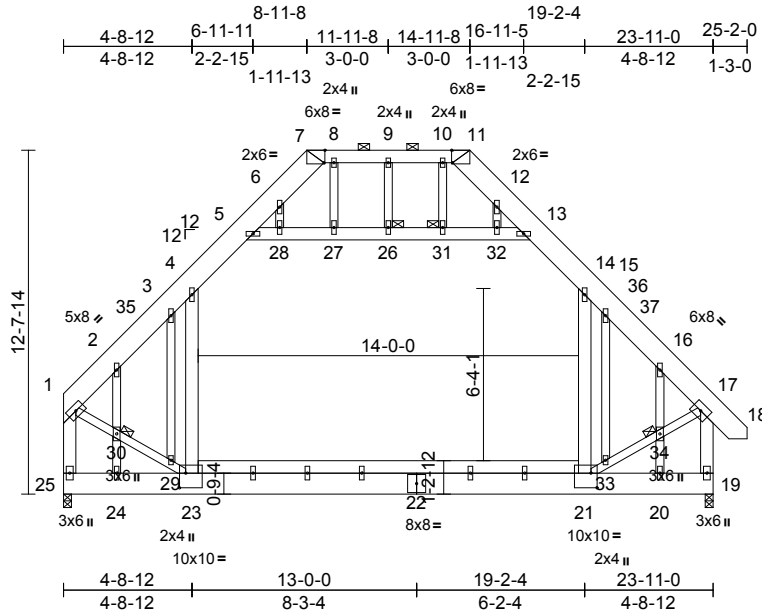

Scale = 1:84.8

Plate Offsets (X, Y): [7:0-0-7,Edge], [11:0-0-7,Edge], [21:0-2-12,0-6-8], [23:0-2-12,0-6-8]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.26	Vert(LL)	-0.18	21-23	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.78	Vert(CT)	-0.28	21-23	>999	240		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.46	Horz(CT)	0.01	19	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.05	21-23	>999	240	Weight: 374 lb	FT = 20%

LUMBER		WEBS	14-21=-16/828, 4-23=-14/829, 5-28=-926/90, 27-28=-910/89, 26-27=-910/89, 26-31=-910/89, 31-32=-910/89, 13-32=-926/84, 9-26=-69/54, 1-30=0/1301, 29-30=0/1262, 23-29=0/1421, 21-33=0/1441, 33-34=0/1279, 17-34=0/1318, 8-27=-22/105, 6-28=-8/171, 3-29=-6/264, 2-30=-693/14, 24-30=-672/14, 10-31=-21/105, 12-32=-6/172, 15-33=-2/269, 16-34=-690/0, 20-34=-669/0	11) Ceiling dead load (10.0 psf) on member(s). 4-5, 13-14, 5-28, 27-28, 26-27, 26-31, 31-32, 13-32; Wall dead load (5.0psf) on member(s).14-21, 4-23 12) Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 21-23 13) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord. 14) Attic room checked for L/360 deflection.
TOP CHORD	2x10 SP No.1 *Except* 7-11:2x6 SP No.1			
BOT CHORD	2x10 SP No.1 *Except* 23-21:2x6 SP No.1			
WEBS	2x6 SP No.1 *Except* 9-26,23-1,21-17:2x4 SP No.2			
OTHERS	2x4 SP No.2			
BRACING		NOTES		LOAD CASE(S) Standard
TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 7-11.	1) Unbalanced roof live loads have been considered for this design.		
BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing, Except: 9-5-9 oc bracing: 21-23.	2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) 0-2-4 to 4-8-4, Interior (1) 4-8-4 to 9-3-5, Exterior(2E) 9-3-5 to 14-7-11, Exterior(2R) 14-7-11 to 20-10-6, Interior (1) 20-10-6 to 24-9-15 zone; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60		
JOINTS	1 Brace at Jt(s): 26, 30, 31, 34	3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.		
REACTIONS	(size) 19=0-3-8, 25=0-3-8 Max Horiz 25=-338 (LC 8) Max Grav 19=1678 (LC 2), 25=1620 (LC 2)	4) N/A		
FORCES	(lb) - Maximum Compression/Maximum Tension	5) Provide adequate drainage to prevent water ponding.		
TOP CHORD	1-2=-1379/0, 2-3=-1774/0, 3-4=-1517/0, 4-5=-1072/139, 5-6=-551/106, 6-7=-433/123, 11-12=-434/156, 12-13=-553/138, 13-14=-1071/161, 14-15=-1511/0, 15-16=-1770/0, 16-17=-1377/0, 17-18=0/47, 1-25=-1554/0, 17-19=-1604/0, 7-8=-323/139, 8-9=-323/139, 9-10=-323/139, 10-11=-323/139	6) All plates are 2x6 () MT20 unless otherwise indicated.		
BOT CHORD	24-25=-335/336, 23-24=-335/336, 21-23=0/1089, 20-21=-50/59, 19-20=-50/59	7) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).		
		8) Gable studs spaced at 2-0-0 oc.		
		9) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.		
		10) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.		

September 23,2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacompnents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932


Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	176525559
252130-A	B2	ATTIC	5	1	Job Reference (optional)	

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:05

Page: 1

ID:oZsdJhAH7sgso7cS4ggLwVyzqzV-RfC?PsB70Hq3NSgPqnL8w3ulTXbGKWrCDoi7J4zJC?f

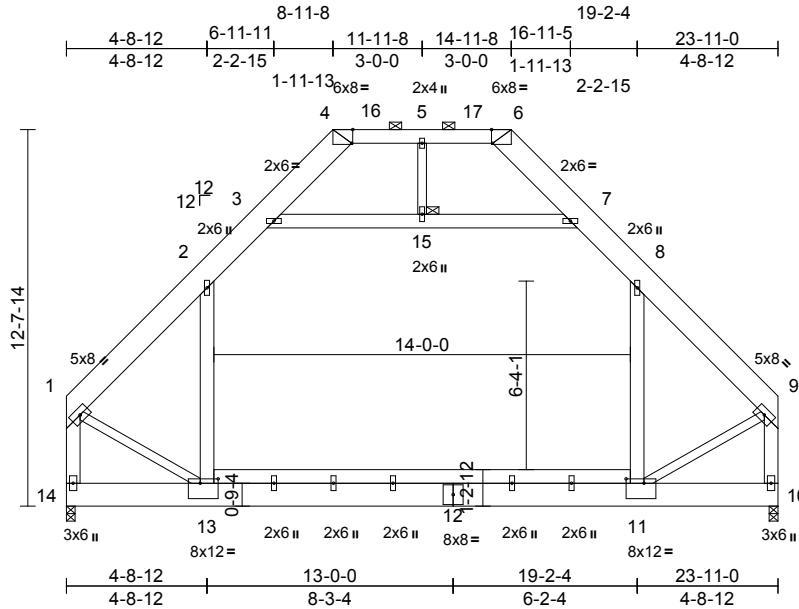

Scale = 1:77.4

Plate Offsets (X, Y): [4:0-0-7,Edge], [6:0-0-7,Edge], [11:0-7-4,0-1-12], [13:0-7-4,0-1-12]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.25	Vert(LL)	-0.20	11-13	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.79	Vert(CT)	-0.31	11-13	>903	240		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.32	Horz(CT)	0.01	10	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.06	11-13	>999	240	Weight: 331 lb	FT = 20%

LUMBER

TOP CHORD 2x10 SP No.1 *Except* 4-6:2x6 SP No.1
 BOT CHORD 2x10 SP No.1 *Except* 13-11:2x6 SP No.1
 WEBS 2x6 SP No.1 *Except* 5-15,13-1,11-9:2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-6.

BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

JOINTS 1 Brace at Jt(s): 15

REACTIONS (size) 10=0-3-8, 14=0-3-8
 Max Horiz 14=321 (LC 9)
 Max Grav 10=1622 (LC 2), 14=1622 (LC 2)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=-1629/0, 2-3=-1069/156, 3-4=-483/139, 6-7=-483/140, 7-8=-1069/155, 8-9=-1628/0, 1-14=-1951/0, 9-10=-1952/0, 4-5=-290/135, 5-6=-290/135

BOT CHORD 13-14=-328/315, 11-13=0/1079, 10-11=-55/60

WEBS 8-11=-40/743, 2-13=-40/743, 3-15=-956/82, 7-15=-956/82, 5-15=0/142, 1-13=0/1298, 9-11=0/1300


NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) 0-2-4 to 4-8-4, Interior (1) 4-8-4 to 9-3-5, Exterior(2R) 9-3-5 to 13-8-1, Interior (1) 13-8-1 to 14-7-11, Exterior(2R) 14-7-11 to 19-2-12, Interior (1) 19-2-12 to 23-8-12 zone; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60

3) N/A

- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Ceiling dead load (10.0 psf) on member(s). 2-3, 7-8, 3-15, 7-15; Wall dead load (5.0psf) on member(s).8-11, 2-13
- Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 11-13
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Attic room checked for L/360 deflection.

LOAD CASE(S) Standard

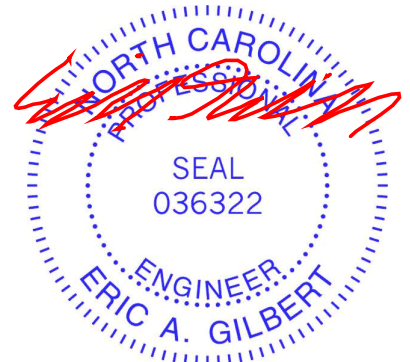

September 23,2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
 A MiTek Affiliate


818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-A	B2-GR	ATTIC	1	3	176525560
Job Reference (optional)					

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:05
ID:oZsdJhAH7sgso7cS4ggLwVyqezV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

Page: 1

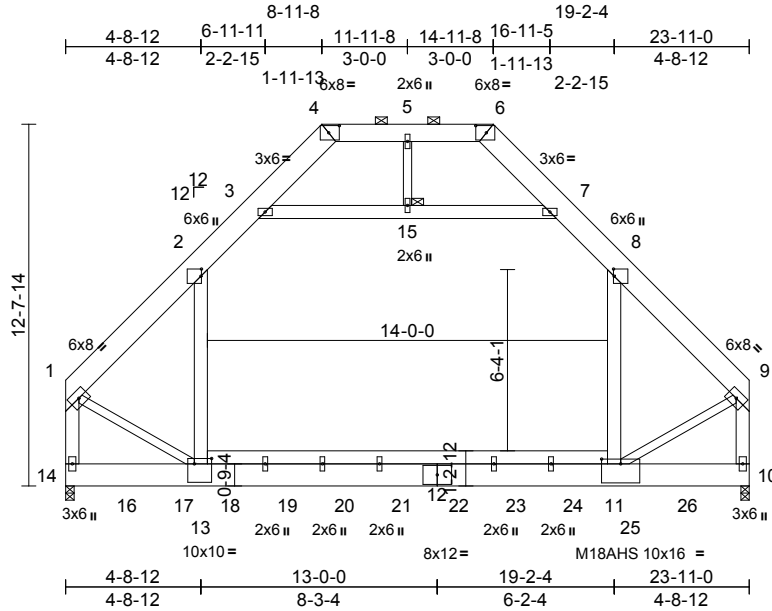

Scale = 1:80.6

Plate Offsets (X, Y): [2:0-3-0,0-0-4], [4:0-4-7,0-3-0], [6:0-4-7,0-3-0], [8:0-3-0,0-0-4], [11:0-8-0,0-2-0], [13:0-7-4,0-2-4]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.30	Vert(LL)	-0.36	11-13	>778	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.71	Vert(CT)	-0.47	11-13	>601	M18AHS	186/179
BCLL	0.0*	Rep Stress Incr	NO	WB	0.53	Horz(CT)	0.01	10	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.01	11-13	>999		
										Weight: 1004 lb FT = 20%	

LUMBER

TOP CHORD	2x10 SP 2400F 2.0E *Except* 4-6:2x8 SP No.1
BOT CHORD	2x10 SP 2400F 2.0E *Except* 13-11:2x6 SP No.1
WEBS	2x6 SP No.1 *Except* 5-15:2x4 SP No.3, 13-1,11-9:2x4 SP No.2

BRACING

TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-6.
BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing.

JOINTS 1 Brace at Jt(s): 15

REACTIONS	(size) 10=0-3-8, 14=0-3-8
	Max Horiz 14=216 (LC 5)
	Max Grav 10=7698 (LC 14), 14=8042 (LC 14)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD	1-2=-7471/0, 2-3=-3592/0, 3-4=-419/695, 6-7=-465/709, 7-8=-3577/0, 8-9=-7494/0, 1-14=-8898/0, 9-10=-8948/0, 4-5=-227/1173, 5-6=-227/1173
BOT CHORD	13-14=-230/242, 11-13=0/4778, 10-11=-19/21
WEBS	8-11=0/5473, 2-13=0/5420, 3-15=-5952/0, 7-15=-5952/0, 5-15=0/239, 1-13=0/5651, 9-11=0/5683

NOTES

- 3-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x10 - 2 rows staggered at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc, 2x8 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x10 - 3 rows staggered at 0-4-0 oc.
Web connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.

- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Ceiling dead load (10.0 psf) on member(s) 2-3, 7-8, 3-15, 7-15; Wall dead load (5.0psf) on member(s) 8-11, 2-13
- Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 11-13
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 1666 lb down at 2-1-12, 1666 lb down at 4-1-12, 456 lb down and 388 lb up at 5-9-4, 831 lb down and 326 lb up at 7-9-4, 1185 lb down and 77 lb up at 9-9-4, 1185 lb down and 77 lb up at 11-9-4, 1185 lb down and 77 lb up at 13-9-4, 1185 lb down and 77 lb up at 15-9-4, 1185 lb down and 77 lb up at 17-9-4, and 1185 lb down and 77 lb up at 19-9-4, and 1185 lb down and 77 lb up at 21-9-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- Attic room checked for L/360 deflection.

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (lb/ft)
Vert: 1-2=-60, 2-3=-80, 3-4=-60, 6-7=-60, 7-8=-80, 8-9=-60, 13-14=-20, 11-13=-40, 10-11=-20, 3-15=-20, 7-15=-20, 4-6=-60
Drag: 8-11=-10, 2-13=-10
Concentrated Loads (lb)
Vert: 16=-401 (B), 17=-401 (B), 18=-10 (B), 19=-120 (B), 20=-249 (B), 21=-249 (B), 22=-249 (B), 23=-249 (B), 24=-249 (B), 25=-249 (B), 26=-249 (B)



September 23, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	176525561
252130-A	C1	ROOF SPECIAL	5	1	Job Reference (optional)	

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:05
ID:oZsdJhAH7sgso7cS4ggLwVyrqezV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

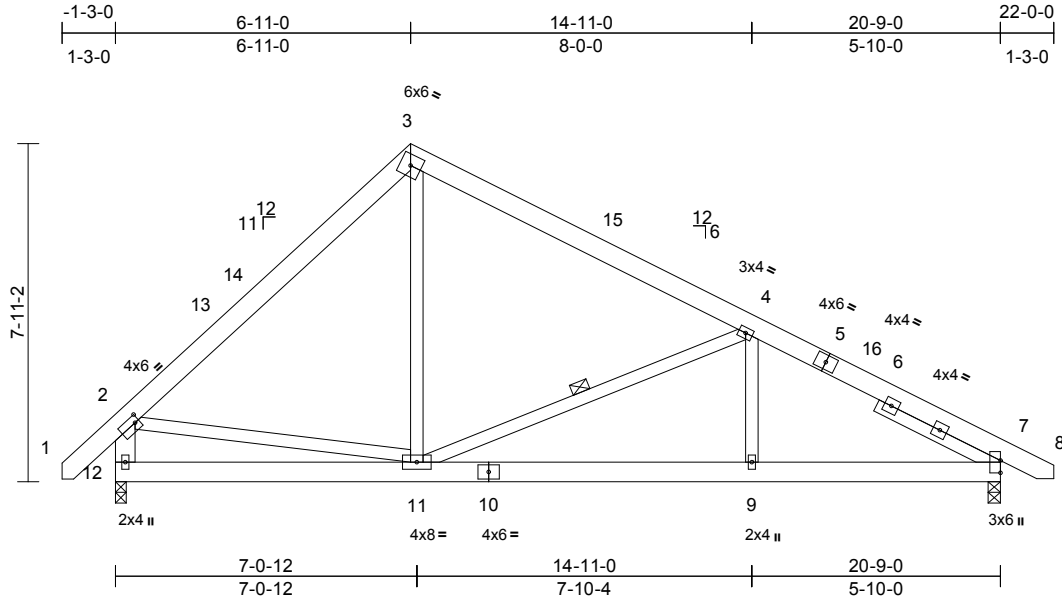

Scale = 1:54

Plate Offsets (X, Y): [2:0-1-4,0-2-0]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.27	Vert(LL)	-0.03	9-11	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.22	Vert(CT)	-0.06	9-11	>999	240		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.20	Horz(CT)	0.01	7	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.02	9-11	>999	240	Weight: 158 lb	FT = 20%

LUMBER

TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
WEBS 2x4 SP No.2 *Except* 12-2:2x6 SP No.1
SLIDER Right 2x4 SP No.2 -- 3-2-6

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

WEBS 1 Row at midpt 4-11

REACTIONS (size) 7=0-3-8, 12=0-3-0
Max Horiz 12=-174 (LC 10)
Max Uplift 7=-74 (LC 13), 12=-40 (LC 13)
Max Grav 7=883 (LC 1), 12=903 (LC 1)

FORCES

(lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/55, 2-3=-862/295, 3-4=-708/295,
4-7=-1288/372, 7-8=0/0, 2-12=-843/366
BOT CHORD 11-12=-190/331, 9-11=-232/1060,
7-9=-232/1060
WEBS 3-11=-46/433, 4-11=-591/271, 4-9=0/275,
2-11=-26/390

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust)
Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) -1-1-6 to 3-3-7, Interior (1) 3-3-7 to 6-11-0, Exterior(2R) 6-11-0 to 11-3-13, Interior (1) 11-3-13 to 21-9-10 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.

- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 40 lb uplift at joint 12 and 74 lb uplift at joint 7.

LOAD CASE(S) Standard



September 23,2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-A	C1GE	ROOF SPECIAL SUPPORT	1	1	176525562
Job Reference (optional)					

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:05
ID:oZsdJhAH7sgso7cS4ggLwVyzqzV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

Page: 1

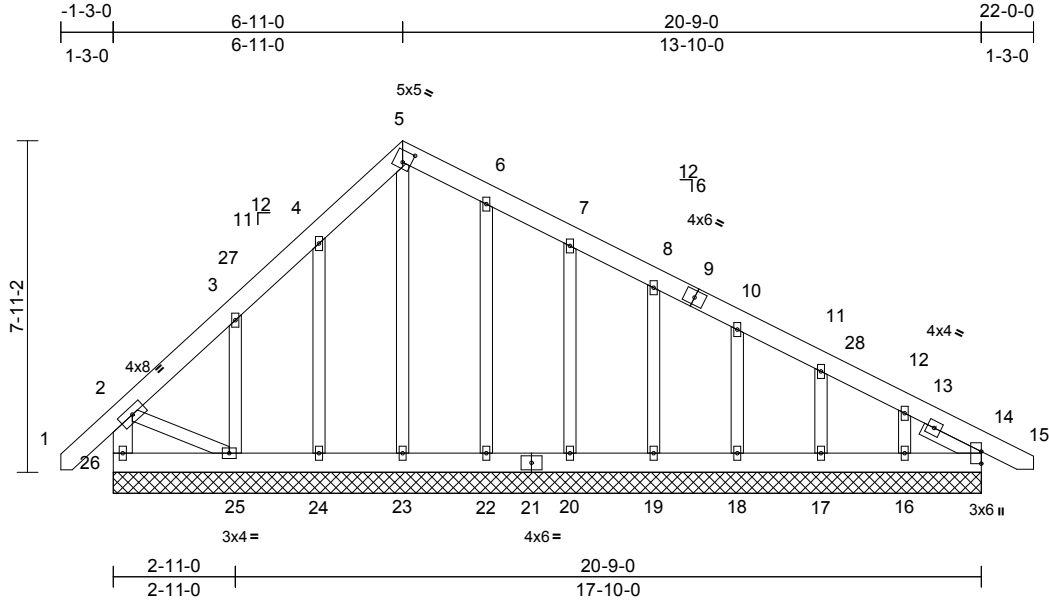

Scale = 1:55.1

Plate Offsets (X, Y): [5:0-2-6,0-3-4]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.07	Vert(LL)	n/a	-	n/a	999	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.02	Vert(CT)	n/a	-	n/a	999	
BCLL	0.0*	Rep Stress Incr	YES	WB	0.13	Horz(CT)	0.00	14	n/a	n/a	
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S							
Weight: 177 lb FT = 20%											

LUMBER	
TOP CHORD	2x6 SP No.1
BOT CHORD	2x6 SP No.1
WEBS	2x6 SP No.1 *Except* 2-25:2x4 SP No.2
OTHERS	2x4 SP No.2
SLIDER	Right 2x4 SP No.2 -- 1-6-6

BRACING	
TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size)	14=20-9-0, 16=20-9-0, 17=20-9-0, 18=20-9-0, 19=20-9-0, 20=20-9-0, 22=20-9-0, 23=20-9-0, 24=20-9-0, 25=20-9-0, 26=20-9-0
Max Horiz	26=-174 (LC 10)
Max Uplift	16=-69 (LC 13), 17=-31 (LC 13), 18=-34 (LC 13), 19=-33 (LC 13), 20=-40 (LC 13), 22=-16 (LC 13), 24=-59 (LC 12), 25=-147 (LC 12), 26=-59 (LC 8)
Max Grav	14=159 (LC 1), 16=139 (LC 26), 17=164 (LC 1), 18=159 (LC 26), 19=160 (LC 1), 20=162 (LC 26), 22=162 (LC 26), 23=142 (LC 22), 24=176 (LC 19), 25=243 (LC 19), 26=224 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension	
TOP CHORD	2-26=-200/72, 1-2=0/55, 2-3=-119/110, 3-4=-79/133, 4-5=-102/244, 5-6=-90/223, 6-7=-75/180, 7-8=-59/117, 8-10=-68/58, 10-11=-76/23, 11-12=-85/26, 12-14=-187/51, 14-15=0/0

BOT CHORD	25-26=-82/169, 24-25=-49/207, 23-24=-49/207, 22-23=-49/207, 20-22=-49/207, 19-20=-49/207, 18-19=-49/207, 17-18=-49/207, 16-17=-49/207, 14-16=-49/207
WEBS	5-23=-148/20, 4-24=-141/139, 3-25=-161/263, 6-22=-122/72, 7-20=-122/119, 8-19=-120/107, 10-18=-120/107, 11-17=-124/123, 12-16=-100/197, 2-25=-100/246

NOTES

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Corner(3E) -1-1-6 to 3-3-7, Exterior(2N) 3-3-7 to 6-11-0, Corner(3R) 6-11-0 to 11-3-13, Exterior(2N) 11-3-13 to 21-9-10 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 4) All plates are 2x4 (||) MT20 unless otherwise indicated.
- 5) Gable requires continuous bottom chord bearing.
- 6) Gable studs spaced at 2-0-0 oc.
- 7) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 8) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.

- 9) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 59 lb uplift at joint 26, 59 lb uplift at joint 24, 147 lb uplift at joint 25, 16 lb uplift at joint 22, 40 lb uplift at joint 20, 33 lb uplift at joint 19, 34 lb uplift at joint 18, 31 lb uplift at joint 17 and 69 lb uplift at joint 16.

LOAD CASE(S) Standard



September 23, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	
252130-A	D1	COMMON	6	1	Job Reference (optional)	I76525563

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:06
ID:oZsdJhAH7sgso7cS4ggLwVYqezV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

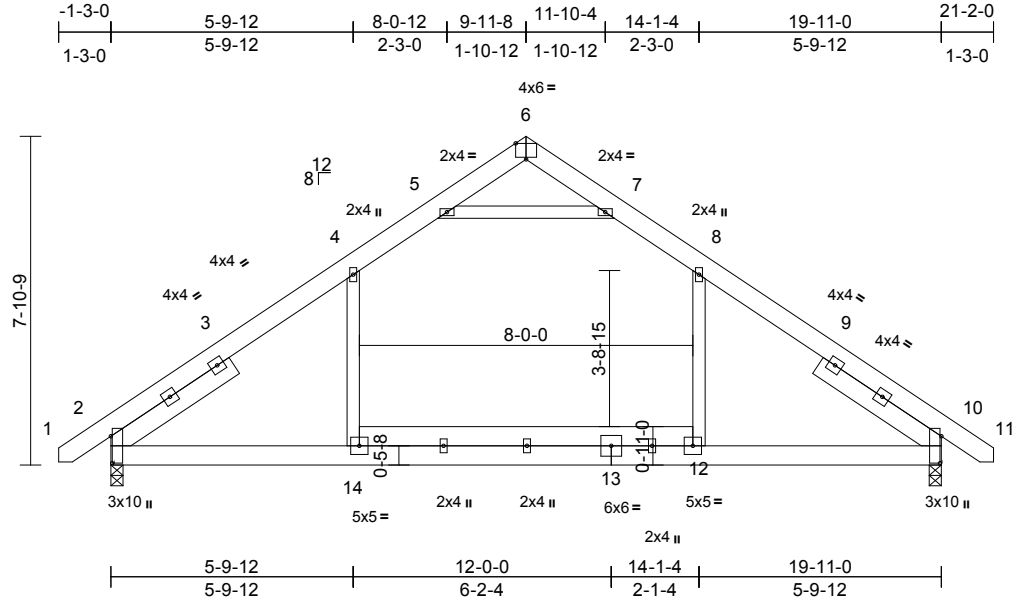

Scale = 1:55.3

Plate Offsets (X, Y): [2:0-7-12,0-0-6], [6:0-3-0,Edge], [10:0-7-12,0-0-6]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.35	Vert(LL)	-0.12	12-14	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.37	Vert(CT)	-0.17	12-14	>999	240		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.35	Horz(CT)	0.02	10	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.08	2-14	>999	240	Weight: 164 lb	FT = 20%

LUMBER

TOP CHORD	2x6 SP No.1
BOT CHORD	2x6 SP No.1
WEBS	2x4 SP No.2
SLIDER	Left 2x6 SP No.2 -- 3-6-6, Right 2x6 SP No.2 -- 3-6-6

BRACING

TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS	(size) 2=0-3-8, 10=0-3-8
	Max Horiz 2=177 (LC 9)
	Max Uplift 2=-55 (LC 12), 10=-55 (LC 13)
	Max Grav 2=1072 (LC 19), 10=1072 (LC 20)


FORCES	(lb) - Maximum Compression/Maximum Tension
TOP CHORD	1-2=-1/0, 2-4=-1345/193, 4-5=-896/253, 5-6=-28/247, 6-7=-28/248, 7-8=-896/253, 8-10=-1345/194, 10-11=-1/0
BOT CHORD	2-14=-42/963, 12-14=-42/963, 10-12=-42/963
WEBS	4-14=0/509, 8-12=0/509, 5-7=-1183/319

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) -1-1-1 to 3-3-12, Interior (1) 3-3-12 to 9-11-8, Exterior(2R) 9-11-8 to 14-1-4, Interior (1) 14-1-4 to 21-0-1 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.

- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 55 lb uplift at joint 2 and 55 lb uplift at joint 10.

LOAD CASE(S) Standard

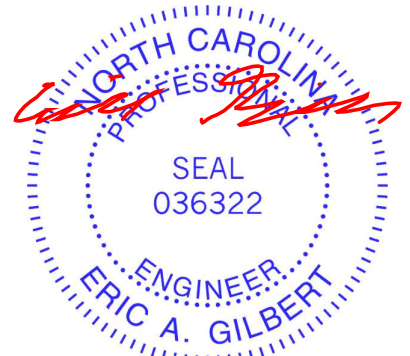

September 23,2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	176525564
252130-A	D1GE	GABLE	1	1	Job Reference (optional)	

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:06
ID:oZsdJhAH7sgso7cS4ggLwVvqezV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

Page: 1

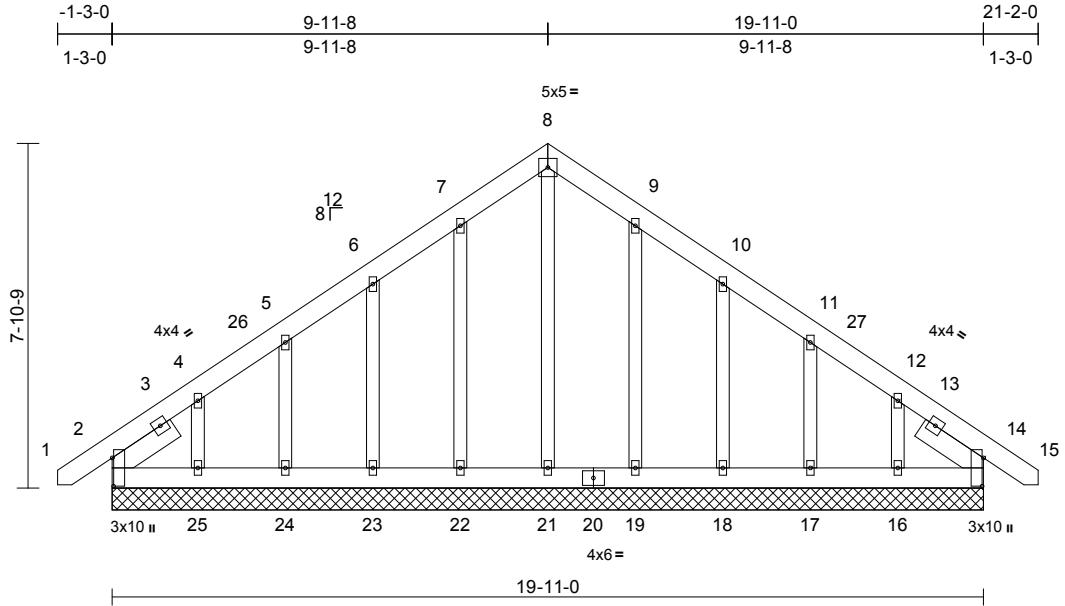

Scale = 1:52.7

Plate Offsets (X, Y): [2:0-7-12,0-0-6], [14:0-7-12,0-0-6]												
Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.04	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.02	Vert(CT)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.13	Horz(CT)	0.00	14	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S							Weight: 172 lb	FT = 20%

LUMBER	
TOP CHORD	2x6 SP No.1
BOT CHORD	2x6 SP No.1
OTHERS	2x4 SP No.2
SLIDER	Left 2x6 SP No.2 -- 1-8-9, Right 2x6 SP No.2 -- 1-8-9

BRACING	
TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS	(size)	2=19-11-0, 14=19-11-0, 16=19-11-0, 17=19-11-0, 18=19-11-0, 19=19-11-0, 21=19-11-0, 22=19-11-0, 23=19-11-0, 24=19-11-0, 25=19-11-0
Max Horiz		2=177 (LC 9)
Max Uplift		2=-61 (LC 8), 14=-13 (LC 9), 16=-91 (LC 13), 17=-42 (LC 13), 18=-54 (LC 13), 19=-30 (LC 13), 22=-33 (LC 12), 23=-53 (LC 12), 24=-41 (LC 12), 25=-101 (LC 12)
Max Grav		2=206 (LC 20), 14=180 (LC 1), 16=177 (LC 20), 17=172 (LC 20), 18=175 (LC 20), 19=170 (LC 20), 21=138 (LC 22), 22=175 (LC 19), 23=173 (LC 19), 24=170 (LC 19), 25=192 (LC 19)

FORCES	(lb) - Maximum Compression/Maximum Tension
TOP CHORD	1-2=-1/0, 2-4=-185/137, 4-5=-124/93, 5-6=-115/89, 6-7=-104/159, 7-8=-136/223, 8-9=-136/223, 9-10=-103/159, 10-11=-75/75, 11-12=-84/40, 12-14=-145/74, 14-15=-1/0

BOT CHORD	2-25=-64/166, 24-25=-64/166, 23-24=-64/166, 22-23=-64/166, 21-22=-64/166, 19-21=-64/166, 18-19=-64/166, 17-18=-64/166, 16-17=-64/166, 14-16=-64/166
WEBS	8-21=-140/36, 7-22=-135/91, 6-23=-133/130, 5-24=-132/122, 4-25=-145/185, 9-19=-130/91, 10-18=-134/130, 11-17=-133/122, 12-16=-140/183

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Corner(3E) -1-1-1 to 3-3-12, Exterior(2N) 3-3-12 to 9-11-8, Corner(3R) 9-11-8 to 14-4-5, Exterior(2N) 14-4-5 to 21-0-1 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
 - All plates are 2x4 (||) MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Gable studs spaced at 2-0-0 oc.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 61 lb uplift at joint 2, 13 lb uplift at joint 14, 33 lb uplift at joint 22, 53 lb uplift at joint 23, 41 lb uplift at joint 24, 101 lb uplift at joint 25, 30 lb uplift at joint 19, 54 lb uplift at joint 18, 42 lb uplift at joint 17 and 91 lb uplift at joint 16.

LOAD CASE(S) Standard

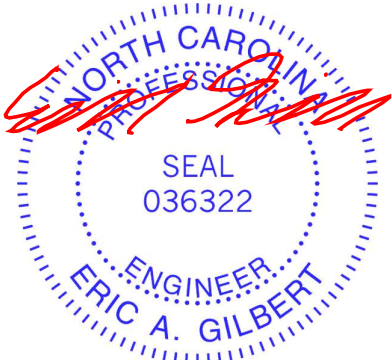

September 23,2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
 A MiTek Affiliate


818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	
252130-A	G1	COMMON	6	1	Job Reference (optional)	I76525565

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:06
ID:oZsdJhAH7sgso7cS4ggLwVyrqezV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

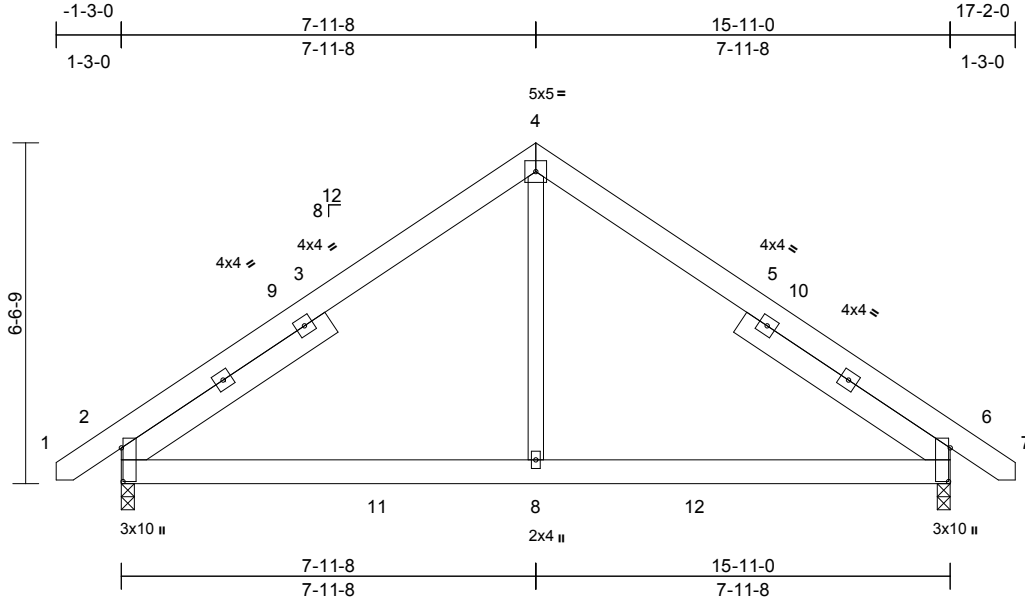

Scale = 1:44.2

Plate Offsets (X, Y): [2:0-7-12,0-0-6], [6:0-7-12,0-0-6]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.25	Vert(LL)	-0.03	2-8	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.31	Vert(CT)	-0.05	6-8	>999	240		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.13	Horz(CT)	0.01	6	n/a	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S		Wind(LL)	0.03	2-8	>999	240	Weight: 121 lb	FT = 20%

LUMBER

TOP CHORD	2x6 SP No.1
BOT CHORD	2x6 SP No.1
WEBS	2x4 SP No.2
SLIDER	Left 2x6 SP No.2 -- 4-9-14, Right 2x6 SP No.2 -- 4-9-14

- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 98 lb uplift at joint 2 and 98 lb uplift at joint 6.

LOAD CASE(S) Standard

BRACING

TOP CHORD	Structural wood sheathing directly applied or 6'-0-0 oc purlins.
BOT CHORD	Rigid ceiling directly applied or 10'-0-0 oc bracing.


REACTIONS (size)	2=0-3-0, 6=0-3-0
Max Horiz	2=145 (LC 9)
Max Uplift	2=-98 (LC 9), 6=-98 (LC 8)
Max Grav	2=822 (LC 2), 6=822 (LC 2)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD	1-2=-1/0, 2-4=-861/426, 4-6=-861/426, 6-7=-1/0
BOT CHORD	2-8=-195/612, 6-8=-195/612
WEBS	4-8=-204/582

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) -1-1-1 to 3-3-12, Interior (1) 3-3-12 to 7-11-8, Exterior(2R) 7-11-8 to 12-4-5, Interior (1) 12-4-5 to 17-0-1 zone; porch left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3'-06-00 tall by 2'-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.

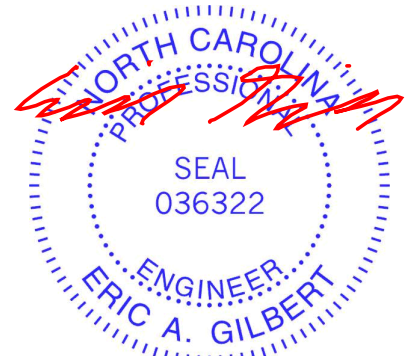

September 23, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932


Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-A	G1GE	COMMON SUPPORTED GAB	1	1	Job Reference (optional)

I76525566

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:06
ID:oZsdJhAH7sgso7cS4ggLwVyqezV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

Page: 1

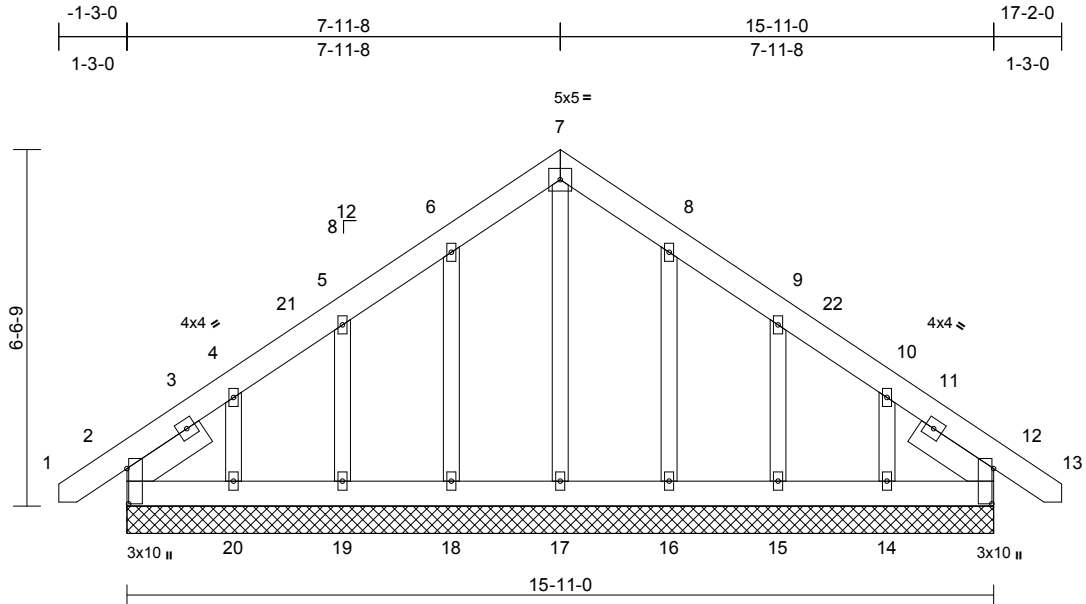

Scale = 1:42.3

Plate Offsets (X, Y): [2:0-7-12,0-0-6], [12:0-7-12,0-0-6]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.03	Vert(LL)	n/a	-	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.02	Vert(CT)	n/a	-	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.07	Horz(CT)	0.00	12	n/a		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-S						Weight: 132 lb	FT = 20%

LUMBER

TOP CHORD	2x6 SP No.1
BOT CHORD	2x6 SP No.1
OTHERS	2x4 SP No.2
SLIDER	Left 2x6 SP No.2 -- 1-8-9, Right 2x6 SP No.2 -- 1-8-9

WEBS7-17=-119/22, 6-18=-136/112, 5-19=-134/150,
4-20=-138/197, 8-16=-132/113,
9-15=-136/151, 10-14=-137/194**BRACING**

TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS


(size)	2=15-11-0, 12=15-11-0, 14=15-11-0, 15=15-11-0, 16=15-11-0, 17=15-11-0, 18=15-11-0, 19=15-11-0, 20=15-11-0
Max Horiz	2=145 (LC 9)
Max Uplift	2=-46 (LC 8), 12=-8 (LC 9), 14=-80 (LC 13), 15=-49 (LC 13), 16=-36 (LC 13), 18=-38 (LC 12), 19=-47 (LC 12), 20=-88 (LC 12)
Max Grav	2=191 (LC 20), 12=180 (LC 1), 14=172 (LC 20), 15=175 (LC 20), 16=172 (LC 20), 17=128 (LC 22), 18=176 (LC 19), 19=172 (LC 19), 20=184 (LC 19)

FORCES

(lb) - Maximum Compression/Maximum Tension	
TOP CHORD	1-2=-1/0, 2-4=-156/105, 4-5=-107/73, 5-6=-99/133, 6-7=-122/208, 7-8=-122/208, 8-9=-84/133, 9-10=-76/36, 10-12=-118/55, 12-13=-1/0
BOT CHORD	2-20=-50/150, 19-20=-50/150, 18-19=-50/150, 17-18=-50/150, 16-17=-50/150, 15-16=-50/150, 14-15=-50/150, 12-14=-50/150

NOTES

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Corner(3E) -1-1-1 to 3-3-12, Exterior(2N) 3-3-12 to 7-11-8, Corner(3R) 7-11-8 to 12-4-5, Exterior(2N) 12-4-5 to 17-0-1 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 4) All plates are 2x4 (||) MT20 unless otherwise indicated.
- 5) Gable requires continuous bottom chord bearing.
- 6) Gable studs spaced at 2-0-0 oc.
- 7) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 8) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- 9) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 46 lb uplift at joint 2, 8 lb uplift at joint 12, 38 lb uplift at joint 18, 47 lb uplift at joint 19, 88 lb uplift at joint 20, 36 lb uplift at joint 16, 49 lb uplift at joint 15 and 80 lb uplift at joint 14.
- 10) Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 12.

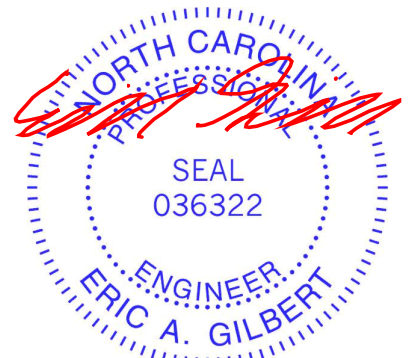LOAD CASE(S) Standard

September 23, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacompnents.com)


ENGINEERING BY
TRENCO
A MiTek Affiliate818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills	
252130-A	M1	MONOPITCH	7	1	Job Reference (optional)	I76525567

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:06
ID:oZsdJhAH7sgso7cS4ggLwVvqezV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

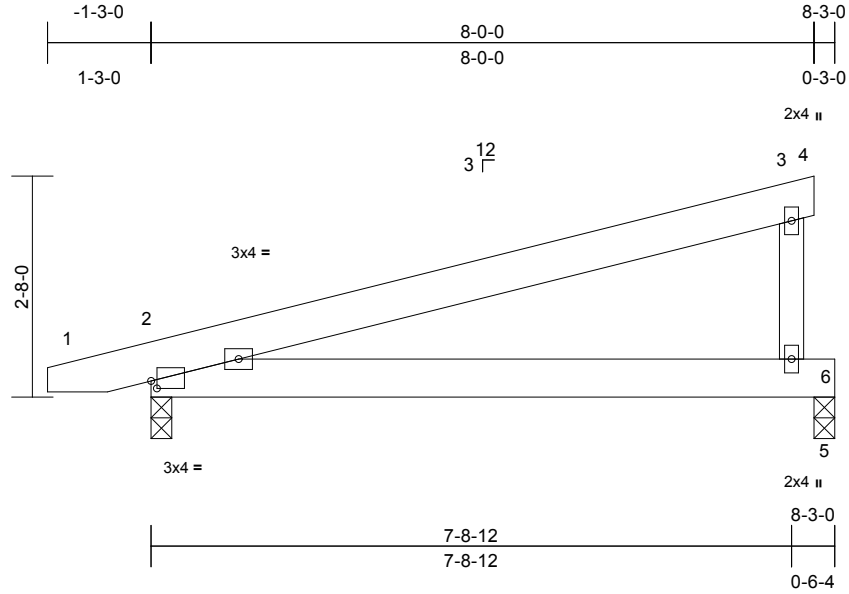

Scale = 1:27.8

Plate Offsets (X, Y): [2:0-0-13,0-1-1]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.36	Vert(LL)	-0.06	2-6	>999	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.27	Vert(CT)	-0.12	2-6	>818	240		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.00	Wind(LL)	0.09	2-6	>999	240		
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-P							Weight: 44 lb	FT = 20%

LUMBER

TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
WEBS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 6'-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10'-0-0 oc bracing.

REACTIONS (size) 2=0-3-0, 5=0-3-0
Max Horiz 2=72 (LC 8)
Max Uplift 2=-153 (LC 8), 5=-127 (LC 8)
Max Grav 2=384 (LC 1), 5=298 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/1, 2-3=-102/48, 3-4=-1/0, 3-6=-230/294
BOT CHORD 2-6=0/0, 5-6=0/0

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust)
Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E)-0-10-11 to 3-6-2, Interior (1) 3-6-2 to 8-0-0 zone; porch left exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3'-06-00 tall by 2'-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 153 lb uplift at joint 2 and 127 lb uplift at joint 5.

LOAD CASE(S) Standard



September 23,2025


WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932



Comtech, Inc, Fayetteville, NC - 28314, Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:06 Page: 1
ID:0zdJhAH7sgso7cS4qgLwVvazV-RfC?PsB70Hg3NSqPanL8w3uITXbGKWrcDoi7J4zJC?f




Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.47	Vert(LL)	-0.14	7	>966	360	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.22	Vert(CT)	-0.23	7	>611	240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.42	Horz(CT)	0.19	11	n/a	n/a		
BCDL	10.0	Code	IRC2021/TP12014	Matrix-S		Wind(LL)	0.21	7	>666	240	Weight: 98 lb	FT = 20%

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust)
Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) -0-10-11 to 3-6-2, Interior (1) 3-6-2 to 20-0-0 zone; porch left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.

- LOAD CASE(S) Standard

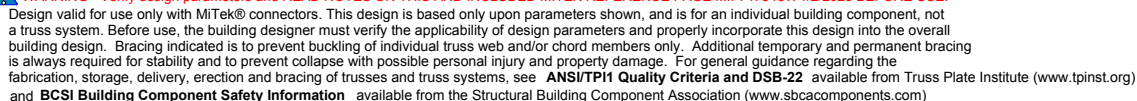

Comtech, Inc, Fayetteville, NC - 28314, Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:06 Page: 1
ID:0zdJhAH7sgso7cS4qgLwVvazV-RfC?PsB70Hg3NSqPanL8w3uITXbGKWrcDoi7J4zJC?f

LOAD CASE(S) Standard

NOTES

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust)
Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 4) Gable requires continuous bottom chord bearing.
- 5) Gable studs spaced at 2'-0" oc.
- 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.




WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbccomponents.com)

ENGINEERING BY
TRENCO
A Mitek Affiliat

818 Soundside Road
Edenton, NC 27932

Page: 1


Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-A	PB2	Piggyback	10	1	Job Reference (optional)

I76525571

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Sep 7 2025 Print: 25.3.0 S Sep 7 2025 MiTek Industries, Inc. Mon Sep 22 11:55:06
ID:oZsdJhAH7sgso7cS4ggLwVyqezV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

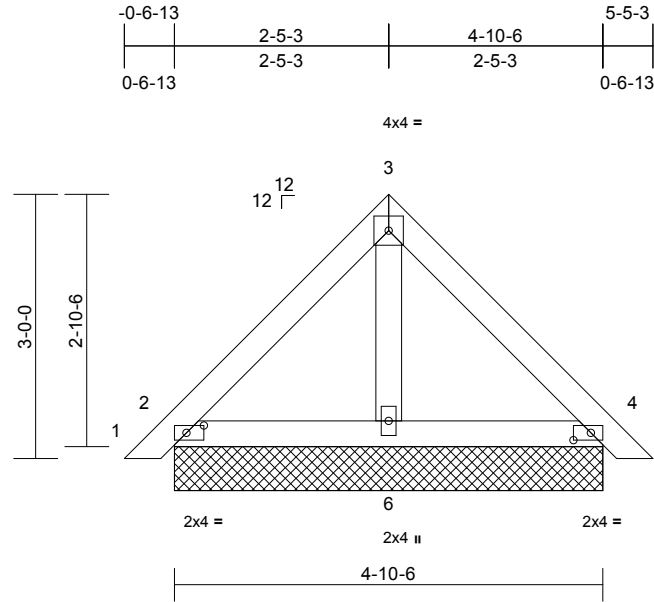

Scale = 1:26.2

Plate Offsets (X, Y): [2:0-2-6,0-1-0], [4:0-2-6,0-1-0]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.17	Vert(LL)	n/a	-	n/a	999	MT20
TCDL	10.0	Lumber DOL	1.15	BC	0.04	Vert(CT)	n/a	-	n/a	999	244/190
BCLL	0.0*	Rep Stress Incr	YES	WB	0.01	Horz(CT)	0.00	4	n/a	n/a	
BCDL	10.0	Code	IRC2021/TPI2014	Matrix-P							Weight: 23 lb FT = 20%

LUMBER

TOP CHORD 2x4 SP No.1
BOT CHORD 2x4 SP No.1
OTHERS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 6'-0" oc purlins.
BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing.

REACTIONS

(size) 2=4-10-6, 4=4-10-6, 6=4-10-6
Max Horiz 2=67 (LC 11)
Max Uplift 2=-24 (LC 13), 4=-28 (LC 13)
Max Grav 2=142 (LC 1), 4=142 (LC 1), 6=151 (LC 3)

FORCES

(lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/13, 2-3=-91/76, 3-4=-81/97, 4-5=0/13
BOT CHORD 2-6=-24/70, 4-6=-24/70
WEBS 3-6=-88/70

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2E) zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Gable requires continuous bottom chord bearing.
- Gable studs spaced at 6'-0" oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.

- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3'-06"-00 tall by 2'-00"-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 24 lb uplift at joint 2 and 28 lb uplift at joint 4.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.

LOAD CASE(S) Standard



September 23, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.




Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932

Symbols

PLATE LOCATION AND ORIENTATION

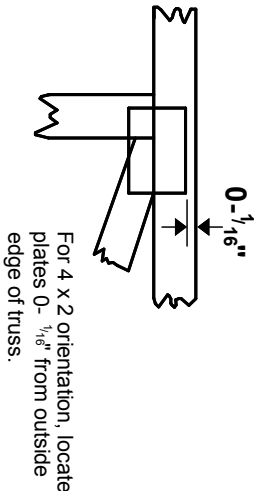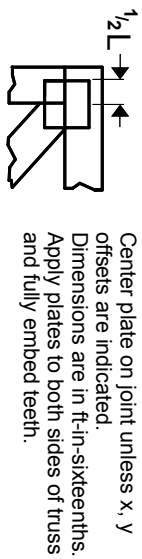

* Plate location details available in MITek software or upon request.

PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.


BEARING



Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number/letter where bearings occur. Min size shown is for crushing only.

Industry Standards:
ANSI/TP1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-22: Building Component Safety Information, Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

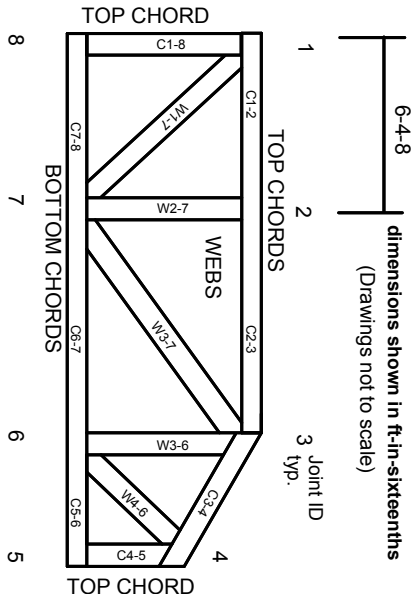

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

Product Code Approvals

ICC-ES Reports:
ESR-1988, ESR-2362, ESR-2685, ESR-3282
ESR-4722, ESL-1388

Design General Notes

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.
Lumber design values are in accordance with ANSI/TP1 1 section 6.3. These truss designs rely on lumber values established by others.

© 2023 MITek® All Rights Reserved

General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.

MITek

ENGINEERING BY
TRENCO
A MITek Affiliate

MITek Engineering Reference Sheet: MIL-7473 rev. 1/2/2023

RE: 252130-B
Lot 50 Magnolia Hills

Trenco
818 Soundside Rd
Edenton, NC 27932

Site Information:

Customer: Precision Custom Homes and Renovations Project Name: 252130-B
Lot/Block: Model:
Address: 223 Myrtle Oak Dr. Subdivision:
City: Cameron State: NC

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: IRC2021/TPI2014 Design Program: MiTek 20/20 25.3
Wind Code: ASCE 7-16 Wind Speed: 130 mph
Roof Load: 40.0 psf Floor Load: N/A psf

This package includes 13 individual, dated Truss Design Drawings and 0 Additional Drawings.

No.	Seal#	Truss Name	Date
1	I75911624	ET1	8/26/2025
2	I75911625	F1	8/26/2025
3	I75911626	F1A	8/26/2025
4	I75911627	F2	8/26/2025
5	I75911628	F2A	8/26/2025
6	I75911629	F3	8/26/2025
7	I75911630	F4	8/26/2025
8	I75911631	F5	8/26/2025
9	I75911632	F5A	8/26/2025
10	I75911633	F6	8/26/2025
11	I75911634	F6A	8/26/2025
12	I75911635	FG1	8/26/2025
13	I75911636	FG2	8/26/2025

The truss drawing(s) referenced above have been prepared by
Truss Engineering Co. under my direct supervision
based on the parameters provided by Comtech, Inc - Fayetteville.

Truss Design Engineer's Name: Gilbert, Eric

My license renewal date for the state of North Carolina is December 31, 2025.

North Carolina COA: C-0844

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to TRENCO. Any project specific information included is for TRENCO customers file reference purpose only, and was not taken into account in the preparation of these designs. TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.



Page: 1

818 Soundside Road
Edenton, NC 27932


Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-B	F1	Floor	4	1	I75911625
Job Reference (optional)					

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Aug 20 2025 Print: 25.3.0 S Aug 20 2025 MiTek Industries, Inc. Tue Aug 26 10:18:44

Page: 1

ID:oZsdJhAH7sgso7cS4ggLwVyzqzV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

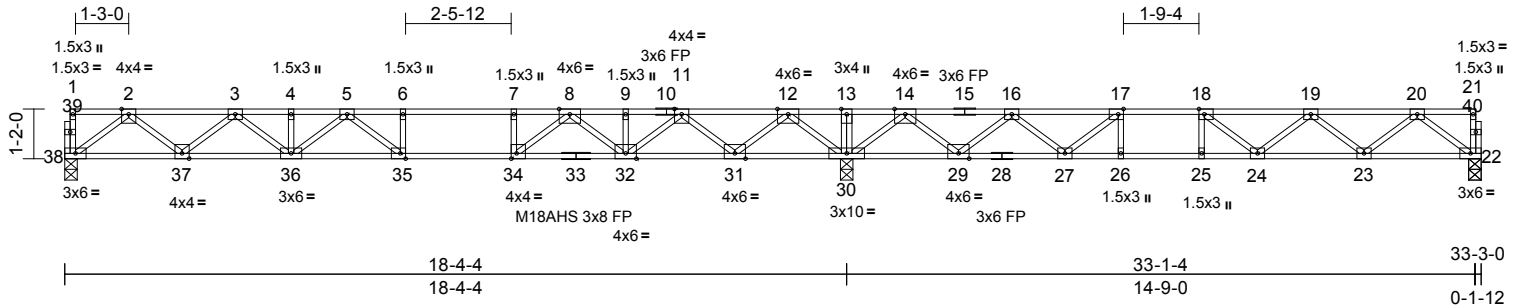

Scale = 1:54.1									
Plate Offsets (X, Y): [17:0-1-8,Edge], [18:0-1-8,Edge], [34:0-1-8,Edge], [35:0-1-8,Edge]									
Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in (loc)	l/defl	L/d
TCLL	40.0	Plate Grip DOL	1.00	TC	0.75	Vert(LL)	-0.28 35-36	>780	480
TCDL	10.0	Lumber DOL	1.00	BC	1.00	Vert(CT)	-0.38 35-36	>569	360
BCLL	0.0	Rep Stress Incr	YES	WB	0.65	Horz(CT)	0.05 22	n/a	n/a
BCDL	5.0	Code	IRC2021/TPI2014	Matrix-S					
Weight: 165 lb FT = 20%F, 11%E									

LUMBER
TOP CHORD 2x4 SP 2400F 2.0E(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing.

REACTIONS (size) 22=0-3-8, 30=0-3-8, 38=0-3-8
Max Grav 22=704 (LC 4), 30=2166 (LC 1), 38=879 (LC 3)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-38=-36/0, 21-22=-46/0, 1-2=-2/0, 2-3=-1826/0, 3-4=-2993/0, 4-5=-2993/0, 5-6=-3302/0, 6-7=-3302/0, 7-8=-3302/0, 8-9=-2097/60, 9-11=-2097/60, 11-12=-373/647, 12-13=0/2712, 13-14=0/2712, 14-16=-464/1230, 16-17=-1636/622, 17-18=-2137/245, 18-19=-2064/14, 19-20=-1398/0, 20-21=-3/0
BOT CHORD 37-38=0/1097, 36-37=0/2531, 35-36=0/3283, 34-35=0/3302, 32-34=0/2687, 31-32=-336/1342, 30-31=-1353/0, 29-30=-1582/0, 27-29=-917/1195, 26-27=-245/2137, 25-26=-245/2137, 24-25=-245/2137, 23-24=0/1910, 22-23=0/859

WEBS
2-38=-1374/0, 2-37=0/949, 3-37=-917/0, 3-36=0/591, 4-36=-80/0, 5-36=-370/0, 5-35=-371/279, 6-35=-157/117, 12-30=-1802/0, 20-22=-1075/0, 20-23=0/702, 19-23=-665/0, 19-24=-145/201, 14-30=-1551/0, 14-29=0/1132, 16-29=-1081/0, 16-27=0/742, 13-30=-113/0, 12-31=0/1373, 11-31=-1321/0, 11-32=0/1025, 9-32=-146/0, 8-32=-820/0, 8-34=0/1108, 7-34=-524/0, 17-27=-961/0, 17-26=0/298, 18-24=-93/370, 18-25=-270/0

- NOTES**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are MT20 plates unless otherwise indicated.
 - 3) All plates are 3x4 (=) MT20 unless otherwise indicated.
 - 4) Plates checked for a plus or minus 1 degree rotation about its center.
 - 5) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 6) CAUTION, Do not erect truss backwards.
- LOAD CASE(S)** Standard




August 26,2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacompoments.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate
818 Soundside Road
Edenton, NC 27932

Comtech, Inc, Fayetteville, NC - 28314, Run: 25.20 E Jun 11 2025 Print: 25.2.0 E Jun 11 2025 MiTek Industries, Inc. Tue Aug 26 11:22:15 Page: 1
ID:oZsdJhAH7sgso7cS4ggLwVyqezV-q8dA1BKujNfOLYQnYX7?ZaOfwf2NIzkbkhOPUmyk_v7

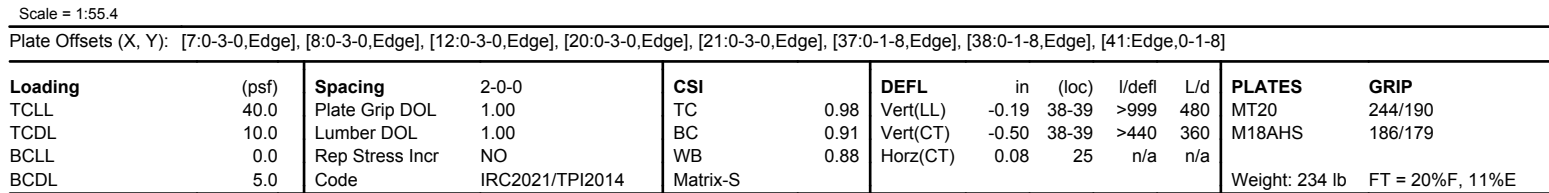

August 26, 2025

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.**
 Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Components Association (www.sbcacomponents.com)

 **ENGINEERING BY**
TRENCO
 A MiTek Affiliate


818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-B	F2	FLOOR	3	1	175911627
Job Reference (optional)					

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Aug 20 2025 Print: 25.3.0 S Aug 20 2025 MiTek Industries, Inc. Tue Aug 26 10:18:44
ID:oZsdJhAH7sgso7cS4ggLwVyqezV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

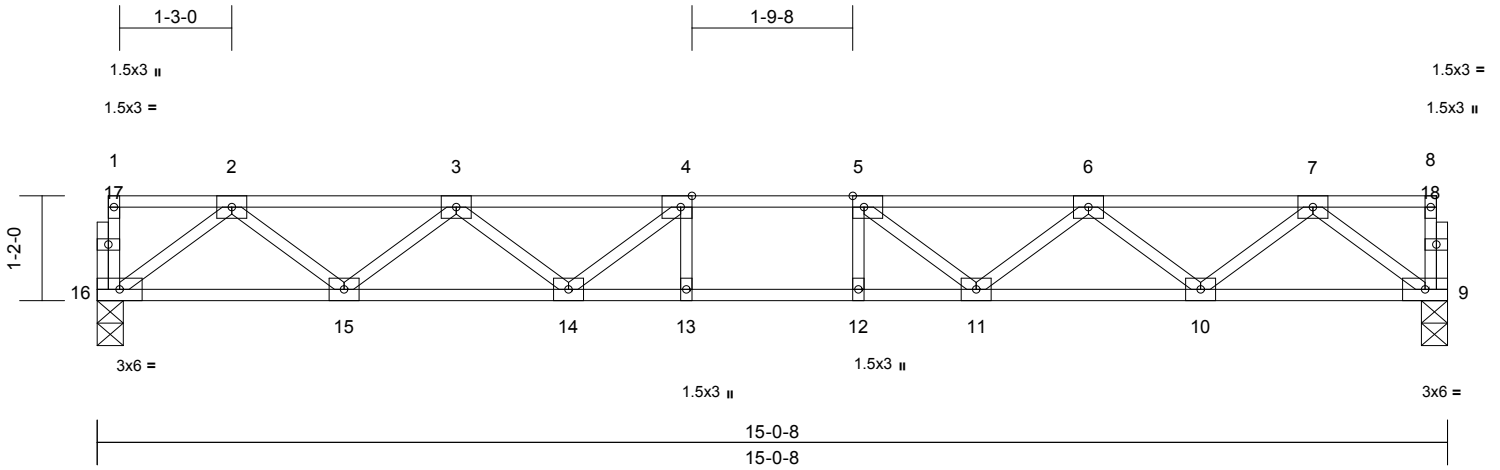

Scale = 1:25.7									
Plate Offsets (X, Y): [4:0-1-8,Edge], [5:0-1-8,Edge]									
Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in (loc)	l/defl	L/d
TCLL	40.0	Plate Grip DOL	1.00	TC	0.34	Vert(LL)	-0.15 12-13	>999	480
TCDL	10.0	Lumber DOL	1.00	BC	0.72	Vert(CT)	-0.20 12-13	>886	360
BCLL	0.0	Rep Stress Incr	YES	WB	0.41	Horz(CT)	0.04 9	n/a	n/a
BCDL	5.0	Code	IRC2021/TPI2014	Matrix-S					
						PLATES		GRIP	
						MT20		244/190	
						Weight: 75 lb		FT = 20%F, 11%E	

LUMBER
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)


BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size) 9=0-3-8, 16=0-3-8
Max Grav 9=807 (LC 1), 16=807 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-16=-42/0, 8-9=-42/0, 1-2=-2/0, 2-3=-1656/0, 3-4=-2575/0, 4-5=-2865/0, 5-6=-2575/0, 6-7=-1656/0, 7-8=-2/0
BOT CHORD 15-16=0/1000, 14-15=0/2277, 13-14=0/2865, 12-13=0/2865, 11-12=0/2865, 10-11=0/2277, 9-10=0/1000
WEBS 2-16=-1252/0, 2-15=0/853, 3-15=-809/0, 3-14=0/447, 4-14=-545/0, 4-13=-126/155, 7-9=-1252/0, 7-10=0/853, 6-10=-809/0, 6-11=0/447, 5-11=-545/0, 5-12=-126/155

- NOTES**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are 3x4 (=) MT20 unless otherwise indicated.
 - 3) Plates checked for a plus or minus 1 degree rotation about its center.
 - 4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

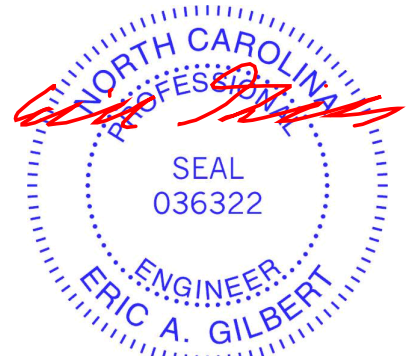

August 26, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacompnents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932

Comtech, Inc, Fayetteville, NC - 28314, Run: 25.30 S Aug 20 2025 Print: 25.3.0 S Aug 20 2025 MiTek Industries, Inc. Tue Aug 26 10:18:44 Page: 1
ID:oZsdJhAH7sgso7cS4ggLwVvgezV-RfC?PsB70Hg3NSgPqnL8w3uITxbGKWRcDoi7J4Jc?#f

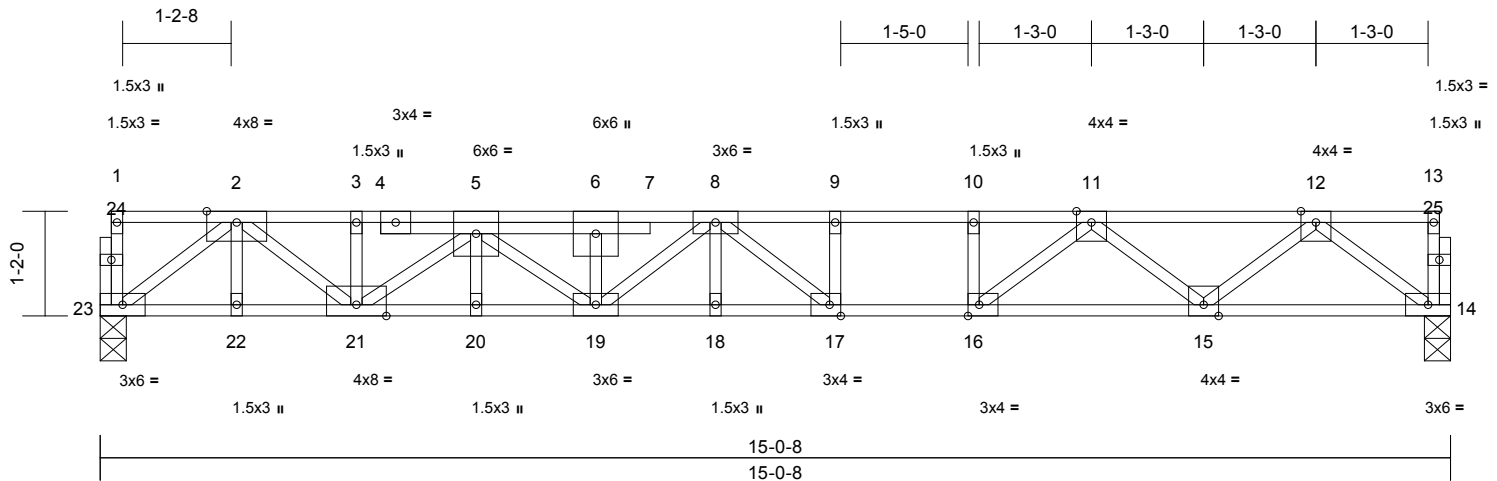


Plate Offsets (X, Y): [16:0-1-8,Edge], [17:0-1-8,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.76	Vert(LL)	-0.20	17-18	>893	480	MT20	244/190
TCDL	10.0	Lumber DOL	1.00	BC	0.81	Vert(CT)	-0.27	17-18	>648	360		
BCLL	0.0	Rep Stress Incr	NO	WB	0.61	Horz(CT)	0.04	14	n/a	n/a		
BCDL	5.0	Code	IRC2021/TPI2014	Matrix-S							Weight: 85 lb	FT = 20%F, 11%E

- 4) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 375 lb down at 4-4-12 on top chord. The design/selection of such connection device(s) is the responsibility of others.
- 5) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).


1) Dead + Floor Live (balanced): Lumber Increase=1.00,
Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 14-23=-10, 1-13=-100
Concentrated Loads (lb)
Vert: 5=-295 (F)

FORCES	(lb) - Maximum Compression/Maximum Tension
TOP CHORD	1-23=-54/0, 13-14=-34/0, 1-2=-3/0, 2-3=-2295/0, 3-5=-2300/0, 5-6=-3511/0, 6-8=-3511/0, 8-9=-3199/0, 9-10=-3199/0, 10-11=-3199/0, 11-12=-1829/0, 12-13=-2/0
BOT CHORD	22-23=0/1287, 21-22=0/1287, 20-21=0/3293, 19-20=0/3293, 18-19=0/3520, 17-18=0/3520 16-17=0/3199, 15-16=0/2572, 14-15=0/1107
WEBS	12-14=-1387/0, 12-15=0/939, 11-15=-968/0, 11-16=0/987, 10-16=-366/0, 2-23=-1601/0, 2-22=0/14, 2-21=0/1280, 3-21=-39/12, 5-21=-1238/0, 5-20=0/9, 5-19=0/270, 6-19=-164/0, 8-19=-140/101, 8-18=0/187, 8-17=-679/178, 9-17=-106/116

- 1) Unbalanced floor live loads have been considered for this design.
- 2) Plates checked for a plus or minus 1 degree rotation about its center.
- 3) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.




August 26, 2025

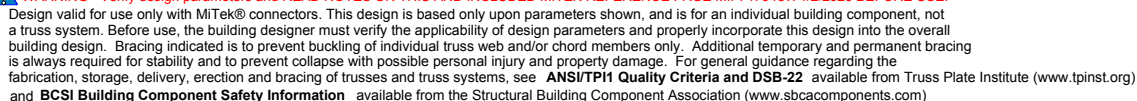

818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-B	F3	Floor	1	1	175911629
Job Reference (optional)					

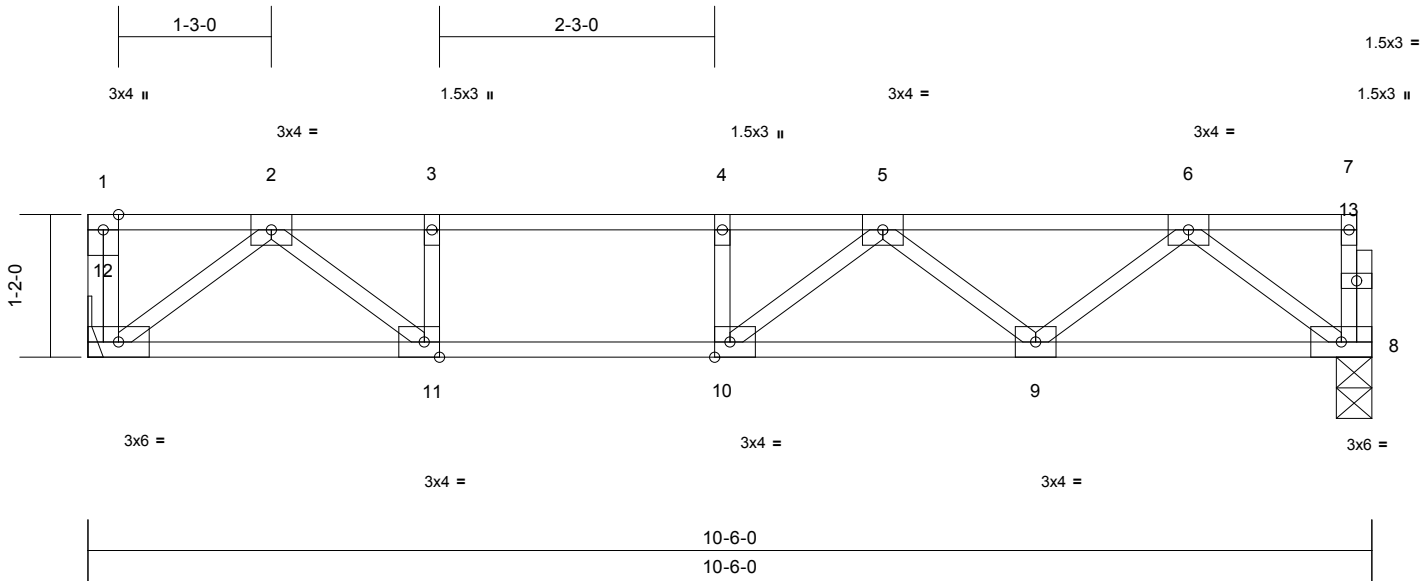


Scale = 1:18.8

Plate Offsets (X, Y): [10:0-1-8,Edge], [11:0-1-8,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.66	Vert(LL)	-0.14	9-10	>904	480	MT20	244/190
TCDL	10.0	Lumber DOL	1.00	BC	0.61	Vert(CT)	-0.18	9-10	>684	360		
BCLL	0.0	Rep Stress Incr	YES	WB	0.38	Horz(CT)	0.01	8	n/a	n/a		
BCDL	5.0	Code	IRC2021/TPI2014	Matrix-S							Weight: 53 lb	FT = 20%F, 11%E

- LUMBER**
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)
- BRACING**
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
- REACTIONS** (size) 8=0-3-8, 12= Mechanical
Max Grav 8=558 (LC 1), 12=564 (LC 1)
- FORCES** (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-12=-77/0, 7-8=-38/0, 1-2=0/0, 2-3=-1261/0, 3-4=-1261/0, 4-5=-1261/0, 5-6=-1043/0, 6-7=-2/0
BOT CHORD 11-12=0/656, 10-11=0/1261, 9-10=0/1325, 8-9=0/682
WEBS 2-12=-822/0, 2-11=0/791, 6-8=-852/0, 6-9=0/471, 5-9=-367/0, 5-10=-168/192, 4-10=-116/23, 3-11=-377/0

- NOTES**
1) Unbalanced floor live loads have been considered for this design.
2) Plates checked for a plus or minus 1 degree rotation about its center.
3) Refer to girder(s) for truss to truss connections.
4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
5) CAUTION, Do not erect truss backwards.
- LOAD CASE(S)** Standard

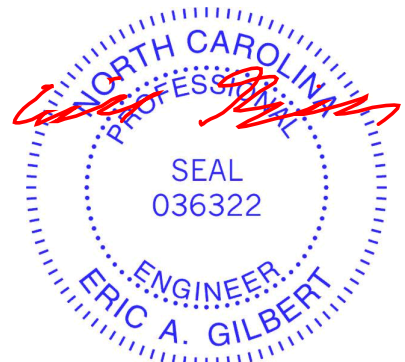


August 26,2025

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-B	F4	FLOOR	5	1	Job Reference (optional)
					I75911630

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Aug 20 2025 Print: 25.3.0 S Aug 20 2025 MiTek Industries, Inc. Tue Aug 26 10:18:44
ID:oZsdJhAH7sgso7cS4ggLwVvyezV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

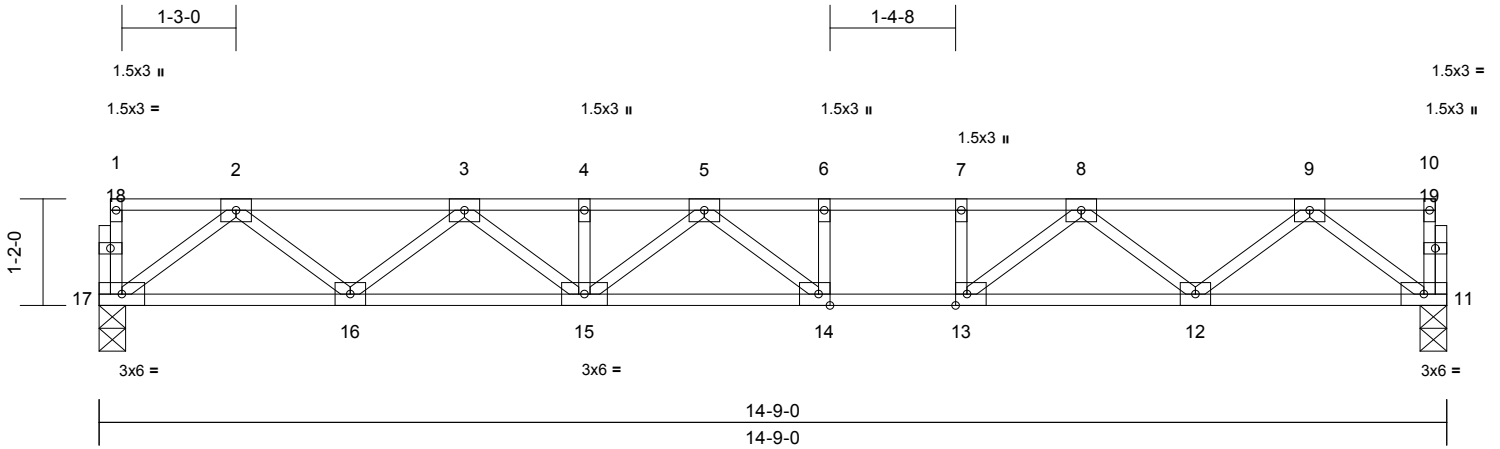

Scale = 1:25.2

Plate Offsets (X, Y): [13:0-1-8,Edge], [14:0-1-8,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.51	Vert(LL)	-0.17	14-15	>999	480	MT20	244/190
TCDL	10.0	Lumber DOL	1.00	BC	0.73	Vert(CT)	-0.24	14-15	>732	360		
BCLL	0.0	Rep Stress Incr	YES	WB	0.39	Horz(CT)	0.04	11	n/a	n/a		
BCDL	5.0	Code	IRC2021/TPI2014	Matrix-S							Weight: 76 lb	FT = 20%F, 11%E

LUMBER

TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING

TOP CHORD Structural wood sheathing directly applied or
6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc
bracing.


REACTIONS (size) 11=0-3-8, 17=0-3-8
Max Grav 11=791 (LC 1), 17=791 (LC 1)

FORCES (lb) - Maximum Compression/Maximum
Tension
TOP CHORD 1-17=-35/0, 10-11=-34/0, 1-2=-2/0,
2-3=-1607/0, 3-4=-2556/0, 4-5=-2556/0,
5-6=-2657/0, 6-7=-2657/0, 7-8=-2657/0,
8-9=-1596/0, 9-10=-2/0
BOT CHORD 16-17=0/983, 15-16=0/2207, 14-15=0/2744,
13-14=0/2657, 12-13=0/2204, 11-12=0/984
WEBS 2-17=-1230/0, 2-16=0/813, 3-16=-780/0,
3-15=0/446, 4-15=-75/0, 5-15=-253/0,
5-14=-298/246, 6-14=-121/86, 9-11=-1232/0,
9-12=0/797, 8-12=-791/0, 8-13=0/722,
7-13=-312/0

NOTES

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are 3x4 (=) MT20 unless otherwise indicated.
- 3) Plates checked for a plus or minus 1 degree rotation about its center.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard

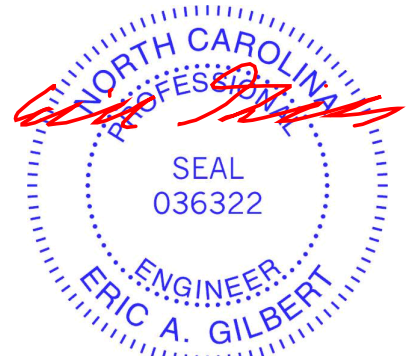

August 26, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-B	F5	Floor	3	1	175911631
Job Reference (optional)					

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Aug 20 2025 Print: 25.3.0 S Aug 20 2025 MiTek Industries, Inc. Tue Aug 26 10:18:44
ID:oZsdJhAH7sgso7cS4ggLwVyzV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

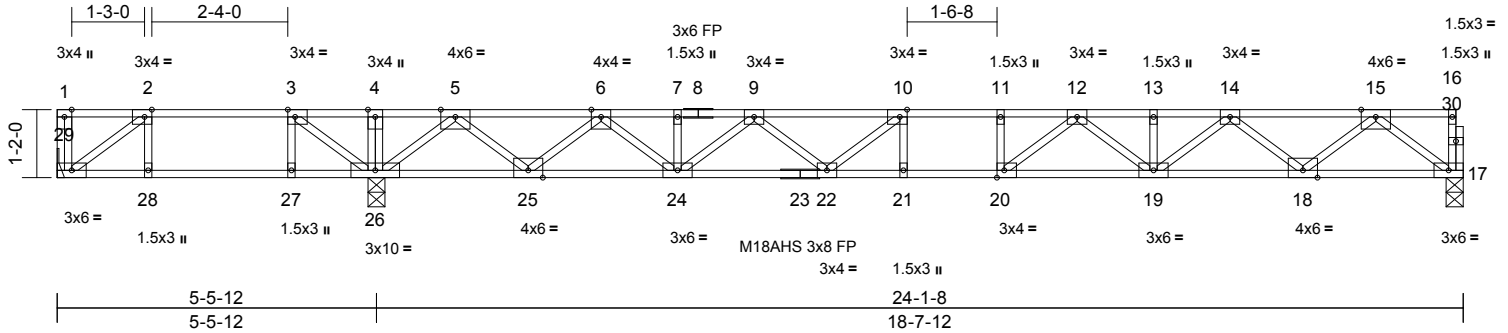

Scale = 1:39.5

Plate Offsets (X, Y): [2:0-1-8,Edge], [3:0-1-8,Edge], [10:0-1-8,Edge], [20:0-1-8,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL	40.0	Plate Grip DOL	1.00	TC	0.67	Vert(LL)	-0.28	21	>784	480	M18AHS	186/179
TCDL	10.0	Lumber DOL	1.00	BC	0.94	Vert(CT)	-0.39	21	>574	360	MT20	244/190
BCLL	0.0	Rep Stress Incr	NO	WB	0.60	Horz(CT)	0.07	17	n/a	n/a		
BCDL	5.0	Code	IRC2021/TPI2014	Matrix-S								
Weight: 122 lb											FT = 20%F, 11%E	

LUMBER

TOP CHORD 2x4 SP 2400F 2.0E(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing. Except:
6-0-0 oc bracing: 28-29,27-28,26-27.

REACTIONS

(size) 17=0-3-8, 26=0-3-8, 29=
Mechanical
Max Grav 17=960 (LC 7), 26=1573 (LC 8),
29=1686 (LC 3)

FORCES

(lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-29=-1588/0, 16-17=-36/0, 1-2=0/0,
2-3=-193/410, 3-4=0/1116, 4-5=0/1116,
5-6=-1352/0, 6-7=-2954/0, 7-9=-2954/0,
9-10=-3806/0, 10-11=-4043/0, 11-12=-4043/0,
12-13=-3383/0, 13-14=-3383/0,
14-15=-2032/0, 15-16=-2/0
BOT CHORD 28-29=-410/193, 27-28=-410/193,
26-27=-410/193, 25-26=0/394, 24-25=0/2268,
22-24=0/3536, 21-22=0/4043, 20-21=0/4043,
19-20=0/3787, 18-19=0/2823, 17-18=0/1206

WEBS

4-26=-20/115, 3-26=-1086/0, 3-27=0/198,
2-29=-238/506, 2-28=-147/0, 5-26=-1742/0,
5-25=0/1259, 6-25=-1206/0, 6-24=0/888,
7-24=-62/0, 9-24=-753/0, 9-22=0/487,
10-22=-557/48, 10-21=-132/123,
15-17=-1510/0, 15-18=0/1076,
14-18=-1029/0, 14-19=0/715, 13-19=-105/0,
12-19=-516/0, 12-20=-93/621, 11-20=-260/0

NOTES

- 1) Unbalanced floor live loads have been considered for this design.
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) Plates checked for a plus or minus 1 degree rotation about its center.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 6) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

- 1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 17-29=-10, 1-16=-100
Concentrated Loads (lb)
Vert: 1=-1450



August 26,2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932


Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-B	F5A	Floor	1	1	I75911632
Job Reference (optional)					

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Aug 20 2025 Print: 25.3.0 S Aug 20 2025 MiTek Industries, Inc. Tue Aug 26 10:18:44

Page: 1

ID:oZsdJhAH7sgso7cS4ggLwVvqezV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

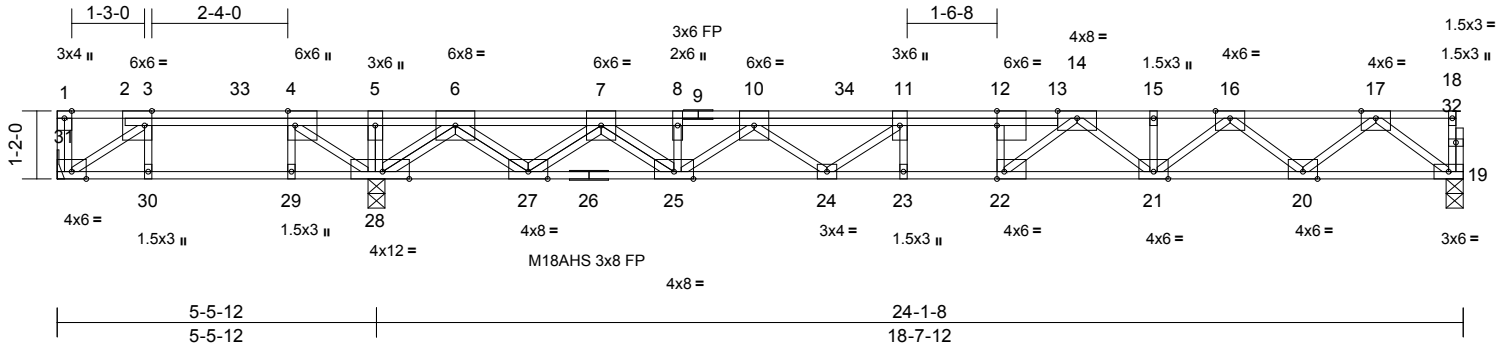

Scale = 1:39.5

Plate Offsets (X, Y): [3:0-1-8,Edge], [4:0-3-0,Edge], [22:0-1-8,Edge], [28:0-5-8,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.95	Vert(LL)	-0.35	23-24	>632	480	M18AHS 186/179
TCDL	10.0	Lumber DOL	1.00	BC	0.96	Vert(CT)	-0.48	23-24	>466	360	MT20 244/190
BCLL	0.0	Rep Stress Incr	NO	WB	0.84	Horz(CT)	0.07	19	n/a	n/a	
BCDL	5.0	Code	IRC2021/TPI2014	Matrix-S							
Weight: 153 lb FT = 20%F, 11%E											

LUMBER

TOP CHORD 2x4 SP 2400F 2.0E(flat)
BOT CHORD 2x4 SP 2400F 2.0E(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING

TOP CHORD Structural wood sheathing directly applied or 5-8-9 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS (size) 19=0-3-8, 28=0-3-8, 31=Mechanical
Max Uplift 31=335 (LC 4)
Max Grav 19=1210 (LC 4), 28=3059 (LC 8), 31=476 (LC 3)

FORCES

(lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-31=-258/0, 18-19=-36/0, 1-3=-16/36, 3-4=-603/1007, 4-5=0/3329, 5-6=0/3329, 6-7=-1061/84, 7-8=-4111/0, 8-10=-4106/0, 10-11=-6189/0, 11-12=-6524/0, 12-14=-6547/0, 14-15=-4621/0, 15-16=-4621/0, 16-17=-2663/0, 17-18=-2/0
BOT CHORD 30-31=-1007/603, 29-30=-1007/603, 28-29=-1007/603, 27-28=-1013/0, 25-27=0/2710, 24-25=0/5739, 23-24=0/6524, 22-23=0/6524, 21-22=0/5319, 20-21=0/3745, 19-20=0/1537
WEBS 5-28=0/614, 3-31=-730/1218, 4-28=-3566/0, 4-29=0/220, 3-30=-171/0, 6-28=-2854/0, 6-27=0/2180, 7-27=-2132/0, 7-25=0/1815, 8-25=-120/129, 10-25=-2038/0, 10-24=0/656, 11-24=-648/0, 11-23=-193/52, 17-19=-1925/0, 17-20=0/1466, 16-20=-1408/0, 16-21=0/1119, 15-21=-154/0, 14-21=-891/0, 14-22=0/1730, 12-22=-907/0

NOTES

- Unbalanced floor live loads have been considered for this design.
- All plates are MT20 plates unless otherwise indicated.
- Plates checked for a plus or minus 1 degree rotation about its center.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 335 lb uplift at joint 31.
- Load case(s) 3, 4, 10 has/have been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
- Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 19-31=-10, 1-18=-100
Concentrated Loads (lb)
Vert: 33=-940, 34=-800
- 1st Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 19-31=-10, 1-5=-100, 5-18=-20
Concentrated Loads (lb)
Vert: 33=-940, 34=-218
- 2nd Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 19-31=-10, 1-5=-20, 5-18=-100
Concentrated Loads (lb)
Vert: 33=-256, 34=-800
- 4th chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00

Uniform Loads (lb/ft)
Vert: 19-31=-10, 1-5=-100, 5-11=-20, 11-18=-100
Concentrated Loads (lb)
Vert: 33=-940, 34=-218




August 26, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932


Page: 1

LUMBER

NOTES

- LOAD CASE(S) Standard

- Ver: 1=245, 32=800
10) 4th chase Dead + Floor Live (unbalanced): Lumber
Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Ver: 20-31=-10, 1-6=-100, 6-12=-20, 12-19=-100
Concentrated Loads (lb)
Ver: 1=-900, 32=-218



 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITER REFERENCE PAGE MIT-1415 Rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Components Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliat


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-B	F6A	Floor	1	1	175911634
Job Reference (optional)					

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Aug 20 2025 Print: 25.3.0 S Aug 20 2025 MiTek Industries, Inc. Tue Aug 26 10:18:45
ID:oZsdJhAH7sgso7cS4ggLwVvqezV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

Page: 1

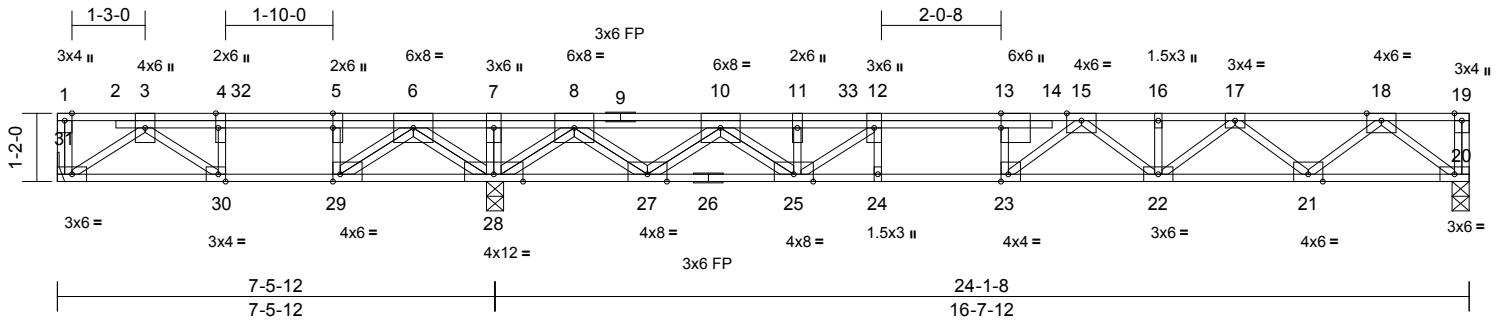

Scale = 1:39.4

Plate Offsets (X, Y): [4:0-3-0,Edge], [5:0-3-0,Edge], [13:0-3-0,Edge], [23:0-1-8,Edge], [29:0-1-8,Edge], [30:0-1-8,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.75	Vert(LL)	-0.21	23-24	>964	480	MT20
TCDL	10.0	Lumber DOL	1.00	BC	0.98	Vert(CT)	-0.28	23-24	>703	360	244/190
BCLL	0.0	Rep Stress Incr	NO	WB	0.70	Horz(CT)	0.05	20	n/a	n/a	
BCDL	5.0	Code	IRC2021/TPI2014	Matrix-S							
Weight: 157 lb FT = 20%F, 11%E											

LUMBER

TOP CHORD 2x4 SP 2400F 2.0E(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS (size) 20=0-3-8, 28=0-3-8, 31= Mechanical
Max Uplift 31=200 (LC 4)
Max Grav 20=997 (LC 7), 28=2925 (LC 1), 31=851 (LC 3)

FORCES

(lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-31=-46/34, 19-20=-39/0, 1-3=-17/0, 3-4=-1646/1142, 4-5=-1646/1142, 5-6=-1646/1142, 6-7=0/3508, 7-8=0/3508, 8-10=-431/34, 10-11=-3614/0, 11-12=-3649/0, 12-13=-4508/0, 13-15=-4517/0, 15-16=-3542/0, 16-17=-3542/0, 17-18=-2109/0, 18-19=0/0
BOT CHORD 30-31=-275/1106, 29-30=-1142/1646, 28-29=-2620/108, 27-28=-1386/0, 25-27=0/2081, 24-25=0/4508, 23-24=0/4508, 22-23=0/3953, 21-22=0/2935, 20-21=0/1247, 7-28=-352/0, 3-31=-1357/337, 3-30=-1083/674, 4-30=-434/601, 8-28=-2633/0, 8-27=0/2161, 10-27=-2111/0, 10-25=0/1955, 11-25=-725/221, 12-25=-1132/0, 12-24=-51/74, 18-20=-1565/0, 18-21=0/1122, 17-21=-1076/0, 17-22=0/775, 16-22=-137/0, 15-22=-525/0, 15-23=-297/1070, 13-23=-593/164, 6-28=-1850/0, 6-29=0/2954, 5-29=-1637/0

NOTES

- Unbalanced floor live loads have been considered for this design.
- Plates checked for a plus or minus 1 degree rotation about its center.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 200 lb uplift at joint 31.
- Load case(s) 3, 4, 10 has/have been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
- Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 20-31=-10, 1-19=-100
Concentrated Loads (lb)
Vert: 32=-1000, 33=-800
- 1st Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 20-31=-10, 1-7=-100, 7-19=-20
Concentrated Loads (lb)
Vert: 32=-1000, 33=-218
- 2nd Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 20-31=-10, 1-7=-20, 7-19=-100
Concentrated Loads (lb)
Vert: 32=-273, 33=-800
- 4th chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)

Vert: 20-31=-10, 1-7=-100, 7-12=-20, 12-19=-100
Concentrated Loads (lb)
Vert: 32=-1000, 33=-218



August 26, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacompnents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932


Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-B	FG1	Floor Girder	1	1	Job Reference (optional)
					I75911635

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Aug 20 2025 Print: 25.3.0 S Aug 20 2025 MiTek Industries, Inc. Tue Aug 26 10:18:45

Page: 1

ID:oZsdJhAH7sgso7cS4ggLwVyrqzV-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

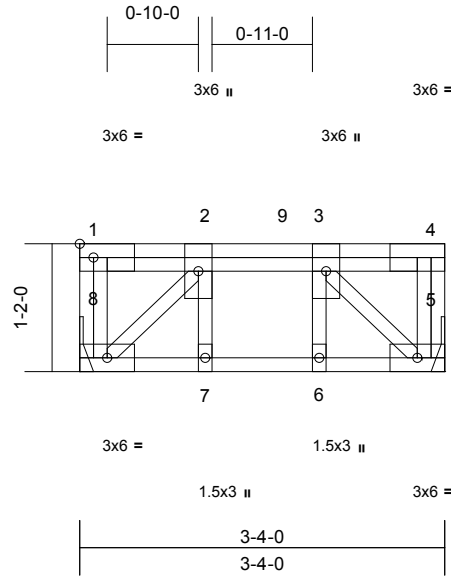

Scale = 1:21

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.00	TC	0.18	0.00	6	>999	480	MT20	244/190
TCDL	10.0	Lumber DOL	1.00	BC	0.13	0.00	6	>999	360		
BCLL	0.0	Rep Stress Incr	NO	WB	0.13	0.00	5	n/a	n/a		
BCDL	5.0	Code	IRC2021/TPI2014	Matrix-S						Weight: 25 lb	FT = 20%F, 11%E

LUMBER

Vert: 9=-464 (B)

TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING

TOP CHORD Structural wood sheathing directly applied or 3-4-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size) 5= Mechanical, 8= Mechanical
Max Grav 5=461 (LC 4), 8=395 (LC 3)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-8=-1/51, 4-5=-53/0, 1-2=0/0, 2-3=-409/0, 3-4=0/0

BOT CHORD 7-8=0/409, 6-7=0/409, 5-6=0/409


WEBS 2-8=-567/0, 2-7=0/34, 3-5=-567/0, 3-6=-17/0

NOTES

- Unbalanced floor live loads have been considered for this design.
- Plates checked for a plus or minus 1 degree rotation about its center.
- Refer to girder(s) for truss to truss connections.
- Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 544 lb down at 1-10-4 on top chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 5-8=-10, 1-4=-100
Concentrated Loads (lb)

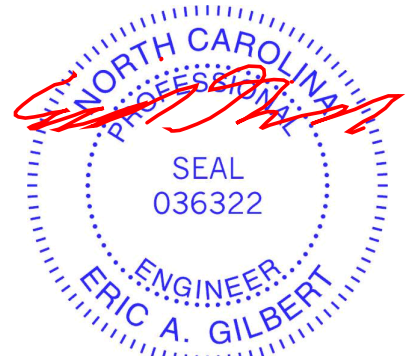

August 26, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Lot 50 Magnolia Hills
252130-B	FG2	FLOOR GIRDER	1	1	I75911636
Job Reference (optional)					

Comtech, Inc, Fayetteville, NC - 28314,

Run: 25.30 S Aug 20 2025 Print: 25.3.0 S Aug 20 2025 MiTek Industries, Inc. Tue Aug 26 10:18:45
ID:oZsdJhAH7sgso7cS4ggLwVvqezV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

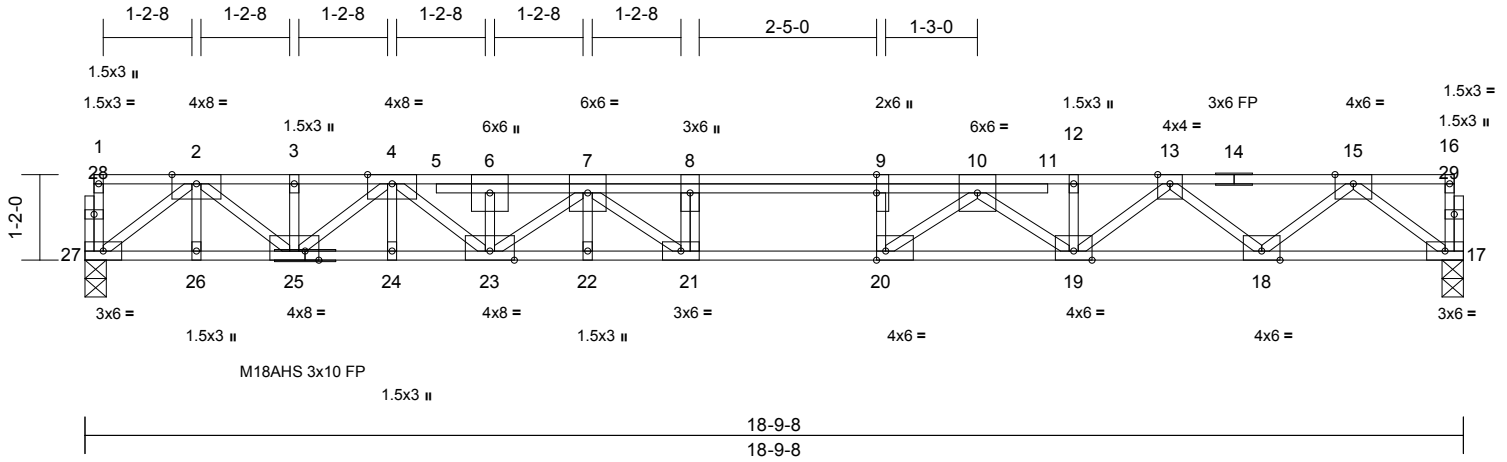

Scale = 1:31.4									
Plate Offsets (X, Y): [9:0-3-0,Edge], [20:0-1-8,Edge], [25:0-2-4,Edge]									
Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl
TCLL	40.0	Plate Grip DOL	1.00	TC	0.74	Vert(LL)	-0.37	21	>600
TCDL	10.0	Lumber DOL	1.00	BC	0.84	Vert(CT)	-0.51	21	>436
BCLL	0.0	Rep Stress Incr	NO	WB	0.77	Horz(CT)	0.08	17	n/a
BCDL	5.0	Code	IRC2021/TPI2014	Matrix-S					n/a
Weight: 111 lb FT = 20%F, 11%E									

LUMBER	
TOP CHORD	2x4 SP No.1(flat)
BOT CHORD	2x4 SP 2400F 2.0E(flat)
WEBS	2x4 SP No.3(flat)
OTHERS	2x4 SP No.3(flat)
BRACING	
TOP CHORD	Structural wood sheathing directly applied or 5-3-2 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
REACTIONS	
(size)	17=0-3-8, 27=0-3-8
Max Grav	17=1172 (LC 1), 27=1216 (LC 1)
FORCES	
(lb) - Maximum Compression/Maximum Tension	
TOP CHORD	1-27=-57/0, 16-17=-36/0, 1-2=-3/0, 2-3=-2812/0, 3-4=-2812/0, 4-6=-4977/0, 6-7=-4976/0, 7-8=-6186/0, 8-9=-6186/0, 9-10=-6186/0, 10-12=-4419/0, 12-13=-4416/0, 13-15=-2567/0, 15-16=-2/0
BOT CHORD	26-27=0/1545, 24-26=0/3872, 23-24=0/3872, 22-23=0/5851, 21-22=0/5851, 20-21=0/6186, 19-20=0/5317, 18-19=0/3610, 17-18=0/1484
WEBS	15-17=-1859/0, 15-18=0/1409, 13-18=-1358/0, 13-19=0/1029, 12-19=0/41, 10-19=-1124/0, 10-20=0/1569, 9-20=-816/0, 2-27=-1924/0, 2-26=0/17, 2-25=0/1607, 3-25=-155/0, 4-25=-1346/0, 4-24=0/21, 4-23=0/1400, 6-23=-212/0, 7-23=-1086/0, 7-22=-16/95, 7-21=-73/826, 8-21=-416/0

- NOTES**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are MT20 plates unless otherwise indicated.
 - 3) Plates checked for a plus or minus 1 degree rotation about its center.

- 4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 5) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 441 lb down at 8-1-12 on top chord. The design/selection of such connection device(s) is the responsibility of others.
 - 6) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).
- LOAD CASE(S)** Standard
- 1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 1-16=-100, 17-27=-10
Concentrated Loads (lb)
Vert: 8=-361 (B)






August 26, 2025

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacompnents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate
818 Soundside Road
Edenton, NC 27932

Symbols

PLATE LOCATION AND ORIENTATION

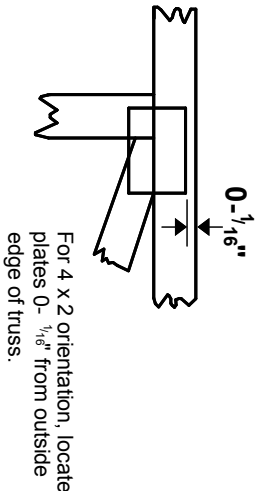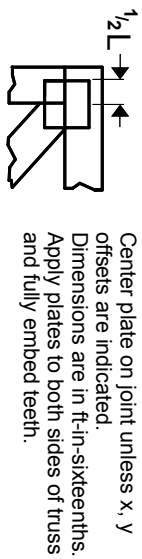


* Plate location details available in MITek software or upon request.

PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.


BEARING



Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number/letter where bearings occur. Min size shown is for crushing only.

Industry Standards:
ANSI/TP1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-22: Building Component Safety Information, Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

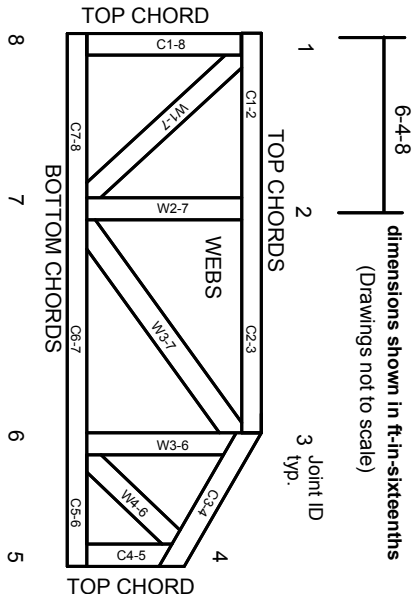

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

Product Code Approvals

ICC-ES Reports:
ESR-1988, ESR-2362, ESR-2685, ESR-3282
ESR-4722, ESL-1388

Design General Notes

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.
Lumber design values are in accordance with ANSI/TP1 1 section 6.3. These truss designs rely on lumber values established by others.

© 2023 MITek® All Rights Reserved

General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.

MITek

ENGINEERING BY
TRENCO
A MITek Affiliate

MITek Engineering Reference Sheet: MIL-7473 rev. 1/2/2023





Client: Precision Custom Homes
Project: Sarah
Address:

Date: 11/7/2025
Input by: Johnnie Baggett
Job Name: Lot 50 Magnolia Hills
Project #: 252130

Page 1 of 12

BM1 Kerto-S LVL 1.750" X 14.000" 2-Ply - PASSED

Level: Level

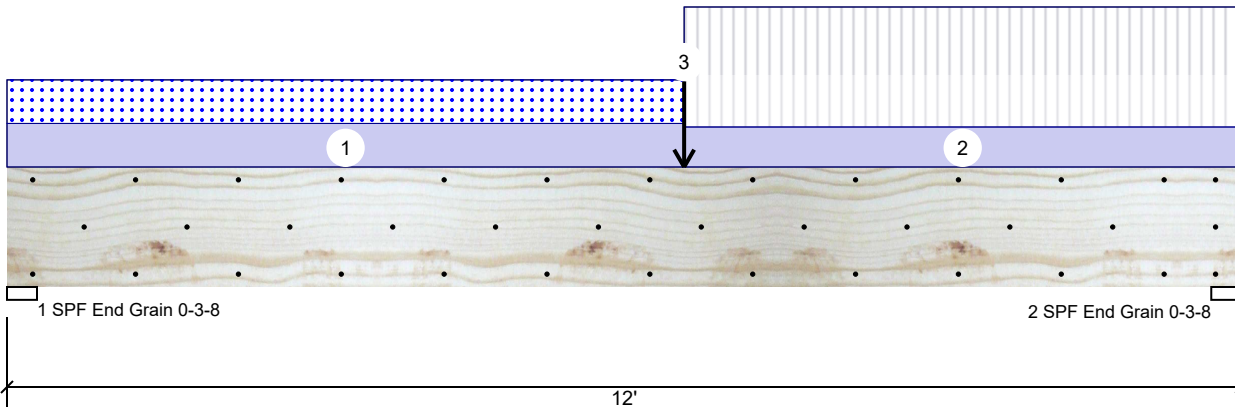

Member Information

Type: Girder
Plies: 2
Moisture Condition: Dry
Deflection LL: 480
Deflection TL: 360
Importance: Normal - II
Temperature: Temp <= 100°F

Application: Floor
Design Method: ASD
Building Code: IBC 2012
Load Sharing: No
Deck: Not Checked

Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind	Const
1	Vertical	2515	2325	1421	0	0
2	Vertical	5367	2369	514	0	0

Bearings

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.500"	Vert	51%	2325 / 2952	5277	L	D+0.75(L+S)
2 - SPF End Grain	3.500"	Vert	75%	2369 / 5367	7736	L	D+L

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	24155 ft-lb	6'7"	26999 ft-lb	89%	D+L	L
Unbraced	24155 ft-lb	6'7"	24188 ft-lb	100%	D+L	L
Shear	6145 lb	10'6 1/2"	10453 lb	59%	D+L	L
LL Defl inch	0.242 (L/573)	6'7"	0.289 (L/480)	84%	L	L
TL Defl inch	0.373 (L/371)	6'6"	0.385 (L/360)	97%	D+L	L

Design Notes

- Provide support to prevent lateral movement and rotation at the end bearings.
- Fasten all plies using 3 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- Refer to last page of calculations for fasteners required for specified loads.
- Girders are designed to be supported on bottom edge only and across their full width.
- Top loads must be supported equally by all plies.
- Top must be laterally braced at a maximum of 3'3 1/4" o.c.
- Bottom must be laterally braced at end bearings.
- Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Part. Uniform	0-0-0 to 6-7-0		Top	294 PLF	0 PLF	294 PLF	0 PLF	0 PLF	A1
2	Part. Uniform	6-7-0 to 12-0-0		Top	270 PLF	810 PLF	0 PLF	0 PLF	0 PLF	F1
3	Point	6-7-0		Top	1165 lb	3495 lb	0 lb	0 lb	0 lb	F1A
	Bearing Length	0-3-8								
	Self Weight				11 PLF					

Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

- Dry service conditions, unless noted otherwise
- LVL not to be treated with fire retardant or corrosive

chemicals

Handling & Installation

- LVL beams must not be cut or drilled
- Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
- Provide lateral support at bearing points to avoid lateral displacement and rotation

- For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

Metsä Wood
301 Merritt 7 Building, 2nd Floor
Norwalk, CT 06851
(800) 622-5850
www.metsawood.com/us

Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS



This design is valid until 2/28/2028




Client: Precision Custom Homes
Project: Sarah
Address:

Date: 11/7/2025
Input by: Johnnie Baggett
Job Name: Lot 50 Magnolia Hills
Project #: 252130

Page 2 of 12

BM1 Kerto-S LVL 1.750" X 14.000" 2-Ply - PASSED

Level: Level

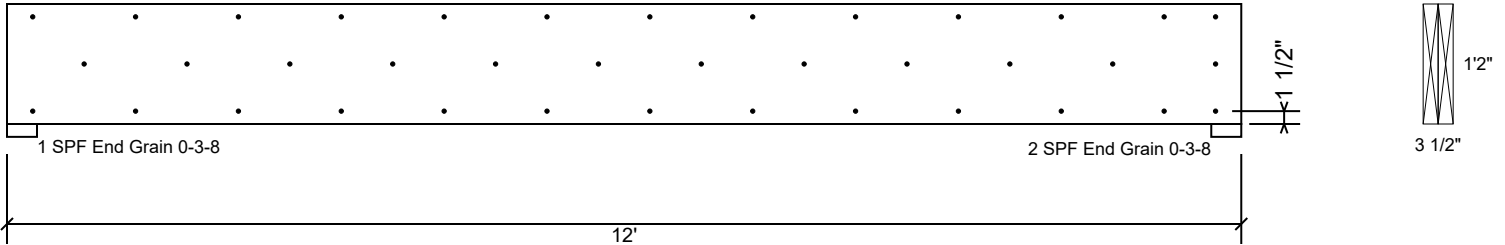

Multi-Ply Analysis

Fasten all plies using 3 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

Capacity	0.0 %
Load	0.0 PLF
Yield Limit per Foot	245.6 PLF
Yield Limit per Fastener	81.9 lb.
C _m	1
Yield Mode	IV
Edge Distance	1 1/2"
Min. End Distance	3"
Load Combination	
Duration Factor	1.00

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

Handling & Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

Metsä Wood
301 Merritt 7 Building, 2nd Floor
Norwalk, CT 06851
(800) 622-5850
www.metsawood.com/us


Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS



This design is valid until 2/28/2028

BM2 Kerto-S LVL 1.750" X 11.875" 2-Ply - **PASSED**

Level: Level

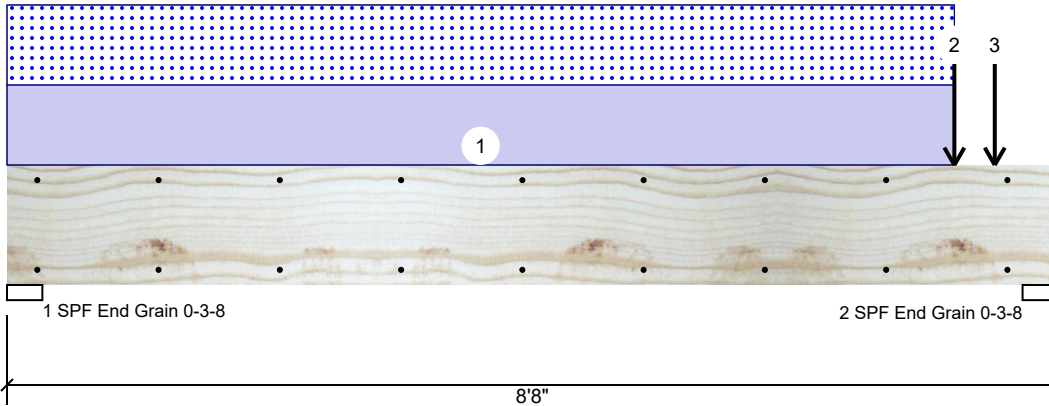

Member Information

Type:	Header	Application:	Floor
Plies:	2	Design Method:	ASD
Moisture Condition:	Dry	Building Code:	IBC 2012
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Header Supports:	No
Importance:	Normal - II	Glass:	
Temperature:	Temp <= 100°F	Deck:	Not Checked

Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind	Const
1	Vertical	0	2091	2042	0	0
2	Vertical	0	5243	4972	0	0

Bearings

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.500"	Vert	40%	2091 / 2042	4133	L	D+S
2 - SPF End Grain	3.500"	Vert	99%	5243 / 4972	10215	L	D+S

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	9474 ft-lb	5' 3/8"	22897 ft-lb	41%	D+S	L
Unbraced	9474 ft-lb	5' 3/8"	22897 ft-lb	41%	D+S	L
Shear	6356 lb	7'4 5/8"	10197 lb	62%	D+S	L
LL Defl inch	0.073 (L/1357)	4'6 13/16"	0.274 (L/360)	27%	S	L
TL Defl inch	0.147 (L/670)	4'6 13/16"	0.410 (L/240)	36%	D+S	L

Design Notes

- Provide support to prevent lateral movement and rotation at the end bearings.
- Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- Refer to last page of calculations for fasteners required for specified loads.
- Headers are designed to be supported on bottom edge only and across their full width.
- Top loads must be supported equally by all plies.
- Top must be continuously laterally braced.
- Bottom must be laterally braced at bearings.
- Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Part. Uniform	0-0-0 to 7-9-12		Top	406 PLF	0 PLF	406 PLF	0 PLF	0 PLF	B2
2	Point	7-9-12		Top	3842 lb	0 lb	3842 lb	0 lb	0 lb	B2-GR
	Bearing Length	0-3-8								
3	Point	8-1-12		Top	240 lb	0 lb	0 lb	0 lb	0 lb	Wall Above
	Bearing Length	0-3-8								
	Self Weight				9 PLF					

Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

- Dry service conditions, unless noted otherwise
- LVL not to be treated with fire retardant or corrosive chemicals

chemicals

Handling & Installation

- LVL beams must not be cut or drilled
- Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
- Provide lateral support at bearing points to avoid lateral displacement and rotation

- For flat roofs provide proper drainage to prevent ponding

This design is valid until 2/28/2028

Manufacturer Info

Metsä Wood
301 Merritt 7 Building, 2nd Floor
Norwalk, CT 06851
(800) 622-5850
www.metsawood.com/us

Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS







Client: Precision Custom Homes
Project: Sarah
Address:

Date: 11/7/2025
Input by: Johnnie Baggett
Job Name: Lot 50 Magnolia Hills
Project #: 252130

Page 4 of 12

BM2 Kerto-S LVL 1.750" X 11.875" 2-Ply - PASSED

Level: Level

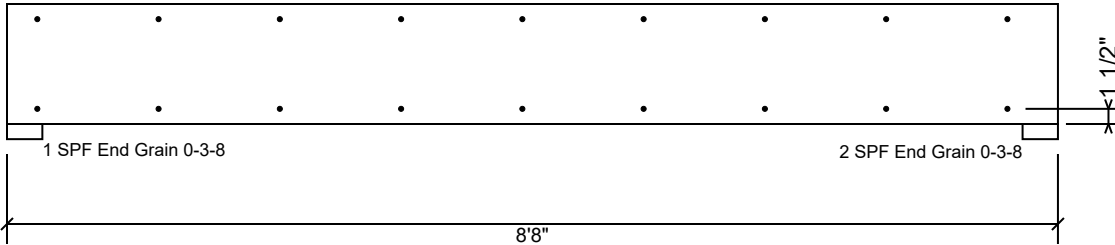

Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

Capacity	0.0 %
Load	0.0 PLF
Yield Limit per Foot	163.7 PLF
Yield Limit per Fastener	81.9 lb.
C _m	1
Yield Mode	IV
Edge Distance	1 1/2"
Min. End Distance	3"
Load Combination	
Duration Factor	1.00

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

Handling & Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 2/28/2028

Manufacturer Info



Metsä Wood
301 Merritt 7 Building, 2nd Floor
Norwalk, CT 06851
(800) 622-5850
www.metsawood.com/us

Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS



BM3 Kerto-S LVL 1.750" X 9.250" 2-Ply - PASSED

Level: Level

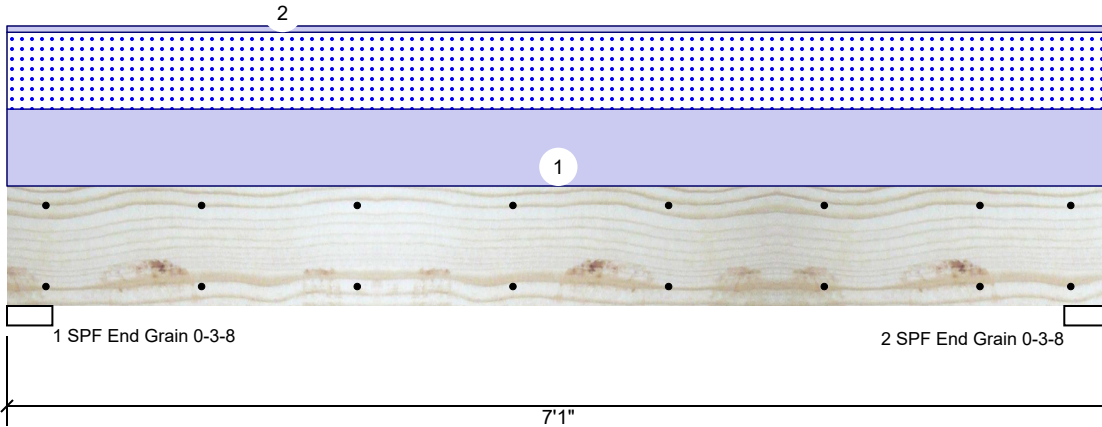

Member Information

Type: Girder
Plies: 2
Moisture Condition: Dry
Deflection LL: 360
Deflection TL: 240
Importance: Normal - II
Temperature: Temp <= 100°F

Application: Floor
Design Method: ASD
Building Code: IBC 2012
Load Sharing: No
Deck: Not Checked

Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind	Const
1	Vertical	0	2150	1966	0	0
2	Vertical	0	2150	1966	0	0

Bearings

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.500"	Vert	40%	2150 / 1966	4116	L	D+S
2 - SPF End Grain	3.500"	Vert	40%	2150 / 1966	4116	L	D+S

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	6376 ft-lb	3'6 1/2"	14423 ft-lb	44%	D+S	L
Unbraced	6376 ft-lb	3'6 1/2"	9973 ft-lb	64%	D+S	L
Shear	2881 lb	1' 3/4"	7943 lb	36%	D+S	L
LL Defl inch	0.063 (L/1263)	3'6 1/2"	0.221 (L/360)	29%	S	L
TL Defl inch	0.132 (L/603)	3'6 1/2"	0.331 (L/240)	40%	D+S	L

Design Notes

- Provide support to prevent lateral movement and rotation at the end bearings.
- Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- Refer to last page of calculations for fasteners required for specified loads.
- Girders are designed to be supported on bottom edge only and across their full width.
- Top loads must be supported equally by all plies.
- Top must be laterally braced at end bearings.
- Bottom must be laterally braced at end bearings.
- Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Top	555 PLF	0 PLF	555 PLF	0 PLF	0 PLF	A1
2	Uniform			Top	45 PLF	0 PLF	0 PLF	0 PLF	0 PLF	Wall Above
	Self Weight				7 PLF					

Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

- Dry service conditions, unless noted otherwise
- LVL not to be treated with fire retardant or corrosive chemicals

Handling & Installation

- LVL beams must not be cut or drilled
- Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
- Provide lateral support at bearing points to avoid lateral displacement and rotation

- For flat roofs provide proper drainage to prevent ponding

This design is valid until 2/28/2028

Manufacturer Info

Metsä Wood
301 Merritt 7 Building, 2nd Floor
Norwalk, CT 06851
(800) 622-5850
www.metsawood.com/us

Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS







Client: Precision Custom Homes
Project: Sarah
Address:

Date: 11/7/2025
Input by: Johnnie Baggett
Job Name: Lot 50 Magnolia Hills
Project #: 252130

Page 6 of 12

BM3 Kerto-S LVL 1.750" X 9.250" 2-Ply - PASSED

Level: Level

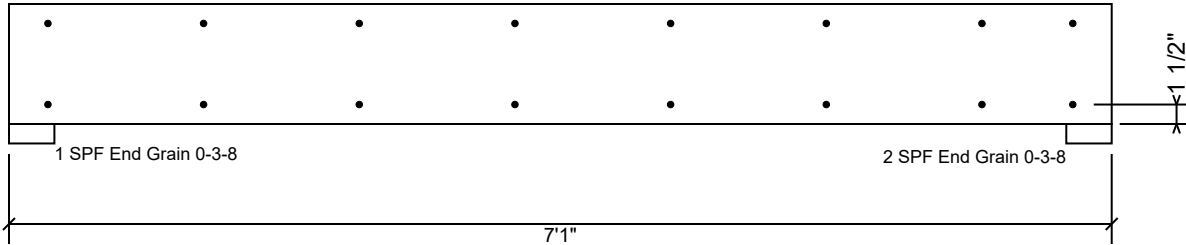

Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

Capacity	0.0 %
Load	0.0 PLF
Yield Limit per Foot	163.7 PLF
Yield Limit per Fastener	81.9 lb.
C _m	1
Yield Mode	IV
Edge Distance	1 1/2"
Min. End Distance	3"
Load Combination	
Duration Factor	1.00

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

Handling & Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

Metsä Wood
301 Merritt 7 Building, 2nd Floor
Norwalk, CT 06851
(800) 622-5850
www.metsawood.com/us


Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS



This design is valid until 2/28/2028

BM4 S-P-F #2 2.000" X 10.000" 2-Ply - PASSED

Level: Level

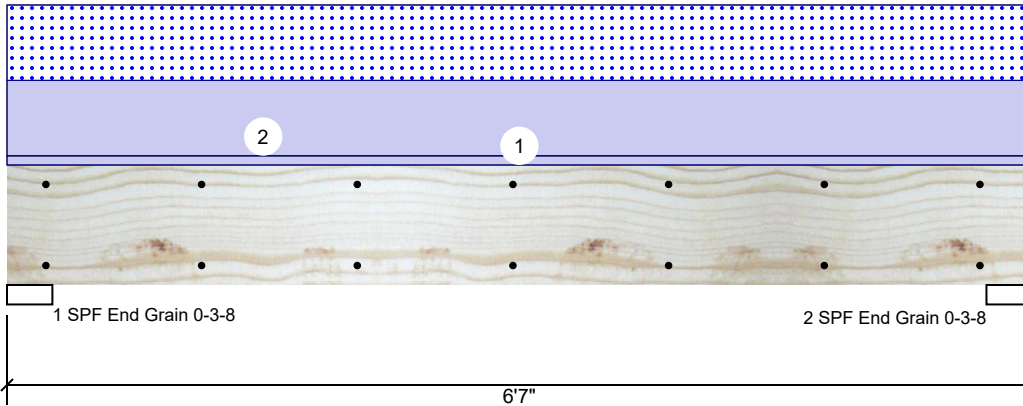

Member Information

Type: Header
Plies: 2
Moisture Condition: Dry
Deflection LL: 480
Deflection TL: 360
Importance: Normal - II
Temperature: Temp <= 100°F

Application: Floor
Design Method: ASD
Building Code: IBC 2012
Load Sharing: No
Header Supports: No
Glass:
Deck: Not Checked

Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind	Const
1	Vertical	0	1380	1205	0	0
2	Vertical	0	1380	1205	0	0

Bearings

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.500"	Vert	58%	1380 / 1205	2584	L	D+S
2 - SPF End Grain	3.500"	Vert	58%	1380 / 1205	2584	L	D+S

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	3682 ft-lb	3'3 1/2"	3946 ft-lb	93%	D+S	L
Unbraced	3682 ft-lb	3'3 1/2"	3946 ft-lb	93%	D+S	L
Shear	1750 lb	5'6 1/4"	2872 lb	61%	D+S	L
LL Defl inch	0.042 (L/1757)	3'3 1/2"	0.153 (L/480)	27%	S	L
TL Defl inch	0.090 (L/819)	3'3 1/2"	0.204 (L/360)	44%	D+S	L

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Headers are designed to be supported on bottom edge only and across their full width.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be continuously laterally braced.
- 7 Bottom must be laterally braced at bearings.
- 8 Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Top	45 PLF	0 PLF	0 PLF	0 PLF	0 PLF	Wall Above
2	Uniform			Top	366 PLF	0 PLF	366 PLF	0 PLF	0 PLF	A1
	Self Weight				8 PLF					

Manufacturer Info

Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS



This design is valid until 2/28/2028




Client: Precision Custom Homes
Project: Sarah
Address:

Date: 11/7/2025
Input by: Johnnie Baggett
Job Name: Lot 50 Magnolia Hills
Project #: 252130

Page 8 of 12

BM4 S-P-F #2 2.000" X 10.000" 2-Ply - PASSED

Level: Level

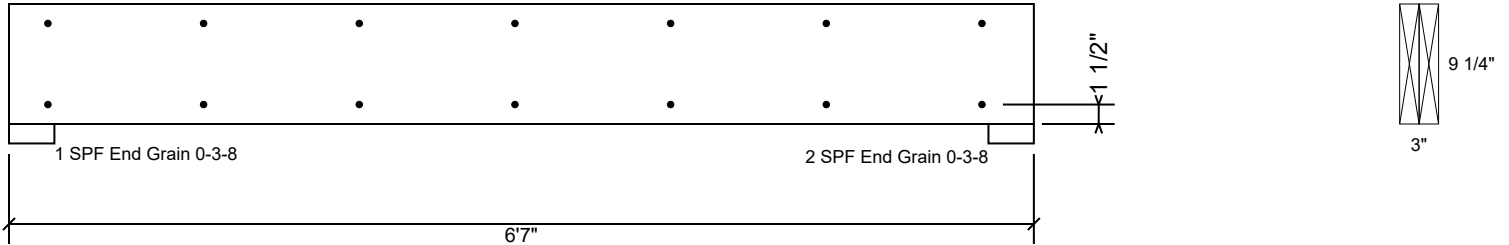

Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

Capacity	0.0 %
Load	0.0 PLF
Yield Limit per Foot	157.4 PLF
Yield Limit per Fastener	78.7 lb.
C _m	1
Yield Mode	IV
Edge Distance	1 1/2"
Min. End Distance	3"
Load Combination	
Duration Factor	1.00

Manufacturer Info

Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS



This design is valid until 2/28/2028




Client: Precision Custom Homes
Project: Sarah
Address:

Date: 11/7/2025
Input by: Johnnie Baggett
Job Name: Lot 50 Magnolia Hills
Project #: 252130

Page 9 of 12

GDH Kerto-S LVL 1.750" X 11.875" 3-Ply - PASSED

Level: Level

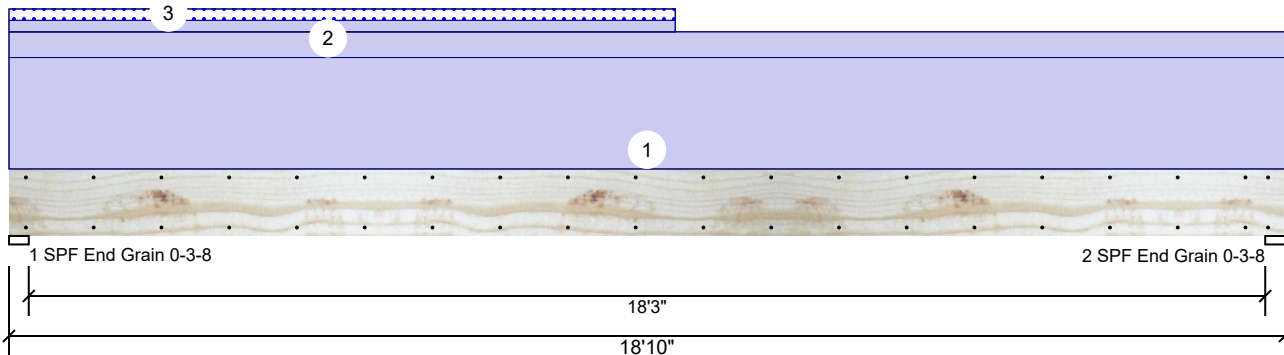

Member Information

Type:	Header	Application:	Floor
Plies:	3	Design Method:	ASD
Moisture Condition:	Dry	Building Code:	IBC 2012
Deflection LL:	360	Load Sharing:	Yes
Deflection TL:	240	Header Supports:	No
Importance:	Normal - II	Glass:	
Temperature:	Temp <= 100°F	Deck:	Not Checked

Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind	Const
1	Vertical	0	2537	146	0	0
2	Vertical	0	2441	50	0	0

Bearings

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.500"	Vert	17%	2537 / 146	2683	L	D+S
2 - SPF End Grain	3.500"	Vert	16%	2441 / 50	2491	L	D+S

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	11177 ft-lb	9'3 3/16"	27954 ft-lb	40%	D	Uniform
Unbraced	11177 ft-lb	9'3 3/16"	27954 ft-lb	40%	D	Uniform
Shear	2186 lb	1'3 3/8"	11970 lb	18%	D	Uniform
LL Defl inch (L/11137)	0.020	8'7 13/16"	0.612 (L/360)	3%	S	L
TL Defl inch	0.503 (L/438)	9'4 1/4"	0.919 (L/240)	55%	D+S	L

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6". Nail from both sides.
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Headers are designed to be supported on bottom edge only and across their full width.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be continuously laterally braced.
- 7 Bottom must be laterally braced at bearings.
- 8 Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Top	195 PLF	0 PLF	0 PLF	0 PLF	0 PLF	B1GE
2	Uniform			Top	45 PLF	0 PLF	0 PLF	0 PLF	0 PLF	Wall Above
3	Tie-In	0-0-0 to 9-10-0	1-0-0	Top	20 PSF	0 PSF	20 PSF	0 PSF	0 PSF	Roof Load
	Self Weight				14 PLF					

Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

chemicals

Handling & Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 2/28/2028

Manufacturer Info

Metsä Wood
301 Merritt 7 Building, 2nd Floor
Norwalk, CT 06851
(800) 622-5850
www.metsawood.com/us

Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS






Client: Precision Custom Homes
Project: Sarah
Address:

Date: 11/7/2025
Input by: Johnnie Baggett
Job Name: Lot 50 Magnolia Hills
Project #: 252130

Page 10 of 12

GDH Kerto-S LVL 1.750" X 11.875" 3-Ply - PASSED

Level: Level

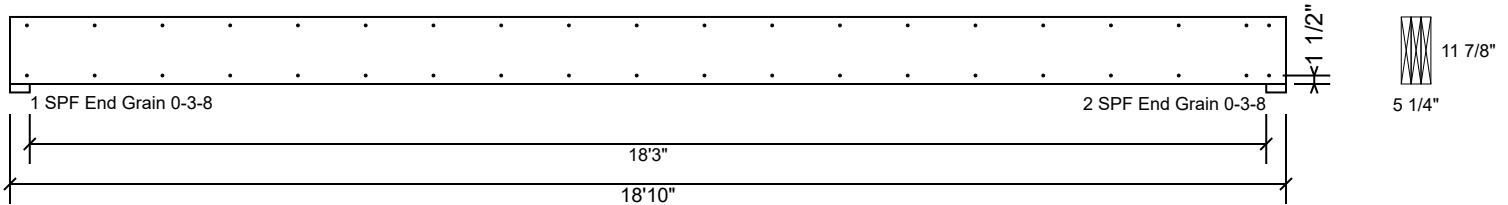

Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Nail from both sides. Maximum end distance not to exceed 6".

Capacity	0.0 %
Load	0.0 PLF
Yield Limit per Foot	163.7 PLF
Yield Limit per Fastener	81.9 lb.
C _m	1
Yield Mode	IV
Edge Distance	1 1/2"
Min. End Distance	3"
Load Combination	
Duration Factor	1.00

Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

Handling & Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 2/28/2028

Manufacturer Info

Metsä Wood
301 Merritt 7 Building, 2nd Floor
Norwalk, CT 06851
(800) 622-5850
www.metsawood.com/us

Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS







Client: Precision Custom Homes
Project: Sarah
Address:

Date: 11/7/2025
Input by: Johnnie Baggett
Job Name: Lot 50 Magnolia Hills
Project #: 252130

Page 11 of 12

GDH2 Kerto-S LVL 1.750" X 11.875" 2-Ply - PASSED

Level: Level

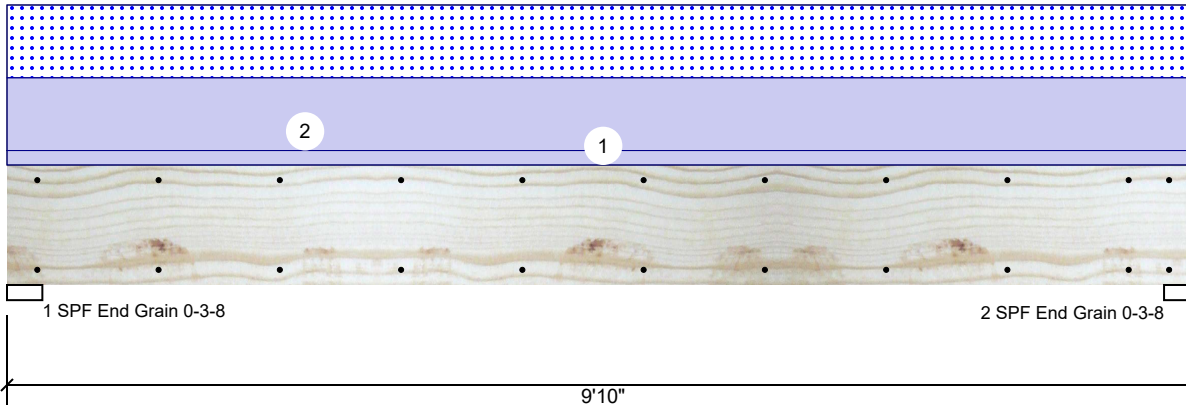

Member Information

Type: Header
Plies: 2
Moisture Condition: Dry
Deflection LL: 360
Deflection TL: 240
Importance: Normal - II
Temperature: Temp <= 100°F

Application: Floor
Design Method: ASD
Building Code: IBC 2012
Load Sharing: No
Header Supports: No
Glass:
Deck: Not Checked

Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind	Const
1	Vertical	0	1378	1111	0	0
2	Vertical	0	1378	1111	0	0

Bearings

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.500"	Vert	24%	1378 / 1111	2489	L	D+S
2 - SPF End Grain	3.500"	Vert	24%	1378 / 1111	2489	L	D+S

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	5562 ft-lb	4'11"	22897 ft-lb	24%	D+S	L
Unbraced	5562 ft-lb	4'11"	22897 ft-lb	24%	D+S	L
Shear	1840 lb	1'3 3/8"	10197 lb	18%	D+S	L
LL Defl inch	0.047 (L/2389)	4'11"	0.312 (L/360)	15%	S	L
TL Defl inch	0.105 (L/1066)	4'11"	0.469 (L/240)	23%	D+S	L

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Headers are designed to be supported on bottom edge only and across their full width.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be continuously laterally braced.
- 7 Bottom must be laterally braced at bearings.
- 8 Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Top	45 PLF	0 PLF	0 PLF	0 PLF	0 PLF	Wall Above
2	Uniform			Top	226 PLF	0 PLF	226 PLF	0 PLF	0 PLF	C1
	Self Weight				9 PLF					

Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

Handling & Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

Metsä Wood
301 Merritt 7 Building, 2nd Floor
Norwalk, CT 06851
(800) 622-5850
www.metsawood.com/us

Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS



This design is valid until 2/28/2028




Client: Precision Custom Homes
Project: Sarah
Address:

Date: 11/7/2025
Input by: Johnnie Baggett
Job Name: Lot 50 Magnolia Hills
Project #: 252130

Page 12 of 12

GDH2 Kerto-S LVL 1.750" X 11.875" 2-Ply - PASSED

Level: Level

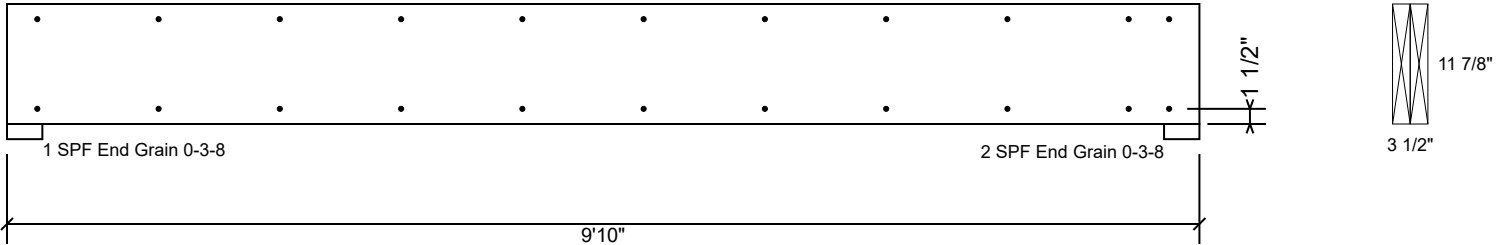

Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

Capacity	0.0 %
Load	0.0 PLF
Yield Limit per Foot	163.7 PLF
Yield Limit per Fastener	81.9 lb.
C _m	1
Yield Mode	IV
Edge Distance	1 1/2"
Min. End Distance	3"
Load Combination	
Duration Factor	1.00

Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

Handling & Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 2/28/2028

Manufacturer Info

Metsä Wood
301 Merritt 7 Building, 2nd Floor
Norwalk, CT 06851
(800) 622-5850
www.metsawood.com/us

Comtech, Inc.
1001 S. Reilly Road, Suite #639
Fayetteville, NC
USA
28314
910-864-TRUS

