


Preliminary Soil Evaluation
~0.66 acres - Old Stage Road
Harnett County, NC
PIN# 0588-73-3032



Legend

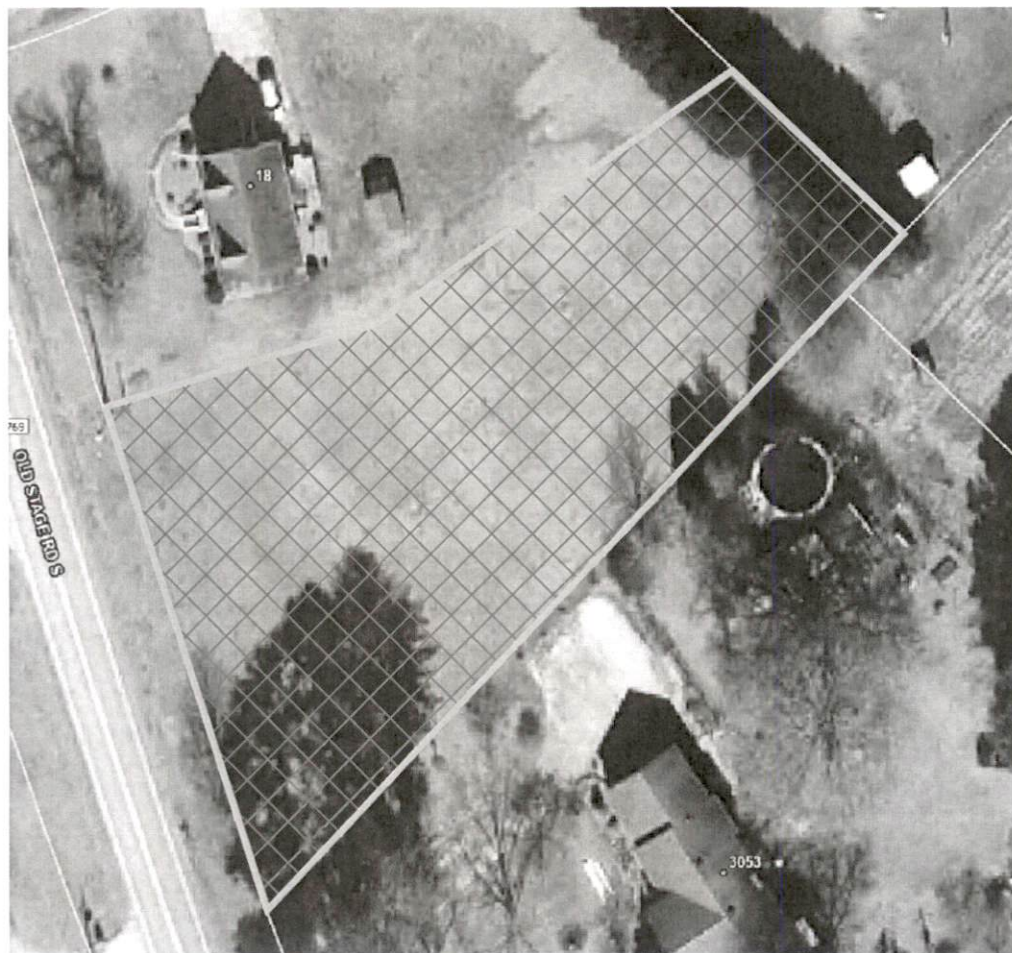

Areas contain soils with 30 inches or more of useable material and have potential for conventional, modified conventional, LPP or ultra-shallow conventional septic systems. There may be inclusion of soils 24-29 inches to a restrictive horizon that will have potential for LPP septic systems.

*Not a Survey
(sketched from Harnett County GIS database)



GRAPHIC SCALE
1" = 60'



Adams
Soil Consulting
919-414-6761
Project #2229
9-12-25

Adams Soil Consulting, PLLC
1676 Mitchell Road
Angier, NC 27501
919-414-6761

September 12, 2025
Project #2229

Luna's Landscape and Consturction, LLC

RE: Preliminary soil/site evaluation for approximately 0.66 acres located adjacent to Old Stage Road in Harnett County, NC (PIN# 0588-73-3032)

To whom it may concern,

Adams Soil Consulting (ASC) conducted a preliminary soil evaluation on the above referenced parcel to determine the areas of soils which are suitable for subsurface wastewater disposal systems (conventional & LPP). The evaluation was performed using hand auger borings during moist soil conditions based on the criteria found in the State Subsurface Rules, 15ANCAC 18E. From this evaluation, ASC sketched the boundary between the suitable soils and unsuitable soils onto a background map taken from the Harnett County GIS database.

The suitable soils shown on the accompanying soil map have potential for a conventional type septic system. There is potentially adequate available space for an initial and repair area for one single family home site on the lot. A bedroom count cannot be specified without a full septic design, but there is apparently adequate available space for a 4-bedroom home. The lot contains approximately 25,000 ft² or more of provisionally suitable soils that consist of a sandy clay loam subsoil that can support a daily loading rate of 0.3-0.4 gallons/day/ft².

The specific septic systems and/or repair systems will be permitted by the Harnett County Health Department. Additionally, the Harnett County Health Department or other permitting authority will establish the loading rates for any proposed system. The areas for the proposed septic fields shall not be impacted by home sites, pools, garages and shall not be mechanically altered from the natural lay of the land.

The lot will require a detailed soils evaluation by the Harnett County Health Department or other permitting authority prior to issuance of any permits for a septic system. A septic system layout/design may be required before a permit can be issued on the above referenced lot demonstrating available space for the primary and repair septic areas. Due to the subjective nature of the permitting process and the variability of naturally occurring soils, Adams Soil Consulting cannot guarantee that areas delineated as suitable for on-site wastewater disposal systems will be permitted by the governing agency. The lot may require a septic system utilizing pumps, shallow or ultra-shallow conventional trench placement, low pressure pipe system, and/or reductions system for final approval. The accompanying soil map is preliminary in nature, no further assumptions or subdivision should be made without a more detailed evaluation.

If you have any questions regarding the findings on the attached map or in this report, please feel free to contact me anytime. Thank you allowing me to perform this site evaluation for you.

Sincerely,



Alex Adams
NC Licensed Soil Scientist #1247

