



ENTRY DETAIL "B"






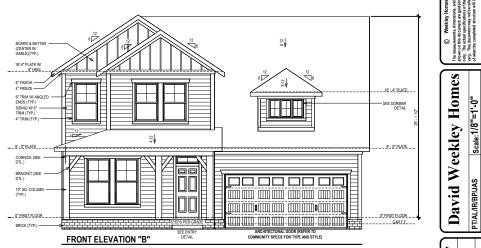



SCALE: 1/4" = 1'-0"

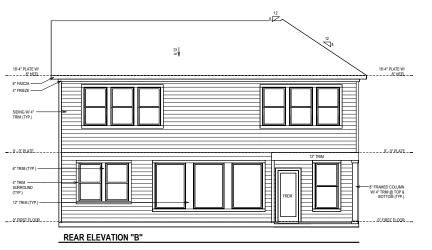




ELV-1 CAPSTONE RALEIGH


Proj. No.: 3294 Job No.: 0907

David Weekley Homes

907 Fot Scale:1/8"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024

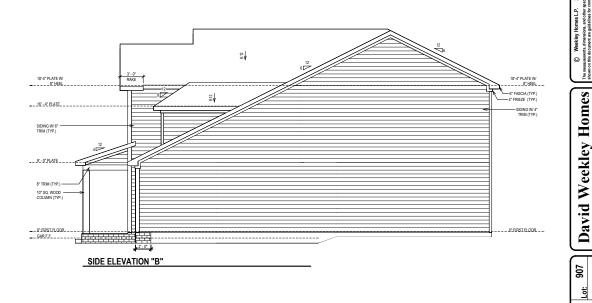

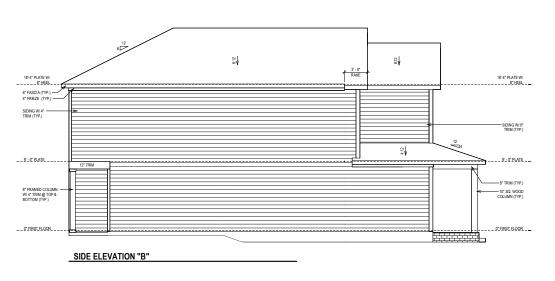

David Weekley Homes Scale:1/8"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024

Proj. No.:	Job No.:
3294	0907
SERENITY 50' 66 RAINBROOK COVE	FUQUAY VARINA, NC

$\overline{}$
NORTH
AG74 D
A671-B
L L V 2
ELV-2
CAPSTONE
CAFSTONE
RALEIGH

# SHEET INDEX:

- COVER SHEET
- S-0.1 GENERAL STRUCTURAL NOTES
- MONOLITHIC SLAB FOUNDATION PLAN
- SECOND FLOOR FRAMING PLAN
- ROOF FRAMING PLAN S-3
- SD-1J BRACED WALL DETAILS
- HOLD DOWN DETAILS
- SD-3 BRACED WALL NOTES & DETAILS
- SD-4 PORTAL FRAME DETAILS
- SD-5 MISCELLANEOUS FRAMING DETAILS
- SD-6 MISCELLANEOUS FRAMING DETAILS
- MONOLITHIC SLAB FOUNDATION DETAILS SD-7
- SD-8
- SD-9 NOT USED SD-10 NOT USED
- SD-11 NOT USED
- ADVANCED FRAMING DETAILS & NOTES



1900 AM DRIVE, SUITE 201, QUAKERTOWN, PA 18951 www.kse-eng.com (215) 804-4449

# A671 CAPSTONE

SERENITY, LOT #907

# RALEIGH, NORTH CAROLINA

THESE DRAWINGS ARE TO BE USED IN CONJUNCTION WITH AND COORDINATED WITH THE ARCHITECTURAL, CIVIL, MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS. THIS COORDINATION IS NOT THE RESPONSIBILITY OF THE RECORDING LENGINEER OF RECORD (SER), SHOULD ANY DISORPEANAIGES BECOME APPARENT, THE CONTRACTOR SHALL NOTIFY KEE MOUNTERING, THE CONTRACTOR SHALL NOTIFY KEE DOCUMENTS, THAT THESE DOCUMENTS CHARGE SECOND IT IS THE INTELLIGENCE PROFESSIONALS CLEAR INFORMATION. EVERY ATTEMPT HAS BEEN MADE TO PREVENT ERROR. THE BUILDER AND ALL SUBCONTRACTORS ARE REQUIRED TO REVIEW ALL OF THE INFORMATION CONTRACTOR AND FROM TO THE COMMENCEMENT OF ANY WORK. THE ENDINEER IS NOT RESPONSIBLE TO RANT PLAN ERRORS, OMISSIONS, OR MISHITERPRETATIONS UNDETECTED AND NOT REPORTED TO THE ENSINEER PRIOR TO CONSTRUCTION. ALL CONSTRUCTION MUST BE IN ACCORDANCE TO THE INFORMATION FOUND IN THESE DOCUMENTS.

### DESIGN SPECIFICATIONS:

DESIGN BUILDING CODE (REFERRED TO HEREIN AS 'THE BUILDING CODE'):

- 2018 NORTH CAROLINA RESIDENTIAL CODE. WALL BRACING PER INTERNATIONAL RESIDENTIAL

CODE 2015 EDITION.

- ON DIE LUMOS:

  \*\*ROOF = 20 PSF (LOAD DURATION FACTOR=1.25)

  \*\*UNINHABITABLE ATTICS WITH LIMITED STORAGE = 20 PSF (WHERE SPECIFIED ON PLANS)

  \*\*HABITABLE ATTICS AND ATTICS SERVED WITH FIXED STAIRS = 30 PSF
- FLOOR (SLEEPING AREAS) = 30 PSF
- \* DECK/BALCONY = 40 PSF \* STAIRS = 40 PSF

DESIGN DEAD LOADS:

- \*ROOF TRUSS = 17 PSF (TC=7, BC=10)

  \*FLOOR TRUSS = 15 PSF (TC=10, BC=5)
- \* FLOOR JOIST = 10 PSF \* STANDARD BRICK = 40 PSF
- · QUEEN ANNE BRICK = 25 PSF

\*NOTE: STRUCTURAL FRAMING HAS NOT BEEN DESIGNED FOR TILE, GRANITE, MARBLE OR OTHER MATERIALS HEAVIER THAN THE ABOVE LOADING UNLESS SPECIFICALLY NOTED ON PLANS.\*

DESIGN WIND LOADS:
- ULTIMATE WIND SPEED = 115 MPH • EXPOSURE CATEGORY = B

ASSUMED SOIL BEARING CAPACITY = 2000 PSF ASSUMED LATERAL SOIL PRESSURE = 45 PCF

FROST DEPTH = 12" MINIMUM

SEISMIC DESIGN CATEGORY = B

ENGINEERED LUMBER SHALL HAVE THE FOLLOWING MINIMUM DESIGN VALUES:

- \*TJI 210 SERIES (SERIES AND SPACING PER PLANS)

  \*LSL: E=1,550,000 PSI, F<sub>8</sub>=2,325 PSI, F<sub>8</sub>=310 PSI, F<sub>6</sub>=900 PSI

  \*LVL: E=2,000,000 PSI, F<sub>8</sub>=2,600 PSI, F<sub>8</sub>=285 PSI, F<sub>6</sub>=750 PSI

  \*PSI: E=2,100,000 PSI, F<sub>8</sub>=2,900 PSI, F<sub>6</sub>=290 PSI, F<sub>6</sub>=625 PSI



David Weekley Homes

Serenity, Lot #907 A671 Capstone Model North М.Р.Н. 115

Project #: 047-24018 Designed By: LMR Checked By: Issue Date: 9/25/25

Sheet

Cover

1/4"=1'-0" @ 22x34

- THE DESIGN PROFESSIONAL WHOSE SEAL APPEARS ON THESE DRAWINGS IS THE STRUCTURAL ENGINEER OF RECORD (SER) FOR THIS PROJECT. THE SER BEARS THE RESPONSIBILITY OF THE PRIMARY STRUCTURAL ELEMENTS AND THE PERFORMANCE OF THIS STRUCTURE. LOO THER PARTY MAY REVISE, ALTER, OR DELETE ANY STRUCTURAL ASPECTS OF THESE CONSTRUCTION DOCUMENTS WITHOUT WRITTEN CONSENT OF KSE ENGINEERING, P.C. OR THE SER, FOR THE PURPOSES OF THESE CONSTRUCTION DOCUMENTS, THE SER AND KSE ENGINEERING SHALL BE CONSIDERED THE SAME ENTITY. THE STRUCTURE IS ONLY STABLE IN TIS COMPLETED FORM. THE CONTRACTOR SHALL PROVIDE ALL REQUIRED TEMPORARY BRACING DURING CONSTRUCTION SEQUENCES, METHODS, OR TECHNIQUES IN CONNECTION WITH THE CONSTRUCTION OF THIS STRUCTURE. THE SER WILL NOT BE HELD RESPONSIBLE FOR THE STRUCTURE. THIS PROJECT, THE SER BEARS THE RESPONSIBILITY OF THE PRIMARY
- THE CONTRACTOR'S FAILURE TO CONFORM TO THE CONTRACT

THE CONTRACTOR'S FAILURE TO COMPORANT OF THE CONTRACT DOCUMENTS, SHOULD ANY NON-CONFORMITIES OCCUR. THE SER DOES NOT CERTIFY DIMENSIONAL ACCURACY OR ARCHITECTURAL LAYOUT INCLUDING ROOF GEOMETRY. THE SER ASSUMES NO LUBBILITY FOR CHANGES MADE TO THESE PLANS BY OTHERS, OR FOR CANN'T DEVIATION METHODS, OR FOR ANY DEVIATION. FROM THE PLANS. THE SER SHALL BE NOTIFIED PRIOR TO CONSTRUCTION IF ANY DISCREPANCIES ARE NOTED ON THE PLANS. ANY STRUCTURAL ELEMENTS OR DETAILS NOT FULLY DEVELOPED ON

- THE CONSTRUCTION DRAWINGS SHALL BE COMPLETED UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, THESE SHOP DIRECTION OF A LICENSED PROFESSIONAL ENGINEER. THESE SHOP DRAWINGS SHALL BE SUBMITTED IT OK SE ENGINEERING FOR REVIEW BEFORE ANY CONSTRUCTION BEGINS. THE SHOP DRAWINGS WILL BE REVIEWED FOR OVERALL COMPLIANCE AS IT RELATES TO THE STRUCTURAL DESIGN OF THIS PROJECT. VERIFICATION OF THE SHOP DRAWINGS FOR DIMENSIONS, OF FOR ACTUAL FILLD COMMITTION, P.C. VERRICATION OF ASSUMED FIELD COMMITTIONS ON THE THE RESPONSIBILITY OF THE SER ON RESE ENGINEERING, P.C. VERRICATION OF ASSUMED FIELD COMMITTIONS TO THE! THE DISCONSIBILITY OF THE SER. THE CONTRACTOR SHALL VERTY TO SECRETARIOES.
- FIELD CONDITIONS FOR ACCURACY AND REPORT AND ISSURPRISHED.

  TO KSE ENGINEERING, P.C. BEFORE CONSTRUCTION BEGINS.

  THE SER IS NOT RESPONSIBLE FOR ANY SECONDARY STRUCTURE

  ELEMENTS OR NON-STRUCTURAL ELEMENTS, EXCEPT FOR THE

  ELEMENTS SPECIFICALLY NOTED ON THE STRUCTURAL DRAWINGS.
- ELEMENTS SPECIFICALET NOTICE ON THE STRUCTURE DRAWNINGS.
  THIS STRUCTURE AND ALL CONSTRUCTION SHALL CONFORM TO ALL
  APPLICABLE SECTIONS OF THE BUILDING CODE AND ANY LOCAL
  CODES OR RESTRICTIONS.
  DO NOT SCALE DRAWNOS. WRITTEN DIMENSIONS TAKE PRECEDENCE
- OVER SCALED DIMENSIONS, ALL DIMENSIONS ARE TO FACE OF STUD OR TO FACE OF FRAMING LINLESS OTHERWISE NOTED 10. WATERPROOFING AND FLASHING BY OTHERS.

FOUNDATIONS: FOUNDATIONS SHALL BE CONSTRUCTED IN ACCORDANCE WITH CHAPTER 4 OF THE BUILDING CODE

- CONTRACTOR IS SOLELY RESPONSIBLE FOR VERIFYING THE SUITABILITY
  OF THE SITE SOIL CONDITIONS AT THE TIME OF CONSTRUCTION. THE BUILDER SHALL FURNISH ANY AND ALL REPORTS RECEIVED FROM THE GEOTECHNICAL ENGINEER ON THE STUDY OF THE PROPOSED SITE TO THE DESIGNER, STRUCTURAL ENGINEER, AND GENERAL CONTRACTOR.
- MAXIMI IM DEPTH OF UNBALANCED FILL AGAINST MASONRY WALLS TO
- BE AS SPECIFIED IN THE BUILDING CODE.

  THE SER HAS NOT PERFORMED A SUBSURFACE INVESTIGATION. VERIFICATION OF THE ASSUMED VALUE IS THE RESPONSIBILITY OF THE OWNER OR THE CONTRACTOR. SHOULD ANY ADVERSE SOIL CONDITION BE ENCOUNTERED, THE SER MUST BE CONTACTED BEFORE
- THE BOTTOM OF ALL FOOTINGS SHALL EXTEND BELOW THE FROST LINE FOR THE REGION IN WHICH THE STRUCTURE IS TO BE CONSTRUCTED, BUT NOT LESS THAN A MINIMUM OF 12" BELOW GRADE, ALL FOOTINGS TO HAVE A MINIMUM PROJECTION OF 2" ON EACH SIDE OF FOUNDATION WALLS, MAXIMUM FOOTING PROJECTION SHALL NOT EXCEED THE THICKNESS OF THE FOOTING.
  WOOD SILL PLATES SHALL BE ANCHORED TO THE FOUNDATION WITH
- 16" ANCHOR BOLTS WITH MINIMUM 7" EMBEDMENT, SPACED A MAXIMUM OF 6'-0' O.C. INSTALL MINIMUM 2 ANCHOR BOLTS PER SECTION, 12'
  MAXIMUM FROM CORNERS. ½" DIAMETER x 8" LONG SIMPSON TITEN HD OR USP SCREW-BOLT+ SCREWS MAY BE SUBSTITUTED ON A 1
- FOR 1 BASIS FOR CONCRETE FOUNDATIONS ONLY.

  ANY FILL SHALL BE PLACED UNDER THE DIRECTION OR
  RECOMMENDATION OF A LICENSED PROFESSIONAL ENGINEER. THE RESULTING SOIL SHALL BE COMPACTED TO A MINIMUM OF 95% MAXIMUM DRY DENSITY
- MAXIMUM DRY DENSITY.

  EXCAVATIONS OF FOOTINGS SHALL BE LINED TEMPORARILY WITH A 6
  MIL POLYETHYLENE MEMBRANE IF PLACEMENT OF CONCRETE DOES NOT OCCUR WITHIN 24 HOURS OF EXCAVATION. NO CONCRETE SHALL BE PLACED AGAINST ANY SUBGRADE CONTAINING
- WATER, ICE, FROST, OR LOOSE MATERIAL.
  PROVIDE FOUNDATION WATERPROOFING AND DRAIN WITH POSITIVE SLOPE TO OUTLET AS REQUIRED BY SITE CONDITIONS (SEE
- ARCHITECTURAL PLANS AND DETAILS).
  NONE OF THE FOUNDATION DESIGNS IN THESE DOCUMENTS ARE SUITABLE
- FOR INSTALLATION IN SHRINK/SWELL CONDITIONS, REFER TO
- GEOTECHNICAL ENGINEER FOR APPROPRIATE DESIGN.
  LOTS SHALL BE GRADED TO DRAIN SURFACE WATER AWAY FROM
  FOUNDATION WALLS. THE GRADE SHALL FALL A MINIMUM OF 6 INCHES WITHIN THE FIRST TEN FEET.
- within the First 1EN FEET.

  3. CRAWL SPACE TO BE GRADED LEVEL AND CLEAR OF ALL DEBRIS.

  14. PROVIDE MINIMUM 6 MIL APPROVED VAPOR BARRIER. ALL JOINTS TO BE LAPPED MINIMUM 12" AND SEALED.

- CONCRETE & REINFORCING
- CONCRETE DESIGN BASED ON ACI 318 AND ACI 318.1 OR ACI 332.
  CONCRETE SHALL HAVE A NORMAL WEIGHT AGGREGATE AND A MINIMUM
  COMPRESSIVE STRENGTH (f'c) = 3,000 PSI MINIMUM AT 28 DAYS PER CODE (VARIES W/ WEATHER), UNLESS OTHERWISE NOTED ON THE PLAN. CONCRETE SHALL BE PROPORTIONED, MIXED, AND PLACED IN
- ACCORDANCE WITH THE LATEST EDITIONS OF ACL 318: "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE" AND ACI 301 "SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS"
- AIR ENTRAINED CONCRETE MUST BE USED FOR ALL STRUCTURAL ELEMENTS EXPOSED TO FREEZE/THAW CYCLES AND DEICING CHEMICALS. AIR ENTRAINMENT AMOUNTS (IN PERCENT) SHALL BE WITHIN -1% TO
- FAIR EXTREMENTATION OF THE PRIVATE OF THE DESCRIPTION OF THE PARK OF THE PRIVATE CONCRETE SLABS-ON-GRADE SHALL BE CONSTRUCTED IN ACCORDANCE
- WITH ACI 302,1R: "GUIDE FOR CONCRETE SLAB AND SLAB CONSTRUCTION". CONTROL OR SAW CUT JOINTS (CUT OR TOOLED) SHALL BE SPACED IN INTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 15'-0" O.C. AND IN
- EXTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 10'-0" UNLESS OTHERWISE NOTED, CARE SHALL BE TAKEN TO AVOID RE-ENTRANT CORNERS CONTROL OR SAW CUT JOINTS SHALL BE PRODUCED USING
- CONVENTIONAL CUT OR TOOLED PROCESSES WITHIN 4 TO 12 HOURS AFTER THE SLAB HAS BEEN FINISHED. REINFORCING STEEL MAY EXTEND THROUGH A SAW CUT JOINT
- ALL WELDED WIRE FABRIC (W.W.F.) FOR CONCRETE SLABS-ON-GRADE SHALL BE PLACED AT MID-DEPTH OF SLAB. THE W.W.F. SHALL BE SECURELY SUPPORTED DURING THE CONCRETE POUR, FIBROUS CONCRETE REINFORCEMENT, OR POLYPROPYLENE FIRERS MAY BE LISED. CONCRETE REINFORCEMENT, OR POLTPROPTENE FIBERS MAY BE USED IN LIEU OF WWW.F. APPLICATION OF POLYPROPYLENE FIBERS PER CUBIC YARD OF CONCRETE SHALL BE PER MANUFACTURER AND COMPLY WITH ASTM C1116, ANY LOCAL BUILDING CODE REQUIREMENTS AND SHALL MEET OR EXCEED CURRENT INDUSTRY STANDARD.
- 10. POLYPROPYLENE REINFORCING TO BE 100% VIRGIN, CONTAINING NO REPROCESSED OLEFIN MATERIALS AND SPECIFICALLY MANUFACTURED FOR USE AS CONCRETE SECONDARY REINFORCEMENT.

  11. STEEL REINFORCING BARS SHALL BE NEW BILLET STEEL CONFORMING.
- TO ASTM A615, GRADE 60. 10 ASIM ABIS, GRADE 60.

  12. DETAILING, FABRICATION, AND PLACEMENT OF REINFORCING STEEL SHALL
  BE IN ACCORDANCE WITH THE LATEST EDITION OF ACI 315: "MANUAL
- OF STANDARD PRACTICE FOR DETAILING CONCRETE STRUCTURES". HORIZONTAL FOOTING AND WALL REINFORCEMENT SHALL BE CONTINUOUS AND SHALL HAVE 90° BENDS, OR CORNER BARS WITH
- THE SAME SIZE/SPACING AS THE HORIZONTAL REINFORCEMENT. 14. PROVIDE REINFORCEMENT LAP AS NOTED BELOW, UNLESS NOTED
  - OTHERWISE: #4 BARS 30" LENGTH #5 BARS - 38" LENGTH #6 BARS - 45" LENGTH
- WHERE REINFORCING DOWELS ARE REQUIRED, THEY SHALL BE 13. WHERE REINFURCING DUWLES ARE REQUIRED, THEI SPAUL FOR EQUIVALENT IN SIZE AND SPACING TO THE VERTICAL REINFORCEMENT. THE DOWEL SHALL EXTEND 48 BAR DIAMETERS VERTICALLY AND 20 BAR DIAMETERS INTO THE FOOTING. SEE KEE FOUNDATION DETAILS. 16. WHERE FOOTING BOTTOMS ARE TO BE STEPPED AT SLOPING GRADE
- CONDITIONS PROVIDE CONTINUOUS REINFORCING WITH 7 BARS (TO MATCH FOOTING REINFORCING) AS REQUIRED.
- 17. BAR SUPPORT ACCESSORIES SHALL BE PROVIDED IN ACCORDANCE WITH THE LATEST ACL MANUAL OF STANDARD PRACTICE FOR DETAILING REINFORCED CONCRETE STRUCTURES, EXCEPT THAT REINFORCING SHALL BE CHAIRED ON THE BOTTOM AND/OR THE SIDES ON BOLSTERS SPACED NOT MORE THAN 4 FEET ON CENTER NO ROCKS CMU CLAY
- SPACED NOT MORE HAN 4 FEET ON CENTER, NO ROCKS, CMD, CLAT TILE, OR BRICK SHALL BE USED TO SUPPORT REINFORCING. FOR GRADE SUPPORTED SLABS, SLAB REINFORCING SHALL BE HELD IN PLACE BY BAR SUPPORTS AND ACCESSORIES AS DESCRIBED IN THE CRSI MANUAL OF STANDARD PRACTICE, BAR SUPPORTS SHALL BE SPACED A MAXIMUM OF 4'-0" O.C. BOTH WAYS IN STRAIGHT LINES ON

### MASONRY

- ALL MASONRY SHALL CONFORM TO ASTM C-90, F'm=1500 PSI, ALL BRICK SHALL CONFORM TO ASTM C-216, F'm=1500 PSL ALL MORTAR SHALL BE TYPE 'S' (TYPE 'M' BELOW GRADE) AND CONFORM TO ASTM C-270. COARSE GROUT SHALL CONFORM TO ASTM C-476 WITH A MAXIMUM
  AGGREGATE SIZE OF 1/2" AND A MINIMUM COMPRESSIVE STRENGTH OF 2,000
- ALL MASONRY WORK SHALL RE IN ACCORDANCE WITH "BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES" ACI 530/ASCE 5/TMS 402 AND "SPECIFICATIONS FOR MASONRY STRUCTURES" ACI 530.1 / ASCE 6/TMS 602
- THE UNSUPPORTED HEIGHT OF SOLID MASONRY PIERS SHALL NOT EXCEED TEN TIMES THEIR LEAST DIMENSION. UNFILLED HOLLOW PIERS MAY BE USED IF THE UNSUPPORTED HEIGHT IS NOT MORE THAN FOUR
- MAY BE OSED IT HE DISOPPORTED HEIGHT IS NOT MORE HAM FOR TIMES THEIR LEAST DIMENSION. EACH CRAIM, SPACE PIER SHALL BEAR IN THE MIDDLE THIRD OF ITS RESPECTIVE FOOTING AND EACH GIRDER SHALL BEAR IN THE MIDDLE THIRD OF THE PIERS. PLASTERS TO BE BONDED TO PERIMETER FOUNDATION WALL
- FOUNDATION WALL.
  TOP COURSE OF MASONRY SHALL BE GROUTED SOLID.
  HORIZONTAL WALL JOINT REINFORCEMENT SHALL BE STANDARD 9 GAGE
  GALVANIZED LADDER OR TRUSS TYPE SPACED AT 16" O.C., UNLESS
- SHOWN OTHERWISE ON THE DRAWINGS.
  SPLICED WIRE REINFORCEMENT SHALL BE LAPPED AT LEAST 6" AND CONTAIN AT LEAST ONE CROSS WIRE OF EACH PIECE OF REINFORCEMENT WITHIN THE 6". LAP WITH STANDARD 'T' AND 'L'

### WOOD FRAMING:

- SOLID SAWN WOOD FRAMING MEMBERS SHALL CONFORM TO THE SPECIFICATIONS LISTED IN THE LATEST EDITION OF THE "NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION": (NDS). UNLESS HERWISE NOTED, ALL WOOD FRAMING MEMBERS ARE DESIGNED
- SPRUCE-PINE-FIR (SPF) WITH THE FOLLOWING MINIMUM DESIGN
- E=1,400,000 PSI, F<sub>b</sub>=875 PSI, F<sub>v</sub>=135 PSI
- 1.1. FRAMING: SPF #2.
- 1.2. PLATES: SPF #2. 1.3. STUDS: SPF STUD GRADE
- ALL LUMBER EXPOSED TO WEATHER OR IN CONTACT WITH CONCRETE SHALL BE PRESERVATIVE TREATED SOUTHERN YELLOW PINE #2 OR
- ANCHOR SILL PLATES IN ACCORDANCE W/ GENERAL STRUCTURAL NOTES. ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY. LARGER MEMBERS MAY BE SUBSTITUTED AS NEEDED FOR EASE OF CONSTRUCTION. NAILS SHALL BE COMMON WIRE NAILS UNLESS OTHERWISE NOTED.
- BOLT HOLES AND LEAD HOLES FOR LAG SCREWS SHALL BE IN ACCORDANCE WITH NDS SPECIFICATIONS.
- INDIVIDUAL STUDS FORMING A COLUMN SHALL BE ATTACHED WITH (2)
  ROWS 104 NAILS \*\* 6" O.C. STAGGERED. THE STUD COLUMN SHALL BE FULLY BLOCKED AT ALL FLOOR LEVELS TO ENSURE PROPER LOAD
- TRANSFER, WALL SHEATHING SHALL BE NALED TO EDGE OF EACH STUD.
  FACE NAIL ALL MULTI-PLY BEAMS AND HEADERS WITH (2) ROWS 16d COMMON NAILS @ 16" O.C., STAGGERED, OR PER MANUFACTURER'S SPECIFICATIONS FOR ENGINEERED LUMBER. APPLY NAILING FROM BOTH FACES FOR (3) OR MORE PLIES.
- FASTEN 4-PLY BEAMS WITH (1) 1/2" DIAMETER THROUGH BOLT w/ NUT WASHERS AT 12" O.C. STAGGERED TOP AND BOTTOM, 15" MINIMUM EDGE DISTANCE. (UNLESS OTHERWISE NOTED)
- ALL BEAMS AND HEADERS SHALL HAVE (1)2x JACK STUD & (1)2x KING STUD LINERS OTHERWISE NOTED. THE NUMBER OF STUDS INDICATED ON
- PLANS ARE THE TOTAL NUMBER OF JACK STUDS REQUIRED, UNLESS OTHERWISE NOTED.

  11. PROVIDE KING STUDS AT EACH END OF HEADERS AS NOTED BELOW. 16" O.C. STUD SPACING: (1) STUD UP TO 3' OPENING 24" O.C. STUD SPACING: (1) STUD UP TO 4' OPENING (2) STUDS UP TO 4' OPENING (2) STUDS UP TO 8' OPENING (4) STUDS UP TO 16' OPENING (5) STUDS UP TO 12' OPENING (6) STUDS UP TO 16' OPENING
  ALL BEAMS TO BE CONTINUOUSLY SUPPORTED LATERALLY AND SHALL
- BEAR FULL WIDTH ON THE SUPPORTING WALLS OR COLUMNS INDICATED WITH A MINIMUM OF TWO STUDS, UNLESS OTHERWISE NOTED. ALL BEAM
- WITH A MINIMUM OF TWO STUDS, DINESS DIFFERMS. NOTED, ALL BEAM SPLICES SHALL OCCUR OVER SUPPORTS.

  13. SOUD BLOCKING TO BE PROVIDED AT ALL POINT LOADS THROUGH FLOOR LEVELS TO THE FOUNDATION OR TO OTHER STRUCTURAL COMPONENTS.

  14. ALL LUMBER SPECIFIED ON DRAWINGS IS INTENDED FOR DRY USE ONLY
- (MOISTURE CONTENT <19%) UNLESS OTHERWISE NOTED.
  ALL WATERPROOFING AND FIRE SAFETY SYSTEMS ARE TH RESPONSIBILITY OF THE CONTRACTOR AND ARE TO BE DESIGNED AND
- DETAILED BY OTHERS DEFINIZED BY OTHERS.
  ANY WOOD FRAME INTERIOR BEARING WALL STUDS THAT HAVE HOLES IN THE CENTER OF THE STUD UP TO 1" DIAMETER SHALL HAVE STUD PROTECTION SHIELDS. ALL HOLES OVER 1" IN DIAMETER FOR PLUMBING PROTECTION SHIELDS. ALL HOLES OVER 1 IN DIAMETER FOR PLUMBI LINES, ETC. SHALL BE REPAIRED WITH SIMPSON HSS2 OR USP STS1 STUD SHOES, TYPICAL, UNLESS OTHERWISE NOTED. BEARING WALLS SHALL BE SHEATHED ON NOT LESS THAN ONE SIDE
- WITH OSB OR GYPSUM BOARD, BRIDGING SHALL BE INSTALLED NOT GREATER THAN 4 FEET APART MEASURED VERTICALLY FROM EITHER END OF THE STUD IN LIEU OF SHEATHING.

## EXTERIOR WOOD FRAMED DECKS

- DECKS ARE TO BE FRAMED IN ACCORDANCE WITH APPLICABLE
- BUILDING CODES AND AS REFERENCED ON THE STRUCTURAL PLANS, EITHER THROUGH CODE REFERENCES OR CONSTRUCTION DETAILS. PRESERVATIVE TREATED WOOD FRAMING TO BE SOUTHERN YELLOW PINE #2 OR BETTER. GUARD RAILS AND LATERAL BRACING IS REQUIRED AT DECKS, DESIGN BY
- PROVIDE DECK LATERAL LOAD CONNECTIONS PER BUILDING CODE.

## RAFTER FRAMED ROOF CONSTRUCTION:

- PROVIDE 2x4x4'-0" RAFTER TIES AT 48" O.C.
  RAFTERS SHALL BE SUPPORTED BY PURLINS AND PURLIN BRACES AS SHOWN ON THE PLAN, PURLIN BRACES SHALL NOT BEAR ON ANY CELLING JOIST STRONGRACK OR HEADER LINLESS SPECIFICALLY SHOWN ON PLAN. RAFTERS MAY BE SPLICED AT PURLIN LOCATIONS
  CEILING JOISTS SHALL HAVE LATERAL SUPPORT w/ 1x4 FLAT
- BRACING ON TOP FDGE OF JOIST AT LOOSE JOIST ENDS (WHERE JOISTS NOT FASTENED TO RAFTERS) OR FULL DEPTH BLOCKING. FASTEN END OF BRACING TO RAFTER OR GABLE END FRAMING
- FASTEN RAFTER AND CEILING JOIST WITH (6) 12d NAILS UNLESS OTHERWISE NOTED.
- PROVIDE VERTICAL 2x6 STRONGBACKS AT CEILING JOISTS @ 8'-0' O.C. TIE STRONGBACK ENDS TO GABLE STUDS OR RAFTERS WHERE POSSIBLE. PROVIDE BLOCKING BETWEEN TOP PLATES AND STRONGBACKS. PROVIDE 2x4 FLAT FASTENED TO EACH JOIST WITH (2) 12d NAILS FASTEN STRONGBACK TO 2v4 FLAT WITH 12d NAILS @ 12" O.C. AND FASTENED TO EACH JOIST WITH (1) 12d TOENAIL

### WOOD TRUSSES (FLOOR & ROOF):

- THE WOOD TRUSS MANUFACTURER/FABRICATOR IS RESPONSIBLE FOR THE DESIGN OF THE WOOD TRUSSES, SUBMIT SEALED SHOP DRAWINGS AND SUPPORTING CALCULATIONS TO THE SER FOR REVIEW PRIOR TO FABRICATION. THE SER SHALL HAVE A MINIMUM OF (5) DAYS FOI REVIEW. THE REVIEW BY THE SER SHALL BE FOR OVERALL COMPLIANCE OF THE DESIGN DOCUMENTS. THE SER SHALL ASSUME NO RESPONSIBILITY FOR THE CORRECTNESS OF THE STRUCTURAL DESIGN FOR THE WOOD TRUSSES.
- THE WOOD TRUSSES SHALL BE DESIGNED FOR ALL REQUIRED LOADINGS AS SPECIFIED IN THE LOCAL BUILDING CODE THE ASCE STANDARD. "MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES. (ASCE 7), AND THE LOADING REQUIREMENTS SHOWN ON THESE SPECIFICATIONS. THE TRUSS DRAWINGS SHALL BE COORDINATED WITH ALL OTHER CONSTRUCTION DOCUMENTS AND PROVISIONS PROVIDED FOR LOADS SHOWN ON THESE DRAWINGS INCLUDING BUT NOT LIMITED TO HVAC FOLIPMENT, PIPING, AND ARCHITECTURAL FIXTURES ATTACHED TO
- THE TRUSSES.
  THE TRUSSES SHALL BE DESIGNED, FABRICATED, AND ERECTED IN ACCORDANCE WITH THE LATEST EDITION OF THE ANSI/TPI 1. "NATIK DESIGN STANDARD FOR METAL PLATE CONNECTED WOOD TRUSS CONSTRUCTION"
- THE TRUSS MANUFACTURER SHALL PROVIDE ADEQUATE BRACING INFORMATION IN ACCORDANCE WITH "BUILDING COMPONENT SAFETY INFORMATION GUIDE TO GOOD PRACTICE FOR HANDLING, INSTALLING, RESTRAINING & BRACING OF METAL PLATE CONNECTED WOOD TRUSSES' (BCSI) THIS BRACING BOTH TEMPORARY AND PERMANENT SHALL BE SHOWN ON THE SHOP DRAWINGS. ALSO, THE SHOP DRAWINGS SHALL SHOW THE REQUIRED ATTACHMENTS FOR THE TRUSSES.

THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING TEMPORARY BRACING AND SHORING FOR THE FLOOR AND ROOF TRUSSES AS REQUIRED DURING CONSTRUCTION. AT A MINIMUM, CONTRACTOR SHALL FOLLOW THE REQUIREMENTS OF THE LATEST BCSI. THE CONTRACTOR SHALL KEEP A COPY OF THE BCSI SUMMARY SHEETS ON SITE.

- THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL PERMANENT THE CONTROLLOR RESPONSIBLE FOR HISTALLINE ALL PERMANENT TRUSS BRACING SHOWN IN THE STRUCTURE DRAWINGS AND IN THE TRUSS DESIGNS. ALL CONTINUOUS LATERAL BRACING OF WEBS REQUIRES BRACES, REFET TO BCSI SUMMARY SHEET BS FOR TYPES OF DIAGONAL BRACES TO PROVIDE AT EACH CONTINUOUS LATERAL BRACE LINE, SUCH BRACES IN PROVIDE AT BUSH OWN THE SPACED MORE THAN 20 FEET O.C. DIGONAL BRACES SHALL NOT SEPRICED MORE THAN 20 FEET O.C. DIGONAL BRACES SHALL BE FASTEND TO EACH TRUSK WEB WITH MINIMUM OF TWO TOOF FACE HAILS. WHERE CONTINUOUS LATERAL BRACING CANNOT BE INSTALLED, DUE TO A MINIMUM OF THREE ADJACENT TRUSSES NOT BEING IDENTICAL, THE CONTINGATION SHALL COORDINATE WITH THE TRUSS SPECIALTY ENGINEER/MANUFACTURER TO DETERMINE WHAT TYPE OF ALTERNATE BRACE (I.E., T OR L BRACE, ETC.) IS REQUIRED
- ANY CHORDS OR TRUSS WEBS SHOWN ON THESE DRAWINGS HAVE BEEN SHOWN AS A REFERENCE ONLY. THE FINAL DESIGN OF THE TRUSSES SHALL BE PER THE MANUFACTURER.

  TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH
- THE SUPPORT LOCATIONS SHOWN ON THE SEALED STRUCTURAL DRAWINGS, TRUSS PROFILES TO BE SEALED BY THE TRUSS
  MANUFACTURER, TRUSS PLANS TO BE COORDINATED WITH THE SEALED STRUCTURAL DRAWINGS.
- TRUSS MANUFACTURER TO PROVIDE REQUIRED UPLIFT CONNECTORS FOR ALL TRUSSES
- 10. PROVIDE SIMPSON H2.5A, USP RT7 OR EQUIVALENT AT FACH TRUSS TO TOP PLATE CONNECTION, UNLESS OTHERWISE NOTED.

- WOOD STRUCTURAL PANELS:

  1. FABRICATION AND PLACEMENT OF STRUCTURAL WOOD SHEATHING SHALL BE IN ACCORDANCE WITH THE APA DESIGN/CONSTRUCTION GUIDE "RESIDENTIAL AND COMMERCIAL," AND ALL OTHER APPLICABLE APA STANDARDS
- ALL STRUCTURALLY REQUIRED WOOD SHEATHING SHALL BEAR THE
- WOOD WALL SHEATHING SHALL COMPLY WITH THE REQUIREMENTS OF LOCAL BUILDING CODES FOR THE APPROPRIATE STATE AS INDICATED ON THESE DRAWINGS. REFER TO WALL BRACING NOTES IN PLAN SET FOR MORE INFORMATION. EXTERIOR WALLS TO BE FULLY SHEATHED LISING 76" OSB MINIMUM AT BRACED WALL PANELS PROVIDE BLOCKING AT ALL SHEET EDGES NOT FALLING ON STUDS OR
- PLATES.
  ROOF SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2. ROOF SHEATHING SHALL BE CONTINUOUS OVER TWO SUPPORTS MINIMUM AND ATTACHED TO ITS SUPPORTING ROOF FRAMING WITH 8d NAL AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. IN PANEL FIELD UNLESS OTHERWISE NOTED ON THE PLANS. SHEATHING SHALL BE APPLIED WITH THE LONG DIRECTION PERPENDICULAR TO FRAMING SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE FRAMING SPACING. PROVIDE SUITABLE EDGE SUPPORT BY USE OF PLYWOOD CLIPS OR LUMBER BLOCKING UNLESS OTHERWISE NOTED PANEL END JOINTS SHALL OCCUR OVER FRAMING. ROOF SHEATHING
- TO BE 76 OSB MINIMUM.

  WOOD FLOOR SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2. ATTACH SHEATHING TO ITS SUPPORTING FRAMING WITH (1) 10d NAIL AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. IN PANEL FIELD UNLESS OTHERWISE NOTED ON THE PLANS. SHEATHING SHALL BE APPLIED PERPENDICULAR TO FRAMING SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE FRAMING SPACING PROVIDE SUITABLE FOGE SUPPORT BY LISE OF PANEL END JOINTS SHALL OCCUR OVER FRAMING.
- SHEATHING SHALL HAVE A %" GAP AT PANEL ENDS AND EDGES AS RECOMMENDED IN ACCORDANCE WITH THE APA

## STRUCTURAL FIBERBOARD PANELS:

- STRUCTURAL FIBERBOARD SHEATHING SHALL ONLY BE USED WHERE SPECIFICALLY NOTED ON THE STRUCTURAL PLANS. FABRICATION AND PLACEMENT OF STRUCTURAL FIBERBOARD
- SHEATHING SHALL BE IN ACCORDANCE WITH THE APPLICABLE AFA STANDARDS
- STARUARDS.

  FIBERBOARD WALL SHEATHING SHALL COMPLY WITH THE REQUIREMENTS OF LOCAL BUILDING CODES FOR THE APPROPRIATE STATE AS INDICATED ON THESE DRAWINGS. REFER TO WALL BRACING NOTES IN PLAN SET FOR MORE INFORMATION.
- SHEATHING SHALL HAVE A M" GAP AT PANEL ENDS AND EDGES AS RECOMMENDED IN ACCORDANCE WITH THE AFA.

- STRUCTURAL STEEL:

  1. STRUCTURAL SITEL SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH THE AMERICAN INSTITUTE OF STEEL CONSTRUCTION "CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES" AND OF THE MANUAL OF STEEL CONSTRUCTION "LOAD RESISTANCE FACTOR DESIGN" LATEST EDITIONS
- ALL STEEL SHALL HAVE A MINIMUM YIELD STRESS (F.) OF 50 KSI UNLESS OTHERWISE NOTED.
  WELDING SHALL CONFORM TO THE LATEST EDITION OF THE
- AMERICAN WELDING SOCIETY'S STRUCTURAL WELDING CODE AWA D1.1 ELECTRODES FOR SHOP AND FIELDING WELDING SHALL BE CLASS 570XX. ALL WELDING SHALL BE PERFORMED BY A CERTIFIED WELDER PER THE ABOVE STANDARDS. ALL STEEL BEAMS TO BE SUPPORTED AT EACH END WITH A
- MINIMUM BEARING LENGTH OF 38" AND FULL FLANGE WIDTH UNLESS OTHERWISE NOTED. BEAMS MUST BE ATTACHED AT EACH END WITH A MINIMUM OF FOUR 16d NAILS OR (2) 35" x 4" LAG SCREWS
- UNLESS OTHERWISE NOTED.
  INSTALL 2x WOOD PLATE ON TOP OF STEEL BEAMS, RIPPED TO
  MATCH BEAM WIDTH. FASTEN PLATE TO BEAM w/ HILTI X-DNI 52 P8 PINS AT 12" O.C. STAGGERED OR 1/2" DIAMETER BOLTS AT 24"

### MECHANICAL FASTENERS

- ALL METAL HARDWARE AND FASTENERS TO BE SIMPSON STRONG—TIE OR APPROVED EQUIVALENT.

  ALL HARDWARE AND FASTENERS IN CONTACT WITH PRESERVATIVE PRESSURE TREATED LUMBER SHALL BE HOT DIPPED GALVANIZED IN
- ACCORDANCE WITH ASTM A 153, C-185,
  MANY OF THE NEW PRESSURE TREATED WOODS USE CHEMICALS
  THAT ARE CORROSIVE TO STEEL. IT IS THE CONTRACTOR'S
  RESPONSIBILITY TO VERIFY THE TYPE OF WOOD TREATMENT AND SELECT APPROPRIATE CONNECTORS THAT WILL RESIST THE APPLICABLE CORROSIVE CHEMICALS.



BRICK	VENEER LINTEL SC	HEDULE				
SPAN LINTEL SIZE END BEARING						
UP TO 3'-0"	3½"x3½"x¼"	4"				
UP TO 6'-3"	5"x3½"x5(6" L.L.V.	8"				
UP TO 9'-6"	9'-6" 6"x3½"x5 <sub>16</sub> " L.L.V. 12"					
LINTELS ARE NOT DESIGNED TO BE BOLTED TO HEADERS UNLESS SPECIFIED ON UNIT PLANS.						
SPANS OVER 4'_O" SHALL BE SHOPED UP LINTH CURED !						



Week1 David 7

ERING 8TOWN, PA 18951 (215) 804-4449

Ш

NGIN

ÍШ

S

 $\checkmark$ 

Homes

\_\_\_\_\_ ည


Not Model 907 Structural ity, Lot #9 Capstone .H. North Serenity, σ.  $\leq$ 115 467

Carolina

gh,

Seneral Ralei Project #: 047-24018 Designed By: LMR Checked By:

Issue Date: 9/25/25 Scale: 1/8"=1'-0" @ 11-17 1/4"=1'-0" @ 22x34

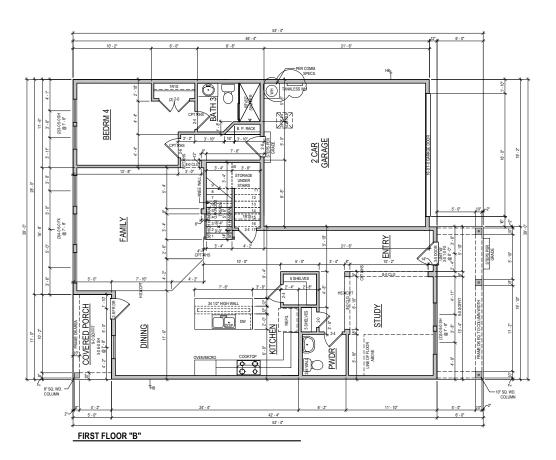

 Week key Homes L.P. 205.
The measurements, dimensions, and other specifical shown on this document are spatientees for construct very. The schall spotleteiton of the finite hasher of what its document may push to the ADVANCED FRAMING: 2X6 EXTERIOR PERIMETER WALLS & ALL INSULATED WALLS UNLESS NOTED OTHERWISE

NOTE: ALL 1ST FLR. CEILING HEIGHTS 9' - 0" UNLESS NOTED OTHERWISE

David Weekley Homes Scale:1/8"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024 907 Block: Ë

Proj. No.: 3294 Job No.: 0907

SERENITY 50' 66 RAINBROOK COVE FUQUAY VARINA, NC

NORTH A671-B

PLN-1

CAPSTONE

RALEIGH

PLAN SQFT - B






GARAGE FLOOR TO BE SLOPED 1/8" PER FOOT TOWARDS VEHICLE ENTRY DOOR

FINISHED HANDRAIL HEIGHT BETWEEN 34" AND 36" MEASURED VERTICALLY ABOVE TREAD NOSING

FINISHED GUARDRAILS REQUIRED AT DECKS, BALCONIES AND WALKWAYS THAT ARE 30° OR GREATER ABOVE GRADE AND BE AT A MINIMUM OF 36° IN HEIGHT

FINISHED GUARDRAIL AND HANDRAIL SPINDLES MUST BE SPACED SO A 4" SPHERE WILL NOT PASS THROUGH

1360 SF 55 SF 119 SF 412 SF 1946 SF 1ST FLOOR 2ND FLOOR COVERED PO FRONT PORCE

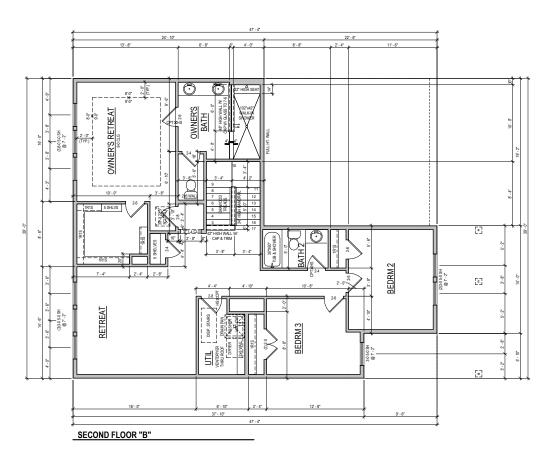

ADVANCED FRAMING: 2X6 EXTERIOR PERIMETER WALLS & ALL INSULATED WALLS UNLESS NOTED OTHERWISE NOTE: ALL 2ND FLR. CEILING HEIGHTS 8' - 0" UNLESS NOTED OTHERWISE

David Weekley Homes 907 Lot:

Weekley Homes L.P. 2024
To assumented dimens, and obe specificals and the specificals and the specification of the short of the comment are galdelines to comment only. The schall specification of the links blanched shorter ways. This observation may not be reliefed on as a summer of what the comment may not be reliefed on as a summer.


Scale:1/8"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024

Block:

Proj. No.: 3294 Job No.: 0907 SERENITY 50' 66 RAINBROOK COVE FUQUAY VARINA, NC

A671-B PLN-2 CAPSTONE RALEIGH



ENGINEERING E, SUITE 201, QUAKERTOWN, PA 18951 COM (215) 804-4449

KSE



PROVIDE SOLID BLOCKING
WITHIN FLOOR SYSTEM TO
MATCH POST SIZE ABOVE.

пшшшп

 BRACED WALL PANEL
 (SEE KSE STRUCTURAL DETAILS
 SET FOR BRACED WALL PANEL 48" WSP SHEATHING FASTENING &
BLOCKING DETAILS)

→ CONTROL JOINT

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS




⇒ BEARING WALL ABOVE ⇒ INTERIOR BEARING WALL

Monolithic Slab Foundation P Serenity, Lot #907 A671 Capstone Model Project #: 047-24018 Designed By: LMR Checked By: Issue Date: 9/25/25 Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

Plan



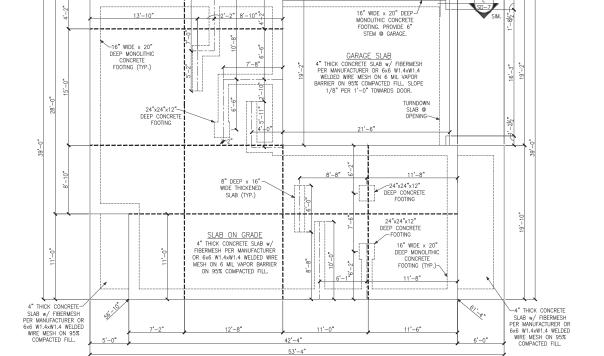

46'-4"

12'-8"

21'-6"

(TYP. @ BRICK VENEER)

24'-10"


48,10

Raleigh, North Carolina

115 M.P.H.

KSI

ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
com (215) 804--4449



REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS

PLAN DESIGNED WITH 9' NOMINAL WALL PLATE HEIGHT

FLOOR FRAMING TO BE 16" DEEP TJI 210 SERIES OR EQUAL, SPACING PER MANUFACTURER. KEYNOTES:

- (3) INSTALL ONE PANEL CS-PF PORTAL FRAME PER DETAIL A/SD-3.
- INSTALL TWO PANEL CS-PF PORTAL FRAME PER DETAIL A OR B/SD-4.



SECOND FLOOR FRAMING PLAN

KITCHEN

RIM BOARD

HANGERS PER

TRUSS SUPPLIER

2x8 LEDGER w/ (4) ROWS 12d NAILS @ r12" O.C.

2x6 @ 12'
0.C. BALLOC
FRAMED WAI
CS-ESW(1)
DESIGNED T
REPLACE 4E
OF CS-WSF

BATH 3

(4)1%"x (4)1%"x PLIES T SIMPSON )

2

FAMILY

DINING

HANGERS PER

JOIST SUPPLIER (TYP.)

BEDRM 4

3)-

INSTALL BLOCKING-PANELS @

CANTILEVERED JOISTS

STRUCTURAL COLUMN BY— OTHERS WITH MIN. 3,000 LB. CAPACITY. INSTALL

PER MANUFACTURER'S

INSTRUCTIONS.

COVERED

1½"x16" 48" WSP

PORCH

2 CAR

GARAGE

VALLEY SET ROOF TRUSSES @ 24" TO FORM FALSE DORMER

RIM BOARD

STUDY

ROOF TRUSSES-

@ 24" O.C.

(2)1¾"x16" LVL FLUSH

ROOF TRUSSES @ 24" O

(Ý.)

PWDR

INSTALL BLOCKING-

PANELS @ CANTILEVERED JOISTS

(2)2x6

ΓZ

(2)134"x1136"

j-(5)

48" CS-WSP

်ပ္ပ(2)2x8

RUN HEADER & OSB SHEATHING CONT. THROUGH -TO INTERIOR FACE OF WALL

STRUCTURAL COLUMN, INSTALL PER

MANUFACTURER'S SPECIFICATIONS (TYPICAL)

-2x4 LEDGER w/ (2) ROWS 12d NAILS @ 16" O.C.

-ROOF TRUSSES

HUC28-2 (TYP.)

Issue Date: 9/25/25

Capstone Model

A671 115

Project #: 047-24018 Designed By: LMR Checked By:

Plan

Framing

Floor

Second

#907

Serenity, Lot


Carolina

Raleigh, North

H. □. □.

ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
(COM (215) 804-449

KSE

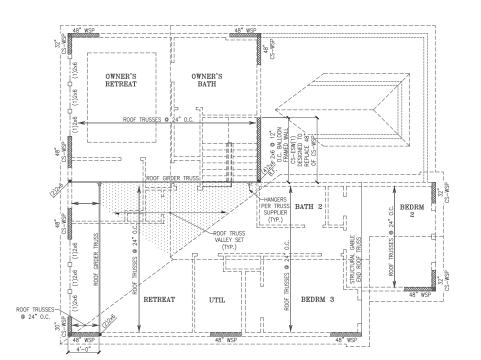

ROOF FRAMING PLAN



48" WSP

LEGEND PROVIDE SOLID BLOCKING

WITHIN FLOOR SYSTEM TO MATCH POST SIZE ABOVE.

→ BEARING WALL ABOVE

□□□□□□ → INTERIOR BEARING WALL BRACED WALL PANEL
 (SEE KSE STRUCTURAL DETAILS
 SET FOR BRACED WALL PANEL
 SHEATHING FASTENING &


BLOCKING DETAILS) REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS


PLAN DESIGNED WITH 8' NOMINAL WALL PLATE HEIGHT





Raleigh, North Carolina

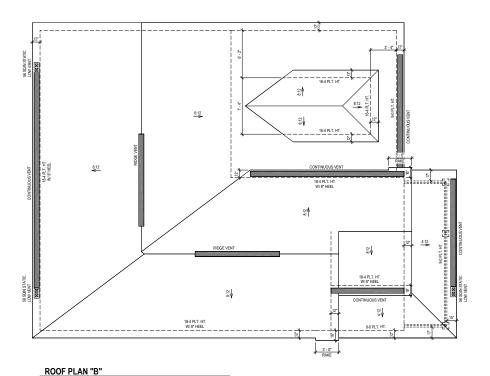



		Α	VENTILATION %												
NET	NET FREE VENTILATED AREA EXHAUST VENTS				INTAKE VENTS										
NEVA	FVA=AREA SF X 144 / RATIO INSTALL NO MORE THAN 3' BELOW HIGHEST POINT OF ZONE			INSTALL IN LOWER THIRD OF ZONE					EXHAUST NOT TO EXCEED INTAKE						
				\	\		,	VENTS	PRII	MARY VENTS		SECON	IDARY VENTS		
ZONE	AREA	VENT	MIN	REQ	SIZE	COUNT	SIZE	COUNT	INTAKE SPLIT %	SIZE	COUNT	EXHAUST	INTAKE		
		100.10			SQIN	EA or SQIN/LF	SQIN	EA or SQIN/LF	01 211 10	SQIN	EA or SQIN/LF		~		
ZONE 1	169 SF	150	162	No	0	0	5	13	60%	56	2	0%	100%		
ZONE 2	1771 SF	300	850	Yes	18	23	5	70	20%	56	2	47%	53%		

# TRUSS ROOF NOTES

ALL OVERHANGS PER PLAN MEASURED FROM OUTSIDE FACE OF FRAME.

GABLE OVERHANGS 12" UNLESS NOTED OTHERWISE.

HIP OVERHANGS 16" UNLESS NOTED OTHERWISE.

ALIGN FASCIA TO MAINTAIN CONSISTENT OVERHANG WITH DIFFERING ROOF PITCH.

HE TRUSS MANUFACTURER SHALL DETERMINE ALL SPANS, WORKING POINTS, BEARING DINTS, AND SIMILAR CONDITIONS. TRUSS SHOP DRAWINGS SHALL SHOW ALL TRUSSES, EMBERS, AND ALL TRUSS TO TRUSS HANGERS.

ALL OVERFRAMING AND BRACING TO BE NO. 2 GRADE 2X S.Y.P. UNLESS NOTED OTHERWIS ROOF SHEATHING AT OVERFRAME SHALL BE REMOVED TO ALLOW FOR VENTILATION BETWEEN ATTIC SPACES ON VENTED ATTICS.

ACTUAL ATTIC VENTILATION MAY VARY, VERIFY IN THE FIELD

© Week lay Homes L.P. 2024
The measurements, dimensions, and other specifications shown on the counter are specifications only. The actual specifications of the instead occurrence on only. The actual specifications of the instead occurs on war, The document may not a such document and only of the complessed structure will not like.

 David Weekley Homes

 PITALIRIBPIJAS
 Scale: 1/8"=1-0"


 Date: 11/27/2024
 Rev: 7.9.25 EB


Lot: 907 Block:

3294 306 No.: 306 No.:

SERENITY 50' 66 RAINBROOK COVE FUQUAY VARINA, NC

NORTH A671-B RFP-1 CAPSTONE RALEIGH

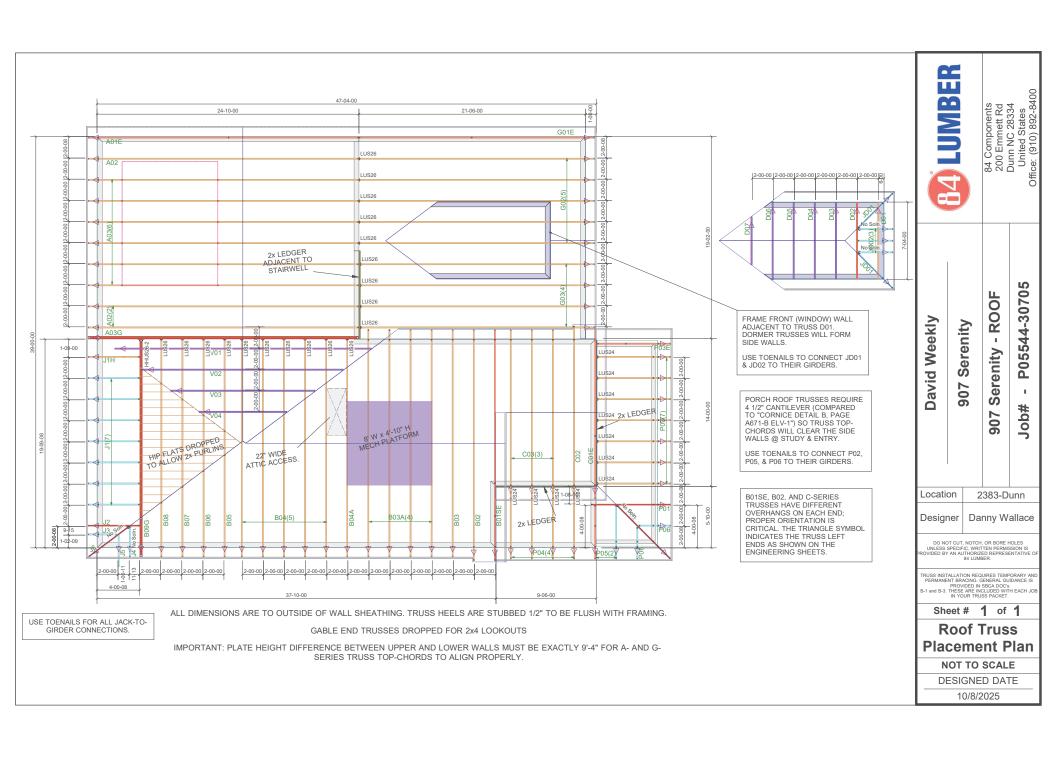

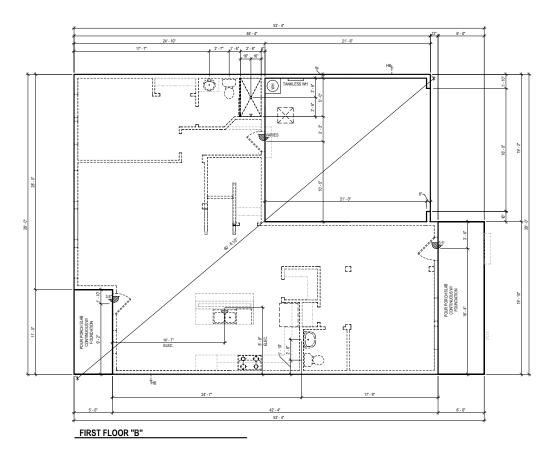

© Week lay Homes L.P. 2024
The measurement, dirention, and bother specialization shown on the document are goldelines for contruction me shown on the document are goldelines for contruction on only. The season specialization of the finished brushes may vary. The document may not be inside of ma a representation of that the completed flux date will look like.

 David Weekley Homes

 PITALIRIBPIJAS
 Scale: 1/8"=1-0"

 Date: 11/27/2024
 Rev: 7.9.25 EB


Lot: 907 Block:

3294 Lo 3294 Job No.: Bl 0907

SERENITY 50' 66 RAINBROOK COVE FUQUAY VARINA, NC

NORTH
A671-B
FS-1
CAPSTONE
RALEIGH

SEE ENGINEERING FOR ANCHOR BOLT REQUIREMENTS

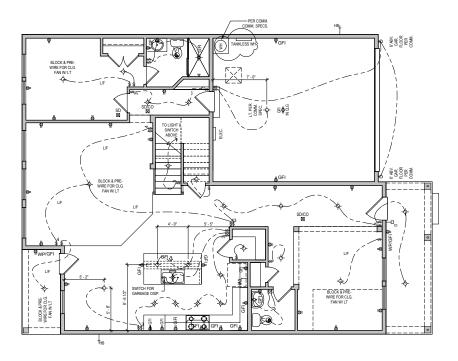

FIRST FLOOR "B"



© Weekle.
The measuments dimens above no first document are only. The actual specification vary. This document of what the co-

David Weekley Homes

907

Fot

Proj. No.: 3294 Job No.: 0907

SERENITY 50' 66 RAINBROOK COVE FUQUAY VARINA, NC

Scale:1/8"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024



ALL RECESS CANS SHOWN ON PLAN ARE **LED** PER COMMUNITY SPEC.

## MID-ATLANTIC General Notes

ALL ELECTRICAL PLUGS TO BE 9" TO TOP FROM FLOOR IN ROOMS WITH WALL MOULDINGS.

2. SWITCH FOR ATTIC LIGHT TO BE LOCATED OUTSIDE OF ATTIC SPACE, 12 INCHES FROM CEILING.

PROM CEILING.

3. DO NOT RUN WIRES ON TOP OF JOISTS IN AREAS LIKELY TO HAVE DECKING IN ATTIC. (near disappearing stairs)


 PROVIDE SMOKE DETECTORS IN EVERY BEDROOM. SEE SPECS FOR REQUIRED TYPE AND WIRING.

C. DOOLDE OAG AT ADDI JANGEO DED COMMUNITY DEGUIDENERS

5. PROVIDE GAS AT APPLIANCES PER COMMUNITY REQUIREMENT

6. LOCATE ELECTRICAL PANEL IN LOCATION CLOSEST TO SERVICE.



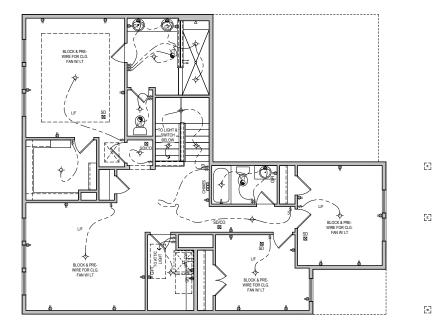

SECOND FLOOR "B"



David Weekley Homes

907

Lot:

Proj. No.: 3294 Job No.: 0907

SERENITY 50' 66 RAINBROOK COVE FUQUAY VARINA, NC

Scale:1/8"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024



ALL RECESS CANS SHOWN ON PLAN ARE **LED** PER COMMUNITY SPEC.

## **MID-ATLANTIC General Notes**

ALL ELECTRICAL PLUGS TO BE 9" TO TOP FROM FLOOR IN ROOMS WITH WALL MOULDINGS.


2. SWITCH FOR ATTIC LIGHT TO BE LOCATED OUTSIDE OF ATTIC SPACE, 12 INCHES FROM CEILING.

3. DO NOT RUN WIRES ON TOP OF JOISTS IN AREAS LIKELY TO HAVE DECKING IN ATTIC. (near disappearing stairs)

4. PROVIDE SMOKE DETECTORS IN EVERY BEDROOM, SEE SPECS FOR REQUIRED TYPE AND WIRING.

6. LOCATE ELECTRICAL PANEL IN LOCATION CLOSEST TO SERVICE.



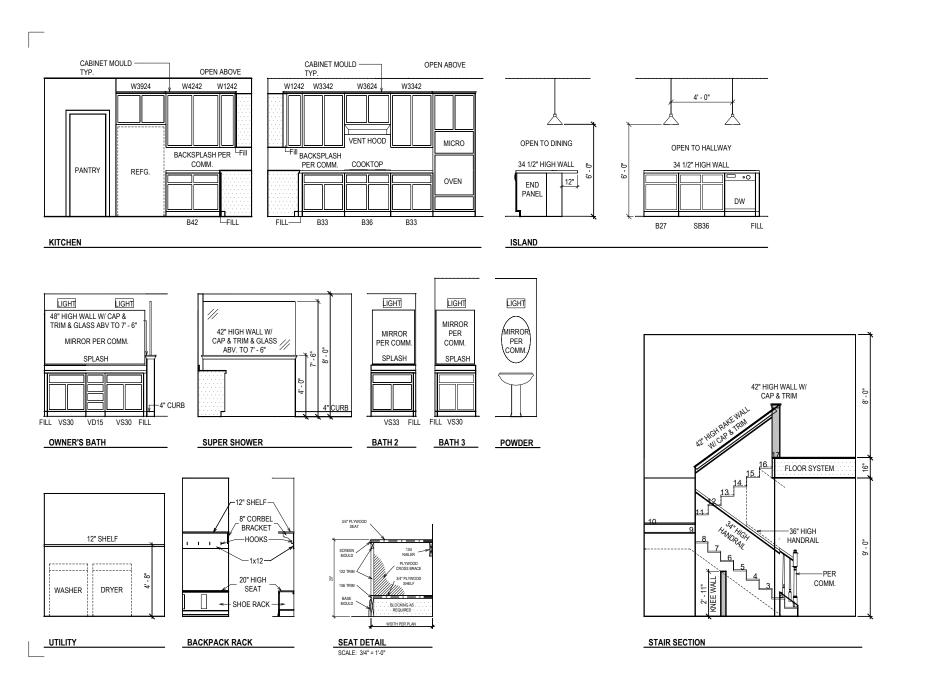

Week key Homes L.P.
The measurements, dimension, and other sp. other on on this former are guidelines for convey. The sexal specification to the Property of the former of the fore

David Weekley Homes Scale:1/4"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024

90 Ë Proj. No.: 3294 Job No.: 0907

SERENITY 50'
66 RAINBROOK COVE
FUQUAY VARINA, NC

A671-B INT-1 CAPSTONE RALEIGH






























Checked By: Issue Date: 9/25/25 Re-Issue:


Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

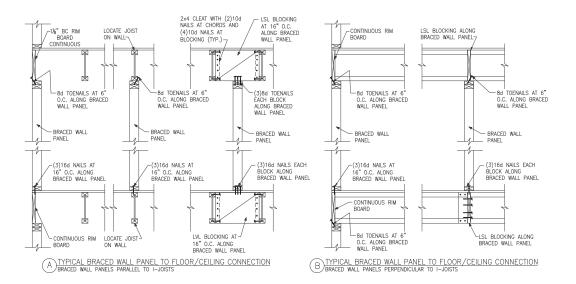




© METHOD GB(1) AND GB(2) INTERSECTION DETAILS







HEEL HEIGHT GREATER THAN 91/4" AND LESS THAN 151/4"


HEEL HEIGHT GREATER 15"


# D TYPICAL EXTERIOR CORNER WALL FRAMING


NOTE: A THIRD STUD AND/OR PARTITION INTERSECTION BACKING STUDS SHALL BE PERMITTED TO BE OMITTED THROUGH THE USE OF WOOD BACKUP CLEATS, METAL DRYWALL CLIPS OR OTHER APPROVED DEVICES THAT WILL SERVE AS ADEQUATE BACKING FOR THE FACING MATERIALS.


ROOF TRUSS BEARING/BLOCKING AT BRACED WALL PANELS ONLY REQUIRED AT BRACED WALL PANELS











# A TYPICAL HOLD DOWN DETAIL

(E)HOLD DOWN AT CRAWL FOUNDATION

A36 ALL THREAD ROD -


SIMPSON CNW1/2 -OR USP CNW12-ZP COUPLER NUT


GROUT CMU SOLID AT ALL THREAD ROD~

-HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET

# B TYPICAL HOLD DOWN DETAIL

C HOLD DOWN AT STEMWALL SLAB

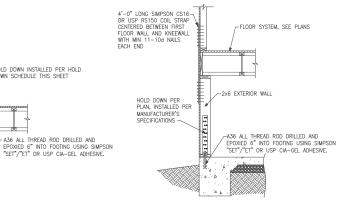



HOLD DOWN AT FOUNDATION
MONOLITHIC TURN-DOWN

G HOLD DOWN AT FOUNDATION STEM WALL

HOLD DOWN SCHEDULE							
	DOWN	ALL TREAD ROD	FASTENERS				
SIMPSON	USP						
LTTP2	LTS20B	½" DIA.	(10)10d NAILS				
HTT4	HTT16	%" DIA.	(18)16dx2½" LONG NAILS				
HTT5	HTT45	%" DIA.	(26)16dx2½" LONG NAILS				


Carolina

North

Details

 $\approx$ 

Notes

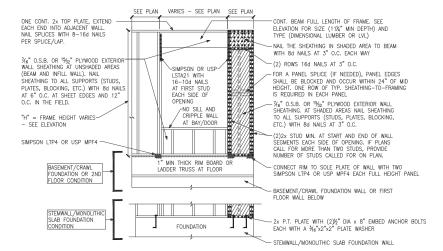

(A) METHOD CS-PF: CONTINUOUS PORTAL FRAME PANEL CONSTRUCTION ONE BRACED WALL SEGMENT


ONE CONT. 2x TOP PLATE, EXTEND EACH END INTO ADJACENT WALL. NAIL SPLICES 8-16d NAILS PER SPLICE/LVP. 74e" O.S.B. OR 15%2" PLYWOOD EXTERIOR WALL SHEATHING AT UNSHADED AREAS	SEE PLAN VARIES – SEE PLAN SEE PLAN  CONT. BEAM FULL LENGTH OF FRAME. SEE ELEVATION FOR SIZE (11½" MIN DEPTH) AND TYPE (DIMENSIONAL LUMBER OR LV.)  NAIL THE SHEATHING IN SHADED AREA TO BEAM WITH 8d NAILS AT 3" O.C. EACH WAY  (2) ROWS 16d NAILS AT 3" O.C.
(BEAM AND INFILL WALL). NAIL SHEATHING TO ALL SUPPORTS (STUDS, PLATES, BLOCKING, ETC.) WITH 8d NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. IN THE FIELD.	SIMPSON OR USP  —(2) KUWS 16d MAILS AI 3 O.C.  LETA21 WITH  16-104 MAILS  FOR A PANEL SPLICE (IF NEEDED), PANEL EDGES  SHALL BE BLOCKED AND OCCUR WITHIN 24" OF MID  HEIGHT. ONE ROW OF TYP. SHEATHING—TO—FRAMING  FOR THE STRUCK OF THE SHEATHING—TO—FRAMING  FOR THE SHEATHING—TO—FRAMIN
"H" = FRAME HEIGHT VARIES—  - SEE ELEVATION  WHERE FULL HEIGHT PANEL WIDTH  EXCEEDS 16". PROVIDE ADDITIONAL STUDS	NO SILL AND CRIPPLE WALL AT BAY/DOOR CITY STILL MIN AT SHAPED AREAS AND SHEATHING TO ALL SUPPORTS (STUDS, PLATES, BLOCKING, ETC.) WITH 8d NAILS AT 3" O.C.
AT 16" O.C. NAIL SHEATHING TO ALL STUDS WITH 8d NAILS AT 3" O.C.  BASEMENT/CRAWL	SEGUENTS EACH SIDE OF OPENING, IF PLANS CALL FOR MORE THAN TWO STUDS, PROVIDE NUMBER OF STUDS CALLED FOR ON PLAN.
FOUNDATION OR 2ND FLOOR CONDITION	LADDER TRUSS AT FLOOR  CONNECT RIM TO SOLE PLATE OF WALL WITH TWO SIMPSON LIP4 OR USP MPF4 EACH FULL HEIGHT PANEL  BASEMENT/CRAWL FOUNDATION WALL OR FIRST FLOOR WALL BELOW
STEMWALL/MONOLITHIC SLAB FOUNDATION CONDITION	2x P.T. PLATE WITH (2)½" DIA x 8" EMBED ANCHOR BOLTS EACH WITH A ¾«"x2"x2" PLATE WASHER
_	STEMWALL/MONOLITHIC SLAB FOUNDATION WALL

(B) METHOD CS-PF: CONTINUOUS PORTAL FRAME PANEL CONSTRUCTION TWO BRACED WALL SEGMENTS

BRACED WALL PANEL AND ENGINEERED SHEAR WALL SCHEDULE							
PANEL TYPES	PANEL TYPE	MATERIAL	FASTENERS				
WSP	INTERMITTENT WOOD STRUCTURAL PANEL	6d OR 8d COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O. 7/16" OSB INTERMEDIATE SUPPORTS. ENGINEERED ALTERNATIVE: 16 AGE BY 1. STAPLES AT 3" O.C. AT SHEET EDGES AND 6" O.C. AT INTERMEDIATE					
GB(1)	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 7" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.				
GB(1)-4	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 4" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.				
GB(2)	INTERMITTENT GYPSUM BOARD (SHEATHING BOTH FACES OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 7" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.				
CS-WSP	CONTINUOUS SHEATHED WOOD STRUCTURAL PANEL	7/16" OSB	6d or 8d common nails at 6" o.c. at sheet edges and 12" o.c. at intermediate supports. <u>Engineered Alternative</u> : 16 <u>Gage By 1.75" long Staples at 3" o.c. at sheet edges and 6" o.c. at intermediate suppor</u>				
CS-PF	CONTINUOUS SHEATHED PORTAL FRAME	7/16" OSB	NAILING PER DETAIL				
CS-EPF	PORTAL FRAME WITH HOLD DOWNS	7/16" OSB	NAILING PER DETAIL				
CS-ESW(1)	ENGINEERED SHEAR WALL, TYPE 1	7/16" OSB	8d COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS				
CS-ESW(2)	ENGINEERED SHEAR WALL, TYPE 2	7/16" OSB	8d COMMON NAILS AT 4" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS				
CS-ESW(3)	ENGINEERED SHEAR WALL, TYPE 3	7/16" OSB	8d COMMON NAILS AT 3" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS				

### BRACED WALL PANEL NOTES:

- ALL BRACED WALL PANELS, EXCEPT GB(1) & GB(2), SHALL HAVE 2x BLOCKING BETWEEN WALL STUDS AT ALL HORIZONTAL SHEET EDGES.
- 2. PROVIDE NAILING/BLOCKING ABOVE AND BELOW ALL BRACED WALL PANELS PER KSE BRACED WALL DETAILS.
- SHEATH ALL EXTERIOR WALLS OF THE HOUSE WITH 1/48" O.S.B., OR 15/2" PLYWOOD, FASTENED PER IRC. AT EXTERIOR CORNERS, SHEATHING SHALL BE FASTENED PER KSE BRACED WALL DETAILS. AT INTERIOR WALL INTERSECTIONS, FASTEN STUDS & WALL BRACING PER KSE BRACED WALL DETAILS.
- BRACED WALL PANELS AND ENGINEERED SHEAR WALLS ARE PROVIDED PER IRC. PANEL LENGTHS SHOWN ON PLANS ARE THE MINIMUM LENGTH REQUIRED.

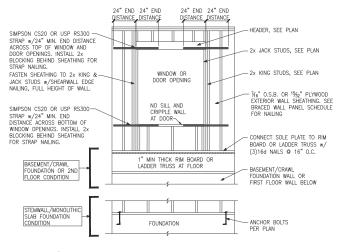

WINDOW OR DOOR REINFORCEMENT IN ENGINEERED SHEAR WALL ONLY REQUIRED WHERE SPECIFIED ON PLANS










Carolina


North


Raleigh, 1 α.

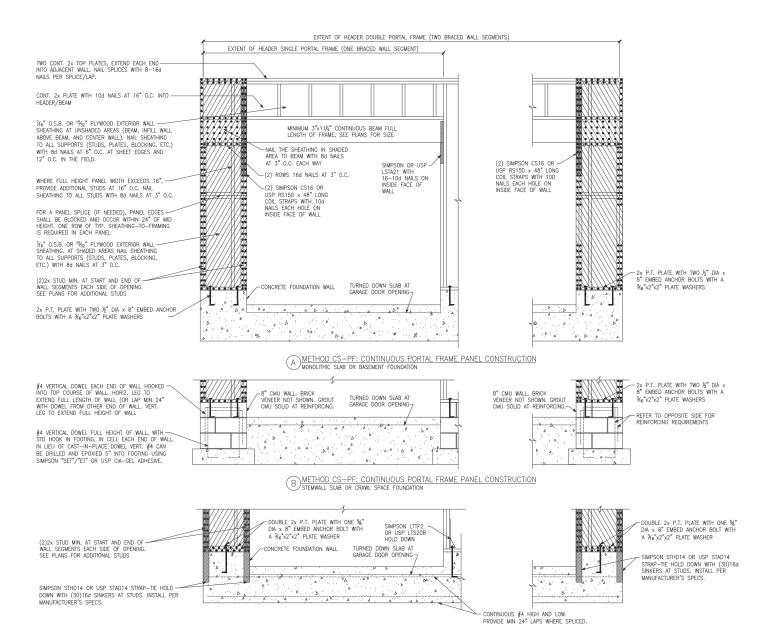


Miscellaneous Framing De Serenity, Lot #907 A671 Capstone Model 115 M.P.H. Project #: 047–24018
Designed By: LMR
Checked By:
Issue Dote: 9/25/25
Re-Issue:
Scole: 1/8"=1'-0" @ 11x17
1/4"=1'-0" @ 22x34

Details

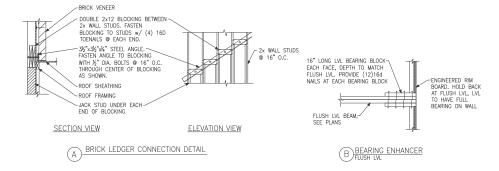



C LADDER BLOCKING
AS REQUIRED ® PARALLEL WALLS

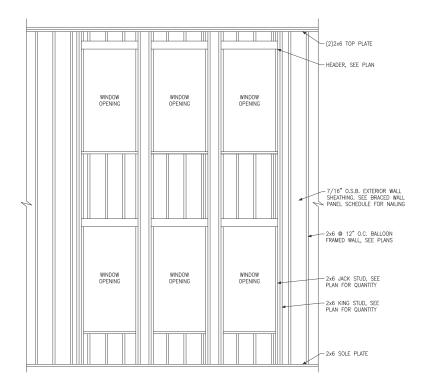

BALLOON FRAMED WALL DETAIL N.T.S.

WALL STUD SIZE, HEIGHT & SPACING SCHEDULE							
BEARING WALLS NONBEARING WALLS							
STUD SIZE	LATERALLY UNSUPPORTED STUD HEIGHT	MAXIMUM SPACING WHEN SUPPORTING A ROOF-CEILING ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY, ONLY	MAXIMUM SPACING WHEN SUPPORTING ONE FLOOR, PLUS A ROOF-CEILING ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY	MAXIMUM SPACING WHEN SUPPORTING TWO FLOORS, PLUS A ROOF-CEILING ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY	LATERALLY UNSUPPORTED STUD HEIGHT	MAXIMUM SPACING	
2x4	10'-0"	24"	16"	-	14'-0"	24"	
2x6	10'-0"	24"	24"	16"	20'-0"	24"	

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

Re-Issue:

Designed By: LMR Checked By: Issue Date: 9/25/25

Project #: 047-24018

Miscellaneous





Detail



-2x4 RAFTER & CEILING JOIST, LAP WITH VERTICAL

-LINE OF OPTIONAL BRICK

CLG. JOIST w/(4) 12d NAILS.

WALL STUDS WITH (2) ROWS SIMPSON U24-2 OR USP


SUH24-2 HANGER


B PENT ROOF DETAIL

12"x12"x½" OSB GUSSET. FASTEN GUSSET TO FRAMING w/8d NAILS @ 4" O.C. INTO EACH - MEMBER. FASTEN VERTICAL TO RAFTER & -2x4 LEDGER. FASTEN TO 2'-6" MAXIMUM 12d NAILS @ 16" Ò.C. -BRICK VENEER, PER ELEVATION

A PENT ROOF DETAIL CURVED ROOF

TRUSS WITH 16d NAILS AT 9" O.C. THROUGH PRE-DRILLED -HOLES.







LINE OF OPTIONAL BRICK

FASTEN RAFTER TO LEDGER WITH SIMPSON H3 OR USP RT3A

-2x4 LEDGER. FASTEN TO WALL STUDS

w/(2) ROWS SIMPSON SDS¼x3½" OR USP WS35 SCREWS @ 16" O.C.

FASTEN VERTICAL TO RAFTER &

CLG. JOIST w/(4) 12d NAILS.

WALL STUDS WITH (2) ROWS 12d NAILS @ 16" O.C.

-SIMPSON U24-2 OR USP SUH24-2 HANGER -BRICK VENEER, PER ELEVATION

-2x4 LEDGER. FASTEN TO

WALL STUD OR GABLE TRUSS

-WALL SHEATHING

-2x4 VERTICAL

-2x4 CEILING JOIST, LAP WITH VERTICAL

BRICK VENEER-

OSB GUSSET, CUT TO MATCH ROOF PROFILE FASTEN GUSSET TO

FRAMING w/8d NAILS @ 4"

O.C. INTO EACH MEMBER:

2'-6" MAXIMUM

2x12 RAFTER WITH

CURVED PROFILE

CUT INTO RAFTER

2x WALL STUDS,

TYP 14 V

(D)TRUSS DETAIL

ROOF GIRDER TRUSS TO SUPPORT DEAD LOAD OF BRICK, SEE PLAN



WALL ABOVE (6" O.C. AT NON-SHEAR WALLS)

%6" OSB WALL SHEATHING

O.C. KICKER MAY BE OMITTED WHEN HEIGHT OF GABLE END TRUSS IS 4'-0" OR LESS. %6" OSB AT GABLE END TRUSS, PER SHEAR WALL

(2) SIMPSON GBC OR ROOF TRUSSES AT 24" O.C.

2x4 BLOCKING BETWEEN TRUSSES WITH SIMPSON U24 OR USP JL24 EACH END

USP HC520 EACH KICKER

(E) GABLE END WALL DETAIL

OTHER BLOCK

2x4 FRAMING AT 24" O.C. -CANTILEVERED OVER GABLE -SIMPSON LTP4 EVERY

2x4 BLOCKING BTWN

2x6 KICKER AT 6'-0" O.C., WITH-2x6 "T" SCAB, NAIL SCAB TO KICKER WITH 10d NAILS AT 6"

8d NAILS AT 6" O.C. -

END TRUSS

RAFTERS.

BELOW

EDGE NAILING PER SHEAR — WALL SCHEDULE PER SHEAR

OSB GUSSET, CUT TO-MATCH ROOF PROFILE FASTEN GUSSET TO FRAMING w/8d NAILS @ 4" O.C. INTO EACH MEMBER.

X SECTION CURVED ROOF

2x12 RAFTER WITH CURVED PROFILE CUT INTO RAFTER-2x4 VERTICAL

2x4 LEDGER. FASTEN TO

WALL STUDS w/(2) ROWS SIMPSON SDS¼x3½" OR USP WS35 SCREWS @ 16" O.C.

- 8d NAILS AT 4" O.C.

SIMPSON A35 OR USP MPA1 SPACED PER SHEAR WALL BELOW ENTIRE GABLE END

(5) 10d-

TOENAIL RAFTER TO LEDGER WITH (4) 12d NAILS -2×4 LEDGER, FASTEN TO WALL STUDS w/(2) ROWS SIMPSON SDS1/4x31/2" SCREWS @ 16" O.C.

EYEBROW ROOF DETAIL STRAIGHT ROOF

-2x4 RAFTER & CEILING JOIST, LAP AND FACE NAIL WITH (4) -2x4 LEDGER. FASTEN TO WALL OR GABLE TRUSS WITH (2) ROWS 12d NAILS @ 16" O.C.

-WALL STUD OR GABLE TRUSS



ENGINEERING

5. SUITE 201, QUAKERTOWN, PA 18951

(215) 804-4449

S

2x STUD WALL w/ P.T. PLATE, SEE PLAN.

-INSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES.

CONCRETE SLAB POURED

MONOLITHICALLY WITH FOOTING, SEE PLAN.

4" GRAVEL FILL

CLASSIFIED SOIL

COMPACTED FILL

MONOLITHIC CONCRETE

FOOTING w/ 4" LEDGE BRICK VENEER, SEE

OR GROUP 1

VENEER TIES SHALL BE SPACED NOT MORE THAN 24" O.C. HORIZONTALLY

AND VERTICALLY AND SHALL SUPPORT NOT

MORE THAN 2 SQUARE

FEET OF WALL AREA

CONCRETE SLAB, SEE PLAN

2x STUD WALL w/ P.T.

STEP VARIES

00000

PLATE, SEE PLAN.

TOP BRICK COURSE CAST INTO SLAB

MASONRY

OUTSIDE:

GARAGE SPACE

EXTERIOR

12" MINIMUM

BELOW GRADE

GRADE



115 467

1/4"=1'-0" @ 22x34

Project #: 047-24018

Designed By: LMR Checked By: Re-Issue:

Issue Date: 9/25/25

Raleigh,

Carolina

North

INSIDE EDGE OF MONOLITHIC INSTALL ½" DIA. ANCHOR BOLTS w/3"x3"x¼" PLATE WASHERS @ 6'-0" O.C., SEE FOUNDATION: FOUNDATION NOTES. (1) ADDITIONAL LADDER WIRE BELOW

FOUNDATION SECTION

LIVING SPACE

THICKENED SLAB

EXTERIOR WALL AT PORCH w/ BRICK VENEER

FINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C., SEE FOUNDATION NOTES.

CONCRETE SLAB POURED

FOOTING, SEE PLAN.

4" GRAVEL FILL

CLASSIFIED SOIL

-MONOLITHIC CONCRETE FOOTING, SEE PLAN.

00

NOTCH BRICK

@ THREADED

GROUT SOLID

OR GROUP 1

COMPACTED FILL

2x STUD WALL W/ -P.T. PLATE, SEE PLAN. INSTALL 1/2" DIA. ANCHOR BOLTS W/ 3"x3"x4" PLATE WASHERS @ 6'-0' O.C., SEE FOUNDATION NOTES. BRICK VENEER -SEE ARCH DWGS -(1) ADDITIONAL LADDER WIRE BELOW TOP BRICK COURSE CAST INTO SLAB FOR BRICK TIES. 4" CONCRETE SLAB, SEE PLAN WEEPS, ETC. 8" MINIMUM TO GRADE, 24" MAX EXTERIOR GRADE f" GRAVEL FILL OR GROUP 1 CLASSIFIED SOIL 95% COMPACTED SOIL 12" MINIMUM-BELOW GRADE

G GARAGE DOOR SECTION

MONOLITHIC CONCRETE FOOTING, SEE PLAN.

rINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES.

CONCRETE SLAB POURED

4" GRAVEL FILL

OR GROUP 1 CLASSIFIED SOIL

COMPACTED FILL

-MONOLITHIC CONCRETE FOOTING

FOOTING SEE PLAN

CONCRETE SLAB POURED

MONOLITHICALLY WITH FOOTING, SEE PLAN.

4" GRAVEL FILL

CLASSIFIED SOIL

COMPACTED FILL

MONOLITHIC CONCRETE FOOTING, SEE PLAN.

OR GROUP 1

2x STUD WALL w/ — P.T. PLATE, SEE PLAN.

20 B

FOUNDATION SECTION

EXTERIOR WALL AT PORCH

CONCRETE SLAB, SEE PLAN

GRADE

12" MINIMUM

BELOW GRADE

FOUNDATION SECTION

2x BEARING WALL w/ P.T. PLATE, SEE PLAN: -INSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C., CONCRETE SLAB POLIRED SEE FOUNDATION NOTES FOOTING, SEE PLAN, THICKENED SLAB, SEE PLAN.

E FOUNDATION SECTION EXTERIOR GARAGE WALL

FINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES.

rINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES

FOUNDATION SECTION

CONCRETE SLAB POURED MONOLITHICALLY WITH FOOTING, SEE PLAN.

"4" GRAVEL FILL OR GROUP 1

CLASSIFIED SOIL

COMPACTED FILL

MONOLITHIC CONCRETE

CONCRETE SLAB POURED

-4" GRAVEL FILL OR GROUP 1

CLASSIFIED SOIL

MONOLITHICALLY WITH

FOOTING, SEE PLAN.

-COMPACTED FILL

MONOLITHIC CONCRETE

FOOTING, SEE PLAN,

FOOTING, SEE PLAN.

P.T. PLATE, SEE PLAN.

8" MINIMI M TO

GRADE, 30" MAX

EXTERIOR GRADE \

12" MINIMUM-BELOW GRADE

2x STUD WALL w/ P.T.

PLATE, SEE PLAN

8" MINIMUM TO

GRADE, 30" MAX

EXTERIOR GRADE-

12" MINIMUM

BELOW GRADE

THICKENED SLAB SECTION ( J )INTERIOR BEARING WALL

ISOLATED PAD FOOTING INTERIOR COLUMN

WIDTH

FOUNDATION SECTION
EXTERIOR GARAGE WALL ® BRICK VENEER

2x STUD WALL w/ P.T. PLATE, SEE PLAN.

rINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES.

FOUNDATION SECTION

B)EXTERIOR WALL @ BRICK VENEER

CONCRETE SLAB POURED

MONOLITHICALLY WITH

4" GRAVEL FILL OR GROUP 1

CLASSIFIED SOIL

COMPACTED FILL

2x STUD WALL w/ P.T. PLATE, SEE PLAN.

-INSTALL ½" DIA. ANCHOR BOLTS ❷ 6'-0" O.C., SEE FOUNDATION NOTES.

CONCRETE SLAB POURED

MONOLITHICALLY WITH

FOOTING, SEE PLAN.

GRAVEL FILL

CLASSIFIED SOIL

COMPACTED FILL

MONOLITHIC CONCRETE

FOOTING w/ 4" LEDGE BRICK VENEER, SEE

POST ABOVE, SEE PLAN

OR GROUP

MONOLITHIC CONCRETE FOOTING w/ 4" LEDGE BRICK VENEER, SEE

FOOTING, SEE PLAN.

VENEER TIES SHALL BE SPACED NOT MORE THAN 24" O.C. HORIZONTALLY

AND VERTICALLY AND

SHALL SUPPORT NOT MORE THAN 2 SQUARE

FEET OF WALL AREA

8" MINIMUM TO

GRADE, 30" MAX .-

EXTERIOR GRADE-

12" MINIMUM

BELOW GRADE

VENEER TIES SHALL BE SPACED NOT MORE THAN 24" O.C. HORIZONTALLY

AND VERTICALLY AND SHALL SUPPORT NOT

8" MINIMUM TO

GRADE, 30" MAX

12" MINIMUM -

BELOW GRADE

MORE THAN 2 SOLIARE FEET OF WALL AREA

> ISOLATED PAD FOOTING, SEE PLAN FOR SIZE

CONCRETE SLAB, SEE PLAN

RECESS @ GARAGE DOOR-

ALTERNATE EXTERIOR WALL

EDGE OF BRICK AND WALL ABOVE

M FOUNDATION SECTION
ALTERNATE EXTERIOR WALL

Foundation 106i ithic Slab F ity, Lot #90 Capstone 1 Monolithic Serenity,

Details

ENGINEERING

5. SUITE 201, QUAKERTOWN, PA 18951

(215) 804-4449


S










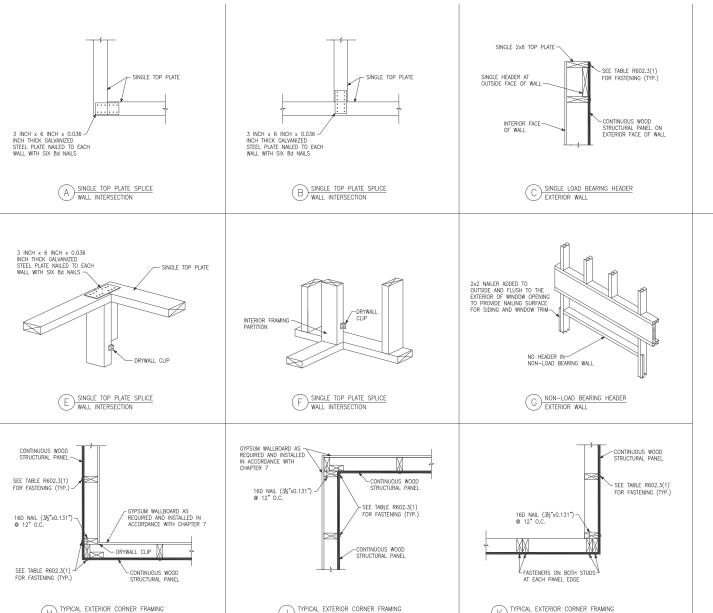

INSIDE CORNER DETAIL

GARAGE DOOR CORNER DETAIL

OUTSIDE CORNER DETAIL



ADVANCED FRAMING NOTES .) EXTERIOR WALLS TO BE 2x6 S.P.F. STUDS @

24" O.C. WITH SINGLE TOP PLATE TO BE SPLICED PER NC RESIDENTIAL CODE.

2.) INTERIOR BEARING WALLS TO BE PER NC RESIDENTIAL CODE.

3.) ROOF TRUSSES AND FLOOR JOISTS ARE TO BE STACKED AND CENTERED OVER STUDS WITH A TOLERANCE OF NO MORE THAN 1 INCH.
ADDITIONAL STUDS ARE TO BE ADDED WHERE THE
ROOF TRUSSES AND FLOOR JOISTS ARE NOT STACKED OVER STUDS WITHIN 1" TOLERANCE.

4.) INTERIOR NON-LOAD BEARING WALLS TO BE 2x4 S.P.F. STUDS @ 24" O.C. WITH SINGLE TOP PLATE. TOP PLATE TO BE SPLICED PER NC RESIDENTIAL CODE.

5.) LOAD-BEARING HEADERS ARE NOT REQUIRED IN INTERIOR OR EXTERIOR NONBEARING WALLS. A SINGLE FLAT 2x MEMBER MAY BE USED AS A HEADER IN INTERIOR OR OR EXTERIOR NONBEARING WALLS FOR OPENINGS UP TO 8 FEET IN WIDTH IF THE VERTICAL DISTANCE TO THE PARALLEL NAILING SURFACE IS NOT MORE THAN 24 INCHES. FOR SUCH NONBEARING HEADERS, NO CRIPPLES OR BLOCKING ARE REQUIRED ABOVE THE HEADER.

Notes  $\approx$ Details Framing Advanced

Serenity, Lot A671

Designed By: LMR Checked By: Issue Date: 9/25/25

1/4"=1'-0" @ 22x34