

WAYFARE
DREAM FINDERS HOMES

PLAN REVISIONS

REVISIONS CONTINUED.

12-23-15 REMOVED GLASS INSERTS AND REMOVED ACCENTS FROM GARAGE DOOR FOR H4H STANDARDS.
CHANGED THRESHOLD FROM STD TO OPTIONAL.
VERIFY GARMENT KITCHEN LAYOUT WITH DBL OVEN OPTION.
REMOVE KITCHEN, BATHROOM, AND LAUNDRY FLOOR HATCHING FROM PLANS.

08-28-20 UPDATED DIMENSIONS FOR PAD AND PATIO.
CHANGED WASHER, DRYER, AND REFRIGERATOR TO OPTIONAL COMPONENTS.
CREATED CUTSHEETS.
CHANGED LOCATIONS OF HOSE BIBBS TO BE ON HEATED WALLS.
VERIFY HOSE HGTS ARE AT LEAST 1'-0".
VERTICAL MASTER'S WAS CHANGED TO OWNERS.
CHANGED 2X4 WALL AT REAR GARAGE WALL TO 2X6.
REMOVED FLOOD LIGHTS AND SWITCHES WIRING AT REAR.
VERIFIED ALL LOCATION FOR COACH LIGHTS WERE MARKED W/ SWITCHES.
ADDED ROOF VENT CALCULATIONS.
ADDED THERMOSTAT TO FIRST FLOOR ELECTRICAL PLAN.
DIMENSIONS CEILING FAN IN GATHERING ROOM ON ELECTRICAL PLAN.
UPDATED FOR NC RC 2008 AND SC RC 2008.
VERIFIED VENTILATION REQMTS AT OWNER'S BEDROOM, ADDED 3/0X5/0 WINDOW ON SIDE WALL.
ADDED INSULATION INFORMATION ON PLANS.

04-01-20 REMOVED HANSEN BOX AND DRYER VENT.
CAFE WAS CHANGED TO CASUAL DINING. GATHERING WAS CHANGED TO FAMILY AND FLEX ROOM WAS CHANGED TO STUDY.
CREATED NEW SHEETS FOR FIRST FLOOR PLAN AND SECOND FLOOR PLAN OPTIONS.
UPDATED OUTBRETS.
ADDED (2) HOSE BIBBS RIGHT AND LEFT SIDE OF THE HOUSE.
CHANGED 2X4 WALL AT LEFT GARAGE WALL TO 2X6.
REMOVED OUTLETS, PHONES AND TVS FROM ELECTRICAL PLANS.
ADDED CARBON MONOXIDE DETECTOR AT BEDROOMS.
CREATED ELEVATION FARMHOUSE B5.
CREATED ELEVATION ARTS AND CRAFTS D1.
CHANGED CORNER BOARDS ON ELEVATIONS TO BE 1/4 TRIM BOARD.
SHOWED COACH LIGHTS ON ELEVATIONS.
ADDED DIAGONAL DIMENSIONS ON SLAB INTERFACE PLAN.
REVISED ROOM DIMENSIONS FOR THE FOLLOWING ROOMS:
GARAGE WAS 20'-0"X20'-0" NOW 18'-0"X20'-0"
STUDY WAS 10'-0"X13'-6" NOW 10'-0"X13'-4"
FAMILY ROOM WAS 11'-0"X16'-6" NOW 11'-0"X16'-4"
REVISED FRONT GARAGE AND LIVING AREAS.
LIVING AT FIRST FLOOR PLAN WAS 959 SF, NOW 963 SF.
LIVING AT SECOND FLOOR PLAN WAS 538 SF AT ELEVATION A AND 534 AT ELEVATION C, NOW 530 AT BOTH ELEVATIONS.
2 CAR GARAGE WAS 413 SF, NOW 41 SF.
CREATED LEFT HAND GARAGE VERSION.
REMOVED ELEVATION C.
REMOVED FIRST STEP AT FIRST FLOOR AND ADDED IT TO SECOND FLOOR, UPDATED SQ. FT. LOS.
TO ELIMINATE 50 SQ. FT. ROUNDING. FIRST FLOOR WAS 962 SF, NOW 963 SF. SECOND FLOOR WAS 530 SF, NOW 530 SF. 2 CAR GARAGE WAS 41 SF, NOW 410 SF. PORCH AT ELEV. D WAS 15 SF, NOW 14 SF.
CHANGED SHUTTERS TO BE 1" WIDE.
CHANGED THE 2ND DOOR AT THE POWDER ROOM AND BATH 3 TO A 2 1/8" DOOR.

04-06-20 ADDED WINDOW SCHEDULE TO PLAN.
CHANGED 1/4" TRIM ON ALL ELEVATIONS TO 3/8" TRIM.
FIXED PORCHES TO KEEP COLUMNS FROM OVERHANGING CONCRETE.
REMOVED COLUMN BASE FROM ELEVATION B AND MADE COLUMN FULL HEIGHT.
REVISED FRONT PORCH OF ELEVATION B, PREVIOUSLY 106 SQ. FT. NOW 111 SQ. FT.
REMOVED COLUMN BASE FROM ELEVATION C AND MADE COLUMN FULL HEIGHT AND 8" SQUARE.
REVISED FRONT PORCH OF ELEVATION D, PREVIOUSLY 14 SQ. FT. NOW 104 SQ. FT.
CREATED NEW DECORATIVE DETAIL FOR ELEVATION B.
CREATED DECORATIVE BRACKET AT ELEVATION D.
CHANGED CAP ON COLUMNS FOR ELEVATION A TO MATCH COLUMNS ON ELEVATION B & ELEVATION D.
CHANGED ALL TRIM AROUND WINDOWS, EXTERIOR DOOR, 4 GARAGE DOOR, TO 1/4" W/ J-CANNEL.
REVISED FRONT PORCH OF ELEVATION A, PREVIOUSLY 60 SQ. FT. NOW 63 SQ. FT.
CHANGED GARAGE WALL FROM 2X6 TO 2X4. GARAGE WALL BETWEEN GARAGE AND FAMILY ROOM FORTY MOVED 2" TOWARDS FAMILY ROOM TO MAKE GARAGE LARGER. PREVIOUSLY GARAGE 50 FT 7 1/2" UPDATED 29 SQ. FT.
RELOCATED CONDUIT TO GO FROM ISLAND TO CLOSEST EXTERIOR WALL.
CHANGED LINEN CLOSET FROM 2 1/8" BIFOLD TO 2 1/8" STD.
CHANGED COAT CLOSET DOOR FROM 2 1/8" BIFOLD TO 2 1/8" STD.
CHANGED OWNER'S BATH LINEN CLOSET FROM 2 1/8" BIFOLD TO 2 1/8" STD.
CHANGED UPSTAIRS LINEN CLOSET FROM 2 1/8" BIFOLD TO 2 1/8" STD.
CHANGED BED 2 CLOSET DOOR FROM 2 1/8" BIFOLD TO 2 1/8" STD.
CHANGED BED 3 CLOSET DOOR FROM 2 1/8" BIFOLD TO 2 1/8" STD.
CHANGED BED 4 CLOSET DOOR FROM 2 1/8" BIFOLD TO 2 1/8" STD.
CHANGED BED 5 CLOSET DOOR FROM 2 1/8" BIFOLD TO 2 1/8" STD.

12-01-22 ADDED ELEVATION D3 SHOWING BRICK COLUMN AND D3 SHOWING STONE COLUMN.
ADDED SQUARE FOOTAGE BLOCK FOR D2 AND D3 ELEVATIONS.
VERIFIED AND UPDATED THE SF AS FOLLOWS:
FIRST FLOOR SF WAS 961. NOW IT IS 958.
TOTAL SF WAS 2267. NOW IT IS 2266.
UPDATED GARAGE DOOR WALL, OPT. CAR CARRIAGE GARAGE TO 2X6.
UPDATED GARAGE DOOR WALL, OPT. GARAGE TO 2X6.
VERIFIED AND UPDATED OPTIONAL OWNER'S BATH 2 & 3 LAYOUTS.

04-05-23 MOVE LINEN CLOSET WALL 2" IN OWNER'S BATH FOR VANITY CABINET.
CHANGED WINDOW HEADER HEIGHT ON SECOND FLOOR TO 1'-1".
ADDED (6) OPTIONAL LED CAN LIGHTS IN KITCHEN (06-15-23).
DOOR FOR BATH 3 IN OPT. BEDROOM 4 W/ BATH 3 (LO STUDY AND POWDER ROOM) CHANGED FROM 1 1/8" TO 1 1/4" (07-11-23).
CHANGED ROOF PITCH ON ELEV. B TO MATCH REST OF PLAN B (10-18-23).
CHANGED TYPO ON GARAGE LEFT TITLE TO READ GL. INSTEAD OF GR (10-18-23).
UPDATED SQ FOOTAGE TABLE TO INCLUDE MISSING OPTIONAL PATIO (08-05-24).

10-30-24 FIRST FLOOR CEILING HEIGHT CHANGED FROM 8'-0" TO 9'-0".
OPTIONAL COVERED PATIO CREATED.

SQUARE FOOTAGE	
HEATED AREAS	ELEV 'A'
FIRST FLOOR	958 SQ. FT.
SECOND FLOOR	1306 SQ. FT.
TOTAL HEATED SF	2266 SQ. FT.
UNHEATED AREAS	2-CAR GARAGE
413 SQ. FT.	
COVERED AREAS	FRONT PORCH
63 SQ. FT.	
UNCOVERED AREAS	PAD
16 SQ. FT.	
OPT COVERED PATIO	80 SQ. FT.
HEATED OPTIONS	OPT BEDRM, 4 W/ BATH 3
0 SQ. FT.	
UNHEATED OPTIONS	OPTIONAL BEDRM, 5 LVL, LOFT
0 SQ. FT.	
UNHEATED OPTIONS	OPTIONAL 1-CAR GARAGE
240 SQ. FT.	

SQUARE FOOTAGE	
HEATED AREAS	ELEV 'B'
FIRST FLOOR	958 SQ. FT.
SECOND FLOOR	1306 SQ. FT.
TOTAL HEATED SF	2266 SQ. FT.
UNHEATED AREAS	2-CAR GARAGE
413 SQ. FT.	
COVERED AREAS	FRONT PORCH
111 SQ. FT.	
UNCOVERED AREAS	PAD
16 SQ. FT.	
OPT COVERED PATIO	80 SQ. FT.
HEATED OPTIONS	OPT BEDRM, 4 W/ BATH 3
0 SQ. FT.	
UNHEATED OPTIONS	OPTIONAL BEDRM, 5 LVL, LOFT
0 SQ. FT.	
UNHEATED OPTIONS	OPTIONAL 1-CAR GARAGE
240 SQ. FT.	

SQUARE FOOTAGE	
HEATED AREAS	ELEV 'D'
FIRST FLOOR	958 SQ. FT.
SECOND FLOOR	1306 SQ. FT.
TOTAL HEATED SF	2266 SQ. FT.
UNHEATED AREAS	2-CAR GARAGE
413 SQ. FT.	
COVERED AREAS	FRONT PORCH
104 SQ. FT.	
UNCOVERED AREAS	PAD
16 SQ. FT.	
OPT COVERED PATIO	80 SQ. FT.
HEATED OPTIONS	OPT BEDRM, 4 W/ BATH 3
0 SQ. FT.	
UNHEATED OPTIONS	OPTIONAL BEDRM, 5 LVL, LOFT
0 SQ. FT.	
UNHEATED OPTIONS	OPTIONAL 1-CAR GARAGE
240 SQ. FT.	

SQUARE FOOTAGE	
HEATED AREAS	ELEV 'D2'
FIRST FLOOR	958 SQ. FT.
SECOND FLOOR	1306 SQ. FT.
TOTAL HEATED SF	2266 SQ. FT.
UNHEATED AREAS	2-CAR GARAGE
413 SQ. FT.	
COVERED AREAS	FRONT PORCH
104 SQ. FT.	
UNCOVERED AREAS	PAD
16 SQ. FT.	
OPT COVERED PATIO	80 SQ. FT.
HEATED OPTIONS	OPT BEDRM, 4 W/ BATH 3
0 SQ. FT.	
UNHEATED OPTIONS	OPTIONAL BEDRM, 5 LVL, LOFT
0 SQ. FT.	
UNHEATED OPTIONS	OPTIONAL 1-CAR GARAGE
240 SQ. FT.	

SQUARE FOOTAGE	
HEATED AREAS	ELEV 'D3'
FIRST FLOOR	958 SQ. FT.
SECOND FLOOR	1306 SQ. FT.
TOTAL HEATED SF	2266 SQ. FT.
UNHEATED AREAS	2-CAR GARAGE
413 SQ. FT.	
COVERED AREAS	FRONT PORCH
104 SQ. FT.	
UNCOVERED AREAS	PAD
16 SQ. FT.	
OPT COVERED PATIO	80 SQ. FT.
HEATED OPTIONS	OPT BEDRM, 4 W/ BATH 3
0 SQ. FT.	
UNHEATED OPTIONS	OPTIONAL BEDRM, 5 LVL, LOFT
0 SQ. FT.	
UNHEATED OPTIONS	OPTIONAL 1-CAR GARAGE
240 SQ. FT.	

ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, CONDITIONS, AND ADHERENCE TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION.
ANY DISCREPANCY OR ERROR IN THESE PLANS OR ADHERENCE TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION.
ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES.
IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTER SHALL NOT BE HELD RESPONSIBLE.



JOB NUMBER	03-181558
CAD FILE NAME	WAYFARE-03
ISSUED	11-28-17
REVISED	11-16-17
	04-20-20
	04-28-20
	12-27-20
	04-20-22
	05-20-22





DRAWINGS ON 11"x17" SHEET ARE ONE HALF THE SCALE NOTED

WAYFARE (Garage Left)
DREAM FINDERS HOMES


2277

REVISION LOG





SHEET
CS

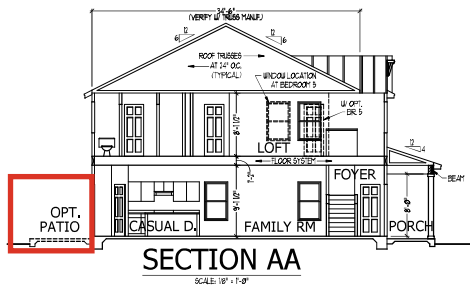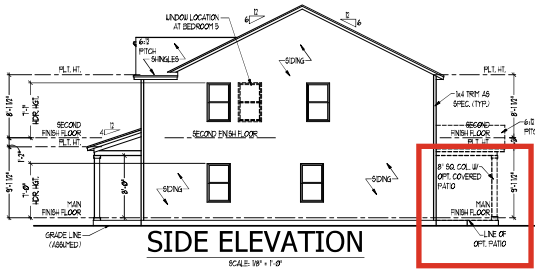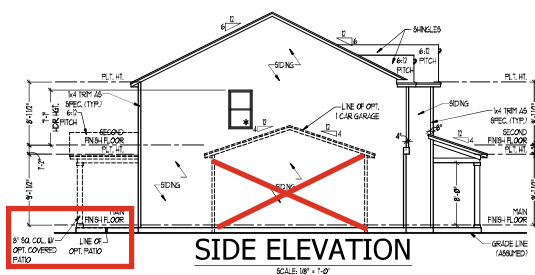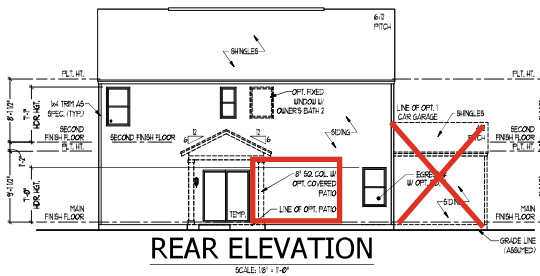

ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, DIMENSIONS AND ADHERENCE TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION.
ANY DISCREPANCY OF ERROR IN NOTES, DIMENSIONS OR ADHERENCE TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION.
ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES.
IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTERS OFFICE SHALL NOT BE HELD RESPONSIBLE.

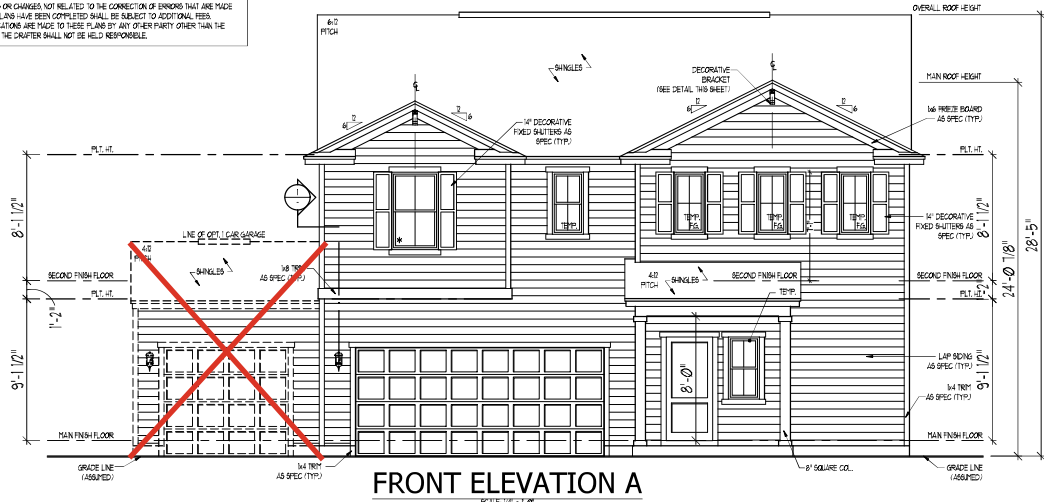

TOTAL UNDER ROOF AREA:		1377	SQ. FT.	
VENTING AREA REQUIRED:		1377	SQ. FT. / 300 = 4.59	
TOTAL REQUIREMENTS:		LOWER: 2.29	UPPER: 2.29	
LOWER AREA VENTING				
SOFFIT VENT	SIZE:	PER UNIT:	# UNITS:	PROVIDED:
	-	.041 SF/LF	65'-5"	2.68
LOWER AREA VENTING PROVIDED:				-
UPPER AREA VENTING				
RIDGE VENT	SIZE:	PER UNIT:	# UNITS:	PROVIDED:
	-	.125 SF/LF	20'-0"	2.50
UPPER AREA VENTING PROVIDED:				-
TOTAL AREA PROVIDED				
SOFFIT AND RIDGE VENT				5.18

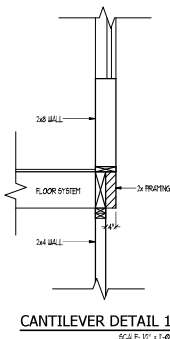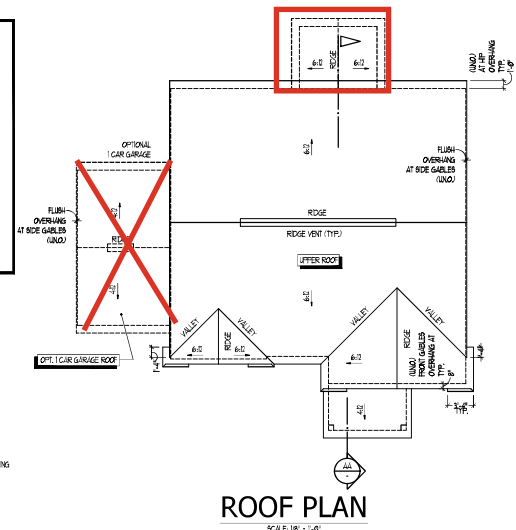

ELEVATIONS, ROOF PLAN & SECTION - TRADITIONAL A



JOB NUMBER	18-181588
CAD FILE NAME	WAYFARE - A
ISSUED	11-28-17
REVISED	11-28-17
	04-28-2018
	04-28-2018
	04-28-2018
	04-28-2018
	04-28-2018

DRAWINGS ON 1/4" X 11" SHEET ARE ONE HALF THE SCALE NOTED


WAYFARE (Garage Left)
DREAM FINDERS HOMES

2277

TITLE
FRONT ELEVATION
DETAILS

SHEET
A3.0

ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, DIMENSIONS, AND ADHERENCE TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION.
ANY DISCREPANCY OF ERROR IN NOTES, DIMENSIONS, OR ADHERENCE TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION.
ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES.
IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTER SHALL NOT BE HELD RESPONSIBLE.

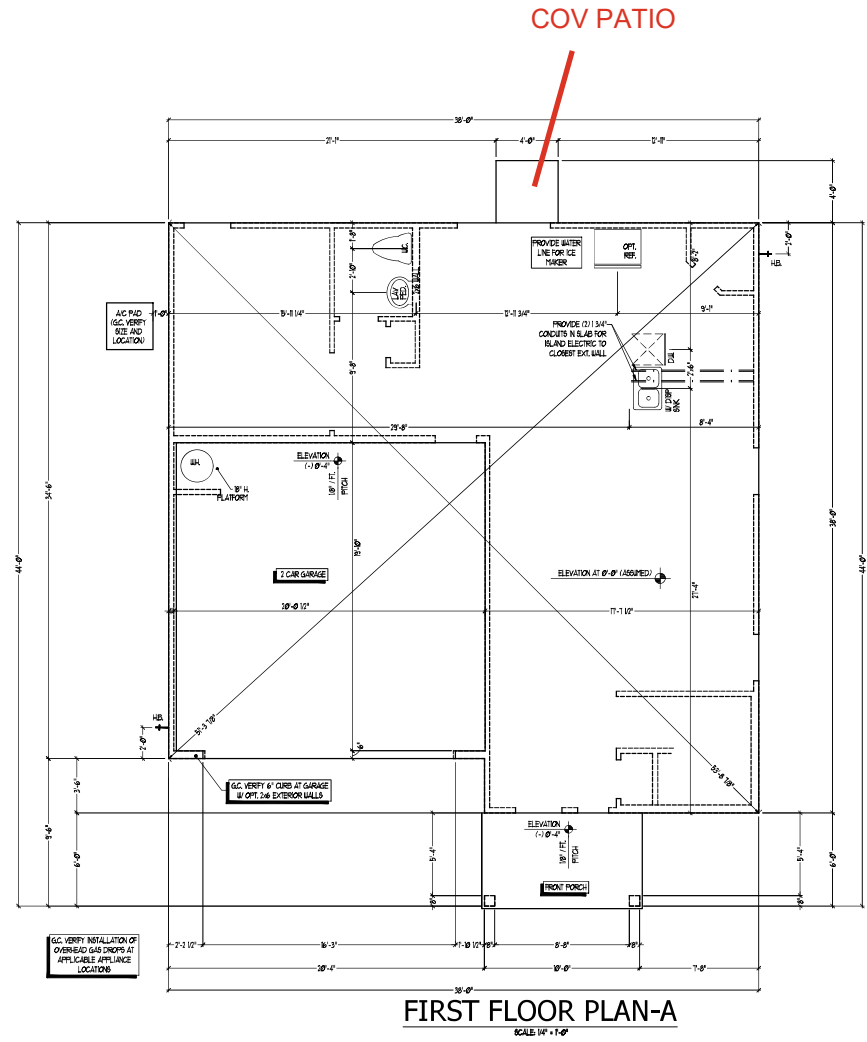

SLAB INTERFACE
FIRST FLOOR PLAN
SCALE 1/4" = 1'-0"



JOB NUMBER	18-181588
CAD FILE NAME	WAYFARE-18
ISSUED	11-28-17
REVISED	11-16-17
	02-16-20
	04-20-20
	04-28-20
	12-21-20
	04-10-21
	05-10-21

DRAWINGS ON 11"x17"
SHEET AREA ONE HALF
THE SCALE NOTED



WAYFARE (Garage Left)
DREAM FINDERS HOMES

2277

TITLE
SLAB INTERFACE PLAN

SHEET
A1.0

ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, DIMENSIONS, AND ADHERENCE TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION.
ANY DISCREPANCY OF ERROR IN NOTES, DIMENSIONS, OR ADHERENCE TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION.
ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES.
IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTER SHALL NOT BE HELD RESPONSIBLE.

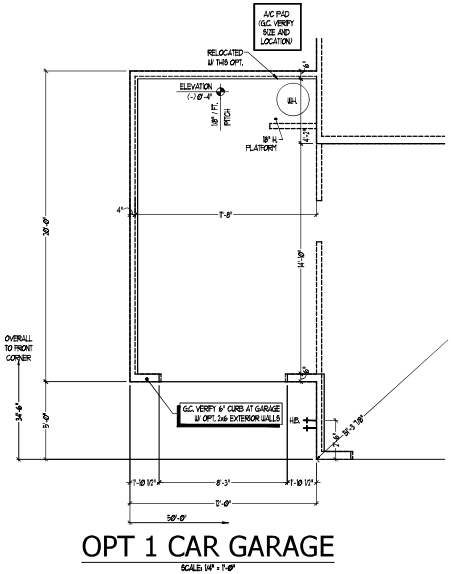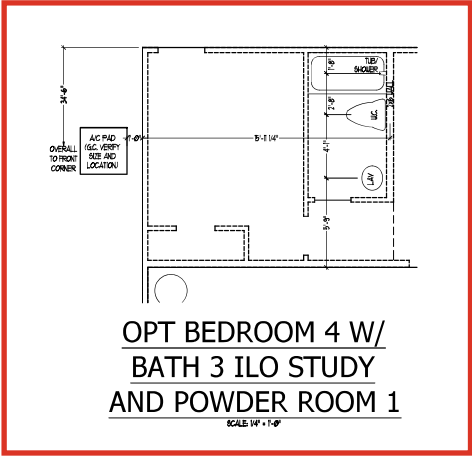

SLAB INTERFACE FIRST
FLOOR PLAN OPTIONS

SCALE 1/4" = 1'-0"



JOB NUMBER	B-18-0586
CAD FILE NAME	WAYFARE-18
ISSUED	11-15-17
REVISED	11-16-17
	02-16-20
	04-21-20
	04-24-20
	12-21-20
	04-10-21
	05-10-21

DRAWINGS ON 11"x17" SHEET ARE ONE HALF THE SCALE NOTED

WAYFARE (Garage Left)
DREAM FINDERS HOMES

2277



TITLE
SLAB INTERFACE PLAN
OPTIONS

SHEET
A1.1

WINDOW SCHEDULE				
MARK	WIDTH	HEIGHT	TYPE	HEAD HEIGHT
(1)	3'-0"	5'-0"	SINGLE HUNG	7'-0"
(2)	2'-0"	4'-0"	SINGLE HUNG	7'-0"
(3)	3'-0"	4'-0"	FX	7'-0"
(4)	2'-0"	4'-0"	FX	7'-0"


SEE PLAN FOR NOTES ON EGRESS, TEMP., & ETC.

STAR NOTES:
 BALUSTERS SHALL BE SPACED SO THAT A 4" SPHERE CANNOT PASS THROUGH THE TRIANGULAR OPENINGS FORMED BY THE RISER, TREAD AND BOTTOM RAIL OF A GUARD AT THE OPEN SIDE OF A STAIRWAY ARE PERMITTED TO BE A SUCH A SIZE THAT A SPHERE OF 6 INCHES CANNOT PASS THROUGH.
 OPENINGS FOR REQUIRED GUARDS ON THE SIDES OF STAIR TREADS SHALL NOT ALLOW A SPHERE 4 INCHES TO PASS THROUGH.
 HANDRAILS HANDRAILS FOR STAIRWAYS SHALL BE CONTINUOUS FOR THE FULL LENGTH OF THE FLIGHT FROM A POINT DIRECTLY ABOVE THE TOP RISER OF THE FLIGHT TO A POINT DIRECTLY ABOVE THE LOWER RISE. HANDRAIL ENDS SHALL BE RETURNED OR SHALL TERMINATE IN NEEL, POSTS OR SAFETY TERMINALS. HANDRAILS ADJACENT TO A WALL SHALL HAVE A SPACE OF NOT LESS THAN 1-0" INCH BETWEEN THE WALL AND HANDRAIL.
 CONTINUOUS GRASPABLE HANDRAIL MUST MEET TYPE ONE OR TYPE TWO CRITERIA

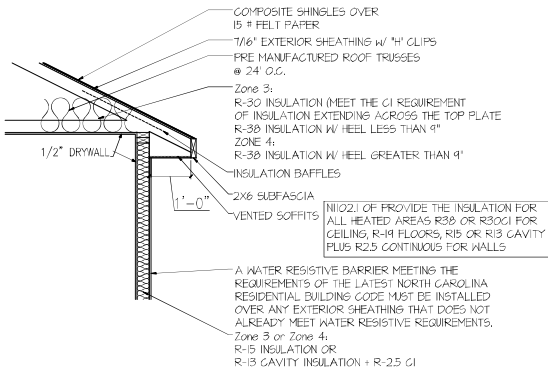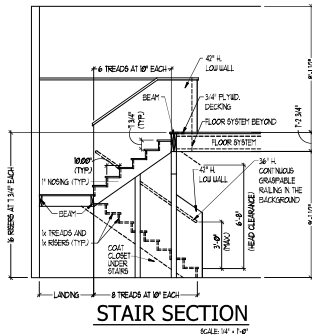

SQUARE FOOTAGE	
HEATED AREAS	ELEV 'A'
FIRST FLOOR	958 SQ. FT.
SECOND FLOOR	1308 SQ. FT.
TOTAL HEATED SF	2266 SQ. FT.
UNHEATED AREAS	
2-CAR GARAGE	413 SQ. FT.
COVERED AREAS	
FRONT PORCH	63 SQ. FT.
UNCOVERED AREAS	
PAD	16 SQ. FT.
OPT COVERED PATIO	80 SQ. FT.
HEATED OPTIONS	
OPT BEDRM, 4 W/ BATH 3	0 SQ. FT.
OPTIONAL BEDRM, 5 1/2 SQ. LOFT	0 SQ. FT.
UNHEATED OPTIONS	
OPTIONAL 1-CAR GARAGE	240 SQ. FT.

ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, DIMENSIONS, AND AGREEMENT TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION.
 ANY DISCREPANCY OF ERROR IN NOTES, DIMENSIONS, OR AGREEMENT TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION.
 ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES.
 IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTER SHALL NOT BE HELD RESPONSIBLE.

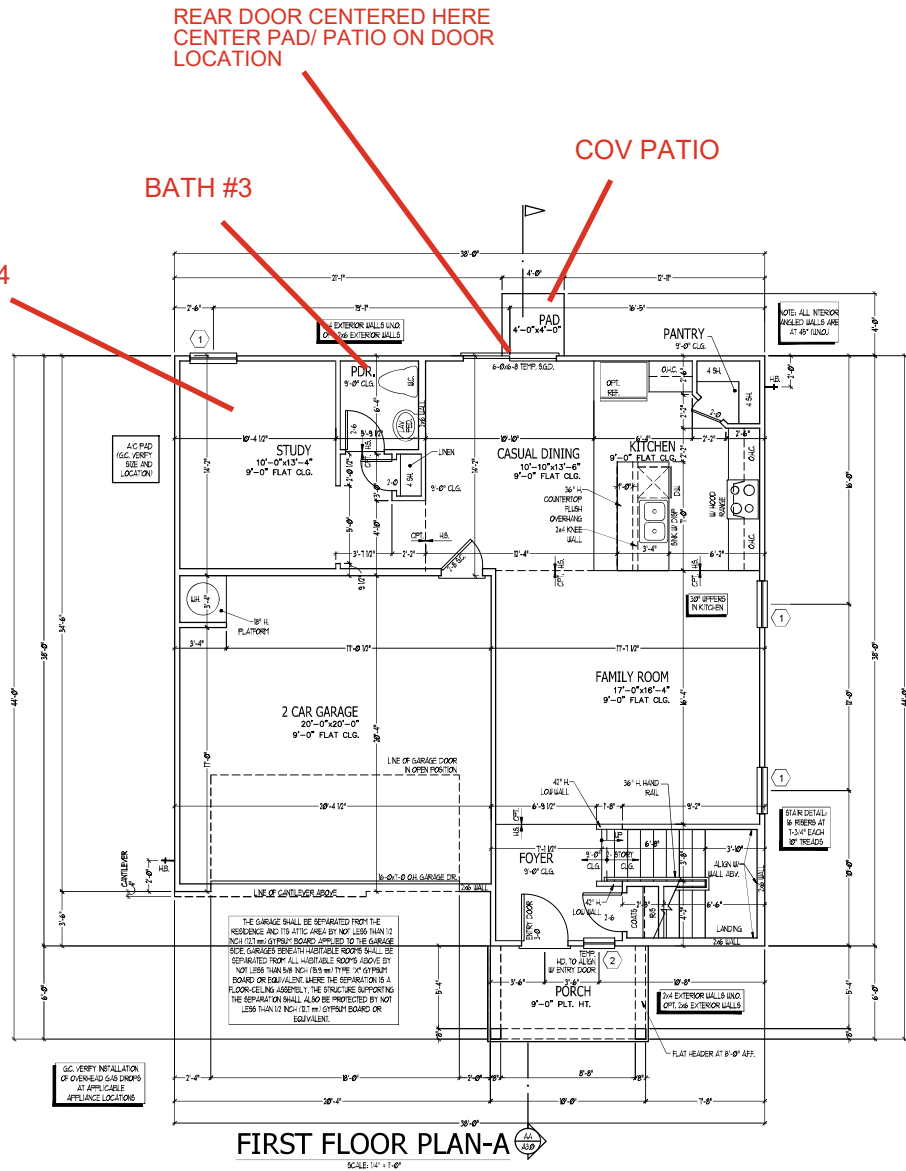

ELEVATION A
FIRST FLOOR PLAN
 SCALE: 1/4" = 1'-0"



JOB NUMBER	18-181588
CAD FILE NAME	WAYFARE-18
ISSUED	11-28-17
REVISED	11-16-17
	04-28-20
	04-28-20
	12-27-20
	02-03-21
	02-03-21

DRAWINGS ON 11"x17" SHEET ARE ONE HALF THE SCALE NOTED

WAYFARE (Garage Left)
DREAM FINDERS HOMES

2277






TITLE
MAIN FLOOR PLAN
STAR SECTION

SHEET
A2.0

WINDOW SCHEDULE				
MARK	SIZE		TYPE	HEAD HEIGHT
	WIDTH	HEIGHT		
(1)	30"	50"	SINGLE HUNG	70"
(2)	20"	40"	SINGLE HUNG	70"
(3)	30"	40"	FIX.	70"
(4)	20"	40"	FIX.	70"

SEE PLAN FOR NOTES ON EGRESS, TEMP., & ETC.

ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, DIMENSIONS AND ADHERENCE TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION. ANY DISCREPANCY OR ERROR IN NOTES, DIMENSIONS OR ADHERENCE TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION. ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES. IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTER SHALL NOT BE HELD RESPONSIBLE.

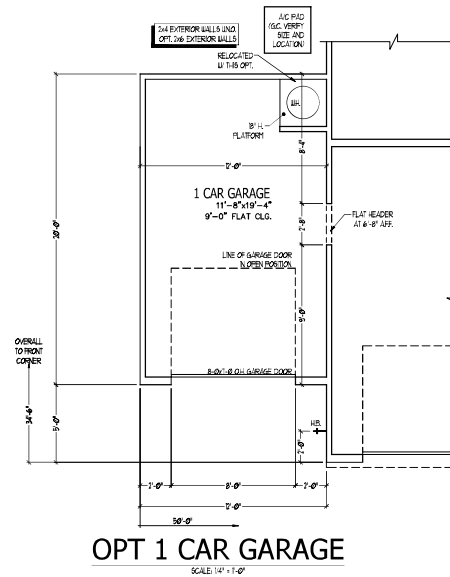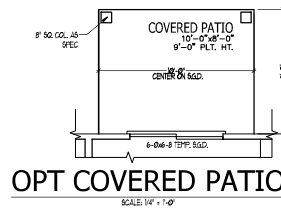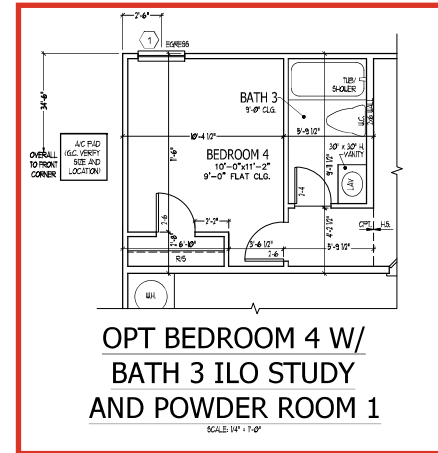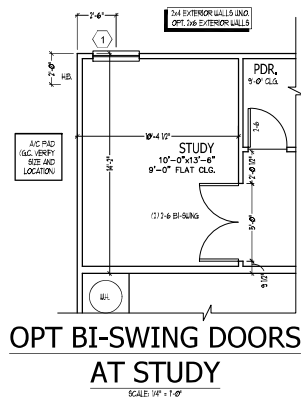

REFER TO STANDARD PLAN FOR INFORMATION NOT SHOWN

FIRST FLOOR PLAN OPTIONS
SCALE 1/4" = 1'-0"



JOB NUMBER	18-181588
CAD FILE NAME	WAYFARE-18
ISSUED	11-15-17
REVISED	11-16-17
	02-16-20
	04-21-20
	04-28-20
	12-21-20
	04-10-22

DRAWINGS ON 11"x17" SHEET ARE ONE HALF THE SCALE NOTED

WAYFARE (Garage Left)
DREAM FINDERS HOMES


2277

PLAN OPTIONS	TITLE

SHEET A2.1

WINDOW SCHEDULE				
MARK	WIDTH	HEIGHT	TYPE	HEAD HEIGHT
(1)	3'-0"	5'-0"	SINGLE HUNG	7'-1"
(2)	2'-0"	4'-0"	SINGLE HUNG	7'-1"
(3)	3'-0"	4'-0"	FIX	7'-1"
(4)	2'-0"	4'-0"	FIX	7'-1"
SEE PLAN FOR NOTES ON EGRESS, TEMP. & ETC.				

ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, DIMENSIONS, AND ADHERENCE TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION. ANY DISCREPANCY OR ERROR IN NOTES, DIMENSIONS, OR ADHERENCE TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION. ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES. IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTER SHALL NOT BE HELD RESPONSIBLE.

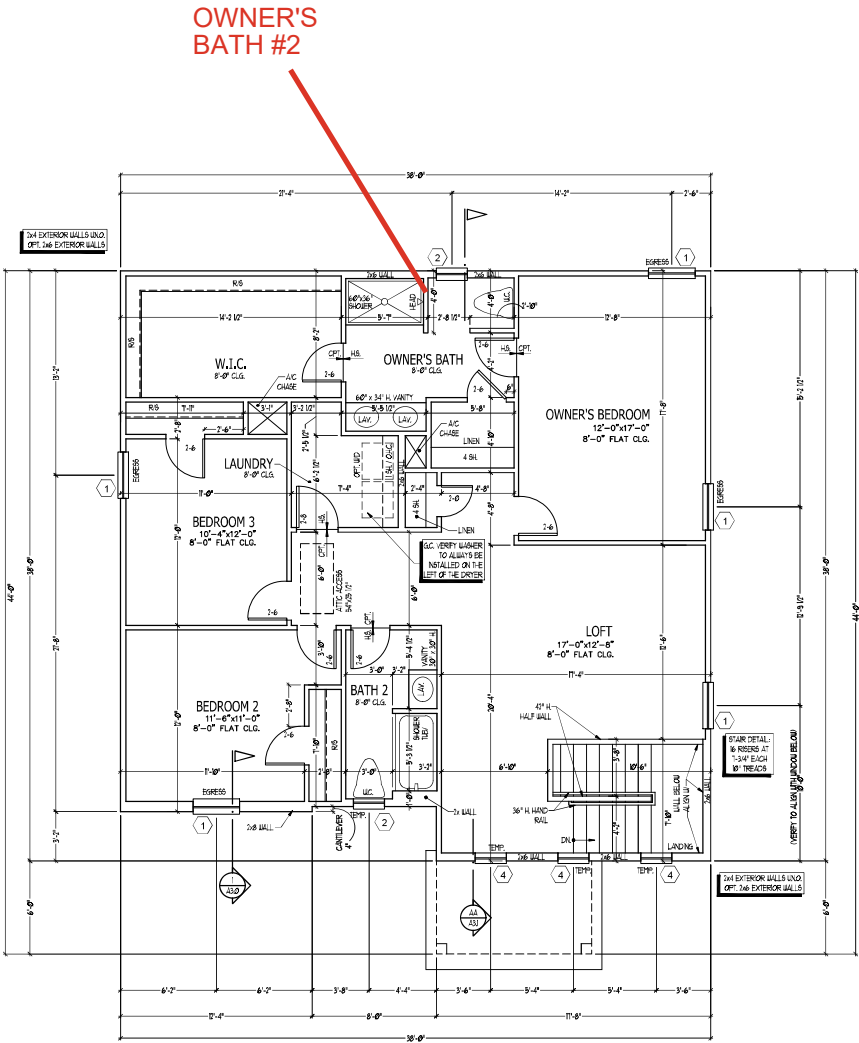

ELEVATION A
SECOND FLOOR PLAN
SCALE: 1/4" = 1'-0"



JOB NUMBER	18-181586
CAD FILE NAME	WAYFARE-18
ISSUED	11-28-17
REVISED	11-16-17
	02-16-18
	04-20-18
	04-18-18
	12-21-18
	02-10-19
	02-10-19

DRAWINGS ON 11"x17" SHEET ARE ONE HALF THE SCALE NOTED






WAYFARE (Garage Left)
DREAM FINDERS HOMES

2277

TITLE
UPPER FLOOR PLAN

SHEET
A2.3


WINDOW SCHEDULE				
MARK	WIDTH	SIZE HEIGHT	TYPE	HEAD HEIGHT
(1)	3'0"	5'0"	SINGLE HUNG	7'1"
(2)	2'0"	4'0"	SINGLE HUNG	7'1"
(3)	3'0"	4'0"	FIX	7'1"
(4)	2'0"	4'0"	FIX	7'1"
SEE PLAN FOR NOTES ON EGRESS, TEMP., & ETC.				

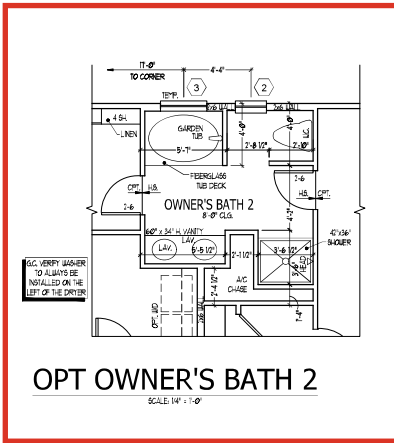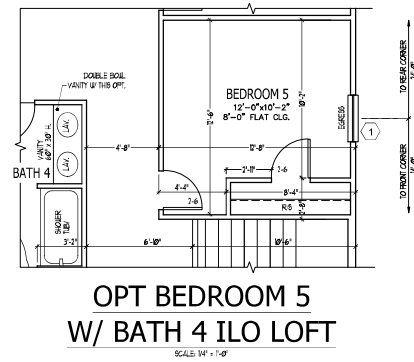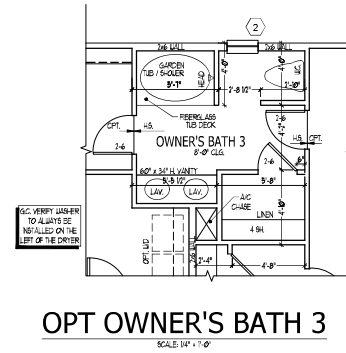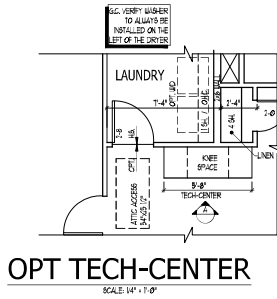

ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, DIMENSIONS, AND ADHERENCE TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION. ANY DISCREPANCY OF ERROR IN NOTES, DIMENSIONS, OR ADHERENCE TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION. ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES. IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTERS SHALL NOT BE HELD RESPONSIBLE.

REFER TO STANDARD PLAN FOR INFORMATION NOT SHOWN

SECOND FLOOR PLAN OPTIONS
SCALE 1/4" = 1'-0"



JOB NUMBER	8-18-088
CAD FILE NAME	WAYFARE-18
ISSUED	11-18-11
REVISED	11-18-11
	02-18-20
	04-18-20
	12-21-20
	04-10-22

DRAWINGS ON 11"x17" SHEET ARE ONE HALF THE SCALE NOTED

WAYFARE (Garage Left)
DREAM FINDERS HOMES

2277

TITLE	PLAN OPTIONS
SHEET	

A2.4

ELECTRICAL KEY

- KO- DUPLEX CONVENIENCE OUTLET
- KO- DUPLEX OUTLET ABOVE COUNTER
- KO- WEATHERPROOF DUPLEX OUTLET
- KO- GROUND FAULT INTERRUPTER DUPLEX OUTLET
- KO- HALF-OUTLETH DUPLEX OUTLET
- KO- SPECIAL PURPOSE OUTLET
- KO- DUPLEX OUTLET IN FLOOR
- 1- WALL SWITCH
- 1.5- THREE-WAY SWITCH
- 1.5- FOUR-WAY SWITCH
- 1.5- DIMMER SWITCH
- 1.5- CEILING MOUNTED INCANDESCENT LIGHT FIXTURE
- 1.5- WALL MOUNTED INCANDESCENT LIGHT FIXTURE
- 1.5- RECESSED INCANDESCENT LIGHT FIXTURE
- 1.5- LIGHT FIXTURE WITH PULL CHAIN
- 1.5- TRACK LIGHT
- 1.5- FLUORESCENT LIGHT FIXTURE
- 1.5- EXHAUST FAN
- 1.5- EXHAUST FAN/LIGHT COMBINATION
- 1.5- ELECTRIC DOOR OPERATOR (OPTIONAL)
- 1.5- CARPES (OPTIONAL)
- 1.5- PUSHBUTTON SWITCH (OPTIONAL)
- 1.5- CARBON MONOXIDE DETECTOR
- 1.5- SMOKE DETECTOR
- 1.5- SMOKE / CARBON MONOXIDE COMBO DETECTOR
- 1.5- TELEPHONE (OPTIONAL)
- 1.5- TELEVISION (OPTIONAL)
- 1.5- THERMOSTAT
- 1.5- ELECTRIC METER
- 1.5- ELECTRIC PANEL
- 1.5- DISCONNECT SWITCH
- 1.5- SPEAKER (OPTIONAL)
- 1.5- ROUGH-IN FOR OPT. CEILING FAN
- 1.5- CEILING MOUNTED INCANDESCENT LIGHT FIXTURE W/ ROUGH-IN FOR OPT. CEILING FAN

NOTES:

1. PROVIDE AND INSTALL GROUND FAULT CIRCUIT INTERRUPTERS (GFCI) AS INDICATED ON PLANS OR AS ITEM NO. 4 AND 5 BELOW INDICATES.

2. UNLESS OTHERWISE INDICATED, INSTALL SWITCHES AND RECEPTACLES AT THE FOLLOWING HEIGHTS ABOVE FINISHED FLOOR:

- SWITCHES ... 4'
- OUTLETS ... 18"
- TELEPHONE ... 12" (UNLESS ASY. COUNTERTOP)
- TELEVISION ... 4'

3. ALL SMOKE DETECTORS SHALL BE HARDWIRED INTO AN ELECTRICAL POWER SOURCE AND SHALL BE EQUIPPED WITH A MONITORED BATTERY BACKUP. PROVIDE AND INSTALL LOCALLY CERTIFIED SMOKE DETECTORS.

4. ALL 120V AND 240V RECEPTACLES IN SLEEPING ROOMS, FAMILY ROOMS, DINING ROOMS, LIVING ROOMS, PORCHES, UNFINISHED DINING ROOMS, RECREATION ROOMS, CLOSETS, HALLWAYS, AND SIMILAR AREAS WILL REQUIRE A COMBINATION TYPE AFCI DEVICE AND TRIPPER-PROOF RECEPTACLES PER NEC 201.40(D) AND 404.5.


5. ALL 120V AND 240V RECEPTACLES LOCATED IN THE GARAGE AND UTILITY ROOMS SHALL BE GFCI PROTECTED (GFI).

6. IT IS THE RESPONSIBILITY OF THE LICENSED ELECTRICIAN TO ENSURE THAT ALL ELECTRICAL WORK IS IN FULL COMPLIANCE WITH NEC, 30, NEC CODE, AND ALL APPLICABLE LOCAL STANDARDS, CODES, AND ORDINANCES.

7. EVERY BUILDING HAVING A FOSSIL-FUEL-BURNING HEATER OR APPLIANCE, FIREPLACE OR AN ATTACHED GARAGE SHALL HAVE AN OPERATIONAL CARBON MONOXIDE DETECTOR INSTALLED WITHIN 10 FEET OF EACH ROOM USED FOR SLEEPING PURPOSES.

8. ALARMS SHALL RECEIVE THEIR PRIMARY POWER FROM THE BUILDING WIRING WHEN SUCH WIRING IS DERIVED FROM THE LOCAL POWER UTILITY. SUCH ALARMS SHALL HAVE BATTERY BACKUP COMBINATION SMOKE/CARBON MONOXIDE ALARMS SHALL BE LISTED OR LABELED BY A NATIONALLY RECOGNIZED TESTING LABORATORY.

ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, DIMENSIONS, AND ADHERENCE TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION. ANY DISCREPANCY OF ERROR IN NOTES, DIMENSIONS, OR ADHERENCE TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION. ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES. IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTERS OFFICE SHALL NOT BE HELD RESPONSIBLE.

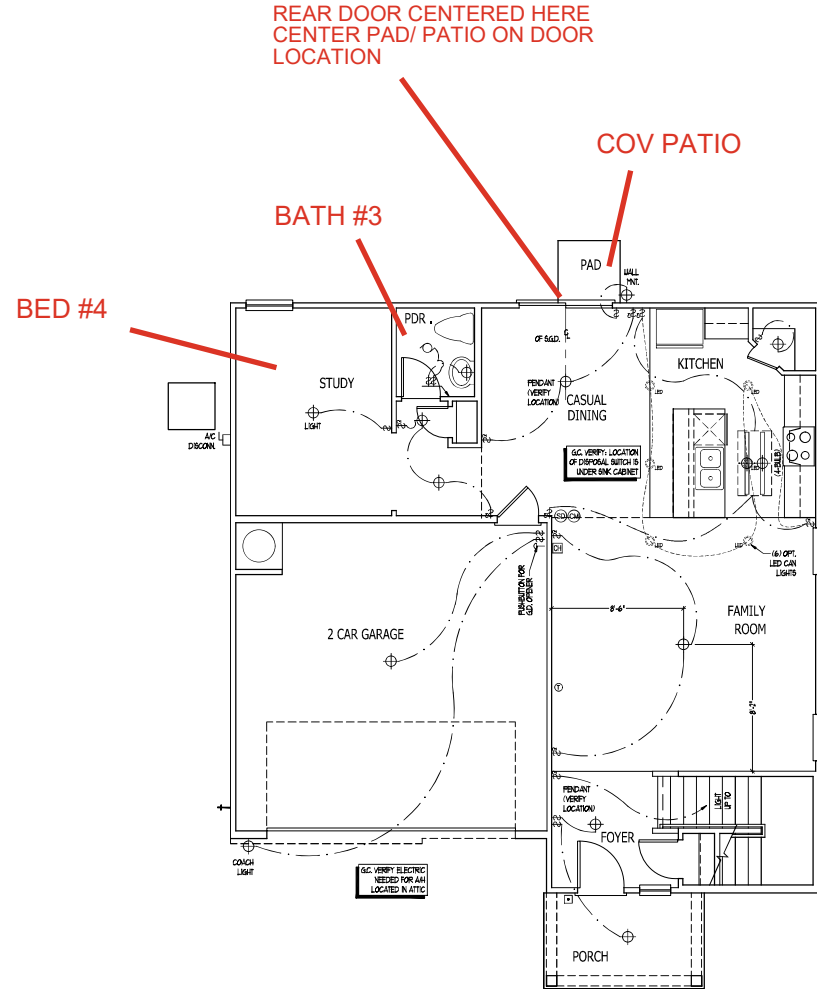

FIRST FLOOR PLAN-A

SCALE: 1/4" = 1'-0"

ELEVATION A
FIRST FLOOR PLAN
SCALE: 1/4" = 1'-0"

DREAM FINDERS HOMES

JOB NUMBER	18-181588
CAD FILE NAME	WAYFARE-18
ISSUED	11-28-17
REVISED	11-16-17
	04-25-20
	04-28-20
	12-21-20
	04-10-21
	05-10-21

DRAWINGS ON 11"x17" SHEET ARE ONE HALF THE SCALE NOTED

WAYFARE (Garage Left)
DREAM FINDERS HOMES

2277

TITLE
MAIN FLOOR ELEC. PLAN

SHEET
E1.0

ELECTRICAL KEY

- Ⓢ DUPLEX CONVENIENCE OUTLET
- Ⓢ DUPLEX OUTLET ABOVE COUNTER
- Ⓢ WEATHERPROOF DUPLEX OUTLET
- Ⓢ GROUND FAULT INTERRUPTER DUPLEX OUTLET
- Ⓢ HALF-OUTLETHED DUPLEX OUTLET
- Ⓢ SPECIAL PURPOSE OUTLET
- Ⓢ DUPLEX OUTLET IN FLOOR
- Ⓢ 250 VOLT OUTLET
- Ⓢ WALL SWITCH
- Ⓢ THREE-WAY SWITCH
- Ⓢ FOUR-WAY SWITCH
- Ⓢ DIMMER SWITCH
- Ⓢ CEILING MOUNTED INCANDESCENT LIGHT FIXTURE
- Ⓢ WALL MOUNTED INCANDESCENT LIGHT FIXTURE
- Ⓢ RECESSED INCANDESCENT LIGHT FIXTURE
- Ⓢ LIGHT FIXTURE WITH PULL CHAIN
- Ⓢ TRACK LIGHT
- Ⓢ FLUORESCENT LIGHT FIXTURE
- Ⓢ EXHAUST FAN
- Ⓢ EXHAUST FAN/LIGHT COMBINATION
- Ⓢ ELECTRIC DOOR OPERATOR (OPTIONAL)
- Ⓢ CARPES (OPTIONAL)
- Ⓢ PUSHBUTTON SWITCH (OPTIONAL)
- Ⓢ CARBON MONOXIDE DETECTOR
- Ⓢ SMOKE DETECTOR
- Ⓢ SMOKE / CARBON MONOXIDE COMBO DETECTOR
- Ⓢ TELEPHONE (OPTIONAL)
- Ⓢ TELEVISION (OPTIONAL)
- Ⓢ THERMOSTAT
- Ⓢ ELECTRIC METER
- Ⓢ ELECTRIC PANEL
- Ⓢ DISCONNECT SWITCH
- Ⓢ SPLITTER (OPTIONAL)
- Ⓢ ROUGH-IN FOR OPT. CEILING FAN
- Ⓢ ROUGH-IN FOR OPT. CEILING FAN
- Ⓢ CEILING MOUNTED INCANDESCENT LIGHT FIXTURE W/ ROUGH-IN FOR OPT. CEILING FAN

NOTES:

1. PROVIDE AND INSTALL GROUND FAULT CIRCUIT INTERRUPTERS (GFI) AS INDICATED ON PLANS OR AS ITEM NO. 4 AND 5 BELOW INDICATES.

2. UNLESS OTHERWISE INDICATED, INSTALL SWITCHES AND RECEPTACLES AT THE FOLLOWING HEIGHTS ABOVE FINISHED FLOOR:

- SWITCHES ... 4'
- OUTLETS ... 1'
- TELEPHONE ... 1' (UNLESS AS BY COUNTERTOP)
- TELEVISION ... 1'

3. ALL SMOKE DETECTORS SHALL BE HARWARED INTO AN ELECTRICAL POWER SOURCE AND SHALL BE EQUIPPED WITH A MONITORED BATTERY BACKUP. PROVIDE AND INSTALL LOCALLY CERTIFIED SMOKE DETECTORS.

4. ALL 120V AND 240V RECEPTACLES IN SLEEPING ROOMS, FAMILY ROOMS, DINING ROOMS, LIVING ROOMS, PORCHES, TERRACES, DECKS, BATHROOMS, RECREATION ROOMS, CLOSETS, HALLWAYS, AND SIMILAR AREAS WILL REQUIRE A COMBINATION TYPE AFCI DEVICE AND TAMPER-PROOF RECEPTACLES PER NEC 201.40(B) AND 404.6.


5. ALL 120V AND 240V RECEPTACLES LOCATED IN THE GARAGE AND UTILITY ROOMS SHALL BE GFCI PROTECTED (GFI).

6. IT IS THE RESPONSIBILITY OF THE LICENSED ELECTRICIAN TO ENSURE THAT ALL ELECTRICAL WORK IS IN FULL COMPLIANCE WITH NEC, 90, NEC CODE, AND ALL APPLICABLE LOCAL STANDARDS, CODES, AND ORDINANCES.


7. EVERY BUILDING HAVING A FOSSIL-FUEL-BURNING HEATER OR APPLIANCE, FIREPLACE OR AN ATTACHED GARAGE SHALL HAVE AN OPERATIONAL CARBON MONOXIDE DETECTOR INSTALLED WITHIN 10 FEET OF EACH ROOM USED FOR SLEEPING PURPOSES.

8. ALARMS SHALL RECEIVE THEIR PRIMARY POWER FROM THE BUILDING WIRING WHEN SUCH WIRING IS DERIVED FROM THE LOCAL POWER UTILITY. SUCH ALARMS SHALL HAVE BATTERY BACKUP CORRELATION WITH CARBON MONOXIDE ALARMS SHALL BE LISTED OR LABELED BY A NATIONALLY RECOGNIZED TESTING LABORATORY.


ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, DIMENSIONS, AND ADHERENCE TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION. ANY DISCREPANCY OF ERROR IN NOTES, DIMENSIONS, OR ADHERENCE TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION. ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES. IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTERS OFFICE SHALL NOT BE HELD RESPONSIBLE.

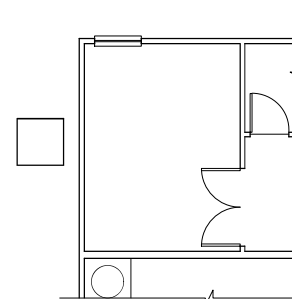


OPT BI-SWING DOORS
AT STUDY
SCALE 1/4\"/>




OPT PATIO
SCALE 1/4\"/>



OPT COVERED PATIO
SCALE 1/4\"/>

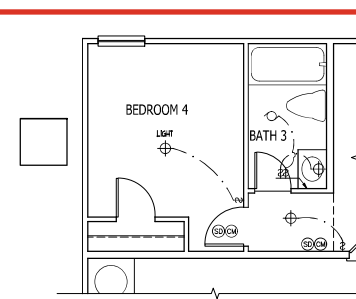

OPT BEDROOM 4 W/
BATH 3 ILO STUDY
AND POWDER ROOM 1
SCALE 1/4\"/>

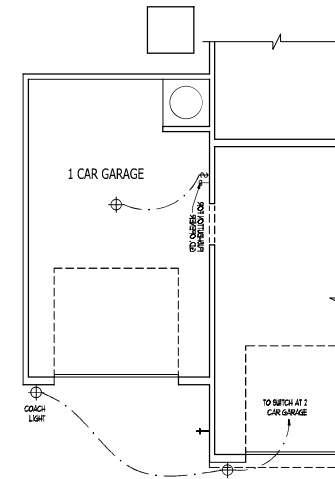

OPT 1 CAR GARAGE
SCALE 1/4\"/>

DREAM FINDERS
HOMES

JOB NUMBER	18-181588
CAD FILE NAME	WAYFARE-18
ISSUED	11-28-17
REVISED	11-16-17
	04-18-20
	04-20-20
	12-21-20
	04-22-20
	05-03-20

DRAWINGS ON 11x17\"/>

WAYFARE (Garage Left)
DREAM FINDERS HOMES

2277

TITLE
ELECTRIC AT PLAN OPTIONS

SHEET
E1.1

FIRST FLOOR PLAN OPTIONS
SCALE 1/4\"/>

ELECTRICAL KEY

- Ⓢ - DUPLEX CONVENIENCE OUTLET
- Ⓢ - DUPLEX OUTLET ABOVE COUNTER
- Ⓢ - WEATHERPROOF DUPLEX OUTLET
- Ⓢ - GROUND FAULT INTERRUPTER DUPLEX OUTLET
- Ⓢ - HALF-OUTLETHED DUPLEX OUTLET
- Ⓢ - SPECIAL PURPOSE OUTLET
- Ⓢ - DUPLEX OUTLET IN FLOOR
- 1 - WALL SWITCH
- 1.5 - THREE-WAY SWITCH
- 1.5 - FOUR-WAY SWITCH
- 1.5 - DIMMER SWITCH
- Ⓢ - CEILING MOUNTED INCANDESCENT LIGHT FIXTURE
- Ⓢ - WALL MOUNTED INCANDESCENT LIGHT FIXTURE
- Ⓢ - RECESSED INCANDESCENT LIGHT FIXTURE
- Ⓢ - LIGHT FIXTURE WITH PULL CHAIN
- Ⓢ - TRACK LIGHT
- Ⓢ - FLUORESCENT LIGHT FIXTURE
- Ⓢ - EXHAUST FAN
- Ⓢ - EXHAUST FAN/LIGHT COMBINATION
- Ⓢ - ELECTRIC DOOR OPERATOR (OPTIONAL)
- Ⓢ - CARPES (OPTIONAL)
- Ⓢ - PUSHBUTTON SWITCH (OPTIONAL)
- Ⓢ - CARBON MONOXIDE DETECTOR
- Ⓢ - SMOKE DETECTOR
- Ⓢ - SMOKE / CARBON MONOXIDE COMBO DETECTOR
- Ⓢ - TELEPHONE (OPTIONAL)
- Ⓢ - TELEVISION (OPTIONAL)
- Ⓢ - THERMOSTAT
- Ⓢ - ELECTRIC METER
- Ⓢ - ELECTRIC PANEL
- Ⓢ - DISCONNECT SWITCH
- Ⓢ - SPLITTER (OPTIONAL)
- Ⓢ - ROUGH-IN FOR OPT. CEILING FAN
- Ⓢ - CEILING MOUNTED INCANDESCENT LIGHT FIXTURE W/ ROUGH-IN FOR OPT. CEILING FAN

NOTES:

1. PROVIDE AND INSTALL GROUND FAULT CIRCUIT INTERRUPTERS (GFCI) AS INDICATED ON PLANS OR AS ITEM NO. 4 AND 5 BELOW INDICATES.

2. UNLESS OTHERWISE INDICATED, INSTALL SWITCHES AND RECEPTACLES AT THE FOLLOWING HEIGHTS ABOVE FINISHED FLOOR:

- SWITCHES ... 4'
- OUTLETS ... 18"
- TELEPHONE, TV, OR (UNLESS ASY. COUNTERTOP) TELEVISION ... 48"

3. ALL SMOKE DETECTORS SHALL BE HARDWIRED INTO AN ELECTRICAL POWER SOURCE AND SHALL BE EQUIPPED WITH A MONITORED BATTERY BACKUP. PROVIDE AND INSTALL LOCALLY CERTIFIED SMOKE DETECTORS.

4. ALL 120V AND 240V RECEPTACLES IN SLEEPING ROOMS, FAMILY ROOMS, DINING ROOMS, LIVING ROOMS, PORCHES, TERRACES, DECKS, BATHROOMS, RECREATION ROOMS, CLOSETS, HALLWAYS, AND SIMILAR AREAS WILL REQUIRE A COMBINATION TYPE AFCI DEVICE AND TRIPPER-PROOF RECEPTACLES PER NEC 210.8(A)(2) AND 400.5.

5. ALL 120V AND 240V RECEPTACLES LOCATED IN THE GARAGE AND UTILITY ROOMS SHALL BE GFCI PROTECTED (GFI).


6. IT IS THE RESPONSIBILITY OF THE LICENSED ELECTRICIAN TO ENSURE THAT ALL ELECTRICAL WORK IS IN FULL COMPLIANCE WITH NEC, 30, NEC, 30, AND ALL APPLICABLE LOCAL STANDARDS, CODES, AND ORDINANCES.

7. EVERY BUILDING HAVING A FOSSIL-FUEL-BURNING HEATER OR APPLIANCE, FIREPLACE OR AN ATTACHED GARAGE SHALL HAVE AN OPERATIONAL CARBON MONOXIDE DETECTOR INSTALLED WITHIN 10 FEET OF EACH ROOM USED FOR SLEEPING PURPOSES.

8. ALARMS SHALL RECEIVE THEIR PRIMARY POWER FROM THE BUILDING WIRING WHEN SUCH WIRING IS DERIVED FROM THE LOCAL POWER UTILITY. SUCH ALARMS SHALL HAVE BATTERY BACKUP CORRELATION WITH CARBON MONOXIDE ALARMS SHALL BE LISTED OR LABELED BY A NATIONALLY RECOGNIZED TESTING LABORATORY.

ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, DIMENSIONS, AND ADHERENCE TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION. ANY DISCREPANCY OF ERROR IN NOTES, DIMENSIONS, OR ADHERENCE TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION. ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES. IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTERS OFFICE SHALL NOT BE HELD RESPONSIBLE.

OWNER'S
BATH #2

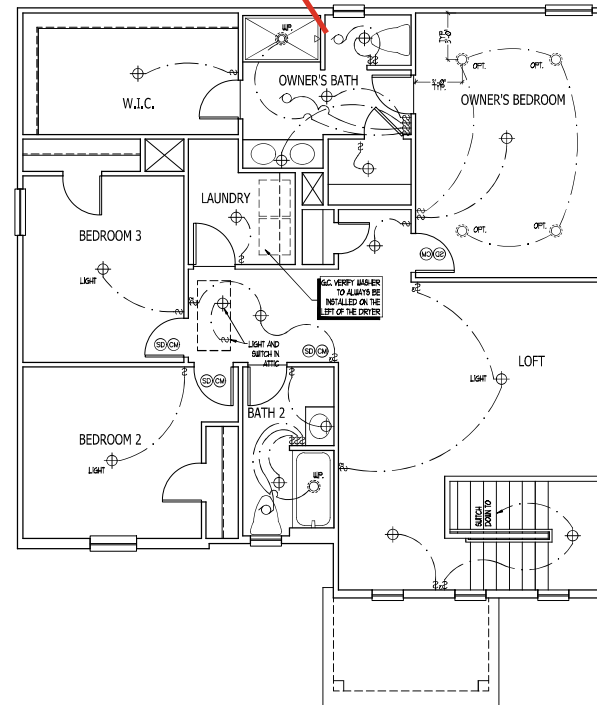

DREAM FINDERS
HOMES

JOB NUMBER	18-181588
CAD FILE NAME	WAYFARE-18
ISSUED	11-28-17
REVISED	11-16-17
	04-28-20
	04-28-20
	12-21-20
	04-28-20
	04-28-20

DRAWINGS ON 11"x17" SHEET ARE ONE HALF THE SCALE NOTED

WAYFARE (Garage Left)
DREAM FINDERS HOMES

2277

TITLE
UPPER FLOOR ELEC. PLAN

SHEET
E1.3

ELEVATION A
SECOND FLOOR PLAN
SCALE: 1/4" = 1'-0"

ELECTRICAL KEY

- Ⓚ- Duplex Convenience Outlet
- Ⓚ- Duplex Outlet Above Counter
- Ⓚ- Weatherproof Duplex Outlet
- Ⓚ- Ground Fault Interrupter Duplex Outlet
- Ⓚ- Half-Outleted Duplex Outlet
- Ⓚ- Special Purpose Outlet
- Ⓚ- Duplex Outlet in Floor
- Ⓚ- 250 Volt Outlet
- Ⓚ- Wall Switch
- Ⓚ- Three-Way Switch
- Ⓚ- Four-Way Switch
- Ⓚ- Dimmer Switch
- Ⓚ- Ceiling Mounted Incandescent Light Fixture
- Ⓚ- Wall Mounted Incandescent Light Fixture
- Ⓚ- Recessed Incandescent Light Fixture
- Ⓚ- Light Fixture with Pull Chain
- Ⓚ- Track Light
- Ⓚ- Fluorescent Light Fixture
- Ⓚ- Exhaust Fan
- Ⓚ- Exhaust Fan/Light Combination
- Ⓚ- Electric Door Operator (Optional)
- Ⓚ- Carps (Optional)
- Ⓚ- Hub/Hub Switch (Optional)
- Ⓚ- Carbon Monoxide Detector
- Ⓚ- Smoke Detector
- Ⓚ- Smoke / Carbon Monoxide Combo Detector
- Ⓚ- Telephone (Optional)
- Ⓚ- Television (Optional)
- Ⓚ- Thermostat
- Ⓚ- Electric Meter
- Ⓚ- Electric Panel
- Ⓚ- Disconnect Switch
- Ⓚ- Sprinkler (Optional)
- Ⓚ- Rough-In for Opt. Ceiling Fan
- Ⓚ- Ceiling Mounted Incandescent Light Fixture w/ Rough-In for Opt. Ceiling Fan

NOTES:

1. PROVIDE AND INSTALL GROUND FAULT CIRCUIT INTERRUPTERS (GFCI) AS INDICATED ON PLANS OR AS ITEM NO. 4 AND 5 BELOW INDICATES.
2. UNLESS OTHERWISE INDICATED, INSTALL SWITCHES AND RECEPTACLES AT THE FOLLOWING HEIGHTS ABOVE FINISHED FLOOR:
 - SWITCHES ... 4'
 - OUTLETS ... 18"
 - TELEPHONE ... 4' (UNLESS ASY. COUNTERTOP)
 - TELEVISION ... 4'
3. ALL SMOKE DETECTORS SHALL BE HARDWIRED INTO AN ELECTRICAL POWER SOURCE AND SHALL BE EQUIPPED WITH A MONITORED BATTERY BACKUP. PROVIDE AND INSTALL LOCALLY CERTIFIED SMOKE DETECTORS.
4. ALL 120V AND 240V RECEPTACLES IN SLEEPING ROOMS, FAMILY ROOMS, DINING ROOMS, LIVING ROOMS, PORCHES, UNFINISHED DINING ROOMS, RECREATION ROOMS, CLOSETS, HALLWAYS, AND SIMILAR AREAS WILL REQUIRE A COMBINATION TYPE AFCI DEVICE AND TRIPPER-PROOF RECEPTACLES PER NEC 210.8(A)(2) AND 400.5.
5. ALL 120V AND 240V RECEPTACLES LOCATED IN THE GARAGE AND UTILITY ROOMS SHALL BE GFCI PROTECTED (GFI).
6. IT IS THE RESPONSIBILITY OF THE LICENSED ELECTRICIAN TO ENSURE THAT ALL ELECTRICAL WORK IS IN FULL COMPLIANCE WITH NEC, 30, NEC CODE, AND ALL APPLICABLE LOCAL STANDARDS, CODES, AND ORDINANCES.
7. EVERY BUILDING HAVING A FOSSIL-FUEL-BURNING HEATER OR APPLIANCE, PREPARE OR AN ATTACHED GARAGE SHALL HAVE AN OPERATIONAL CARBON MONOXIDE DETECTOR INSTALLED WITHIN 10 FEET OF EACH ROOM USED FOR SLEEPING PURPOSES.
8. ALARMS SHALL RECEIVE THEIR PRIMARY POWER FROM THE BUILDING WIRING WHEN SUCH WIRING IS DERIVED FROM THE LOCAL POWER UTILITY. SUCH ALARMS SHALL HAVE BATTERY BACKUP CORRELATION WITH CARBON MONOXIDE ALARMS SHALL BE LISTED OR LABELED BY A NATIONALLY RECOGNIZED TESTING LABORATORY.

ISSUANCE OF PLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BUILDER OF RESPONSIBILITY TO REVIEW AND VERIFY ALL NOTES, DIMENSIONS, AND ADHERENCE TO APPLICABLE BUILDING CODES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION. ANY DISCREPANCY OF ERROR IN NOTES, DIMENSIONS, OR ADHERENCE TO APPLICABLE BUILDING CODES SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTERS OFFICE FOR CORRECTION BEFORE COMMENCEMENT OF ANY CONSTRUCTION. ANY REVISIONS OR CHANGES NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE MADE AFTER THE FINAL PLANS HAVE BEEN COMPLETED SHALL BE SUBJECT TO ADDITIONAL FEES. IF ANY MODIFICATIONS ARE MADE TO THESE PLANS BY ANY OTHER PARTY OTHER THAN THE DRAFTERS OFFICE, THE DRAFTERS OFFICE SHALL NOT BE HELD RESPONSIBLE.

OPT TECH-CENTER

SCALE 1/4" = 1'-0"

OPT OWNER'S BATH 3

SCALE 1/4" = 1'-0"

OPT BEDROOM 5 W/ BATH 4 ILO LOFT

SCALE 1/4" = 1'-0"

OPT OWNER'S BATH 2

SCALE 1/4" = 1'-0"

SECOND FLOOR PLAN OPTIONS

SCALE 1/4" = 1'-0"

DREAM FINDERS
HOMES

JOB NUMBER	18-181588
CAD FILE NAME	WAYFARE-18
ISSUED	11-28-17
REVISED	11-16-17
	04-25-20
	04-28-20
	12-21-20
	04-28-20
	05-20-20




DRAWINGS ON 11"x17" SHEET ARE ONE HALF THE SCALE NOTED

WAYFARE (Garage Left)
DREAM FINDERS HOMES

2277

TITLE
ELECTRIC AT PLAN OPTIONS

SHEET
E1.4

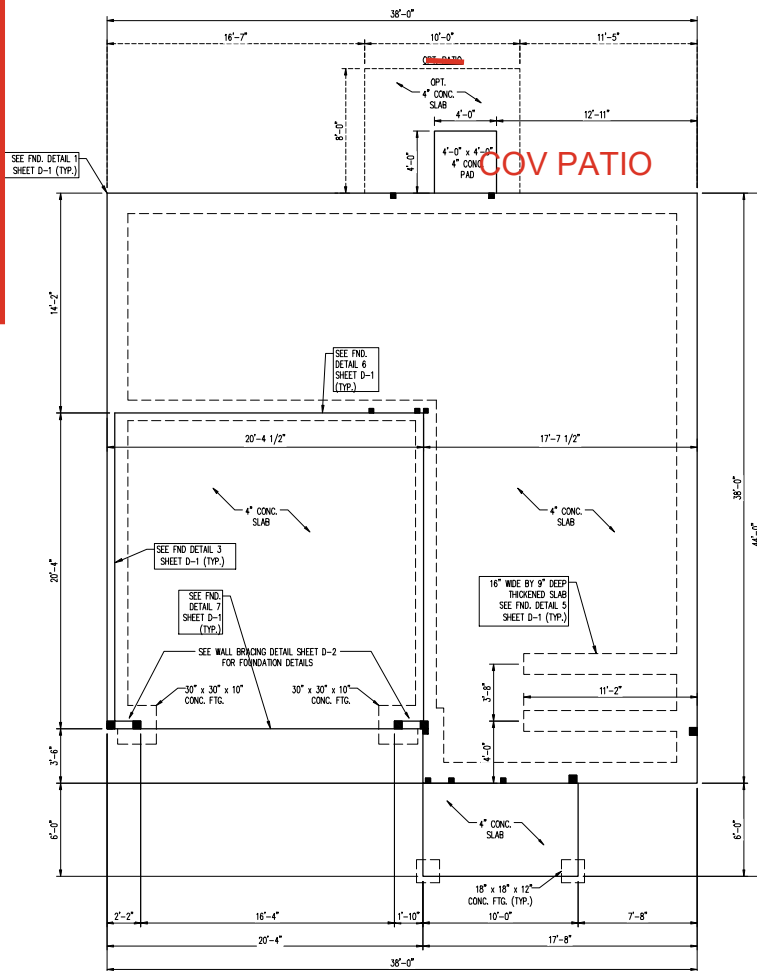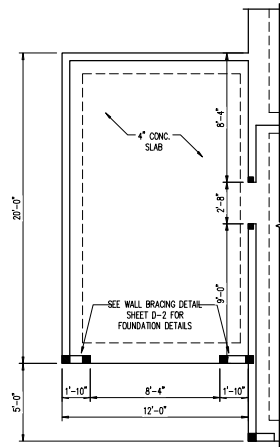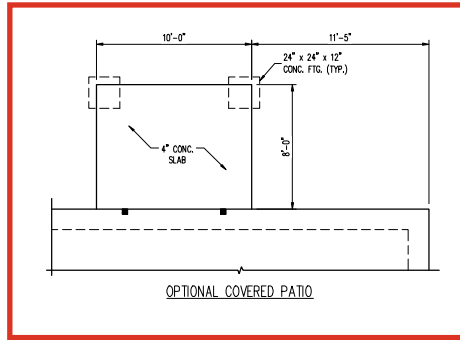

ELEVATION A

SCALE NOTE:
LARGE FORMAT PRINTS ARE TO SCALE AS NOTED.
11" x 17" PRINTS ARE ONE HALF THE NOTED SCALE.

LEGEND	
CONT	CONTINUOUS
XJ	EXTRA JOIST
DJ	DOUBLE JOIST
TJ	TRIPLE JOIST
EA	EACH
FND	FOUNDATION
FTG	FOOTING
OC	ON CENTER
SPT	SPRUCE PINE FIR
SYR	SOUTHERN YELLOW PINE
TRTD	PRESSURE TREATED
TYP	TYPICAL
UNO	UNLESS NOTED OTHERWISE

120 MPH ULTIMATE DESIGN WIND SPEED
NOTES FOR LESS THAN 30' MEAN ROOF HEIGHT:

- ENGINEER'S SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS. ENGINEER'S SEAL DOES NOT CERTIFY DIMENSIONAL ACCURACY OR ARCHITECTURAL LAYOUT INCLUDING ROOF SYSTEM.
- STRUCTURAL DESIGN PER NORTH CAROLINA RESIDENTIAL CODE, 2024 EDITION.
- INSTALL 1/2" ANCHOR BOLTS 4'-0" O.C. AND WITHIN 1'-0" FROM END OF EACH CORNER. ANCHOR BOLTS MUST EXTEND A MINIMUM OF 7" INTO MASONRY OR CONCRETE. LOCATE BOLT WITHIN MIDDLE THIRD OF PLATE WIDTH.
- MEAN ROOF HEIGHT IS LESS THAN 30 FEET.
- EXTERIOR WALLS DESIGNED FOR 120 MPH WINDS.
- ROOF AND WALL CLADDING DESIGNED FOR WIND PRESSURES PER TABLE R301.2.1(1) OF THE 2024 NRC.
- INSTALL 7/8" OSB SHEATHING ON ALL EXTERIOR WALLS OF ALL STOREYS IN ACCORDANCE WITH SECTION 905.2 OF THE NRC, 2024 EDITION. SEE THE WALL BRACING NOTES AND DETAIL SHEET FOR MORE INFORMATION.
- ENERGY EFFICIENCY COMPLIANCE AND INSULATION VALUES OF THE BUILDING TO BE IN ACCORDANCE WITH CHAPTER 11 OF THE NRC, 2024 EDITION.
- REFER TO NOTES AND DETAIL SHEETS FOR ADDITIONAL STRUCTURAL INFORMATION.

130 MPH ULTIMATE DESIGN WIND SPEED
NOTES FOR LESS THAN 30' MEAN ROOF HEIGHT:

- ENGINEER'S SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS. ENGINEER'S SEAL DOES NOT CERTIFY DIMENSIONAL ACCURACY OR ARCHITECTURAL LAYOUT INCLUDING ROOF SYSTEM.
- STRUCTURAL DESIGN PER NORTH CAROLINA RESIDENTIAL CODE, 2024 EDITION.
- INSTALL 1/2" ANCHOR BOLTS 4'-0" O.C. AND WITHIN 1'-0" FROM END OF EACH CORNER. ANCHOR BOLTS MUST EXTEND A MINIMUM OF 7" INTO MASONRY OR 7" INTO CONCRETE. LOCATE BOLT WITHIN MIDDLE THIRD OF PLATE WIDTH.
- MEAN ROOF HEIGHT IS LESS THAN 30 FEET.
- EXTERIOR WALLS DESIGNED FOR 130 MPH WINDS.
- ROOF AND WALL CLADDING DESIGNED FOR WIND PRESSURES PER TABLE R301.2.1(1) OF THE 2024 NRC.
- INSTALL 7/8" OSB SHEATHING ON ALL EXTERIOR WALLS OF ALL STOREYS IN ACCORDANCE WITH SECTION 905.2 OF THE NRC, 2024 EDITION. SEE THE WALL BRACING NOTES AND DETAIL SHEET FOR MORE INFORMATION.
- ENERGY EFFICIENCY COMPLIANCE AND INSULATION VALUES OF THE BUILDING TO BE IN ACCORDANCE WITH CHAPTER 11 OF THE NRC, 2024 EDITION.
- REFER TO NOTES AND DETAIL SHEETS FOR ADDITIONAL STRUCTURAL INFORMATION.

150 MPH ULTIMATE DESIGN WIND SPEED
NOTES FOR LESS THAN 30' MEAN ROOF HEIGHT:

- ENGINEER'S SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS. ENGINEER'S SEAL DOES NOT CERTIFY DIMENSIONAL ACCURACY OR ARCHITECTURAL LAYOUT INCLUDING ROOF SYSTEM.
- STRUCTURAL DESIGN PER NORTH CAROLINA RESIDENTIAL CODE, 2024 EDITION WITH SPECIAL CONSIDERATION TO CHAPTER 45 (HIGH WIND ZONES) FOR 150 MPH WINDS OF THE NORTH CAROLINA RESIDENTIAL CODE, 2024 EDITION.
- BUILDER IS TO PROVIDE FRAMING CONNECTIONS AS REQUIRED BY CHAPTER 45 (HIGH WIND ZONES) FOR 150 MPH WINDS OF THE NORTH CAROLINA RESIDENTIAL CODE, 2024 EDITION.
- FOUNDATION ANCHORAGE TO COMPLY WITH SECTION 905.4 OF THE NORTH CAROLINA RESIDENTIAL CODE, 2024 EDITION.
- MEAN ROOF HEIGHT IS LESS THAN 30 FEET.
- ROOF AND WALL CLADDING DESIGNED FOR WIND PRESSURES PER TABLE R301.2.1(1) OF THE 2024 NRC.
- 7/8" OSB SHEATHING IS REQUIRED ON ALL EXTERIOR WALLS.
- WALLS TO BE BRACED IN ACCORDANCE WITH CHAPTER 45 OF THE NORTH CAROLINA RESIDENTIAL CODE, 2024 EDITION AND AS NOTED ON PLANS.
- ENERGY EFFICIENCY COMPLIANCE AND INSULATION VALUES OF THE BUILDING TO BE IN ACCORDANCE WITH CHAPTER 11 OF THE NRC, 2024 EDITION.



12/3/2024

J.S. THOMPSON
ENGINEERING, INC.
3315 EAST STATE STREET, SUITE 100
WAYFARE, NC 27587
PHONE (919) 880-9919 FAX (919) 880-9921
N.C. LICENSE NO. C-1133

WAYFARE
DREAM FINDERS HOMES

DATE: DECEMBER 1, 2024
SCALE: 1/4" = 1'-0"
DRAWN BY: PELLEGRINI
CHECKED BY: WBS

SHEET: 3 OF 12
S-1.2a
MONO SLAB
FOUNDATION PLAN

J.S. THOMPSON
ENGINEERING, INC.
333 EAST SIX FORKS ROAD, SUITE 180 RALEIGH, NC 27609
PHONE: (919) 786-9919 FAX: (919) 786-9921
N.C. LICENSE NO. C1713

WAYFARE
DREAM FINDERS HOMES

DATE: DECEMBER 2, 2024




SCALE: 1/4" = 1'-0"

DRAWN BY: PURL HOMES

ENGINEERED BY: WFB

SHEET 7 OF 12
S-2a
SECOND FLOOR
FRAMING PLAN

SHEET 7 OF 12
S-2a
SECOND FLOOR
FRAMING PLAN

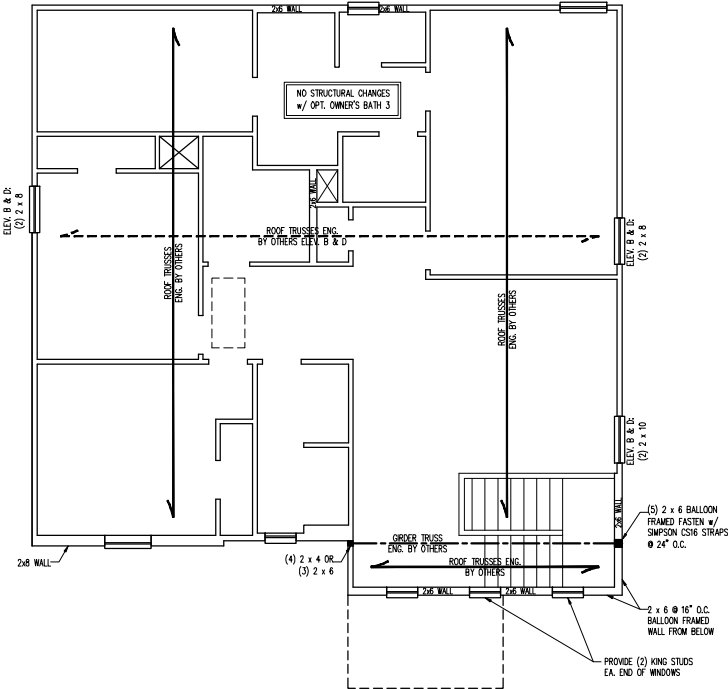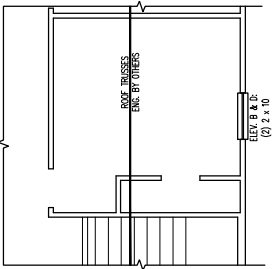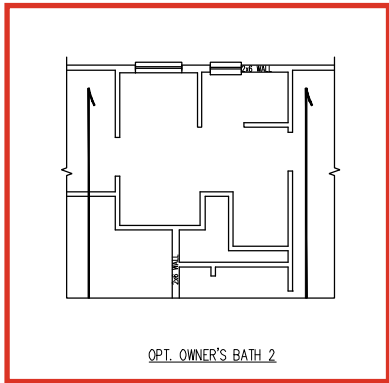

ELEVATION A



SCALE NOTE:
LARGE FORMAT PRINTS ARE TO SCALE AS NOTED.
11" x 17" PRINTS ARE ONE HALF THE NOTED SCALE.

[NOTE: ALL SECOND FLOOR EXTERIOR WALLS AND ATTIC WALLS ARE TO BE 2 x 4 SPF #2 @ 24" O.C. 2 x 6 SPF #2 @ 24" O.C. SECOND FLOOR EXTERIOR WALLS MAY BE CONSTRUCTED IN LIEU OF 2 x 4 WALLS (UNO). ALL INTERIOR LOAD BEARING AND NON-LOAD BEARING WALLS ARE TO BE 2 x 4 SPF #2 @ 24" O.C. (UNO).

- BRACED WALL DESIGN NOTES:**
1. WALL BRACING IS BY ENGINEERED DESIGN PER SECTION R301.1.3 "ENGINEERED DESIGN" OF THE NIRC 2024 EDITION USING BRACING MATERIALS AND METHODS LISTED IN TABLE R602.10.4 ALONG WITH ALTERNATIVE MATERIALS AND METHODS THAT COMPLY WITH ACCEPTED ENGINEERING PRACTICES. BRACED WALL DESIGN IS NOT PRESCRIPTIVE.
 2. SHEATH ALL EXTERIOR WALLS w/ 7/16" OSB TO PROVIDE CS-WSP WALL BRACING THAT WILL BRACE THE STRUCTURE FOR ALL LATERAL LOADS AS REQUIRED BY THE NIRC 2024 EDITION.
 3. CS-WSP REFERS TO "CONTINUOUSLY SHEATHED WOOD STRUCTURAL PANELS." CONTRACTOR IS TO INSTALL 7/16" OSB ON ALL EXTERIOR WALLS WITH HORIZONTAL JOINTS BLOCKED. ATTACH SHEATHING w/ 8d NAILS SPACED 6" O.C. ALONG PANEL EDGES AND 12" O.C. IN THE FIELD INCLUDING TOP AND BOTTOM PLATES.
 4. GB REFERS TO "GYPSUM BOARD." CONTRACTOR IS TO INSTALL 1/2" (MIN.) GYPSUM BOARD ON BOTH SIDES OF WALL (UNO) WHERE NOTED ON THE PLANS ATTACHED WITH 1 1/4" LONG #6 SCREWS OR 1 5/8" LONG Sd COOLER NAILS SPACED 7" O.C. ALONG PANEL EDGES AND IN THE FIELD INCLUDING TOP AND BOTTOM PLATES. WHERE METHOD GB PANELS ARE INSTALLED HORIZONTALLY, BLOCKING OF HORIZONTAL JOINTS IS NOT REQUIRED.
 5. BRACED WALL DESIGN APPLIED IN WIND ZONES UP TO 130 MPH. FOR HIGH WIND ZONES, BRACED WALLS ARE TO BE CONSTRUCTED IN ACCORDANCE WITH CHAPTER 45 OF THE NIRC 2024 EDITION.
 6. SEE NOTES AND DETAIL SHEETS FOR ADDITIONAL BRACED WALL INFORMATION.

- STRUCTURAL NOTES:**
1. ALL FRAMING LUMBER TO BE SPF #2 (UNO). ALL TREATED LUMBER TO BE SYP #2 (UNO).
 2. ALL LOAD BEARING HEADERS TO BE (2) 2 x 6 (UNO).
 3. WINDOW AND DOOR HEADERS TO BE SUPPORTED w/ (1) JACK STUD AND (1) KING STUD EA. END (UNO). SEE KING STUD TABLES FOR ADDITIONAL KING STUD REQUIREMENTS.
 4. SQUARES DENOTE POINT LOADS WHICH REQUIRE SOLID BLOCKING TO ORDER OR FOUNDATION. ALL SQUARES TO BE (2) STUDS (UNO).
 5. FOR HIGH WIND ZONES, ALL EXTERIOR WALLS TO BE SHEATHED WITH 7/16" OSB SHEATHING WITH JOINTS BLOCKED AND SECURED WITH 8d NAILS AT 3" O.C. ALONG EDGES AND 6" O.C. IN THE FIELD.
 6. FOR HIGH WIND ZONES, SECURE ALL EXTERIOR WALL SHEATHING PANELS TO DOUBLE TOP PLATES, BANDS, JOISTS, AND ORDERS WITH (2) ROWS OF 8d NAILS STAGGERED AT 3" O.C. PANELS SHALL EXTEND 12" BEYOND CONSTRUCTION JOINTS AND SHALL OVERLAP ORDERS AND DOUBLE SILL PLATES THEIR FULL DEPTH.
 7. REFER TO NOTES AND DETAIL SHEETS FOR ADDITIONAL STRUCTURAL INFORMATION.

TABLE R602.7.5
MINIMUM NUMBER OF FULL HEIGHT KING STUDS AT EACH END OF HEADERS IN EXTERIOR WALLS IN 120/130 MPH WIND ZONES

HEADER SPAN (FEET)	MINIMUM NUMBER OF FULL HEIGHT STUDS (KINGS)
UP TO 4'	1
> 4' TO 8'	2
> 8' TO 14'	3
> 14' TO 18'	4

MINIMUM NUMBER OF FULL HEIGHT KING STUDS AT EACH END OF HEADERS IN EXTERIOR WALLS IN 140/150 MPH WIND ZONES

HEADER SPAN (FEET)	MINIMUM NUMBER OF FULL HEIGHT STUDS (KINGS)
UP TO 4'	2
> 4' TO 8'	3
> 8' TO 14'	4
> 14' TO 18'	5

LEGEND

CONT	CONTINUOUS
XT	EXTRA TRUSS
TS	TRUSS SUPPORT
EA	EACH
()	NUMBER OF STUDS
DSP	DOUBLE STUD POCKET
TSP	TRIPLE STUD POCKET
O.C.	ON CENTER
SPF	SPRUCE PINE FIR
SYP	SOUTHERN YELLOW PINE
TRTD	PRESSURE TREATED
TYP	TYPICAL
UNO	UNLESS NOTED OTHERWISE

J.S. THOMPSON ENGINEERING INC.
101 EAST MAIN STREET, SUITE 100
WAYFARE, NC 27587
PHONE (919) 889-9919 FAX (919) 889-9921
N.C. LICENSE NO. C-1133

WAYFARE
DREAM FINDERS HOMES

DATE: DECEMBER 1, 2024
SCALE: 1/4" = 1'-0"
DRAWN BY: PUELLERHORN
ENGINEERED BY: WBS

SHEET: 9 OF 12
S-3a
CELLING FRAMING PLAN

SCALE NOTE:
LARGE FORMAT PRINTS ARE TO SCALE AS NOTED.
11" x 17" PRINTS ARE ONE HALF THE NOTED SCALE

STRUCTURAL NOTES:


3. ALL FRAMING LINGER IN 2 X 4 POSTS (JNF).
4. CIRCLES DECKED 3/4 2 X 4 JOISTS FOR UNIFORM SUPPORT.
5. FRAMING MEMBER WALK ON TOP OF DOUBLE OR TRIPLE RAFTERS.
6. IF SPACES ARE TO BE SPACED A MIN. OF 8'-0" APART, FASTEN MEMBERS WITH THREE ROWS OF 16 D NAILS @ 16" O.C.
7. STICK FRAME OVER-FRAMED ROOF SECTIONS 2" X 6" X RIDGES, 2" X 6" RAFTERS @ 16" O.C. WITH 1/2" PLATE 2 X 10 VALLEYS OR USE VALLEY TRUSSES.
8. FASTEN PLATE VALLEYS TO RAFTERS OR TRUSSES WITH SPS204 HAZARD RESISTANT NAILS @ 16" O.C.
9. IF TRUSS OR MAX. PACE HURRICANE RESISTANT TRUSS WITH NOTCH IN ROOF SHEATHING, EACH RAFTER VALLEY IS TO BE FASTENED TO THE RAFTER VALLEY WITH A MIN. OF (6) 12S TOE NAILS.
10. REFER TO PERMITS 1101.01 SECTION 2024.01A FOR REQUIRED UPLIFT RESISTANCE AT RAFTERS AND TRUSSES, IN HIGH WIND ZONES, AND FOR TRUSS OR TRUSS TRUSS (T/T) FOR MAXIMUM UPLIFT HURRICANE TRUSS (T/T) EQUALS. UNLESS NOTED OTHERWISE BY TRUSS ENGINEER BASE ON DESIGN UPLIFT FOR EA. TRUSS OR TRUSS SECTION OF THE 2024 CODE TO ENSURE COMPLIANCE WITH REQUIRED UPLIFT AND LATERAL CONNECTIONS, BRACKETS AND DETAIL CONNECTIONS FOR ANY ADDITIONAL STRUCTURAL INFORMATION.

NOTE: REFER TO ARCHITECTURAL DRAWINGS FOR ROOF PITCHES, PLATE HEIGHTS, DIMENSIONS, OVERHANG WIDTHS, AND ATTIC VENT CALCS.

LEGEND

XT	EXTRA TRUSS
TS	TRUSS SUPPORT
XR	EXTRA RAFTER
RS	RAFTER SUPPORT
CONT	CONTINUOUS
EA	EACH
OC	ON CENTER
SPF	SPRUCE PINE FIR
SYP	SOUTHERN YELLOW PINE
TP	TYPICAL
UNO	UNLESS NOTED OTHERWISE

ELEVATION A

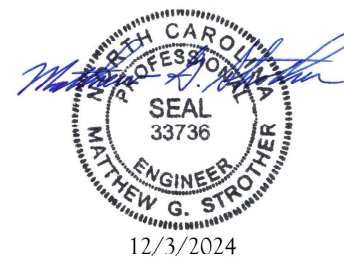

J.S. THOMPSON
ENGINEERING, INC.
333 EAST SIX FORKS ROAD, SUITE 180 RALEIGH, NC 27609
PHONE: (919) 788-0919 FAX: (919) 788-9921
N.C. LICENSE NO. C-1731

WAYFARE
DREAM FINDERS HOMES

DATE: DECEMBER 2, 2024

SCALE 1/4" = 1'-0"

DRAWN BY: PUL HOMER


ENGINEERED BY: WTB

SHEET: 11 OF 12

S-4a
ROOF FRAMING
PLAN


MONOLITHIC SLAB DETAILS

DETAIL 1

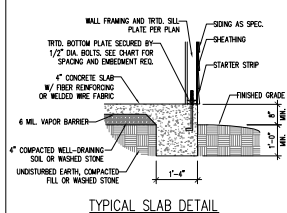


TYPICAL SLAB DETAIL

DETAIL 2

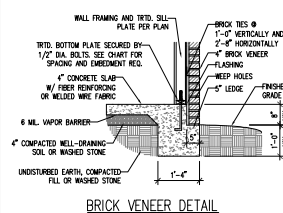


BRICK VENEER DETAIL

DETAIL 3

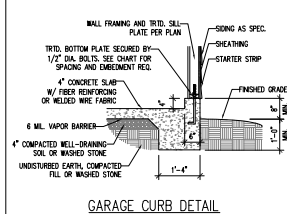


GARAGE CURB DETAIL

DETAIL 4

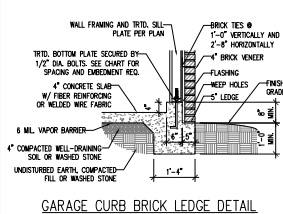


GARAGE CURB BRICK LEDGE DETAIL

DETAIL 5

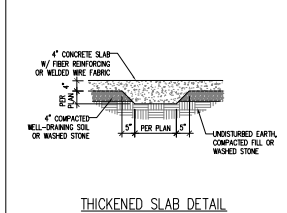


THICKENED SLAB DETAIL

DETAIL 6

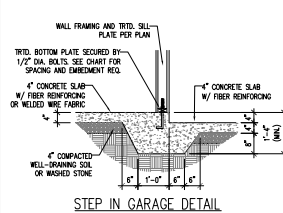

STEP IN GARAGE DETAIL


DETAIL 7

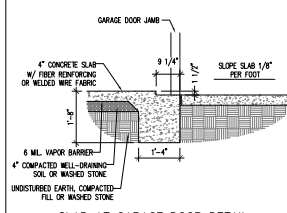


SLAB AT GARAGE DOOR DETAIL

STEM WALL DETAILS

DETAIL 1

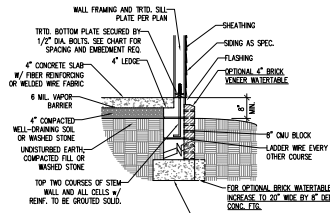
TYPICAL STEM WALL DETAIL
(w/ OPTIONAL WATERTABLE)

OPTIONAL DETAIL 1

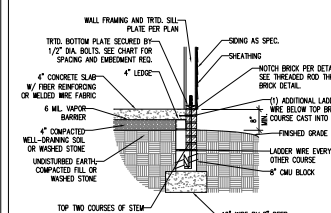


OPTIONAL STEM WALL DETAIL

DETAIL 2

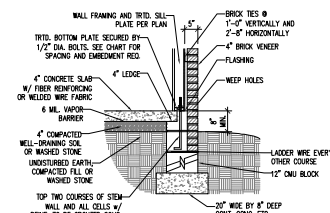


TYPICAL STEM WALL FND. w/ BRICK DETAIL


DETAIL 3

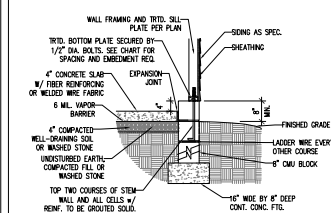TYPICAL STEM WALL FND. DETAIL
w/ CURB @ GARAGE


OPTIONAL DETAIL 3

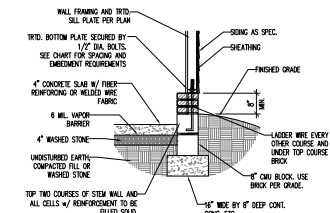OPTIONAL STEM WALL FND. DETAIL
w/ CURB @ GARAGE

DETAIL 4

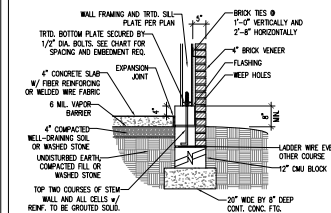TYPICAL STEM WALL FND. DETAIL w/ BRICK
AND CURB @ GARAGE

OPTIONAL DETAIL 8

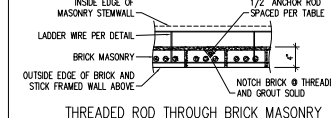

THREADED ROD THROUGH BRICK MASONRY

MASONRY STEM WALL SPECIFICATIONS

WALL HEIGHT (FEET)	MASONRY WALL TYPE			
	8" CMU	4" BRICK AND 4" CMU	4" BRICK AND 8" CMU	12" CMU
2 AND BELOW	UNGRADED	GROUT SOLID	UNGRADED	UNGRADED
3	UNGRADED	GROUT SOLID	UNGRADED	UNGRADED
4	GROUT SOLID w/ #4 REBAR @ 64" O.C.	GROUT SOLID w/ #4 REBAR @ 48" O.C.	GROUT SOLID	GROUT SOLID w/ #4 REBAR @ 64" O.C.
5	GROUT SOLID w/ #4 REBAR @ 36" O.C.	NOT APPLICABLE	GROUT SOLID w/ #4 REBAR @ 36" O.C.	GROUT SOLID w/ #4 REBAR @ 64" O.C.
6 AND GREATER	ENGINEERED DESIGN BASED ON SITE CONDITIONS			

STRUCTURAL NOTES:


- 1) WALL HEIGHT MEASURED FROM TOP OF FOOTING TO TOP OF THE WALL.
- 2) THE MULTIPLE WYTHES TOGETHER WITH LADDER WIRE AT 16" O.C. VERTICALLY.
- 3) CHART APPLICABLE FOR HOUSE FOUNDATION ONLY. CONSULT ENGINEER FOR DESIGN OF GARAGE FOUNDATION NOT COMMON TO HOUSE w/ GREATER THAN 3' OF FILL AS MEASURED FROM THE TOP OF THE FOOTING.
- 4) BACKFILL OF CLEAN #57 @ 7' WASHED STONE IS ALLOWABLE.
- 5) BACKFILL OF WELL DRAINED OR SAND - GRAVEL MORTAR SOLLS (#6 PER FT BELOW GRADE) CLASSIFIED AS GROUP 1 ACCORDING TO UNIFIED SOILS CLASSIFICATION SYSTEM IN ACCORDANCE WITH TABLE B.6.01 OF THE 2024 NORTH CAROLINA RESIDENTIAL CODE ARE ALLOWABLE.
- 6) PREP SLAB PER RS&S.2.1 AND RS&S.2.2 BASE AND EXCEPTION OF 2024 NORTH CAROLINA RESIDENTIAL CODE.
- 7) MINIMUM 24" LAP SPICE LENGTH.
- 8) LOCATE REBAR IN CENTER OF FOUNDATION WALL.
- 9) WHERE REQUIRED, FILL BLOCK SOLID WITH TYPE "S" MORTAR OR 3000 PSI GROUT. USE "LOW LIFT GROUTING" METHOD REQUIRED WHEN FILLING WALLS WITH GROUT AT HEIGHTS OF 5' AND GREATER.

ANCHOR SPACING AND EMBEDMENT

WIND ZONE	120 MPH	130 MPH
SPACING	6"-0" O.C. INSTALL MIN. (2) ANCHORS PER PLATE SECTION AND (1) ANCHOR WITHIN 12" OF CORNERS	4"-0" O.C. INSTALL MIN. (2) ANCHORS PER PLATE SECTION AND (1) ANCHOR WITHIN 12" OF CORNERS
EMBEDMENT	7"	15" INTO MASONRY 7" INTO CONCRETE

NOTE:

THREADED ROD WITH EPOXY, SIMPSON ITEN HD, OR APPROVED ANCHORS SPACED AS REQUIRED TO PROVIDE EQUIVALENT ANCHORAGE TO 1/2" DIAMETER ANCHOR BOLTS MAY BE USED IN LIEU OF 1/2" ANCHOR BOLTS.

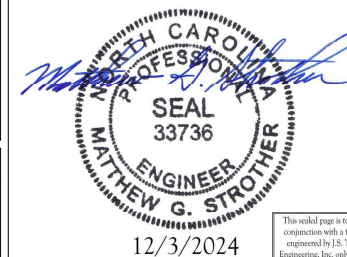

This sealed page is to be used in conjunction with a full plan set engineered by J.S. Thompson Engineering, Inc. with the use of this individual sealed page within architectural pages or shop drawings by others is a punishable offense under N.C. Statute § 89C-23

**J.S. THOMPSON
ENGINEERING, INC.**
101 EAST PINE BLVD. SUITE 100, WALKER, NC 28382
PHONE: (919) 789-9191 FAX: (919) 789-9191
S.C. LICENSE #801-0151


120 MPH - 130 MPH ULTIMATE DESIGN WIND SPEED
FOUNDATION DETAILS
DREAM FINDERS HOMES

DATE: 2/2/2024
SCALE: STD
DRAWN: JST
CHECKED: JST
DESIGNED BY: JST


D-1
FOUNDATION DETAILS

GENERAL WALL BRACING NOTES:

1. WALL BRACING IS BY ENGINEER DESIGN PER SECTION R301.1.3 "ENGINEERED DESIGN" OF THE NRC 2024 EDITION USING BRACING MATERIALS AND METHODS LISTED IN TABLE R602.10.4 ALONG WITH ALTERNATIVE MATERIALS AND METHODS THAT COMPLY WITH ACCEPTED ENGINEERING PRACTICE. BRACED WALL DESIGN IS NOT PRESCRIPTIVE.
2. SEE THIS SHEET FOR GENERAL DETAILS. REFER TO THE 2024 NRC FOR ADDITIONAL INFORMATION AS NEEDED.
3. BRACED EXTERIOR WALLS SUPPORTING ROOF TRUSSES AND RAFTERS, INCLUDING STORES BELOW THE TOP FLOOR, HAVE BEEN DESIGNED PER R602.3.5 (3). WALL SHEATHING AND FASTENERS HAVE BEEN DESIGNED TO RESIST COMBINED UPLIFT AND SHEAR FORCES IN ACCORDANCE WITH ACCEPTED ENGINEERING PRACTICE.
4. SEE STRUCTURAL SHEETS FOR HOLD DOWN TYPE AND LOCATIONS WHERE REQUIRED AND ANY SPECIAL NOTES OR REQUIREMENTS.
5. ALL EXTERIOR WALLS ARE TO BE SHEATHED WITH CS-WSP IN ACCORDANCE WITH SECTION R602.10 UNLESS NOTED OTHERWISE.
6. ALL EXTERIOR AND INTERIOR WALLS TO HAVE 1/2" OYSPUM INSTALLED, WHEN NOT USING METHOD "GB", OYSPUM TO BE FASTENED PER TABLE R702.3.5. METHOD GB TO BE FASTENED PER TABLE R602.10.4
7. CS-WSP REFERS TO THE "CONTINUOUS SHEATHING - WOOD STRUCTURAL PANELS" WALL BRACING METHOD. 7/16" OSB SHEATHING IS TO BE INSTALLED ON ALL EXTERIOR WALLS WITH JOINTS BLOODED. ATTACH SHEATHING w/ 6d COMMON NAILS OR 8d (2 1/2" LONG x 0.113" DIAMETER) NAILS SPACED 6" O.C. ALONG PANEL EDGES AND 12" O.C. IN THE FIELD (U.N.O.).
8. GB REFERS TO THE "GYPSUM BOARD" WALL BRACING METHOD. 1/2" (MIN.) GYPSUM WALL BOARD IS TO BE INSTALLED ON BOTH SIDES OF THE BRACED WALL FASTENED WITH 1 1/4" SCREWS OR 1 5/8" NAILS SPACED 7" O.C. ALONG PANEL EDGES INCLUDING TOP AND BOTTOM PLATES AND INTERMEDIATE SUPPORTS (U.N.O.). VERIFY ALL FASTENER OPTIONS FOR 1/2" AND 5/8" OYSPUM PRIOR TO CONSTRUCTION. FOR INTERIOR FASTENER OPTIONS SEE TABLE R702.3.5. FOR EXTERIOR FASTENER OPTIONS SEE TABLE R602.X(1), WHERE METHOD GB PANELS ARE INSTALLED HORIZONTALLY, BLOODED OF HORIZONTAL JOINTS IS NOT REQUIRED. EXTERIOR GB TO BE INSTALLED VERTICALLY.

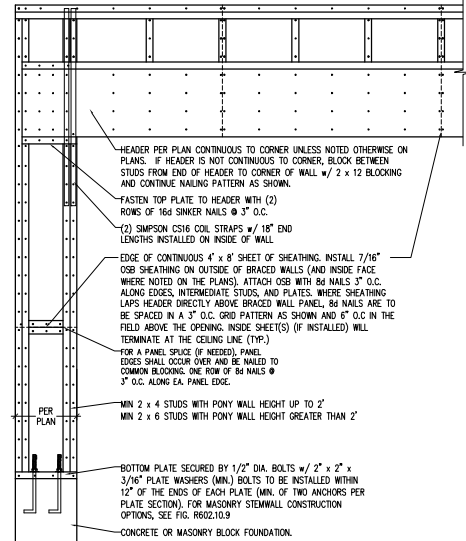


OVER CONCRETE OR MASONRY BLOCK FOUNDATION

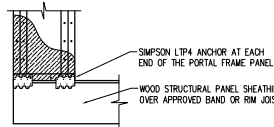


OVER RAISED WOOD FLOOR - FRAMING ANCHOR OPTION

* APPLICABLE w/ GREATER THAN 12" KNEE WALL HEIGHTS IN CRAWL SPACE AND ABOVE FRAMED BASEMENT WALLS *


METHOD PF-PORTAL FRAME DETAIL ①

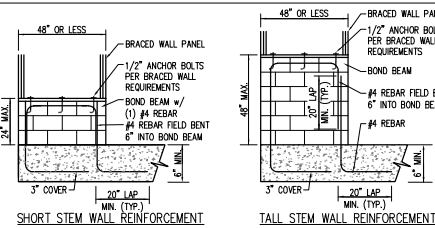

SHORT STEM WALL REINFORCEMENT



TALL STEM WALL REINFORCEMENT

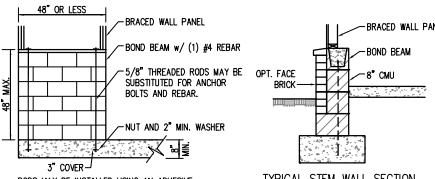


OPTIONAL STEM WALL REINFORCEMENT

NOTE: GROUT BOND BEAMS AND ALL CELLS WHICH CONTAIN REBAR, THREADED RODS AND ANCHOR BOLTS


MASONRY STEM WALLS SUPPORTING BRACED WALL PANELS ②

PER FIGURE R602.10.9

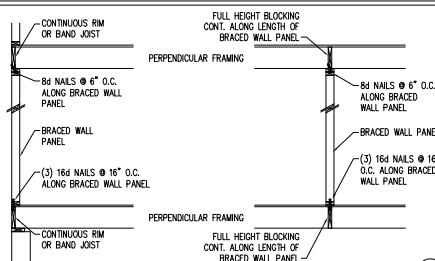

BRACED WALL PANEL CONNECTION WHEN PERPENDICULAR TO FLOOR/CEILING FRAMING ③

PER FIGURE R602.10.8(1)


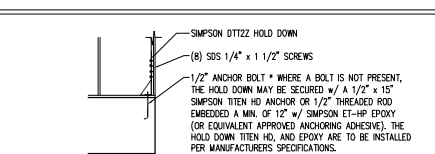


HOLD DOWN DETAIL FOR MASONRY FOUNDATION OR MONOLITHIC SLAB ④

* APPLICABLE ONLY WHERE SPECIFIED ON PLAN *

BRACED WALL PANEL CONNECTION WHEN PARALLEL TO FLOOR/CEILING FRAMING ⑤

PER FIG. R602.10.8(2)

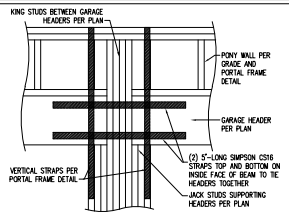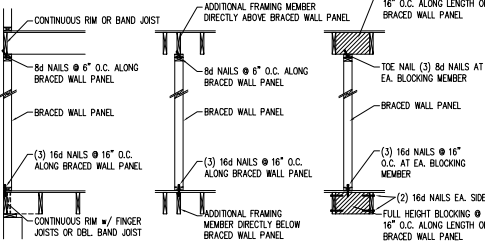


PORTAL FRAME CONNECTION DETAIL BETWEEN GARAGE DOOR HEADERS ⑥

(REFERENCE PORTAL FRAME DETAIL FOR ALL OTHER PORTAL FRAME INFORMATION)


BRACED WALL PANEL CONNECTION TO PERPENDICULAR RAFTERS ⑦

PER FIGURE R602.10.8.2(1)

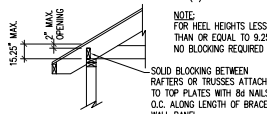


BRACED WALL PANEL CONNECTION TO PERPENDICULAR ROOF TRUSSES ⑧

PER FIGURE R602.10.8.2(3) (OR ALTERNATIVE: FIGURE R602.10.8.2(2))

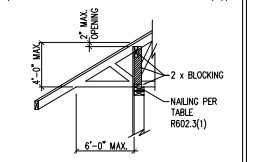

This detail page is to be used in conjunction with a full plan set engineered by J.S. Thompson Engineering, Inc. only. Use of this individual detail page within architectural pages or shop drawings by others is a punishable offense under N.C. Statute § 89C-23

J.S. THOMPSON
ENGINEERING, INC.
1000 W. 10TH STREET, SUITE 100
DURHAM, NC 27601
919.486.1000
N.C. LICENSE #041071120 MPH - 130 MPH ULTIMATE DESIGN WIND SPEED
WALL BRACING NOTES AND DETAILS
DREAM FINDERS HOMESDATE: NOVEMBER 7, 2024
SCALE: N/A
DRAWN: DS/JST
ENGINEERED BY: JST

12/3/2024

D-2
BRACED WALL
NOTES AND DETAILS
AND PF DETAIL

GENERAL NOTES

1. ENGINEER'S SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS INCLUDING ROOF RAFTERS, HIPS, VALLEYS, RIDGES, FLOORS, WALLS, BEAMS, HEADERS, COLUMNS, CANTILEVERS, OFFSET LOAD BEARING WALLS, PIERS, ORDER SYSTEM AND FOOTING. ENGINEER'S SEAL DOES NOT CERTIFY DIMENSIONAL ACCURACY OF ARCHITECTURAL LAYOUT INCLUDING ROOF. ENGINEER'S SEAL DOES NOT APPLY TO I-JOIST OR FLOOR/ROOF TRUSS LAYOUT DESIGN AND ACCURACY.
2. ALL CONSTRUCTION SHALL CONFORM TO THE LATEST REQUIREMENTS OF THE NORTH CAROLINA RESIDENTIAL CODE (NORC), 2024 EDITION, PLUS ALL LOCAL CODES AND REGULATIONS. THE STRUCTURAL ENGINEER IS NOT RESPONSIBLE FOR, AND WILL NOT HAVE CONTROL OF, CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES OR PROCEDURES, OR SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE CONSTRUCTION WORK. NOR WILL THE ENGINEER BE RESPONSIBLE FOR THE CONTRACTORS FAILURE TO CARRY OUT THE CONSTRUCTION WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
3. STRUCTURAL DESIGN BASED ON THE PROVISIONS OF THE NORC, 2024 EDITION (R301.4 - R301.7)

DESIGN CRITERIA:	LIVE LOAD (PSF)	DEAD LOAD (PSF)	DEFLECTION (IN)
ATTIC WITH LIMITED STORAGE	20	10	L/240 (L/360 w/ BRITTLE FINISHES)
ATTIC WITHOUT STORAGE	10	10	L/360
DECKS	40	10	L/360
EXTERIOR BALCONIES	40	10	L/360
TIRE ESCAPES	40	10	L/360
HANDRAILS/GUARDRAILS	200	10	L/360
PASSENGER VEHICLE GARAGE	50	10	L/360
ROOMS OTHER THAN SLEEPING ROOM	40	10	L/360
SLEEPING ROOMS	30	10	L/360
STAIRS	40	10	L/360
WIND LOAD (BASED ON TABLE R301.2(4) WIND ZONE AND EXPOSURE)			
GROUND SNOW LOAD: P _g	20 (PSF)		
SEISMIC DESIGN CATEGORY:	B		

- I-JOIST SYSTEMS DESIGNED WITH 12 PSF DEAD LOAD AND DEFLECTION (IN) OF L/480
- FLOOR TRUSS SYSTEMS DESIGNED WITH 15 PSF DEAD LOAD

- CLADDING DESIGNED FOR:

120 MPH WIND ZONE			
		POS. (PSF) PRESSURE	NEG. (PSF) PRESSURE
GABLE ROOF CLADDING	FLAT ROOF	+ 6.3	- 44.5
	2.25 TO 5/12	+ 9.6	- 49.8
	5 TO 7/12	+ 11.6	- 41.9
	7 TO 12/12	+ 14.2	- 35.3
	12.25 TO 5/12	+ 11.6	- 38.6
HP ROOF CLADDING	5 TO 7/12	+ 11.6	- 28.7
	7 TO 12/12	+ 11.1	- 35.6
WALL CLADDING		+ 15.5	- 20.8

130 MPH WIND ZONE			
		POS. (PSF) PRESSURE	NEG. (PSF) PRESSURE
GABLE ROOF CLADDING	FLAT ROOF	+ 7.4	- 52.2
	2.25 TO 5/12	+ 11.3	- 58.4
	5 TO 7/12	+ 13.6	- 49.2
	7 TO 12/12	+ 16.7	- 41.4
	12.25 TO 5/12	+ 13.6	- 43
HP ROOF CLADDING	5 TO 7/12	+ 13.6	- 33.7
	7 TO 12/12	+ 13	- 41.7
WALL CLADDING		+ 18.2	- 24.4

4. FOR 115 AND 120 MPH WIND ZONES, FOUNDATION ANCHORAGE IS TO COMPLY WITH SECTION R404.1.6 OF THE NORC, 2024 EDITION. FOR 130 MPH, 140 MPH, AND 150 MPH WIND ZONES, FOUNDATION ANCHORAGE IS TO COMPLY WITH SECTION 4504 OF THE NORC, 2024 EDITION.
5. ENERGY EFFICIENCY COMPLIANCE AND INSULATION VALUES OF THE BUILDING TO BE IN ACCORDANCE WITH CHAPTER 11 OF THE NORC, 2024 EDITION.


FOOTING AND FOUNDATION NOTES

1. FOUNDATION DESIGN BASED ON A MINIMUM ALLOWABLE BEARING CAPACITY OF 2000 PSF. CONTACT GEOTECHNICAL ENGINEER IF BEARING CAPACITY IS NOT ACHIEVED.
2. FOR ALL CONCRETE SLABS AND FOOTINGS, THE AREA WITHIN THE PERIMETER OF THE BUILDING ENVELOPE SHALL HAVE ALL VEGETATION, TOP SOIL AND FOREIGN MATERIAL REMOVED. FILL MATERIAL SHALL BE FREE OF COMPACTED AND FOREIGN MATERIAL. THE FILL SHALL BE COMPACTED TO ASSURE UNIFORM SUPPORT OF THE SLAB, AND EXCEPT WHERE APPROVED, THE FILL DEPTHS SHALL NOT EXCEED 24" FOR CLEAN SAND OR GRAVEL, EXCEPTED, #57 OR #67 STONE MAY BE USED AS FILL FOR MAXIMUM DEPTH OF 4 FEET WITHOUT CONSOLIDATION. A 4" THICK BASED COURSE CONSISTING OF CLEAN GRADED SAND OR GRAVEL SHALL BE PLACED. A BASE COURSE IS NOT REQUIRED WHERE A CONCRETE SLAB IS INSTALLED ON WELL-DRAINED OR SAND-GRAVEL MIXTURE SOILS CLASSIFIED AS GROUP 1, ACCORDING TO THE UNITED SOIL CLASSIFICATION SYSTEM IN ACCORDANCE WITH TABLE R405.1 OF THE NORC, 2024 EDITION.
3. PROPERLY DEWATER EXCAVATION PRIOR TO POURING CONCRETE WHEN BOTTOM OF CONCRETE SLAB IS AT OR BELOW WATER TABLE. IF APPLICABLE, 3/4" - 1" DEEP CONTROL JOINTS ARE TO BE SAVED WITHIN 4 TO 12 HOURS OF CONCRETE FINISHING AND WALL LOCATIONS HAVE BEEN MARKED. ADJUST WHERE NECESSARY.
4. CONCRETE SHALL CONFORM TO SECTION R402.2 OF THE NORC, 2024 EDITION. CONCRETE REINFORCING STEEL TO BE ASTM A635 GRADE 60, WELDED WIRE FABRIC TO BE ASTM A185, MAINTAIN A MINIMUM CONCRETE COVER AROUND REINFORCING STEEL OF 3" IN FOOTINGS AND 1 1/2" IN SLABS. FOR POURED CONCRETE WALLS, CONCRETE COVER FOR REINFORCING STEEL MEASURED FROM THE INSIDE FACE OF THE WALL SHALL NOT BE LESS THAN 3/4". CONCRETE COVER FOR REINFORCING STEEL MEASURED FROM THE OUTSIDE FACE OF THE WALL SHALL NOT BE LESS THAN 1 1/2" FOR #5 BARS OR SMALLER, AND NOT LESS THAN 2" FOR #6 BARS OR LARGER.
5. MASONRY UNITS TO CONFORM TO AISC 530/ASCE 5/TMS 402. MORTAR SHALL CONFORM TO ASTM C270.
6. THE UNSUPPORTED HEIGHT OF MASONRY PIERS SHALL NOT EXCEED FOUR TIMES THEIR LEAST DIMENSION FOR UNFILLED HOLLOW CONCRETE MASONRY UNITS AND TEN TIMES THEIR LEAST DIMENSION FOR SOLID OR SOLID FILLED PIERS. PIERS MAY BE FILLED SOLID WITH CONCRETE OR TYPE M OR MORTAR. PIERS AND WALLS SHALL BE CAPPED WITH 8" OF SOLID MASONRY.
7. THE CENTER OF EACH OF THE PIERS SHALL BEAR IN THE MIDDLE THIRD OF ITS RESPECTIVE FOOTING. EACH ORDER SHALL BEAR IN THE MIDDLE THIRD OF THE PIERS.
8. ALL CONCRETE AND MASONRY FOUNDATION WALLS ARE TO BE CONSTRUCTED IN ACCORDANCE WITH THE PROVISIONS OF SECTION R404 OF THE NORC, 2024 EDITION OR IN ACCORDANCE WITH AISC 318, AISC 332, NOMA 1988-A OR AISC 530/ASCE 5/TMS 402. MASONRY FOUNDATION WALLS ARE TO BE REINFORCED PER TABLE R404.1.1(1), R404.1.1(2), R404.1.1(3), OR R404.1.1(4) OF THE NORC, 2024 EDITION. CONCRETE FOUNDATION WALLS ARE TO BE REINFORCED PER TABLE R404.1.2(8) OF THE NORC, 2024 EDITION. STEP CONCRETE FOUNDATION WALLS TO 2 x 6 FRAMED WALLS AT 16" O.C. WHERE GRADE PERMITS (UNO).

FRAMING NOTES

1. ALL FRAMING LUMBER SHALL BE #2 SPF MINIMUM (F_b = 875 PSI, F_v = 375 PSI, E = 1600000 PSI) UNLESS NOTED OTHERWISE (UNO). ALL TREATED LUMBER SHALL BE #2 SYP MINIMUM (F_b = 875 PSI, F_v = 175 PSI, E = 1600000 PSI) UNLESS NOTED OTHERWISE (UNO).
2. LAMINATED VENER LUMBER (LVL) SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: F_b = 2600 PSI, F_v = 285 PSI, E = 1900000 PSI. LAMINATED STRAND LUMBER (LSL) SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: F_b = 2325 PSI, F_v = 310 PSI, E = 1550000 PSI. PARALLEL STRAND LUMBER (PSL) UP TO 7" DEPTH SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: F_b = 2500 PSI, E = 1800000 PSI. PARALLEL STRAND LUMBER (PSL) MORE THAN 7" DEPTH SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: F_b = 2800 PSI, E = 2000000 PSI. INSTALL ALL CONNECTIONS PER MANUFACTURER'S SPECIFICATIONS.
3. STRUCTURAL STEEL SHALL CONFORM TO THE FOLLOWING ASTM SPECIFICATIONS
- A. W AND WT SHAPES: ASTM A992
- B. CHANNELS AND ANGLES: ASTM A36
- C. PLATES AND BARS: ASTM A36
- D. HOLLOW STRUCTURAL SECTIONS: ASTM A500 GRADE B
- E. STEEL PIPE: ASTM A53, GRADE B, TYPE E OR S
4. STEEL BEAMS SHALL BE SUPPORTED AT EACH END WITH A MINIMUM BEARING LENGTH OF 3 1/2" AND FULL FLANGE WIDTH (UNO). PROVIDE SOLID BEARING FROM BEAM SUPPORT TO FOUNDATION. BEAMS SHALL BE ATTACHED AT THE BOTTOM FLANGE TO EACH SUPPORT AS FOLLOWS (UNO):
- A. WOOD FRAMING (2) 1/2" DIA. x 4" LONG LAG SCREWS
- B. CONCRETE (2) 1/2" DIA. x 4" WEDGE ANCHORS
- C. MASONRY (FULLY GROUTED) (2) 1/2" DIA. x 4" LONG SIMPSON ITEN HD ANCHORS
- D. STEEL PIPE COLUMN (4) 3/4" DIA. A325 BOLTS OR 3/4" FILLET WELD
- LATERAL SUPPORT IS CONSIDERED ADEQUATE PROVIDING THE JOISTS ARE TOE NAILED TO THE 2X NAILED ON TOP OF THE STEEL BEAM, AND THE 2X NAILED IS SECURED TO THE TOP OF THE STEEL BEAM w/ (2) ROWS OF SELF TAPPING SCREWS @ 16" O.C. OR (2) ROWS OF 1/2" DIAMETER BOLTS @ 16" O.C. IF 1/2" BOLTS ARE USED TO FASTEN THE NAILED, THE STEEL BEAM SHALL BE FABRICATED w/ (2) ROWS OF 3/8" DIAMETER HOLES @ 16" O.C.
5. SQUARES DENOTE POINT LOADS WHICH REQUIRE SOLID BLOCKING TO GROUND OR FOUNDATION. SHADER SQUARES DENOTE POINT LOADS FROM ABOVE WHICH REQUIRE SOLID BLOCKING TO SUPPORTING MEMBER BELOW.
6. ALL LOAD BEARING HEADERS TO CONFORM TO TABLE R602.7(1) AND R602.7(2) OF THE NORC, 2024 EDITION OR BE (2) 2 x 6 WITH (1) JACK AND (1) KING STUD EACH END (UNO), WHICHEVER IS GREATER ALL HEADERS TO BE SECURED TO EACH JACK STUD WITH (4) 8d NAILS. ALL BEAMS TO BE SUPPORTED WITH (2) STUDS AT EACH BEARING POINT (UNO). INSTALL KING STUDS PER SECTION R602.7.5 OF THE NORTH CAROLINA RESIDENTIAL CODE, 2024 EDITION.
7. ALL BEAMS, HEADERS, OR ORDER TRUSSES PARALLEL TO WALL ARE TO BEAR FULLY ON (1) JACK OR (2) STUDS MINIMUM OR THE NUMBER OF JACKS OR STUDS NOTED. ALL BEAMS OR ORDER TRUSSES PERPENDICULAR TO WALL AND SUPPORTED BY (1) STUDS OR LESS ARE TO HAVE 1 1/2" MINIMUM BEARING (UNO). ALL BEAMS OR ORDER TRUSSES PERPENDICULAR TO WALL AND SUPPORTED BY MORE THAN (1) STUDS OR OTHER NOTED COLUMN ARE TO BEAR FULLY ON SUPPORT COLUMN FOR ENTIRE WALL DEPTH (UNO). BEAM ENDS THAT BUTT INTO ONE ANOTHER ARE TO EACH BEAR EQUAL LENGTHS (UNO).
8. FLITCH BEAMS SHALL BE BOLTED TOGETHER USING 1/2" DIAMETER BOLTS (ASTM A307) WITH WASHERS PLACED AT THREADED END OF BOLT. BOLTS SHALL BE SPACED AT 24" CENTERS (MAXIMUM), AND STAGGERED AT TOP AND BOTTOM OF BEAM (2" EDGE DISTANCE), WITH (2) BOLTS LOCATED AT 6" FROM EACH END (UNO).
9. ALL I-JOIST OR TRUSS LAYOUTS ARE TO BE IN COMPLIANCE WITH THE OVERALL DESIGN SPECIFIED ON THE PLANS. ALL DEVIATIONS ARE TO BE BROUGHT TO THE ATTENTION OF THE ENGINEER OF RECORD PRIOR TO INSTALLATION.
10. BRACED WALL PANELS SHALL BE CONSTRUCTED ACCORDING TO THE NORTH CAROLINA RESIDENTIAL CODE 2024 EDITION WALL BRACING CRITERIA. THE AMOUNT, LENGTH, AND LOCATION OF BRACING SHALL COMPLY WITH ALL APPLICABLE TABLES IN SECTION R602.10.
11. PROVIDE DOUBLE JOIST UNDER ALL WALLS PARALLEL TO FLOOR JOISTS. PROVIDE SUPPORT UNDER ALL WALLS PARALLEL TO FLOOR TRUSSES OR I-JOISTS PER STRUCTURAL PLAN. INSTALL BLOCKING BETWEEN JOISTS OR TRUSSES FOR POINT LOAD SUPPORT FOR ALL POINT LOADS ALONG OFFSET LOAD LINES.
12. FOR ALL HEADERS SUPPORTING BRICK VENEER THAT ARE LESS THAN 8'-0" IN LENGTH, REST A 6" x 6" x 5/16" STEEL ANGLE WITH 6" MINIMUM EMBEDMENT AT SIDES FOR BRICK SUPPORT (UNO). FOR ALL HEADERS 8'-0" AND GREATER IN LENGTH, BOLT A 6" x 6" x 5/16" STEEL ANGLE TO HEADER WITH 1/2" LAG SCREWS AT 12" O.C. STAGGERED FOR BRICK SUPPORT. FOR ALL BRICK SUPPORT AT ROOF LINES, BOLT A 6" x 6" x 5/16" STEEL ANGLE TO (2) 2 x 10 BLOCKING INSTALLED w/ (4) 12d NAILS E.A. PLY BETWEEN WALL STUDS WITH (2) ROWS OF 1/2" LAG SCREWS AT 12" O.C. STAGGERED AND IN ACCORDANCE WITH SECTION R703.8.2.1 OF THE NORC, 2024 EDITION.
13. FOR STICK FRAMED ROOFS, CIRCLES DENOTE (3) 2 x 4 POSTS FOR ROOF MEMBER SUPPORT. HIP SPICES ARE TO BE SPACED A MINIMUM OF 8'-0". FASTEN NUMBERS WITH THREE ROWS OF 12d NAILS AT 16" O.C. FRAME DORMER WALLS ON TOP OF DOUBLE OR TRIPLE RAFTERS AS SHOWN (UNO).
14. FOR TRUSSED ROOFS, FRAME DORMER WALLS ON TOP OF 2 x 4 LADDER FRAMING AT 24" O.C. BETWEEN ADJACENT ROOF TRUSSES. STICK FRAME OVER-FRAMED ROOF SECTIONS WITH 2 x 8 RIDGES, 2 x 6 RAFTERS AT 16" O.C. AND FLAT 2 x 10 VALLEYS (UNO).
15. ALL 4 x 4 AND 6 x 6 POSTS TO BE INSTALLED WITH 700 LB CAPACITY UPLIFT CONNECTORS TOP AND BOTTOM (UNO). POSTS MAY BE SECURED TO WOOD FRAMING WITH SIMPSON C556 CBL STRAPPING WITH 9" END LENGTHS OR (2) 4" LONG SIMPSON SDS SCREWS (OR EQUAL) DRIVEN AT AN ANGLE FROM OPPOSITE SIDES. FOR MASONRY OR CONCRETE FOUNDATION USE SIMPSON POST BASE.
16. CONSTRUCT ALL WOOD DECKS ACCORDING TO CHAPTER 47-WOOD DECKS.

This sealed page is to be used in conjunction with a full plan set engineered by J.S. Thompson Engineering, Inc. only. Use of this individual sealed page within architectural pages or shop drawings by others is a punishable offense under N.C. Statute § 89C-21

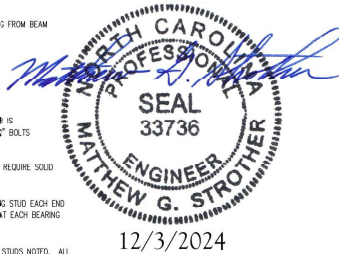

**J.S. THOMPSON
ENGINEERING, INC.**
301 W. 10TH STREET, SUITE 100
FARMVILLE, NC 27831
PHONE: (919) 789-9999 FAX: (919) 789-9921
N.C. LICENSE NO. C1133

120 MPH - 130 MPH ULTIMATE DESIGN WIND SPEED
STANDARD STRUCTURAL NOTES
DREAM FINDERS HOMES

DATE: 10/15/2024 7:10:24
SCALE: N/A
DRAWN BY: JET
REVISION: 01/10/2024

S-0
STRUCTURAL
NOTES