





Scale:1/8"=1'-0" Rev: 7.9.25 EB

David We	PT/AL/IR/BP/JAS	Date: 11/27/2024
Lot: 914	Block:	Sect:
	Job No.:	0914
53 RAINBROOK COVE	FUQUAY VARINA, NC	

SOUTH

RALEIGH

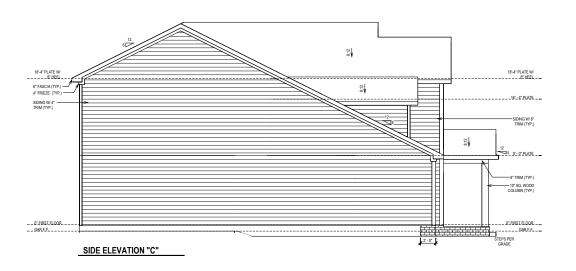

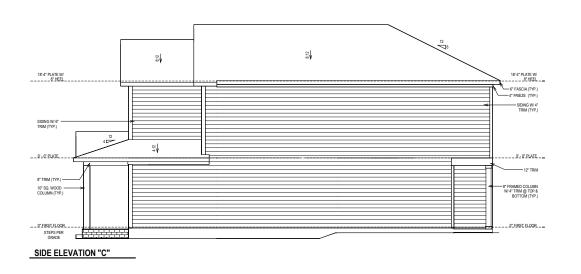

David Weekley Homes

Tial.Ruseljus

Scale;1/8"=1'-0"

ate: 11/27/2024 Revr. 7.9.25 EB

SERENITY 50'	Proj. No.:	914	
53 RAINBROOK COVE	3294		<u> </u>
FUQUAY VARINA, NC	Job No.:	Block:	PT/A
	0914	Soct.	46

sоитн А671-С
A671-C
ELV 0
LLV-Z
CAPSTONE
RALEIGH

SHEET INDEX:

COVER SHEET

S-0.1 GENERAL STRUCTURAL NOTES

MONOLITHIC SLAB FOUNDATION PLANS

SECOND FLOOR FRAMING PLANS - WOOD I-JOISTS

ROOF FRAMING PLAN S-3

SD-1J BRACED WALL DETAILS

SD-2J HOLD DOWN DETAILS SD-3 BRACED WALL NOTES & DETAILS

SD-4 PORTAL FRAME DETAILS

MISCELLANEOUS FRAMING DETAILS SD-5

SD-6 MISCELLANEOUS FRAMING DETAILS

SD-7 MONOLITHIC SLAB FOUNDATION DETAILS

SD-8 NOT USED NOT USED SD-9

SD-10 NOT USED

NOT USED SD-11

SD-12 ADVANCED FRAMING DETAILS & NOTES



1900 AM DRIVE, SUITE 201, QUAKERTOWN, PA 18951 www.kse-eng.com (215) 804-4449

A671 CAPSTONE

SERENITY, LOT #914

RALEIGH, NORTH CAROLINA

THESE DRAWINGS ARE TO BE USED IN CONJUNCTION WITH AND COORDINATED WITH THE ARCHITECTURAL, CIVIL, MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS. THIS COORDINATION IS NOT THE RESPONSIBILITY OF THE RECORDING LENGINEER OF RECORD (SER), SHOULD ANY DISORPEANCIES BECOME APPARENT, THE CONTRACTOR SHALL NOTIFY KSE ENGINEERING, P.C. SEFORE CONSTRUCTION BEGINS. IT IS THE INTENT OF THE ENGINEER LISTED ON THESE DOCUMENTS THAT THESE DOCUMENTS BE ACCURATE, PROVIDING LICENSED PROFESSIONALS CLEAR INFORMATION. EVERY ATTEMPT HAS BEEN MADE TO PREVENT ERROR. THE BUILDER AND ALL SUBCONTRACTORS ARE REQUIRED TO REVIEW ALL OF THE INFORMATION CONTRACTED IN THESE DOCUMENTS PRIOR TO THE COMMENCEMENT OF ANY WORK. THE ENGINEER IS NOT RESPONSIBLE TO FOR ANY PLAN DRAFORS, OMISSIONS, OR MISHITERPRETATIONS UNDETECTED AND NOT REPORTED TO THE ENGINEER PROOF TO CONSTRUCTION. ALL CONSTRUCTION MUST BE IN ACCORDANCE TO THE INFORMATION FOUND IN THESE DOCUMENTS.

DESIGN SPECIFICATIONS:

DESIGN BUILDING CODE (REFERRED TO HEREIN AS 'THE BUILDING CODE'):

• 2018 NORTH CAROLINA RESIDENTIAL CODE. WALL BRACING PER INTERNATIONAL RESIDENTIAL

CODE 2015 EDITION.

**RODF = 20 PSF (LOAD DURATION FACTOR=1.25)

**UNINHABITABLE ATTICS WITH LIMITED STORAGE = 20 PSF (WHERE SPECIFIED ON PLANS)

· HABITABLE ATTICS AND ATTICS SERVED WITH FIXED STAIRS = 30 PSF

• FLOOR (SLEEPING AREAS) = 30 PSF

• DECK/BALCONY = 40 PSF • STAIRS = 40 PSF

DESIGN DEAD LOADS:

*ROOF TRUSS = 17 PSF (TC=7, BC=10)

*FLOOR TRUSS = 15 PSF (TC=10, BC=5)

• FLOOR JOIST = 10 PSF • STANDARD BRICK = 40 PSF

· QUEEN ANNE BRICK = 25 PSF

NOTE: STRUCTURAL FRAMING HAS NOT BEEN DESIGNED FOR TILE, GRANITE, MARBLE OR OTHER MATERIALS HEAVIER THAN THE ABOVE LOADING UNLESS SPECIFICALLY NOTED ON PLANS.

DESIGN WIND LOADS:
- ULTIMATE WIND SPEED = 115 MPH • EXPOSURE CATEGORY = B

ASSUMED SOIL BEARING CAPACITY = 2000 PSF

ASSUMED LATERAL SOIL PRESSURE = 45 PCF

FROST DEPTH = 12" MINIMUM

SEISMIC DESIGN CATEGORY = B

ENGINEERED LUMBER SHALL HAVE THE FOLLOWING MINIMUM DESIGN VALUES:

*TJI 210 SERIES (SERIES AND SPACING PER PLANS)

*LSL: E=1,550,000 PSI, F₈=2,325 PSI, F₈=310 PSI, F₆=900 PSI

*LVL: E=2,000,000 PSI, F₈=2,600 PSI, F₈=285 PSI, F₆=750 PSI

*PSI: E=2,100,000 PSI, F₈=2,900 PSI, F₆=290 PSI, F₆=625 PSI

ENGINEERING F. SUITE 201, QUAKERTOWN, PA 18951

David Weekley Homes

Cover Sheet Serenity, Lot #914 AA71 Capstone Model Raleigh, North

Project #: 047-24018 Designed By: LMR Checked By:

Issue Date: 10/29/25 1/4"=1'-0" @ 22x34



- THE DESIGN PROFESSIONAL WHOSE SEAL APPEARS ON THESE DRAWINGS IS THE STRUCTURAL ENGINEER OF RECORD (SER) FOR THIS PROJECT, THE SER BEARS THE RESPONSIBILITY OF THE PRIMARY STRUCTURAL ELEMENTS AND THE PERFORMANCE OF THIS STRUCTURE.
 NO OTHER PARTY MAY REVISE, ALTER, OR DELETE ANY STRUCTURAL
 ASPECTS OF THESE CONSTRUCTION DOCUMENTS WITHOUT WRITTEN ASPECTS OF THESE CONSTRUCTION DOCUMENTS WITHOUT WHITEN CONSENT OF KEE ENGINEERING, P.C. OR THE SER, FOR THE PURPOSES OF THESE CONSTRUCTION DOCUMENTS, THE SER AND KSE ENGINEERING SHALL BE CONSIDERED THE SAME ENTITY. THE STRUCTURE IS DOWNLY STABLE IN ITS COMPLETED FORM. THE CONTRACTOR SHALL PROVIDE ALL REQUIRED TRAVORANT BRACKING DURING CONSTRUCTION STABLE THE STRUCTURE. IS NOT RESPONSIBLE FOR CONSTRUCTION SCOUGHACES, THE SER IS NOT RESPONSIBLE FOR CONSTRUCTION SCOUGHACES.
- METHODS, OR TECHNIQUES IN CONNECTION WITH THE CONSTRUCTION OF THIS STRUCTURE. THE SER WILL NOT BE HELD RESPONSIBLE FOR THE CONTRACTOR'S FAILURE TO CONFORM TO THE CONTRACT

THE CONTROLLOR'S PALLORE TO COMPORANT OF THE CONTROL.

DOCUMENTS, SHOULD ANY NON-CONFORMITIES OCCUR.

THE SER DOES NOT CERTIFY DIMENSIONAL ACCURACY OR
ARCHITECTURAL LAYOUT INCLUDING ROOF GEOMETRY. THE SER
ASSUMES NO LUBILITY FOR CHANGES MADE TO THESE PLANS BY
OTHERS, OR FOR CONSTRUCTION METHODS, OR FOR ANY DEVIATION

OTHERS, OR FOR CONSTRUCTION METHODS, OR FOR ANY DEVIATION FROM THE PLANS. THE SER SHALL BE NOTIFIED PRIOR TO CONSTRUCTION IF ANY DISCREPANCIES ARE NOTED ON THE PLANS. ANY STRUCTURAL ELEMENTS OR DETAILS NOT FULLY DEVELOPED ON

- THE CONSTRUCTION DRAWINGS SHALL BE COMPLETED UNDER THE DIRECTION OF A LICENSED PROFESSIONAL INSINIER. THESE SHOP DRAWINGS SHALL BE SUBMITTED TO KSE ENDINEERING FOR REVIEW BEFORE ANY CONSTRUCTION BEGINS. THE SHOP DRAWINGS WILL BE REVIEWED FOR OVERALL COMPLIANCE AS IT RELATES TO THE STRUCTURAL DESIGN OF THIS FROMEOUT. VERIFICATION OF THE SHOP DRAWINGS FOR DIMENSIONS, OR FOR ACTUAL FIELD CONDITIONS, IS NOT THE RESPONSIBILITY OF THE SER OR KSE ENDINEERING, P.C. VERIFICATION OF ASSUMED FIELD CONDITIONS IS NOT THE RESPONSIBILITY OF THE CONTRACTOR SHALL VERIFY THE FIELD CONDITIONS FOR ACCURACY AND REPORT ANY DISCREPANCIES TO KSE FINDINGETHING, P.C. BEFORE CONSTRUCTION FROM S. THE CONSTRUCTION DRAWINGS SHALL BE COMPLETED UNDER THE
- TO KSE ENGINEERING, P.C. BEFORE CONSTRUCTION BEGINS.
 THE SER IS NOT RESPONSIBLE FOR ANY SECONDARY STRUCTURE
 LELMENTS OR NON-STRUCTURAL ELEMENTS, EXCEPT FOR THE
 ELEMENTS SPECIFICALLY NOTED ON THE STRUCTURAL DRAWINGS.
- ELEMENTS SPECIFICALET NOTICE ON THE STRUCTURE DRAWNINGS.
 THIS STRUCTURE AND ALL CONSTRUCTION SHALL CONFORM TO ALL
 APPLICABLE SECTIONS OF THE BUILDING CODE AND ANY LOCAL
 CODES OR RESTRICTIONS.
 DO NOT SCALE DRAWNINGS. WRITTEN DIMENSIONS TAKE PRECEDENCE
- OVER SCALED DIMENSIONS, ALL DIMENSIONS ARE TO FACE OF STUD OR TO FACE OF FRAMING LINLESS OTHERWISE NOTED 10. WATERPROOFING AND FLASHING BY OTHERS.

FOUNDATIONS: FOUNDATIONS SHALL BE CONSTRUCTED IN ACCORDANCE WITH CHAPTER 4 OF THE BUILDING CODE

- CONTRACTOR IS SOLELY RESPONSIBLE FOR VERIFYING THE SUITABILITY
 OF THE SITE SOIL CONDITIONS AT THE TIME OF CONSTRUCTION. THE BUILDER SHALL FURNISH ANY AND ALL REPORTS RECEIVED FROM THE GEOTECHNICAL ENGINEER ON THE STUDY OF THE PROPOSED SITE TO THE DESIGNER, STRUCTURAL ENGINEER, AND GENERAL CONTRACTOR.
- MAXIMUM DEPTH OF UNBALANCED FILL AGAINST MASONRY WALLS TO
- BE AS SPECIFIED IN THE BUILDING CODE.

 THE SER HAS NOT PERFORMED A SUBSURFACE INVESTIGATION. VERIFICATION OF THE ASSUMED VALUE IS THE RESPONSIBILITY OF THE OWNER OR THE CONTRACTOR. SHOULD ANY ADVERSE SOIL CONDITION BE ENCOUNTERED, THE SER MUST BE CONTACTED BEFORE DEPORTED.
- THE BOTTOM OF ALL FOOTINGS SHALL EXTEND BELOW THE FROST LINE FOR THE REGION IN WHICH THE STRUCTURE IS TO BE CONSTRUCTED, BUT NOT LESS THAN A MINIMUM OF 12" BELOW GRADE, ALL FOOTINGS TO HAVE A MINIMUM PROJECTION OF 2" ON EACH SIDE OF FOUNDATION WALLS, MAXIMUM FOOTING PROJECTION SHALL NOT EXCEED THE THICKNESS OF THE FOOTING.
 WOOD SILL PLATES SHALL BE ANCHORED TO THE FOUNDATION WITH
- 16" ANCHOR BOLTS WITH MINIMUM 7" EMBEDMENT, SPACED A MAXIMUM OF 6'-0' O.C. INSTALL MINIMUM 2 ANCHOR BOLTS PER SECTION, 12'
 MAXIMUM FROM CORNERS. ½" DIAMETER x 8" LONG SIMPSON TITEN HD OR USP SCREW-BOLT+ SCREWS MAY BE SUBSTITUTED ON A 1 FOR 1 BASIS FOR CONCRETE FOUNDATIONS ONLY.

 ANY FILL SHALL BE PLACED UNDER THE DIRECTION OR
- RECOMMENDATION OF A LICENSED PROFESSIONAL ENGINEER, THE RESULTING SOIL SHALL BE COMPACTED TO A MINIMUM OF 95% MAXIMUM DRY DENSITY
- EXCAVATIONS OF FOOTINGS SHALL BE LINED TEMPORARILY WITH A 6
 MIL POLYETHYLENE MEMBRANE IF PLACEMENT OF CONCRETE DOES NOT OCCUR WITHIN 24 HOURS OF EXCAVATION. NO CONCRETE SHALL BE PLACED AGAINST ANY SUBGRADE CONTAINING
- WATER, ICE, FROST, OR LOOSE MATERIAL.
 PROVIDE FOUNDATION WATERPROOFING AND DRAIN WITH POSITIVE SLOPE TO OUTLET AS REQUIRED BY SITE CONDITIONS (SEE
- ARCHITECTURAL PLANS AND DETAILS).

 NONE OF THE FOUNDATION DESIGNS IN THESE DOCUMENTS ARE SUITABLE FOR INSTALLATION IN SHRINK/SWELL CONDITIONS, REFER TO
- GEOTECHNICAL ENGINEER FOR APPROPRIATE DESIGN.
 LOTS SHALL BE GRADED TO DRAIN SURFACE WATER AWAY FROM
 FOUNDATION WALLS. THE GRADE SHALL FALL A MINIMUM OF 6 INCHES
- WITHIN THE FIRST TEN FEET.
- WITHIN THE HIST IEN FEEL.

 3. CRAWL SPACE TO BE GRADED LEVEL AND CLEAR OF ALL DEBRIS.

 14. PROVIDE MINIMUM 6 MIL APPROVED VAPOR BARRIER. ALL JOINTS TO BE LAPPED MINIMUM 12" AND SEALED.

CONCRETE & REINFORCING

- CONCRETE DESIGN BASED ON ACI 318 AND ACI 318.1 OR ACI 332.
 CONCRETE SHALL HAVE A NORMAL WEIGHT AGGREGATE AND A MINIMUM
 COMPRESSIVE STRENGTH (f'c) = 3,000 PSI MINIMUM AT 28 DAYS PER CODE (VARIES W/ WEATHER), UNLESS OTHERWISE NOTED ON THE PLAN. CONCRETE SHALL BE PROPORTIONED, MIXED, AND PLACED IN
- ACCORDANCE WITH THE LATEST EDITIONS OF ACL 318: "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE" AND ACI 301 "SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS"
- AIR ENTRAINED CONCRETE MUST BE USED FOR ALL STRUCTURAL ELEMENTS EXPOSED TO FREEZE/THAW CYCLES AND DEICING CHEMICALS. AIR ENTRAINMENT AMOUNTS (IN PERCENT) SHALL BE WITHIN -1% TO
- +2% OF 5% FOR FOOTINGS AND EXTERIOR SLABS.

 NO ADMIXTURES SHALL BE ADDED TO ANY STRUCTURAL CONCRETE
 WITHOUT WRITTEN PERMISSION OF THE SER. WATER ADDED TO CONCRETE ON SITE SHALL NOT EXCEED THAT ALLOWED BY THE MIX
- CONCRETE SLABS-ON-GRADE SHALL BE CONSTRUCTED IN ACCORDANCE WITH ACI 302,1R: "GUIDE FOR CONCRETE SLAB AND SLAB CONSTRUCTION". CONTROL OR SAW CUT JOINTS (CUT OR TOOLED) SHALL BE SPACED IN
- INTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 15'-0" O.C. AND IN EXTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 10'-0" UNLESS OTHERWISE NOTED, CARE SHALL BE TAKEN TO AVOID RE-ENTRANT CORNERS
- CONTROL OR SAW CUT JOINTS SHALL BE PRODUCED USING CONVENTIONAL CUT OR TOOLED PROCESSES WITHIN 4 TO 12 HOURS AFTER THE SLAB HAS BEEN FINISHED. REINFORCING STEEL MAY EXTEND THROUGH A SAW CUT JOINT
- ALL WELDED WIRE FABRIC (W.W.F.) FOR CONCRETE SLABS-ON-GRADE SHALL BE PLACED AT MID-DEPTH OF SLAB. THE W.W.F. SHALL BE SECURELY SUPPORTED DURING THE CONCRETE POUR, FIBROUS CONCRETE REINFORCEMENT, OR POLYPROPYLENE FIRERS MAY BE LISED. CONCRETE REINFORCEMENT, OR POLTPROPTENE FIBERS MAY BE USED IN LIEU OF WWW.F. APPLICATION OF POLYPROPYLENE FIBERS PER CUBIC YARD OF CONCRETE SHALL BE PER MANUFACTURER AND COMPLY WITH ASTM C1116, ANY LOCAL BUILDING CODE REQUIREMENTS AND SHALL MEET OR EXCEED CURRENT INDUSTRY STANDARD.
- 10. POLYPROPYLENE REINFORCING TO BE 100% VIRGIN, CONTAINING NO REPROCESSED OLEFIN MATERIALS AND SPECIFICALLY MANUFACTURED FOR USE AS CONCRETE SECONDARY REINFORCEMENT.
- 11. STEEL REINFORCING BARS SHALL BE NEW BILLET STEEL CONFORMING TO ASTM A615, GRADE 60.
- DEFALLING, FABRICATION, AND PLACEMENT OF REINFORCING STEEL SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF ACI 315: "MANUAL OF STANDARD PRACTICE FOR DETAILING CONCRETE STRUCTURES". HORIZONTAL FOOTING AND WALL REINFORCEMENT SHALL BE
- CONTINUOUS AND SHALL HAVE 90° BENDS, OR CORNER BARS WITH THE SAME SIZE/SPACING AS THE HORIZONTAL REINFORCEMENT.
- 14. PROVIDE REINFORCEMENT LAP AS NOTED BELOW, UNLESS NOTED
- OTHERWISE: #4 BARS 30" LENGTH #5 BARS - 38" LENGTH #6 BARS - 45" LENGTH
- # DEMO: 43 LEUNIH SERVICE THE SHALL BE EQUIRED, THEY SHALL BE EQUIVALENT IN SIZE AND SPACING TO THE VERTICAL REINFORCEMENT. THE DOWEL SHALL EXTEND 48 BAR DAMETERS VERTICALLY AND 20 BAR DAMETERS INTO THE FOOTING. SEE KSE FOUNDATION DETAILS.

 16. WHERE FOOTING BOTTOMS ARE TO BE STEPPED AT SLOPING GRADE
- CONDITIONS PROVIDE CONTINUOUS REINFORCING WITH 7 BARS (TO MATCH FOOTING REINFORCING) AS REQUIRED.
- 17. BAR SUPPORT ACCESSORIES SHALL BE PROVIDED IN ACCORDANCE WITH THE LATEST ACL MANUAL OF STANDARD PRACTICE FOR DETAILING REINFORCED CONCRETE STRUCTURES, EXCEPT THAT REINFORCING SHALL BE CHAIRED ON THE BOTTOM AND/OR THE SIDES ON BOLSTERS SPACED NOT MORE THAN 4 FEET ON CENTER NO ROCKS CMU CLAY
- SPACED NOT MORE HAN 4 FEET ON CENTER, NO ROCKS, CMD, CLAT TILE, OR BRICK SHALL BE USED TO SUPPORT REINFORCING. FOR GRADE SUPPORTED SLABS, SLAB REINFORCING SHALL BE HELD IN PLACE BY BAR SUPPORTS AND ACCESSORIES AS DESCRIBED IN THE CRSI MANUAL OF STANDARD PRACTICE, BAR SUPPORTS SHALL BE SPACED A MAXIMUM OF 4'-0" O.C. BOTH WAYS IN STRAIGHT LINES ON

MASONRY

- ALL MASONRY SHALL CONFORM TO ASTM C-90, F'm=1500 PSI, ALL BRICK SHALL CONFORM TO ASTM C-216, F'm=1500 PSI. ALL MORTAR SHALL BE TYPE 'S' (TYPE 'M' BELOW GRADE) AND CONFORM TO ASTM C-270. COARSE GROUT SHALL CONFORM TO ASTM C-476 WITH A MAXIMUM AGGREGATE SIZE OF 36" AND A MINIMUM COMPRESSIVE STRENGTH OF 2,000
- ALL MASONRY WORK SHALL BE IN ACCORDANCE WITH "BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES" ACI 530/ASCE 5/TMS 402 AND "SPECIFICATIONS FOR MASONRY STRUCTURES" ACI 530.1 / ASCE 6/TMS 602
- SPECIFICATIONS FOR MASONRY STRUCTURES ACT 530.17 ASCE 6/IMS 802. THE UNSUPPORTED HEIGHT OF SOLID MASONRY PIERS SHALL NOT EXCEED TEN TIMES THEIR LEAST DIMENSION. UNFILLED HOLLOW PIERS MAY BE USED IF THE UNSUPPORTED HEIGHT IS NOT MORE THAN FOUR TIMES THEIR LEAST DIMENSION
- EACH CRAWL SPACE PIER SHALL BEAR IN THE MIDDLE THIRD OF ITS RESPECTIVE FOOTING AND EACH GIRDER SHALL BEAR IN THE MIDDLE THIRD OF THE PIERS. PILASTERS TO BE BONDED TO PERIMETER FOUNDATION WALL
- FOUNDATION WALL.
 TOP COURSE OF MASONRY SHALL BE GROUTED SOLID.
 HORIZONTAL WALL JOINT REINFORCEMENT SHALL BE STANDARD 9 GAGE
 GALVANIZED LADDER OR TRUSS TYPE SPACED AT 16" O.C., UNLESS SHOWN OTHERWISE ON THE DRAWINGS.
- SPLICED WIRE REINFORCEMENT SHALL BE LAPPED AT LEAST 6" AND CONTAIN AT LEAST ONE CROSS WIRE OF EACH PIECE OF REINFORCEMENT WITHIN THE 6". LAP WITH STANDARD 'T' AND 'L'

WOOD FRAMING:

- SOLID SAWN WOOD FRAMING MEMBERS SHALL CONFORM TO THE SPECIFICATIONS LISTED IN THE LATEST EDITION OF THE "NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION": (NDS), UNLESS HERWISE NOTED, ALL WOOD FRAMING MEMBERS ARE DESIGNED
- SPRUCE-PINE-FIR (SPF) WITH THE FOLLOWING MINIMUM DESIGN
- E=1,400,000 PSI, F_b=875 PSI, F_v=135 PSI
- 1.1. FRAMING: SPF #2.
- 1.2. PLATES: SPF #2. 1.3. STUDS: SPF STUD GRADE
- ALL LUMBER EXPOSED TO WEATHER OR IN CONTACT WITH CONCRETE SHALL BE PRESERVATIVE TREATED SOUTHERN YELLOW PINE #2 OR
- ANCHOR SILL PLATES IN ACCORDANCE W/ GENERAL STRUCTURAL NOTES. ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY. LARGER MEMBERS MAY BE SUBSTITUTED AS NEEDED FOR EASE OF CONSTRUCTION. NAILS SHALL BE COMMON WIRE NAILS UNLESS OTHERWISE NOTED.
- BOLT HOLES AND LEAD HOLES FOR LAG SCREWS SHALL BE IN ACCORDANCE WITH NDS SPECIFICATIONS.
- INDIVIDUAL STUDS FORMING A COLUMN SHALL BE ATTACHED WITH (2) ROWS 10d NAILS @ 6" O.C. STAGGERED. THE STUD COLUMN SHALL BE FULLY BLOCKED AT ALL FLOOR LEVELS TO ENSURE PROPER LOAD
- TRANSFER. WALL SHEATHING SHALL BE NAILED TO EDGE OF EACH STUD.
 FACE NAIL ALL MULTI-PLY BEAMS AND HEADERS WITH (2) ROWS 16d COMMON NAILS @ 16" O.C., STAGGERED, OR PER MANUFACTURER'S SPECIFICATIONS FOR ENGINEERED LUMBER. APPLY NAILING FROM BOTH FACES FOR (3) OR MORE PLIES.
- FASTEN 4-PLY BEAMS WITH (1) 1/2" DIAMETER THROUGH BOLT w/ NUT WASHERS AT 12" O.C. STAGGERED TOP AND BOTTOM, 15" MINIMUM EDGE DISTANCE, (UNLESS OTHERWISE NOTED)
- ALL BEAMS AND HEADERS SHALL HAVE (1)2x JACK STUD & (1)2x KING STUD LINERS OTHERWISE NOTED. THE NUMBER OF STUDS INDICATED ON PLANS ARE THE TOTAL NUMBER OF JACK STUDS REQUIRED, UNLESS
- 11. PROVIDE KING STUDS AT EACH END OF HEADERS AS NOTED BELOW. 24" O.C. STUD SPACING: (1) STUD UP TO 4' OPENING 16" O.C. STUD SPACING: (1) STUD UP TO 3' OPENING (2) STUDS UP TO 4' OPENING (2) STUDS UP TO 8' OPENING STUDS UP TO 8' OPENING (5) STUDS UP TO 12' OPENING (4) STUDS UP TO 16' OPENING (6) STUDS UP TO 16' OPENING
 ALL BEAMS TO BE CONTINUOUSLY SUPPORTED LATERALLY AND SHALL
- BEAR FULL WIDTH ON THE SUPPORTING WALLS OR COLUMNS INDICATED WITH A MINIMUM OF TWO STUDS, UNLESS OTHERWISE NOTED. ALL BEAM
- WITH A MINIMUM OF TWO STUDS, UNLESS OTHERWISE NOTED. ALL BEAM SPLICES SHALL OCCUR OVER SUPPORTS. SOLID BLOCKING TO BE PROVIDED AT ALL POINT LOADS THROUGH FLOOR LEVELS TO THE FOUNDATION OR TO OTHER STRUCTURAL COMPONENTS. 14. ALL LUMBER SPECIFIED ON DRAWINGS IS INTENDED FOR DRY USE ONLY
- (MOISTURE CONTENT <19%) UNLESS OTHERWISE NOTED.
 ALL WATERPROOFING AND FIRE SAFETY SYSTEMS ARE TH RESPONSIBILITY OF THE CONTRACTOR AND ARE TO BE DESIGNED AND DETAILED BY OTHERS
- DETAILED BY OTHERS.
 ANY WOOD FRAME INTERIOR BEARING WALL STUDS THAT HAVE HOLES IN THE CENTER OF THE STUD UP TO 1" DIAMETER SHALL HAVE STUD PROTECTION SHIELDS. ALL HOLES OVER 1" IN DIAMETER FOR PLUMBING PROTECTION SHIELDS. ALL HOLES OVER 1 IN DIAMETER FOR PLUMBI LINES, ETC. SHALL BE REPAIRED WITH SIMPSON HSS2 OR USP STS1 STUD SHOES, TYPICAL, UNLESS OTHERWISE NOTED. BEARING WALLS SHALL BE SHEATHED ON NOT LESS THAN ONE SIDE
- WITH OSB OR GYPSUM BOARD, BRIDGING SHALL BE INSTALLED NOT GREATER THAN 4 FEET APART MEASURED VERTICALLY FROM EITHER END THE STUD IN LIEU OF SHEATHING.

EXTERIOR WOOD FRAMED DECKS

- DECKS ARE TO BE FRAMED IN ACCORDANCE WITH APPLICABLE BUILDING CODES AND AS REFERENCED ON THE STRUCTURAL PLANS,
- EITHER THROUGH CODE REFERENCES OR CONSTRUCTION DETAILS.
 PRESERVATIVE TREATED WOOD FRAMING TO BE SOUTHERN YELLOW PINE #2 OR BETTER. GUARD RAILS AND LATERAL BRACING IS REQUIRED AT DECKS. DESIGN BY
- PROVIDE DECK LATERAL LOAD CONNECTIONS PER BUILDING CODE

RAFTER FRAMED ROOF CONSTRUCTION:

- PROVIDE 2x4x4'-0" RAFTER TIES AT 48" O.C.
 RAFTERS SHALL BE SUPPORTED BY PURLINS AND PURLIN BRACES
 AS SHOWN ON THE PLAN. PURLIN BRACES SHALL NOT BEAR ON ANY CELLING JOIST STRONGRACK OR HEADER LINLESS SPECIFICALLY
- SHOWN ON PLAN. RAFTERS MAY BE SPLICED AT PURLIN LOCATIONS
 CEILING JOISTS SHALL HAVE LATERAL SUPPORT w/ 1x4 FLAT BRACING ON TOP FDGE OF JOIST AT LOOSE JOIST ENDS (WHERE JOISTS NOT FASTENED TO RAFTERS) OR FULL DEPTH BLOCKING. FASTEN END OF BRACING TO RAFTÉR OR GABLE END FRAMING
- FASTEN RAFTER AND CEILING JOIST WITH (6) 12d NAILS UNLESS THERWISE NOTED.
- PROVIDE VERTICAL 2x6 STRONGBACKS AT CEILING JOISTS @ 8'-0" O.C. TIE STRONGBACK ENDS TO GABLE STUDS OR RAFTERS WHERE POSSIBLE. PROVIDE BLOCKING BETWEEN TOP PLATES AND STRONGBACKS. PROVIDE 2x4 FLAT FASTENED TO EACH JOIST WITH (2) 12d NAILS FASTEN STRONGRACK TO 2v4 FLAT WITH 12d NAILS @ 12" O.C. AND FASTENED TO EACH JOIST WITH (1) 12d TOENAIL

WOOD TRUSSES (FLOOR & ROOF):

- THE WOOD TRUSS MANUFACTURER/FABRICATOR IS RESPONSIBLE FOR THE DESIGN OF THE WOOD TRUSSES, SUBMIT SEALED SHOP DRAWINGS AND SUPPORTING CALCULATIONS TO THE SER FOR REVIEW PRIOR TO FABRICATION. THE SER SHALL HAVE A MINIMUM OF (5) DAYS FOR REVIEW. THE REVIEW BY THE SER SHALL BE FOR OVERALL COMPLIANCE OF THE DESIGN DOCUMENTS. THE SER SHALL ASSUME NO RESPONSIBILITY FOR THE CORRECTNESS OF THE STRUCTURAL DESIGN FOR THE WOOD TRUSSES.
- THE WOOD TRUSSES SHALL BE DESIGNED FOR ALL REQUIRED LOADINGS AS SPECIFIED IN THE LOCAL BUILDING CODE THE ASCE STANDARD. "MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES. (ASCE 7), AND THE LOADING REQUIREMENTS SHOWN ON THESE SPECIFICATIONS. THE TRUSS DRAWINGS SHALL BE COORDINATED WITH ALL OTHER CONSTRUCTION DOCUMENTS AND PROVISIONS PROVIDED FOR LOADS SHOWN ON THESE DRAWINGS INCLUDING BUT NOT LIMITED TO HVAC FOLIPMENT, PIPING, AND ARCHITECTURAL FIXTURES ATTACHED TO
- THE TRUSSES.
 THE TRUSSES SHALL BE DESIGNED, FABRICATED, AND ERECTED IN ACCORDANCE WITH THE LATEST EDITION OF THE ANSI/TPI 1. "NATIK." DESIGN STANDARD FOR METAL PLATE CONNECTED WOOD TRUSS CONSTRUCTION"
- THE TRUSS MANUFACTURER SHALL PROVIDE ADEQUATE BRACIN INFORMATION IN ACCORDANCE WITH "BUILDING COMPONENT SAFETY INFORMATION GUIDE TO GOOD PRACTICE FOR HANDLING, INSTALLING, RESTRAINING & BRACING OF METAL PLATE CONNECTED WOOD TRUSSES' (BCSI) THIS BRACING BOTH TEMPORARY AND PERMANENT SHALL BE SHOWN ON THE SHOP DRAWINGS. ALSO, THE SHOP DRAWINGS SHALL SHOW THE REQUIRED ATTACHMENTS FOR THE TRUSSES.

THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING TEMPORARY BRACING AND SHORING FOR THE FLOOR AND ROOF TRUSSES AS REQUIRED DURING CONSTRUCTION. AT A MINIMUM, CONTRACTOR SHALL FOLLOW THE REQUIREMENTS OF THE LATEST BCSI. THE CONTRACTOR SHALL KEEP A COPY OF THE BCSI SUMMARY SHEETS ON SITE.

- THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL PERMANENT THE CONTROLLOR RESPONSIBLE FOR HISTAGLING ALL PERMANENT TRUSS BRACING SHOWN IN THE STRUCTURAL DRAWINGS AND IN THE TRUSS DESIGNS. ALL CONTINUOUS LATERAL BRACING OF WEBS REQUIRES BRACES, REFET TO BCSI SUMMARY SHEET BS FOR TYPES OF DIAGONAL BRACES TO PROVIDE AT EACH CONTINUOUS LATERAL BRACE LINE, SUCH BRAUGE TO PROVIDE SHALL NOT BE SPACED MORE THAN 20 FEET O.C. DIGONAL BRACES SHALL NOT BE SPACED MORE THAN 20 FEET O.C. DIGONAL BRACES SHALL BE FASTEN. WHERE CONTINUOUS LATERAL BRACING CANNOT BE INSTALLED, DIE TO A MINIMUM OF THREE ADJACENT TRUSSES NOT BEING IDENTICAL, HE CONTRICTOR SHALL BRACING CANNOT BE INSTALLED, DIE TO A MINIMUM OF THREE ADJACENT TRUSSES NOT BEING IDENTICAL, HE CONTRICTOR SHALL COORDINATE WITH THE TRUSS SPECIALTY ENGINEER/MANUFACTURER TO DETERMINE WHAT TYPE OF ALTERNATE BRACE (I.E., T OR L BRACE, ETC.) IS REQUIRED
- ANY CHORDS OR TRUSS WEBS SHOWN ON THESE DRAWINGS HAVE BEEN SHOWN AS A REFERENCE ONLY. THE FINAL DESIGN OF THE TRUSSES SHALL BE PER THE MANUFACTURER.

 TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH
- THE SUPPORT LOCATIONS SHOWN ON THE SEALED STRUCTURAL DRAWINGS, TRUSS PROFILES TO BE SEALED BY THE TRUSS
 MANUFACTURER, TRUSS PLANS TO BE COORDINATED WITH THE SEALED STRUCTURAL DRAWINGS.
- TRUSS MANUFACTURER TO PROVIDE REQUIRED UPLIFT CONNECTORS FOR ALL TRUSSES
- PROVIDE SIMPSON H2.5A, USP RT7 OR EQUIVALENT AT EACH TRUSS TO TOP PLATE CONNECTION, UNLESS OTHERWISE NOTED.

- WOOD STRUCTURAL PANELS:

 1. FABRICATION AND PLACEMENT OF STRUCTURAL WOOD SHEATHING SHALL BE IN ACCORDANCE WITH THE APA DESIGN/CONSTRUCTION GUIDE "RESIDENTIAL AND COMMERCIAL," AND ALL OTHER APPLICABLE APA STANDARDS
- ALL STRUCTURALLY REQUIRED WOOD SHEATHING SHALL BEAR THE
- WOOD WALL SHEATHING SHALL COMPLY WITH THE REQUIREMENTS OF LOCAL BUILDING CODES FOR THE APPROPRIATE STATE AS INDICATED ON THESE DRAWINGS. REFER TO WALL BRACING NOTES IN PLAN SET FOR MORE INFORMATION. EXTERIOR WALLS TO BE FULLY SHEATHED LISING 76" OSB MINIMUM AT BRACED WALL PANELS PROVIDE BLOCKING AT ALL SHEET EDGES NOT FALLING ON STUDS OR
- PLATES.
 ROOF SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2. ROOF SHEATHING SHALL BE CONTINUOUS OVER TWO SUPPORTS MINIMUM AND ATTACHED TO ITS SUPPORTING ROOF FRAMING WITH 8d NAIL AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. IN PANEL FIELD UNLESS OTHERWISE NOTED ON THE PLANS. SHEATHING SHALL BE APPLIED WITH THE LONG DIRECTION PERPENDICULAR TO FRAMING SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE FRAMING SPACING. PROVIDE SUITABLE EDGE SUPPORT BY USE OF PLYWOOD CLIPS OR LUMBER BLOCKING UNLESS OTHERWISE NOTED PANEL END JOINTS SHALL OCCUR OVER FRAMING. ROOF SHEATHING
- TO BE $\frac{7}{6}$ OSB MINIMUM. WOOD FLOOR SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2. ATTACH SHEATHING TO ITS SUPPORTING FRAMING WITH (1) 10d NAIL AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. IN PANEL FIELD UNLESS OTHERWISE NOTED ON THE PLANS. SHEATHING SHALL BE APPLIED PERPENDICULAR TO FRAMING SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE FRAMING SPACING PROVIDE SHITABLE EDGE SUPPORT BY USE OF PANEL END JOINTS SHALL OCCUR OVER FRAMING.
- SHEATHING SHALL HAVE A %" GAP AT PANEL ENDS AND EDGES AS RECOMMENDED IN ACCORDANCE WITH THE APA

STRUCTURAL FIBERBOARD PANELS:

- STRUCTURAL FIBERBOARD SHEATHING SHALL ONLY BE USED WHERE SPECIFICALLY NOTED ON THE STRUCTURAL PLANS. FABRICATION AND PLACEMENT OF STRUCTURAL FIBERBOARD SHEATHING SHALL BE IN ACCORDANCE WITH THE APPLICABLE AFA STANDARDS
- STARUARDS.

 FIBERBOARD WALL SHEATHING SHALL COMPLY WITH THE REQUIREMENTS OF LOCAL BUILDING CODES FOR THE APPROPRIATE STATE AS INDICATED ON THESE DRAWINGS. REFER TO WALL BRACING NOTES IN PLAN SET FOR MORE INFORMATION.
- SHEATHING SHALL HAVE A %" GAP AT PANEL ENDS AND EDGES AS RECOMMENDED IN ACCORDANCE WITH THE AFA.

- STRUCTURAL STEEL:


 1. STRUCTURAL SITEL SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH THE AMERICAN INSTITUTE OF STEEL CONSTRUCTION "CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES" AND OF THE MANUAL OF STEEL CONSTRUCTION "LOAD RESISTANCE FACTOR DESIGN" LATEST EDITIONS
- ALL STEEL SHALL HAVE A MINIMUM YIELD STRESS (F.) OF 50 KSI UNLESS OTHERWISE NOTED.
 WELDING SHALL CONFORM TO THE LATEST EDITION OF THE
- AMERICAN WELDING SOCIETY'S STRUCTURAL WELDING CODE AWA D1.1 ELECTRODES FOR SHOP AND FIELDING WELDING SHALL BE CLASS 570XX. ALL WELDING SHALL BE PERFORMED BY A CERTIFIED WELDER PER THE ABOVE STANDARDS. ALL STEEL BEAMS TO BE SUPPORTED AT EACH END WITH A
- MINIMUM BEARING LENGTH OF 38" AND FULL FLANGE WIDTH UNLESS OTHERWISE NOTED. BEAMS MUST BE ATTACHED AT EACH END WITH A MINIMUM OF FOUR 16d NAILS OR (2) 35" x 4" LAG SCREWS
- UNLESS OTHERWISE NOTED.
 INSTALL 2x WOOD PLATE ON TOP OF STEEL BEAMS, RIPPED TO MATCH BEAM WIDTH, FASTEN PLATE TO BEAM w/ HILTI X-DNI 52 P8 PINS AT 12" O.C. STAGGERED OR 1/2" DIAMETER BOLTS AT 24"

MECHANICAL FASTENERS

- ALL METAL HARDWARE AND FASTENERS TO BE SIMPSON STRONG—TIE OR APPROVED EQUIVALENT.

 ALL HARDWARE AND FASTENERS IN CONTACT WITH PRESERVATIVE ALL HARDWARE AND FASTENERS IN CONTACT WITH PRESERVATIVE PRESSURE TREATED LUMBER SHALL BE HOT DIPPED GALVANIZED IN
- ACCORDANCE WITH ASTIM A 153, G-185.

 MANY OF THE NEW PRESSURE TREATED WOODS USE CHEMICALS THAT ARE CORROSIVE TO STEEL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THE TYPE OF WOOD TREATMENT AND SELECT APPROPRIATE CONNECTORS THAT WILL RESIST THE APPLICABLE CORROSIVE CHEMICALS.



BRICK VENEER LINTEL SCHEDULE						
SPAN LINTEL SIZE END BEARING						
UP TO 3'-0" 3½"x3½"x½" 4"						
UP TO 6'-3" 5"x3½"x5/16" L.L.V. 8"						
UP TO 9'-6" 6"x3½"x5/6" L.L.V. 12"						
LINTELS ARE NOT DESIGNED TO BE BOLTED TO HEADERS UNLESS SPECIFIED ON UNIT PLANS.						
SPANS OVER A'_O" SHALL BE SHOPED UP LINTH CURED						



Not Model 7 Structural 9 ity, Lot #9 Capstone .H. North

Carolina

IEERING KERTOWN, PA 18951 (215) 804-4449

Nein

íш

S

Homes

Weekley I


David 7

Serenity, gh, General 115 467 Ral Project #: 047-24018 Designed By: LMR

σ.

 \succeq

Checked By: Issue Date: 10/29/25 Re-Issue: Scale: 1/8"=1'-0" @ 11v17 1/4"=1'-0" @ 22x34

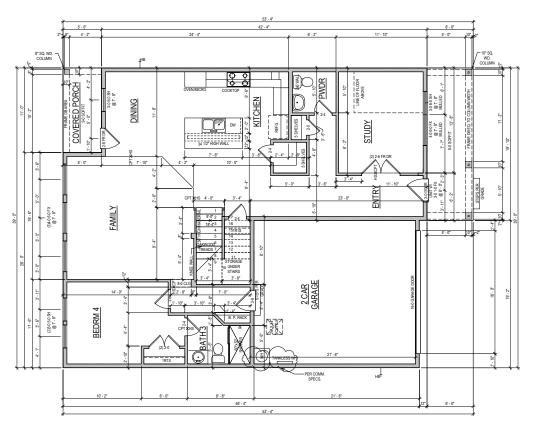

FIRST FLOOR "C"

NOTE: ALL 1ST FLR. CEILING HEIGHTS 9' - 0" UNLESS NOTED OTHERWISE

ADVANCED FRAMING: ZX6 EXTERIOR
PERIMETER WALLS & ALL INSULATED
WALLS UNLESS NOTED OTHERWISE

© two which the properties of the properties

Proj. No.: Lot: 914 3294 Lot: 916 Job No.: Block: 0914 Sect:

Scale:1/8"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024

SERENITY 50' 53 RAINBROOK COVE FUQUAY VARINA, NC

PLAN SQFT - C
SERENITY
S3 RAINBROO

SLAB		Į.
1ST FLOOR	1360 SF	
COVERED PORCH	55 SF	SOUTH
FRONT PORCH	119 SF	
GARAGE	412 SF	A671-C
TOTAL SLAB	1946 SF	1401 I-C
FRAMING		PI N-1
1ST FLOOR	1360 SF	1 -14 1
2ND FLOOR	1297 SF	CAPSTONE
COVERED PORCH	55 SF	CALCIONE
FRONT PORCH	119 SF	RALEIGH
GARAGE	412 SF	
TOTAL FRAMING	3243 SF	(

GENERAL REQUIREMENTS

SLOPED SURFACE REQUIREMENT

GARAGE FLOOR TO BE SLOPED 1/8" PER FOOT TOWARDS VEHICLE ENTRY DOOR


OF DECKS AND BALCONIES TO BE SLOPED 1/4" PER FOOT TOWARDS RELIEF POINTS

AILING REQUIREMENTS NISHED HANDRAIL REQUIRED AT

FINISHED HANDRAIL HEIGHT BETWEEN 34" AND 36" MEASURED VERTICALLY AROVE TREA

FINISHED GUARDRAILS REQUIRED AT DECKS, BALCONIES AND WALKWAYS THAT ARE 30° OR SREATER ABOVE GRADE AND BE AT A MINIMIM OF 36° IN HEIGHT

FINISHED	GUARDRAII	AND HANDRAIL	SPINDLES MUS	T RE SPACED	SO A 4" SPHERE WIL	I NOT
PASS THE						

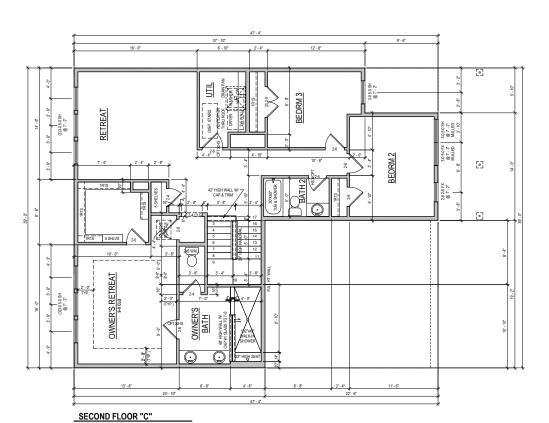

NOTE: ALL 2ND FLR. CEILING HEIGHTS 8' - 0" UNLESS NOTED OTHERWISE

ADVANCED FRAMING: 2X6 EXTERIOR PERIMETER WALLS & ALL INSULATED WALLS UNLESS NOTED OTHERWISE

David Weekley Homes 914 Lot:

© Weekley Homes L.P. 2024

The measurement, dimension, and other specialistics as other in the document are positions to restriction as other in the document are positions to reduce the only in a such specialisation of the inhand sector any very fine Accounted may also sectors.

Scale:1/8"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024

Proj. No.: 3294 Job No.: 0914

Block:

SERENITY 50' 53 RAINBROOK COVE FUQUAY VARINA, NC






ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
com (215) 804-4449

KSE





BRACED WALL PANEL
(SEE KSE STRUCTURAL DETAILS
SET FOR BRACED WALL PANEL SHEATHING FASTENING & BLOCKING DETAILS)

→ CONTROL JOINT

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS





53'-4"

11'-0"

6'-0"

61.4

11'-6"

16" WIDE x 20"-DEEP MONOLITHIC CONCRETE FOOTING (TYP.)

TURNDOWN SLAB @

OPENING-

(TYP. @ BRICK

VENEER)

\$6.

21'-6"

GARAGE SLAB

4" THICK CONCRETE SLAB w/ FIBERMESH
PER MANUFACTURER OR 6x6 W1.4xW1.4
WELDED WIRE MESH ON 6 MIL VAPOR
BARRIER ON 95% COMPACTED FILL. SLOPE

1/8" PER 1'-0" TOWARDS DOOR.

16" WIDE x 20" DEEP MONOLITHIC CONCRETE FOOTING. PROVIDE 6" STEM @ GARAGE.—

4" THICK CONCRETE

SLAB w/ FIBERMESH PER MANUFACTURER OR

6x6 W1.4xW1.4 WELDED WIRE MESH ON 95% —COMPACTED FILL.

42'-4"

12'-8"

SLAB ON GRADE 4" THICK CONCRETE SLAB

w/ FIBERMESH PER MANUFACTURER OR 6x6 W1.4xW1.4 WELDED WIRE MESH ON 6 MIL VAPOR BARRIER ON 95% COMPACTED FILL.

12'-8"

46'-4"

53'-4"

MONOLITHIC SLAB FOUNDATION PLAN

24'-10"

5'-0"

56.

7'-2"

24"x24"x12"— DEEP CONCRETE FOOTING

16" WIDE x 20" DEEP MONOLITHIC CONCRETE

FOOTING (TYP.)

4" THICK CONCRETE

SLAB w/ FIBERMESH PER MANUFACTURER OR

6x6 W1.4xW1.4 WELDED WIRE MESH ON 95% COMPACTED FILL.

28'-0"

12'-0"

61-1

Plan

Monolithic Slab Foundation P
Serenity, Lot #914
A671 Capstone Model
115 M.P.H.
Raleigh, North Carolina

ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
com (215) 804--4449

KSE





SIMPSON HUC28-2

~(TYP.)

LEGEND PROVIDE SOLID BLOCKING
WITHIN FLOOR SYSTEM TO
MATCH POST SIZE ABOVE. ⇒ BEARING WALL ABOVE

⇒ INTERIOR BEARING WALL ⇒ BRACED WALL PANEL 48" WSP

(SEE KSE STRUCTURAL DETAILS SET FOR BRACED WALL PANEL SHEATHING FASTENING & BLOCKING DETAILS)

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS

PLAN DESIGNED WITH 9' NOMINAL WALL PLATE HEIGHT

FLOOR FRAMING TO BE 16" DEEP TJI 210 SERIES OR EQUAL, SPACING PER MANUFACTURER. KEYNOTES:

- (3) INSTALL ONE PANEL CS-PF PORTAL FRAME PER DETAIL A/SD-3.
- INSTALL TWO PANEL CS-PF PORTAL FRAME PER DETAIL A OR B/SD-4. (5)

Raleigh, North Carolina A671 Capstone Model Second Floor Serenity, Lot 115 M.P.H. Project #: 047-24018 Designed By:LMR Checked By:

Plan


Framing

Floor

#914

Issue Date: 10/29/25 Re-Issue:

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

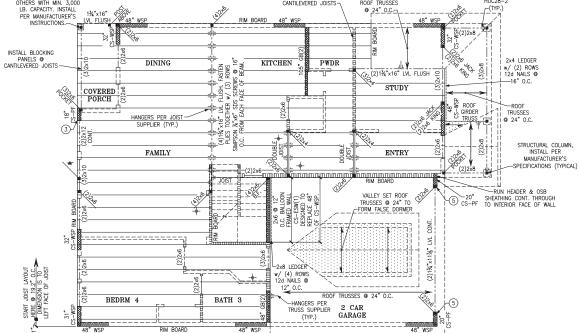

INSTALL BLOCKING PANELS @

CANTILEVERED JOISTS

RIM BOARD

ROOF TRUSSES


@ 24" O.C.

48" WSP

STRUCTURAL COLUMN BY OTHERS WITH MIN. 3,000 LB. CAPACITY. INSTALL PER MANUFACTURER'S

ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
com (215) 804-4449

KSE

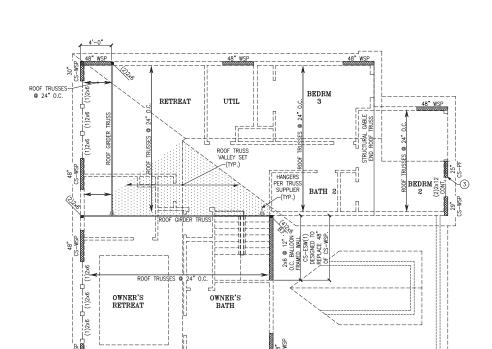

ROOF FRAMING PLAN



⇒ BRACED WALL PANEL

(SEE KSE STRUCTURAL DETAILS

SET FOR BRACED WALL PANEL

SHEATHING FASTENING & BLOCKING DETAILS)

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS

PLAN DESIGNED WITH 8' NOMINAL WALL PLATE HEIGHT


KEYNOTES:

3 INSTALL ONE PANEL CS-PF PORTAL FRAME PER DETAIL A/SD-3.






Plan

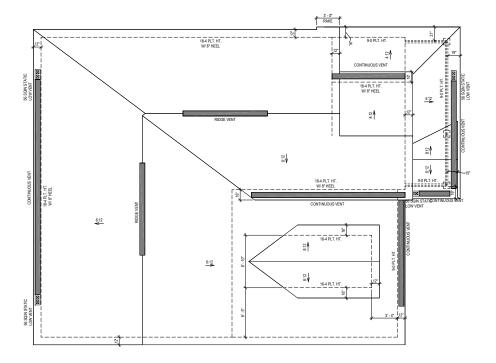

ROOF PLAN "C"

ATTIC VENTILATION WITH SECONDARY INTAKE - C ACTUAL VENTILATION % EXHAUST NOT TO EXCEED INTAKE EXHAUST VENTS

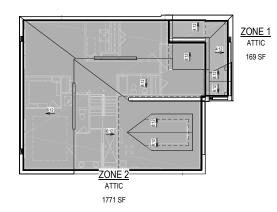

VENTILATION PLAN "C"

TRUSS ROOF NOTES

ALL OVERHANGS PER PLAN MEASURED FROM OUTSIDE FACE OF FRAME.

GABLE OVERHANGS 12" UNLESS NOTED OTHERWISE.

HIP OVERHANGS 16" UNLESS NOTED OTHERWISE.

ALL OVERFRAMING AND BRACING TO BE NO. 2 GRADE 2X S.Y.P. UNLESS NOTED OTHERWISE

ACTUAL ATTIC VENTILATION MAY VARY, VERIFY IN THE FIELD

Week key Homes L.P.
The measurements, dimension, and other go, so you may the found in a gold since the convey. The second may not the found of the found of

Scale:1/8"=1'-0" Rev: 7.9.25 EB

David Weekley Homes PT/AL/IR/BP/JAS Date: 11/27/2024


914 Fot


Proj. No.: 3294 Job No.: 0914

SERENITY 50' 53 RAINBROOK COVE FUQUAY VARINA, NC

A671-C RFP-1 CAPSTONE

RALEIGH

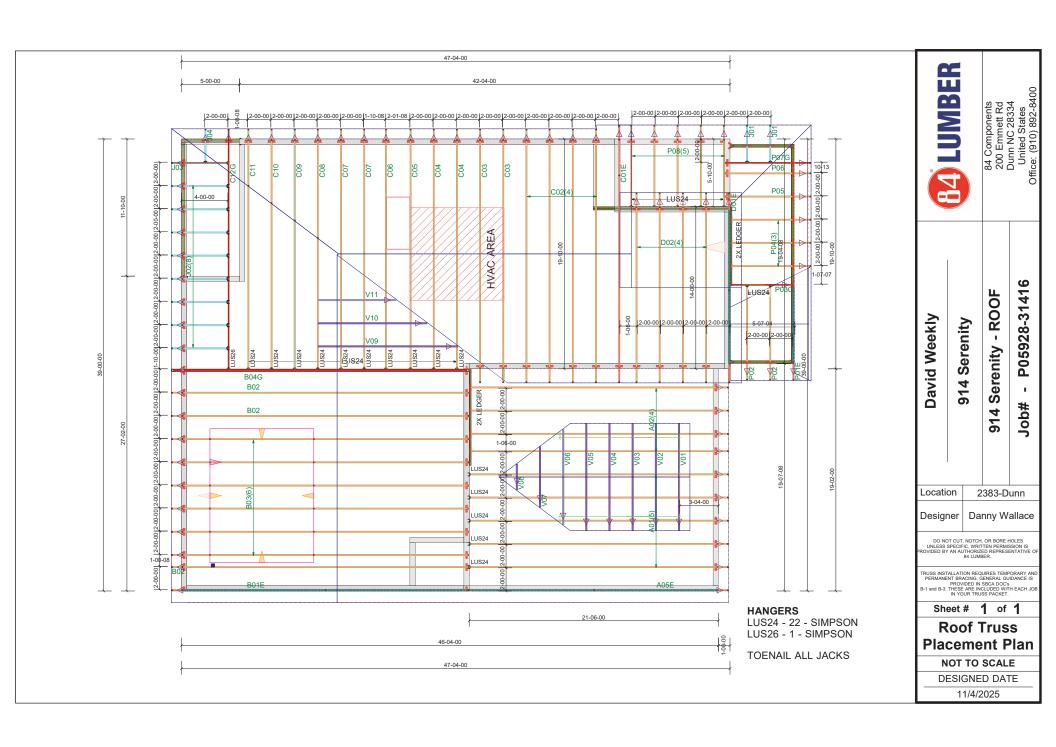

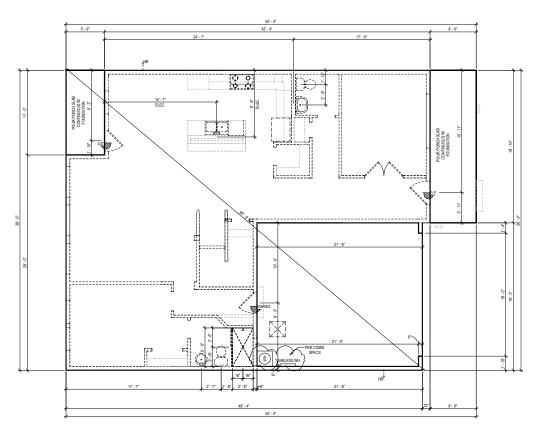

FIRST FLOOR "C"

Week ley Homes L.P. 2024
The measurement's dimension, and not specification show on all side document are guidelines for construction use only. The state independent on the limited structure may vary. This document may not be relied on as a representation of what the completed standard well look like.

 David Weekley Homes

 PITALIRIBPIJAS
 Scale: 1/8"=1-0"


 Date: 11/27/2024
 Rev: 7.9.25 EB

3294 Lot: 914 3294 Block: 0914 Sect:

SERENITY 50' 53 RAINBROOK COVE FUQUAY VARINA, NC

SOUTH
A671-C
FS-1
CAPSTONE
RALEIGH

SEE ENGINEERING FOR ANCHOR BOLT REQUIREMENTS

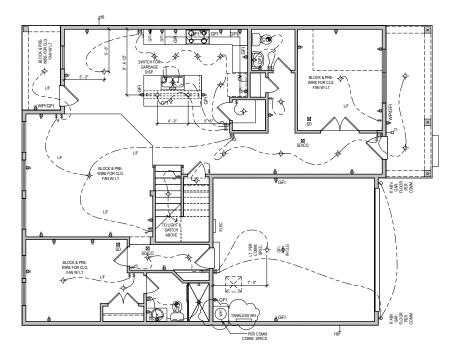

FIRST FLOOR "C"



© Weekle.
The measuments dimens above no this document are only. The actual specification vary. This document of what the co-

David Weekley Homes

914 Fot

Proj. No.: 3294 Job No.: 0914

SERENITY 50' 53 RAINBROOK COVE FUQUAY VARINA, NC

Scale:1/8"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024

UTILITY LEGEND

ALL RECESS CANS SHOWN

MID-ATLANTIC General Notes

ALL ELECTRICAL PLUGS TO BE 9" TO TOP FROM FLOOR IN ROOMS WITH WALL MOULDINGS.

3. DO NOT RUN WIRES ON TOP OF JOISTS IN AREAS LIKELY TO HAVE DECKING IN ATTIC. (near disappearing stairs)

PROVIDE SMOKE DETECTORS IN EVERY BEDROOM. SEE SPECS FOR REQUIRED TYPE AND WIRING.

6. LOCATE ELECTRICAL PANEL IN LOCATION CLOSEST TO SERVICE.

SOUTH A671-C ELE-1 CAPSTONE RALEIGH

 110V OUTLET
 12" A.F.F. (U.N.O.)

GFI GROUND FAULT INTERRUPTOR
 (WEATHER PROOF AS NOTED) SURFACE MOUNTED LED LED DISC LIGHT


Q WALL MOUNTED LIGHT RECESS CAN LIGHT (EYEBALL AS NOTED)

VT VT EXHAUST VENT SD SMOKE DETECTOR

(CARBON MONOXIDE AS
D NOTED)
DOOR BELL CHIMES DOOR BELL
CHIMES
PANELBOARD W
CIRCUIT
HB. BREAKERS
HOSE BIB GAS GAS TAP W HW COLD/HOT WATER SUPPLY ELEVATOR CALL BUTTON JUNCTION BOX

ON PLAN ARE **LED** PER COMMUNITY SPEC.

2. SWITCH FOR ATTIC LIGHT TO BE LOCATED OUTSIDE OF ATTIC SPACE, 12 INCHES FROM CEILING.

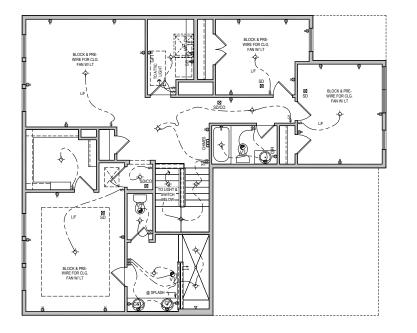

[3]

[3]

SECOND FLOOR "C"

UTILITY LEGEND 110V OUTLET 12" A.F.F. (U.N.O.) GFI GROUND FAULT INTERRUPTOR (WEATHER PROOF AS NOTED) HALF HOT OUTLET 220V OUTLET (36" A.F.F. @ UTILITY) © Weekle. The measuments dimens above no this document are only. The actual specification vary. This document of what the co-▼ PHONE LINE CABLE TELEVISION \$ STANDARD SWITCH (3 OR 4 WAY AS NOTED) - SURFACE MOUNTED LIGHT LIGHT SURFACE MOUNTED LED DISC LIGHT WALL MOUNTED LIGHT RECESS CAN LIGHT (EYEBALL AS NOTED) VT EXHAUST VENT SD SMOKE DETECTOR (CARBON MONOXIDE AS D NOTED) DOOR BELL CHIMES DOOR BELL CHIMES PANELBOARD W CIRCUIT HB BREAKERS HOSE BIB

David Weekley Homes

914

Fot

Proj. No.: 3294 Job No.: 0914

SERENITY 50' 53 RAINBROOK COVE FUQUAY VARINA, NC

Scale:1/8"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024



CW HW COLD/HOT WATER SUPPLY E ELEVATOR CALL BUTTON JUNCTION BOX

GAS GAS TAP

ALL RECESS CANS SHOWN
ON PLAN ARE **LED** PER
COMMUNITY SPEC.

MID-ATLANTIC General Notes

ALL ELECTRICAL PLUGS TO BE 9" TO TOP FROM FLOOR IN ROOMS WITH WALL MOULDINGS.


2. SWITCH FOR ATTIC LIGHT TO BE LOCATED OUTSIDE OF ATTIC SPACE, 12 INCHES FROM CEILING.

3. DO NOT RUN WIRES ON TOP OF JOISTS IN AREAS LIKELY TO HAVE DECKING IN ATTIC. (near disappearing stairs)

PROVIDE SMOKE DETECTORS IN EVERY BEDROOM. SEE SPECS FOR REQUIRED TYPE AND WIRING.

6. LOCATE ELECTRICAL PANEL IN LOCATION CLOSEST TO SERVICE.

SOUTH A671-C ELE-2 CAPSTONE RALEIGH

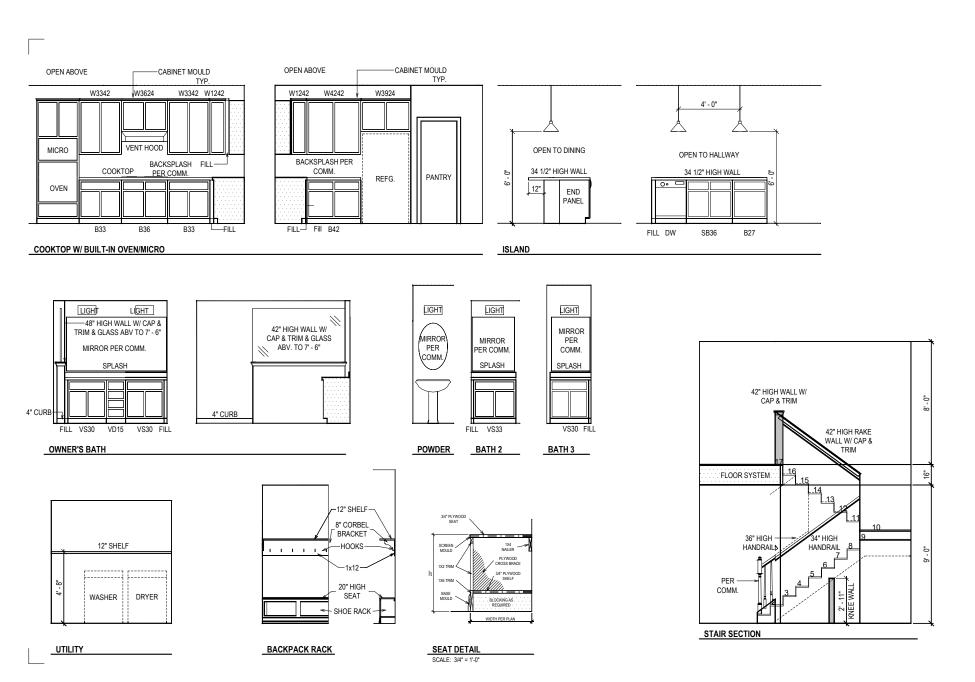

Week ley Homes L.P.
The measurements, almention, and other goe above on this document are guidelines for cor only. The actual specifications of the finished vary. This document may not be trelied on as a city what the completed is entiremed.

David Weekley Homes Scale:1/4"=1'-0" Rev: 7.9.25 EB

PT/AL/IR/BP/JAS Date: 11/27/2024 914

Proj. No.: 3294 Job No.: 0914

Ë

SERENITY 50' 53 RAINBROOK COVE FUQUAY VARINA, NC

A671-C INT-1 CAPSTONE RALEIGH


































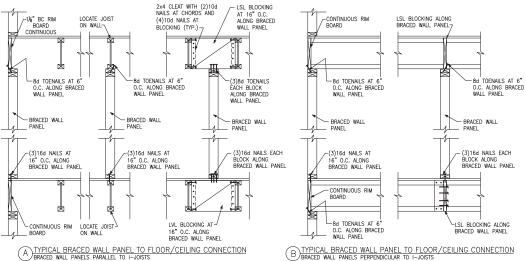







© METHOD GB(1) AND GB(2) INTERSECTION DETAILS







HEEL HEIGHT GREATER THAN 91/4" AND LESS THAN 151/4"

HEEL HEIGHT GREATER 15"

D TYPICAL EXTERIOR CORNER WALL FRAMING

NOTE: A THIRD STUD AND/OR PARTITION INTERSECTION BACKING STUDS SHALL BE PERMITTED TO BE OMITTED
THROUGH THE USE OF WOOD BACKUP CLEATS, METAL
DRYWALL CLIPS OR OTHER APPROVED DEVICES THAT WILL SERVE AS ADEQUATE BACKING FOR THE FACING

E ROOF TRUSS BEARING/BLOCKING AT BRACED WALL PANELS ONLY REQUIRED AT BRACED WALL PANELS






Raleigh, North Carolina

М.Р.Н.

115







-HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET - A36 ALL THREAD ROD DRILLED AND EPOXIED 6" INTO FOOTING USING SIMPSON "SET"/"ET" OR USP CIA-GEL ADHESIVE.

(C)HOLD DOWN AT STEMWALL SLAB

4'-0" LONG SIMPSON CS16-OR USP RS150 COIL STRAP CENTERED BETWEEN FIRST FLOOR SYSTEM, SEE PLANS FLOOR WALL AND KNEEWALL WITH MIN 11-10d NAILS EACH END -2x6 EXTERIOR WALL HOLD DOWN PER PLAN, INSTALLED PER MANUFACTURER'S SPECIFICATIONS -A36 ALL THREAD ROD DRILLED AND EPOXIED 6" INTO FOOTING USING SIMPSON "SET"/"ET" OR USP CIA-GEL ADHESIVE. 400000

G HOLD DOWN AT FOUNDATION STEM WALL

	4'-0" LONG SIMPSON CS16- OR USP RS150 COIL STRAP CENTERED BETWEEN FIRST FLOOR WALL AND KNEWALL WITH MIN 11-10d NAILS EACH END	FLOOR SYSTEM, SEE PLANS
OLD DOWN INSTALLED PER HOLD OWN SCHEDULE THIS SHEET		2x6 EXTERIOR WALL
	HOLD DOWN PER PLAN, INSTALLED PER MANUFACTURER'S SPECIFICATIONS	
A36 ALI THREAD ROD DRILLED AND EPOXIED 6" INTO FOOTING USING SIMPSON "SET"/"ET" OR USP CIA-GEL ADHESIVE.	***************************************	-A36 ALL THREAD ROD DRILLED AND EPOXIED 6" INTO FOOTING USING SIMPSON "SET"/"ET" OR USP CIA-GEL ADHESIVE.

-SHEAR WALL, SEE

HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET, SEE PLANS FOR TYPE AND LOCATION.

B TYPICAL HOLD DOWN DETAIL

SCHEDULE AND PLANS FOR LOCATION

2x FULL HEIGHT

STUD w/ 16d NAILS @ 6" O.C.

(2)2x FULL HEIGHT

STUD w/ 10d NAILS @ 6" O.C. EACH PLY

SHEAR WALL, SEE SCHEDULE AND PLANS FOR LOCATION -

HOLD DOWN INSTALLED PERHOLD DOWN SCHEDULE THIS SHEET, SEE PLANS FOR TYPE

A36 ALL THREAD ROD -

SIMPSON CNW1/2 OR USP CNW12-ZP COUPLER NUT

GROUT CMU SOLID AT ALL THREAD ROD-

AND LOCATION.

(2) 2x FULL HEIGHT

STUD w/ 10d NAILS

@ 6" O.C. EACH PLY

2x FULL HEIGHT STUDS

A TYPICAL HOLD DOWN DETAIL

(E)HOLD DOWN AT CRAWL FOUNDATION

w/ 16d NAILS @ 6" O.C.

-HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET

HOLD DOWN AT FOUNDATION
MONOLITHIC TURN-DOWN

HOLD DOWN SCHEDULE						
HOLD		FASTENERS				
SIMPSON	USP	ALL TREAD ROD	TAGTERE			
LTTP2	LTS20B	½" DIA.	(10)10d NAILS			
HTT4	HTT16	%" DIA.	(18)16dx2½" LONG NAILS			
HTT5	HTT45	%" DIA.	(26)16dx2½" LONG NAILS			

SLA
MANAGEMENT AND A STATE OF THE S

Carolina

North

Details

೫

Notes

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

SEE PLAN VARIES - SEE PLAN SEE PLAN ONE CONT. 2x TOP PLATE, EXTEND EACH END INTO ADJACENT WALL. CONT. BEAM FULL LENGTH OF FRAME. SEE ELEVATION FOR SIZE (111/4" MIN DEPTH) AND TYPE (DIMENSIONAL LUMBER OR LVL) NAIL SPLICES WITH 8-16d NAILS PER SPLICE/LAP. NAIL THE SHEATHING IN SHADED AREA TO BEAM WITH 8d NAILS AT 3" O.C. EACH WAY %6" O.S.B. OR 1%2" PLYWOOD EXTERIOR WALL SHEATHING AT UNSHADED AREAS -(2) ROWS 16d NAILS AT 3" O.C. -SIMPSON OR LISP -FOR A PANEL SPLICE (IF NEEDED), PANEL EDGES SHALL BE BLOCKED AND OCCUR WITHIN 24" OF MID HEIGHT. ONE ROW OF TYP. SHEATHING-TO-FRAMING (BEAM AND INFILL WALL), NAIL LSTA21 WITH 16-10d NAILS SHEATHING TO ALL SUPPORTS (STUDS, PLATES, BLOCKING, ETC.) WITH 8d NAILS AT 6" O.C. AT SHEET EDGES AND 12" AT FIRST STUD EACH SIDE OF IS REQUIRED IN EACH PANEL $\%_6$ " O.S.B. OR $^{1}\%_2$ " PLYWOOD EXTERIOR WALL SHEATHING. AT SHADED AREAS NAIL SHEATHING TO ALL SUPPORTS (STUDS, PLATES, BLOCKING, O.C. IN THE FIELD. OPENING NO SILL AND CRIPPLE WALL "H" = FRAME HEIGHT VARIES-- SEE ELEVATION AT BAY/DOOR ETC.) WITH 8d NAILS AT 3" O.C. -(2)2x STUD MIN. AT START AND END OF WALL SEGMENTS EACH SIDE OF OPENING. IF PLANS CALL FOR MORE THAN TWO STUDS, PROVIDE NUMBER OF STUDS CALLED FOR ON PLAN. SIMPSON LTP4 OR USP MPF4 1" MIN THICK RIM BOARD OR LADDER TRUSS AT FLOOR BASEMENT/CRAWL FOUNDATION OR 2ND CONNECT RIM TO SOLE PLATE OF WALL WITH TWO SIMPSON LTP4 OR USP MPF4 EACH FULL HEIGHT PANEL FLOOR CONDITION BASEMENT/CRAWL FOUNDATION WALL OR FIRST FLOOR WALL BELOW STEMWALL /MONOLITHIC SLAB FOUNDATION $-2\times$ P.T. PLATE WITH (2)½" DIA \times 8" EMBED ANCHOR BOLTS EACH WITH A $\frac{1}{2}$ 6" \times 2" \times 2" PLATE WASHER CONDITION FOUNDATION STEMWALL/MONOLITHIC SLAB FOUNDATION WALL


(A) METHOD CS-PF: CONTINUOUS PORTAL FRAME PANEL CONSTRUCTION ONE BRACED WALL SEGMENT

(B) METHOD CS-PF: CONTINUOUS PORTAL FRAME PANEL CONSTRUCTION TWO BRACED WALL SEGMENTS

BRACED WALL PANEL AND ENGINEERED SHEAR WALL SCHEDULE					
PANEL TYPES	PANEL TYPE	MATERIAL FASTENERS			
WSP	INTERMITTENT WOOD STRUCTURAL PANEL	7/16" OSB	6d or 8d common nails at 6" o.c. at sheet edges and 12" o.c. at intermediate supports. <u>Engineered Alternative</u> : 16 <u>Gage By 1.75" Long</u> <u>STAPLES AT 3" o.c. at sheet edges and 6" o.c. at intermediate supports</u>		
GB(1)	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 7" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.		
GB(1)-4	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 4" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.		
GB(2)	INTERMITTENT GYPSUM BOARD (SHEATHING BOTH FACES OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 7" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.		
CS-WSP	CONTINUOUS SHEATHED WOOD STRUCTURAL PANEL	7/16" OSB	6d OR 8d COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. ENGINEERED ALTERNATIVE: 16 GAGE BY 1.75" LONG STAPLES AT 3" O.C. AT SHEET EDGES AND 6" O.C. AT INTERMEDIATE SUPPORTS		
CS-PF	CONTINUOUS SHEATHED PORTAL FRAME	7/16" OSB	NAILING PER DETAIL		
CS-EPF	PORTAL FRAME WITH HOLD DOWNS	7/16" OSB	NAILING PER DETAIL		
CS-ESW(1)	ENGINEERED SHEAR WALL, TYPE 1	7/16" OSB	8d COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS		
CS-ESW(2)	ENGINEERED SHEAR WALL, TYPE 2	7/16" OSB	8d COMMON NAILS AT 4" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS		
CS-ESW(3)	ENGINEERED SHEAR WALL, TYPE 3	7/16" OSB	8d COMMON NAILS AT 3" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS		

BRACED WALL PANEL NOTES:

- ALL BRACED WALL PANELS, EXCEPT GB(1) & GB(2), SHALL HAVE 2x BLOCKING BETWEEN WALL STUDS AT ALL HORIZONTAL SHEET EDGES.
- PROVIDE NAILING/BLOCKING ABOVE AND BELOW ALL BRACED WALL PANELS PER KSE BRACED WALL DETAILS.
- SHEATH ALL EXTERIOR WALLS OF THE HOUSE WITH 1/4" O.S.B., OR 15/2" PLYWOOD, FASTENED PER IRC. AT EXTERIOR CORNERS, SHEATHING SHALL BE FASTENED PER KSE BRACED WALL DETAILS. AT INTERIOR WALL INTERSECTIONS, FASTEN STUDS & WALL BRACING PER KSE BRACED WALL DETAILS.
- BRACED WALL PANELS AND ENGINEERED SHEAR WALLS ARE PROVIDED PER IRC. PANEL LENGTHS SHOWN ON PLANS ARE THE MINIMUM LENGTH REQUIRED.

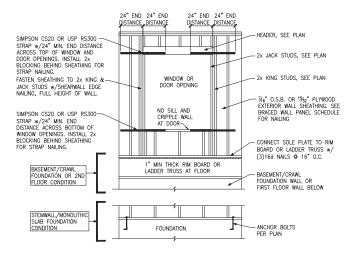

WINDOW OR DOOR REINFORCEMENT IN ENGINEERED SHEAR WALL ONLY REQUIRED WHERE SPECIFIED ON PLANS














Re-Issue: 1/4"=1'-0" @ 22x34



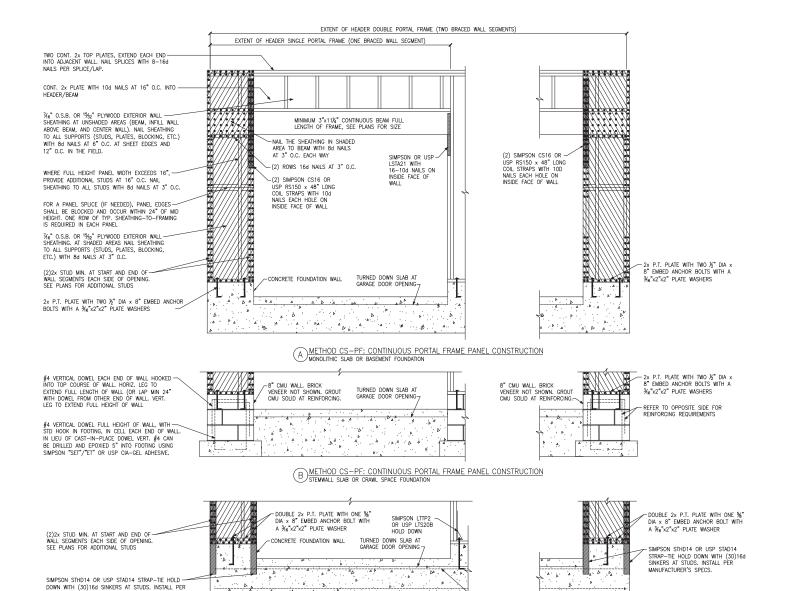

CONTINUOUS #4 HIGH AND LOW PROVIDE MIN 24" LAPS WHERE SPLICED.


MANUFACTURER'S SPECS.














Project #: 047–24018
Designed By: LMR
Checked By:
Issue Dote: 10/29/25
Re-Issue:
Scole: 1/8"=1'-0" @ 11x17
1/4"=1'-0" @ 22x34

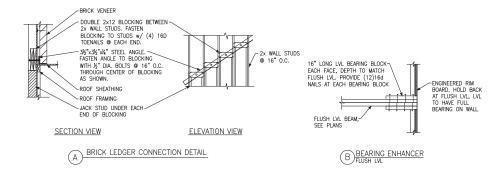



C LADDER BLOCKING
AS REQUIRED ® PARALLEL WALLS

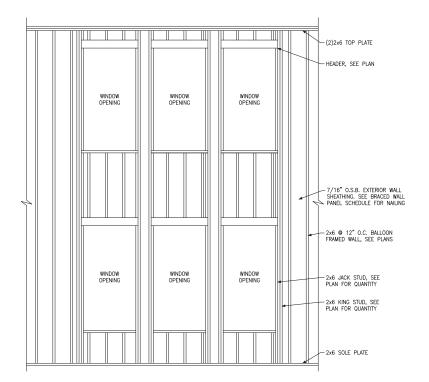

DBALLOON FRAMED WALL DETAIL N.T.S.

WALL STUD SIZE, HEIGHT & SPACING SCHEDULE						
BEARING WALLS NONBEARING WALLS						
STUD SIZE	LATERALLY UNSUPPORTED STUD HEIGHT	MAXIMUM SPACING WHEN SUPPORTING A ROOF-CEILING ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY, ONLY	MAXIMUM SPACING WHEN SUPPORTING ONE FLOOR, PLUS A ROOF-CEILING ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY	MAXIMUM SPACING WHEN SUPPORTING TWO FLOORS, PLUS A ROOF-CEILING ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY	LATERALLY UNSUPPORTED STUD HEIGHT	MAXIMUM SPACING
2x4	10'-0"	24"	16"	-	14'-0"	24"
2x6	10'-0"	24"	24"	16"	20'-0"	24"

ENGINEERING

5. SUITE 201, QUAKERTOWN, PA 18951

(215) 804-4449

S

Issue Date: 10/29/25 Re-Issue:


Project #: 047-24018 Designed By: LMR

Checked By:

A671 115

Framing iity, Lot #914 Capstone Model Miscellaneous | | Serenity, Lot #


Detail



-LINE OF OPTIONAL BRICK

B PENT ROOF DETAIL

A PENT ROOF DETAIL CURVED ROOF



ROOF GIRDER TRUSS TO

SUPPORT DEAD LOAD OF BRICK, SEE PLAN

(D)TRUSS DETAIL

OSB GUSSET, CUT TO MATCH ROOF PROFILE FASTEN GUSSET TO

FRAMING w/8d NAILS @ 4"

O.C. INTO EACH MEMBER.

2'-6" MAXIMUM

2x12 RAFTER WITH

CURVED PROFILE

CUT INTO RAFTER

-2x4 LEDGER. FASTEN TO WALL STUDS WITH (2) ROWS 12d NAILS @ 16" O.C. -SIMPSON U24-2 OR USP SUH24-2 HANGER -BRICK VENEER, PER ELEVATION

LINE OF OPTIONAL BRICK

FASTEN RAFTER TO LEDGER WITH SIMPSON H3 OR USP RT3A

FASTEN VERTICAL TO RAFTER &

CLG. JOIST w/(4) 12d NAILS.

/WALL STUD OR GABLE TRUSS

-WALL SHEATHING

-2x4 VERTICAL

-2x4 CEILING JOIST, LAP WITH VERTICAL

2x12 RAFTER WITH -2x4 LEDGER. FASTEN TO WALL STUDS CURVED PROFILE CUT INTO RAFTER-2x4 VERTICAL w/(2) ROWS SIMPSON SDS4x3½" OR USP WS35 SCREWS @ 16" O.C. OSB GUSSET, CUT TO-MATCH ROOF PROFILE FASTEN GUSSET TO FRAMING w/8d NAILS @ 4"

O.C. INTO EACH MEMBER.

8d NAILS AT 6" O.C. -

END TRUSS 2x4 BLOCKING BTWN

RAFTERS.

2x4 FRAMING AT 24" O.C. -CANTILEVERED OVER GABLE

2x6 KICKER AT 6'-0" O.C., WITH-

2x6 "T" SCAB, NAIL SCAB TO

KICKER WITH 10d NAILS AT 6" O.C. KICKER MAY BE OMITTED WHEN HEIGHT OF GABLE END TRUSS IS 4'-0" OR LESS.

%6" OSB AT GABLE END TRUSS, PER SHEAR WALL

EDGE NAILING PER SHEAR — WALL SCHEDULE PER SHEAR

WALL ABOVE (6" O.C. AT NON-SHEAR WALLS)

%6" OSB WALL SHEATHING

X SECTION CURVED ROOF

(E) GABLE END WALL DETAIL

2x4 BLOCKING BETWEEN TRUSSES WITH SIMPSON U24 OR USP JL24 EACH END

-SIMPSON LTP4 EVERY

(2) SIMPSON GBC OR

USP HC520 EACH KICKER

2x4 LEDGER. FASTEN TO

WALL STUDS w/(2) ROWS SIMPSON SDS¼x3½" OR USP WS35 SCREWS ⊕ 16" O.C.

AT 4" O.C.

(5) 10d-

ROOF TRUSSES AT 24" O.C.

SIMPSON A35 OR USP MPA1 SPACED PER SHEAR WALL BELOW ENTIRE GABLE END

C EYEBROW ROOF DETAIL STRAIGHT ROOF

-WALL STUD OR GABLE TRUSS

TOENAIL RAFTER TO LEDGER

-2×4 LEDGER, FASTEN TO WALL STUDS w/(2) ROWS SIMPSON

SDS1/4×31/2" SCREWS @ 16" O.C.

-2x4 RAFTER & CEILING JOIST,

LAP AND FACE NAIL WITH (4)

-2x4 LEDGER. FASTEN TO WALL

OR GABLE TRUSS WITH (2) ROWS 12d NAILS @ 16" O.C.

WITH (4) 12d NAILS

ENGINEERING

5. SUITE 201, QUAKERTOWN, PA 18951

(215) 804-4449

S

2x STUD WALL w/ P.T. PLATE, SEE PLAN.

FINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES.

CONCRETE SLAB POURED

MONOLITHICALLY WITH

FOOTING, SEE PLAN.

4" GRAVEL FILL

CLASSIFIED SOIL

COMPACTED FILL

MONOLITHIC CONCRETE

FOOTING w/ 4" LEDGE BRICK VENEER, SEE

OR GROUP 1

VENEER TIES SHALL BE SPACED NOT MORE THAN 24" O.C. HORIZONTALLY

AND VERTICALLY AND SHALL SUPPORT NOT

MORE THAN 2 SQUARE

FOUNDATION SECTION EXTERIOR WALL AT PORCH w/ BRICK VENEER

LIVING SPACE

THICKENED SLAB

M FOUNDATION SECTION ALTERNATE EXTERIOR WALL

FINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C., SEE FOUNDATION NOTES.

CONCRETE SLAB POURED

MONOLITHICALLY WITH FOOTING, SEE PLAN.

4" GRAVEL FILL

CLASSIFIED SOIL

-MONOLITHIC CONCRETE FOOTING, SEE PLAN.

COMPACTED FILL

OR GROUP 1

FEET OF WALL AREA

CONCRETE SLAB, SEE PLAN

2x STUD WALL w/ P.T. PLATE, SEE PLAN.

STEP VARIES

INSIDE EDGE OF MONOLITHIC

FOUNDATION:

(1) ADDITIONAL LADDER WIRE BELOW

GARAGE SPACE


EXTERIOR

12" MINIMUM

BELOW GRADE

GRADE







Δ. \leq 115

1/4"=1'-0" @ 22x34

Project #: 047-24018 Issue Date: 10/29/25 Re-Issue:

Raleigh,

North

Carolina

TOP BRICK COURSE CAST INTO SLAB -(1) ADDITIONAL LADDER WIRE BELOW TOP BRICK COURSE CAST INTO SLAB CA" CONCRETE SLAB. SEE PLAN. BRICK -MASONRY 00 " GRAVEL FILL OR GROUP 1 CLASSIFIED SOIL OUTSIDE EDGE OF BRICK AND 95% COMPACTED SOIL MONOLITHIC CONCRETE WALL ABOVE

BRICK VENEER -SEE ARCH DWGS FOR BRICK TIES. WEEPS, ETC. 8" MINIMUM TO GRADE, 24" MAX EXTERIOR GRADE 12" MINIMUM-BELOW GRADE

FOOTING, SEE PLAN.

ISOLATED PAD FOOTING, SEE PLAN FOR SIZE

ISOLATED PAD FOOTING INTERIOR COLUMN

WIDTH

POST ABOVE, SEE PLAN CONCRETE SLAB, SEE PLAN

2x STUD WALL w/ P.T. PLATE, SEE PLAN.

rINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES.

FOUNDATION SECTION

B) FOUNDATION SECTION EXTERIOR WALL @ BRICK VENEER

CONCRETE SLAB POURED

MONOLITHICALLY WITH

4" GRAVEL FILL OR GROUP 1

CLASSIFIED SOIL

COMPACTED FILL

2x STUD WALL w/ P.T. PLATE, SEE PLAN.

-INSTALL ½" DIA. ANCHOR BOLTS ❷ 6'-0" O.C., SEE FOUNDATION NOTES.

MONOLITHIC CONCRETE FOOTING w/ 4" LEDGE BRICK VENEER, SEE

FOOTING, SEE PLAN.

VENEER TIES SHALL BE SPACED NOT MORE THAN 24" O.C. HORIZONTALLY

AND VERTICALLY AND

SHALL SUPPORT NOT MORE THAN 2 SQUARE

FEET OF WALL AREA

8" MINIMUM TO

GRADE, 30" MAX.

EXTERIOR GRADE-

12" MINIMUM ~ BELOW GRADE

VENEER TIES SHALL BE SPACED NOT MORE THAN

24" O.C. HORIZONTALLY AND VERTICALLY AND SHALL SUPPORT NOT

MORE THAN 2 SOLIARE FEET OF WALL AREA

8" MINIMUM TO

GRADE, 30" MAX

EXTERIOR GRADE

12" MINIMUM -

BELOW GRADE

FOUNDATION SECTION
EXTERIOR GARAGE WALL @ BRICK VENEER

OR GROUP 1 CLASSIFIED SOIL COMPACTED FILL MONOLITHIC CONCRETE

FOOTING w/ 4" LEDGE BRICK VENEER, SEE

CONCRETE SLAB POURED

MONOLITHICALLY WITH

FOOTING, SEE PLAN.

GRAVEL FILL

4" GRAVEL FILL COMPACTED FILL

OR GROUP 1 CLASSIFIED SOIL -MONOLITHIC CONCRETE FOOTING

CONCRETE SLAB POURED

FOOTING SEE PLAN.

/ INSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES.

CONCRETE SLAB POURED

MONOLITHICALLY WITH FOOTING, SEE PLAN.

4" GRAVEL FILL

CLASSIFIED SOIL

COMPACTED FILL

MONOLITHIC CONCRETE FOOTING, SEE PLAN.

OR GROUP 1

2x STUD WALL w/ — P.T. PLATE, SEE PLAN.

RECESS @ GARAGE DOOR

B 2

C EXTERIOR WALL AT PORCH FOUNDATION SECTION

CONCRETE SLAB, SEE PLAN

EXTERIOR

12" MINIMUM

BELOW GRADE

GRADE

G GARAGE DOOR SECTION

2x STUD WALL W/ -P.T. PLATE, SEE PLAN. INSTALL 1/2" DIA. ANCHOR BOLTS W/ 3"x3"x4" PLATE WASHERS @ 6'-0' O.C., SEE FOUNDATION NOTES.

> FOUNDATION SECTION ALTERNATE EXTERIOR WALL

INSTALL ½" DIA. ANCHOR BOLTS w/3"x3"x4" PLATE WASHERS @ 6'-0" O.C., SEE FOUNDATION NOTES. 00 NOTCH BRICK @ THREADED ROD AND GROUT SOLID

SEAL 051215

THICKENED SLAB SECTION (J)INTERIOR BEARING WALL

E) FOUNDATION SECTION EXTERIOR GARAGE WALL

BELOW GRADE

rINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C., 2x STUD WALL w/ P.T. SEE FOUNDATION NOTES PLATE, SEE PLAN -6" CONCRETE STEMWALL

CONCRETE SLAB POURED 8" MINIMUM TO MONOLITHICALLY WITH GRADE, 30" MAX FOOTING, SEE PLAN. EXTERIOR GRADE

-4" GRAVEL FILL OR GROUP 1 CLASSIFIED SOIL

rINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES.

CONCRETE SLAB POURED MONOLITHICALLY WITH FOOTING, SEE PLAN.

"4" GRAVEL FILL OR GROUP 1

CLASSIFIED SOIL

COMPACTED FILL

-MONOLITHIC CONCRETE

FOOTING, SEE PLAN.

-COMPACTED FILL MONOLITHIC CONCRETE FOOTING, SEE PLAN,

12" MINIMUM

FOUNDATION SECTION

-INSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES

THICKENED SLAB,

SEE PLAN.

P.T. PLATE, SEE PLAN.

8" MINIMIM TO

GRADE, 30" MAX

EXTERIOR GRADE~

12" MINIMUM~ BELOW GRADE

FOOTING, SEE PLAN,

2x BEARING WALL w/ P.T. PLATE, SEE PLAN: CONCRETE SLAB POLIRED



ENGINEERING

5. SUITE 201, QUAKERTOWN, PA 18951

(215) 804-4449

S

SINGLE TOP PLATE. SPLICE OVER STUD

-SINGLE TOP PLATE, SPLICE OVER STUD

SINGLE TOP PLATE SPLICE

INTERIOR OR EXTERIOR WALL

ADVANCED FRAMING NOTES 1.) EXTERIOR WALLS TO BE 2x6 S.P.F. STUDS @ 24" O.C. WITH SINGLE TOP PLATE. TOP PLATE TO

BE SPLICED PER NC RESIDENTIAL CODE.

TOLERANCE OF NO MORE THAN 1 INCH.

RESIDENTIAL CODE.

RESIDENTIAL CODE.

2.) INTERIOR BEARING WALLS TO BE PER NO

3.) ROOF TRUSSES AND FLOOR JOISTS ARE TO BE STACKED AND CENTERED OVER STUDS WITH A

ADDITIONAL STUDS ARE TO BE ADDED WHERE THE ROOF TRUSSES AND FLOOR JOISTS ARE NOT

4.) INTERIOR NON-LOAD BEARING WALLS TO BE

2x4 S.P.F. STUDS @ 24" O.C. WITH SINGLE TOP

5.) LOAD-BEARING HEADERS ARE NOT REQUIRED IN

HEADER IN INTERIOR OR OR EXTERIOR NONBEARING

WALLS FOR OPENINGS UP TO 8 FEET IN WIDTH IF THE VERTICAL DISTANCE TO THE PARALLEL NAILING

SURFACE IS NOT MORE THAN 24 INCHES. FOR SUCH NONBEARING HEADERS, NO CRIPPLES OR BLOCKING ARE REQUIRED ABOVE THE HEADER.

INTERIOR OR EXTERIOR NONBEARING WALLS. A

SINGLE FLAT 2x MEMBER MAY BE USED AS A

STACKED OVER STUDS WITHIN 1" TOLERANCE.

PLATE. TOP PLATE TO BE SPLICED PER NC



Notes

 \approx

Details







1/4"=1'-0" @ 22x34



