


SECTION DETAIL

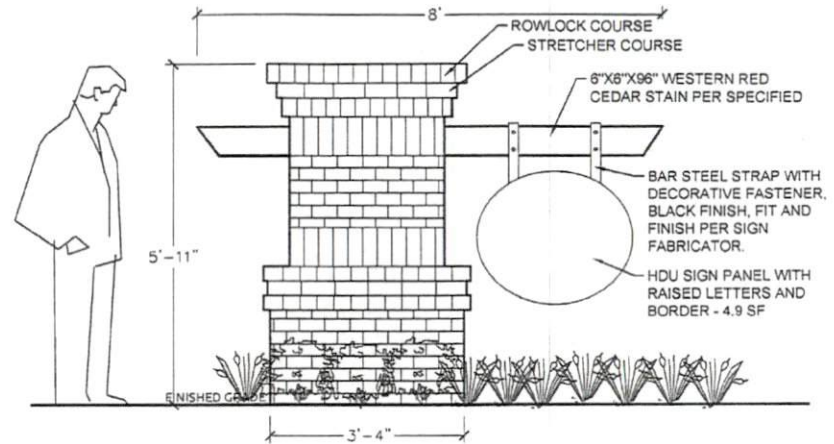

FRONT ELEVATION DETAIL

GENERAL NOTES:

1. All construction shall be in conformance with local ordinance and building code.
2. Secure required building permit(s) prior to commencement of work.
3. Contractor to contact utility locator service, maintain record of marked utilities, and field verify marked utility locations prior to the commencement of construction within area of work.
4. All areas not otherwise landscaped shall be permanently established as turf.
5. All turf areas shall be seeded with Rebel IV tall turf fescue or eqv and established per sediment and erosion control requirements.
6. Do not change the design without approval from the Owner and governing body.
7. Installed plants shall be guaranteed for one year to be free of disease, defect, damage or death and shall be replaced within the warranty period per the request of the owner or its agents.
8. Contractor shall honor plant quantity and size as specified on the plant list.
9. Apply 3 inches of triple shredded hardwood mulch to all landscape areas and tree rings.
10. Brick to be Pine Hall Brick type Chesapeake Pearl or Triangle Brick Cape Fear with ivory buff mortar.
11. Submit brick sample and mortar color to Owner for approval prior to commencement of work.
12. Sign panel art and attachment method shall be approved by owner prior to commencement of work.
13. No structures or plantings shall be erected within right of way.



SIGN DETAILS
SCALE: 1/2"=1'



MONUMENT BRICK - TRIANGLE
BRICK CAPE FEAR OR PINE HALL
BRICK CHESAPEAKE PEARL WITH
CONCAVE IVORY BUFF MORTAR
JOINT OR APPROVED EQV



BEHR PREMIUM #ST-110 CHESTNUT
SEMI-TRANSPARENT
WATERPROOFING EXTERIOR WOOD
STAIN AND SEALER OR EQUIVALENT



TITLA ASSOCIATES
7011 SOUTHPARK DRIVE, STE. 200 - DURHAM, NC 27713
P: (919) 464-8830 | titla@titla.com

12/30/2019




Olde Mill Village
Mill Bend Drive
Fuquay-Varina, North Carolina




Dan Ryan Builders
3000 RDU Center Drive | Ste
202 | Morrisville, NC | 27560


S-2

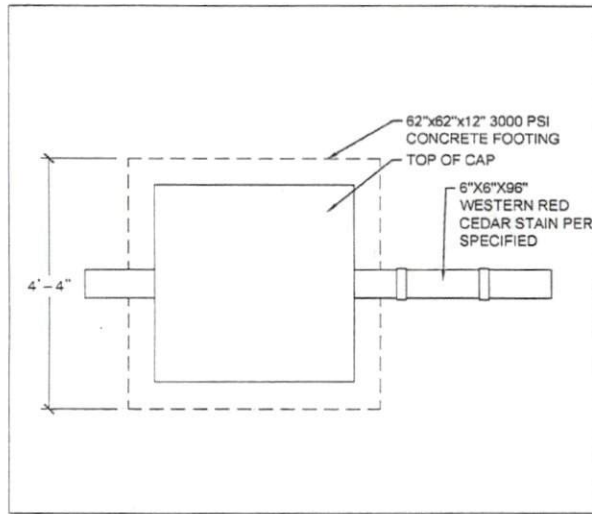

○ SIGN CROSS SECTION
SCALE: $\frac{1}{2}$ "=1'

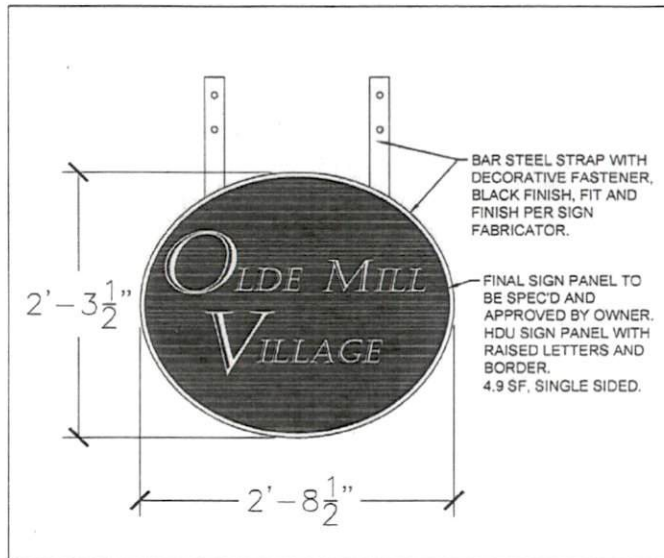

○ SIGN PANEL DETAIL
SCALE: 1"=1'

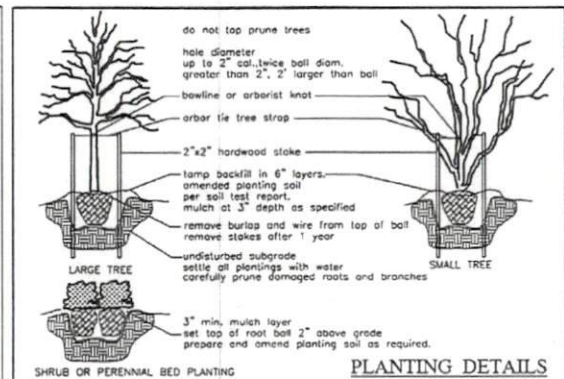

GENERAL PLANTING NOTES

1. VERIFICATION OF TOTAL QUANTITIES AS SHOWN SHALL BE THE RESPONSIBILITY OF THE PLANTING CONTRACTOR.
2. ALL TREES, SHRUBS, AND BEDDING PLANTS SHALL CONFORM TO THE ACCEPTED STANDARDS ESTABLISHED BY THE AMERICAN ASSOCIATION OF NURSERMEN.
3. ALL SAUCERS SHALL BE SOAKED WITH WATER AND MULCHED IMMEDIATELY FOLLOWING PLANTING.
4. SET TOP OF TREE ROOT BALL 3" ABOVE GRADE, SHRUBS 2" ABOVE GRADE.
5. PLANT MATERIAL SHALL CARRY A ONE YEAR WARRANTY AND REPLACEMENT GUARANTEE.
6. AMEND PLANTING SOIL WITH FERTILIZE AND/OR LIME PER SOIL TEST REPORT AT THE RECOMMENDED MANUFACTURERS APPLICATION RATE.
7. BLACK COW PLANTING MIX TO BE ADDED TO PLANTING SOILS DURING INSTALLATION AT A RATE OF 10% BY VOLUME FOR SAUCER BACKFILL.
8. GUYING AND STAKING SHALL BE REMOVED AFTER ONE GROWING SEASON.
9. ALL ROOT BALLS REMOVED FROM CONTAINERS SHALL BE SCARIFIED PRIOR TO BACKFILLING.
10. ALL TREES HAVE BEEN LOCATED WITH RESPECT TO KNOWN OR EXISTING FACILITIES OR STRUCTURES. COORDINATE FIELD ADJUSTMENT WITH PROJECT OWNER OR AGENT.
11. ALL PLANT BEDS AND PLANT MATERIAL SHALL BE MAINTAINED IN GOOD HEALTH, AND ANY DEAD, UNHEALTHY OR MISSING PLANTS SHALL BE REPLACED WITH LOCALLY ADAPTED VEGETATION WHICH CONFORMS TO THE INITIAL PLANTING STANDARDS OF THE LANDSCAPE ORDINANCE.
12. REPORT ANY DISCREPANCIES TO THE PROJECT OWNER OR AGENT.
13. SUBSTITUTIONS OR ALTERATIONS SHALL NOT BE MADE WITHOUT PRIOR WRITTEN NOTIFICATION BY THE OWNER OR AGENT.
14. APPLY MULCH TO ALL PLANTING AREAS AS SPECIFIED.
15. ALL TREES ARE TO HAVE A MINIMUM 3" DIAMETER MULCH RING.
16. ALL BEDS ARE TO HAVE A SPADE CUT MULCH EDGE WHEN ADJACENT TO TURF.



12/30/2019



Olde Mill Village
Mill Bend Drive
Fuquay-Varina, North Carolina



Dan Ryan Builders
3000 RDU Center Drive | Ste
202 | Morrisville, NC | 27560

S-3