



AMERICAN TOWER®

ATC SITE NAME: SPOUT SPRINGS NC1 ATC SITE NUMBER: 21274 AT&T MOBILITY SITE ID: SINC006548 AT&T MOBILITY FA LOCATION CODE: 10017390 AT&T MOBILITY SITE NAME: 368-218 AT&T MOBILITY USID: 71630 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332



AT&T MOBILITY IWM JOB NUMBER(S): WSVWN0055007, WSVWN0057294, WSVWN0055910, WSVWN0055342, WSVWN0056618, WSVWN0056173, WSVWN0056310. AT&T MOBILITY PACE JOB NUMBER(S): MRVWN043897, MRVWN043436, MRVWN043016, MRVWN043414, MRVWN043774, MRVWN042959, MRVWN043577.

COMPLIANCE CODE	PROJECT SUMMARY	PROJECT DESCRIPTION		SHEET INDEX	x		
ALL WORK SHALL BE PERFORMED AND MATERIALS INSTALLED IN ACCORDANCE WITH THE CURRENT EDITIONS OF THE	SITE ADDRESS:	THE PROPOSED PROJECT INCLUDES MODIFYING GROUND BASED AND TOWER MOUNTED EQUIPMENT AS INDICATED PER BELOW:	SHEET NO:	DESCRIPTION:	REV:	DATE:	BY:
FOLLOWING CODES AS ADOPTED BY THE LOCAL GOVERNMENT AUTHORITIES, NOTHING IN THESE PLANS IS TO	2305 NC 87 S SANFORD, NC 27332	TOWER WORK: G-I REMOVE (6) ANTENNA(S), (3) RRU(s), (6) TMA(s), AND (1) 2-1/4" G-I COAX CABLE(S). G-I		TITLE SHEET	1	05/14/25	SSP
BE CONSTRUED TO PERMIT WORK NOT CONFORMING TO THESE CODES.	COUNTY: HARNETT			GENERAL NOTES	0	05/02/25	ANM
1. 2018 NORTH CAROLINA BUILDING CODE (NCBC)	GEOGRAPHIC COORDINATES:	INSTALL (9) MOUNT PIPE(S), (18) CROSSOVER PLATE KIT(S),	G-003 - G-007	APPENDIX B	1	05/14/25	SSP
2. 2020 NATIONAL ELECTRIC CODE (NEC) WITH NC	LATITUDE: 35.27725	(3) BACK TO BACK RRU BRACKET(S), (2) HOISTING ANCHOR GRIP(S), (2) CABLE HOISTING ANCHOR(S), (9) ANTENNA(S), (6) RRU(s),	C-001	OVERALL SITE PLAN	0	05/02/25	ANM
AMENDMENTS 3. LOCAL BUILDING CODE	LONGITUDE: -79.07085	(1) SQUID(S), (1) 0.96" 6 AWG 6 DC POWER TRUNK(S), AND (1) 0.41"	C-101	DETAILED SITE PLAN	1	05/14/25	SSP
4. CITY/COUNTY ORDINANCES	GROUND ELEVATION: 380' AMSL			-			
	ZONING INFORMATION:	EXISTING (3) RRU(s), (2) SQUID(S), (1) 0.39" FIBER TRUNK(S), (2) 0.78" 8 AWG 6 DC POWER TRUNK(S), (2) 1.24" 4 AWG 6 DC POWER	C-102	DETAILED EQUIPMENT LAYOUT	0	05/02/25	ANM
PARCEL PRC <u>TOWER OWNER:</u> AMERICAN TOWER	JURISDICTION: HARNETT COUNTY	TRUNK(S), (5) 2-1/4" COAX CABLE(S), AND (1) 3/8" RET CONTROL CABLE(S) TO REMAIN.	C-201	TOWER ELEVATION	0	05/02/25	ANM
	PARCEL ID: 9575-86-9090.000	GROUND WORK: REMOVE (1) ALPHA TE45V2 POWER PLANT(S). INSTALL (1) ODN512 POWER PLANT(S), (1) FLX16 DOOR UPGRADE(S), (9) -48V RECTIFIER(S), (7) -58V CONVERTER(S), (4) POWERSAFE SBS 170F BATTERY(IES), (1) DC12-48-60-0-25E-SS(S), (1) -58V CONVERTER SHELF(VES), (1) #6 TELCOFLEX CABLE(S), (1) 6672 BBU(S), (6) VERTIV 50A DC BREAKER(S), (3) ASA 4494 B14/B29 DC	C-401	ANTENNA INSTALLATION	0	05/02/25	ANM
	PROJECT TEAM		C-402	ANTENNA SCHEDULE	0	05/02/25	ANM
			C-501	CONSTRUCTION DETAILS	0	05/02/25	ANM
	TOWER OWNER: APPLICANT:		E-101	ELECTRICAL DETAILS	1	05/14/25	SSP
	AMERICAN TOWER AT&T MOBILITY 10 PRESIDENTIAL WAY		E-102	ELECTRICAL DETAILS	1	05/14/25	SSP
	WOBURN, MA 01801		E-103	GROUNDING PLAN	1	05/14/25	SSP
UTILITY COMPANIES		BREAKER(S).	E-501	GROUNDING DETAILS	1	05/14/25	SSP
POWER COMPANY: CENTRAL EMC PHONE: (919) 774-4900	ENGINEER: PROPERTY OWNER: TEP ENGINEERING, PLLC RAGLAND JOHN T	PROJECT NOTES	R-601 - R-614	SUPPLEMENTAL			
TELEPHONE COMPANY: VERIZON PHONE: (800) 837-4966	326 TRYON RD1575 MINTER SCHOOL RDRALEIGH, NC 27603SANFORD, NC 27332-2486	THE FACILITY IS UNMANNED. A TECHNICIAN WILL VISIT THE SITE APPROXIMATELY ONCE A MONTH FOR ROUTINE INSPECTION AND MAINTENANCE. THE PROJECT WILL NOT RESULT IN ANY SIGNIFICANT LAND					
Know what's below. Call before you dig.	PROJECT LOCATION DIRECTIONS	DISTURBANCE OR EFFECT OF STORM WATER DRAINAGE. 4. NO SANITARY SEWER, POTABLE WATER OR TRASH DISPOSAL					
	FROM RALEIGH: TAKE I-440 (OUTER BELTLINE) TO HWY US 1 SOUTH. TAKE EXIT 421/87 SOUTH (DUNN/GREENSBORO). TAKE A RIGHT OFF THE EXIT AND TRAVEL APPROX. 4.8 MILES. BEAR RIGHT AT THE FORK (HWY 87 SOUTH FAYETTEVILLE). TRAVEL FOR ABOUT 7 MILES AND MAKE A LEFT ONTO BUFFALO LAKE ROAD (CAROLINA TRACE ENTRANCE). TAKE ANOTHER LEFT BEFORE THE FIRE STATION. DRIVE PAST THE TRAILER PARK AND ENTER THROUGH DIRT ROAD.	 IS REQUIRED. HANDICAP ACCESS IS NOT REQUIRED. HANDICAP ACCESS IS NOT REQUIRED. THE PROJECT DEPICTED IN THESE PLANS QUALIFIES AS AN ELIGIBLE FACILITIES REQUEST ENTITLED TO EXPEDITED REVIEW UNDER 47 U.S.C. § 1455(A) AS A MODIFICATION OF AN EXISTING WIRELESS TOWER THAT INVOLVES THE COLLOCATION, REMOVAL, AND/OR REPLACEMENT OF TRANSMISSION EQUIPMENT THAT IS NOT A SUBSTANTIAL CHANGE UNDER CFR § 1.61000 (B)(7). 					





LOCATION MAP



GENERAL CONSTRUCTION NOTES:

- OWNER FURNISHED MATERIALS, AT&T MOBILITY "THE COMPANY" WILL PROVIDE AND THE CONTRACTOR WILL INSTALL
 - BTS EQUIPMENT FRAME (PLATFORM) AND ICEBRIDGE SHELTER (GROUND BUILD/CO-LOCATE ONLY)
 - AC/TELCO INTERFACE BOX (PPC)
 - ICE BRIDGE (CABLE TRAY WITH COVER) (GROUND BUILD/CO-LOCATE ONLY, GC TO FURNISH AND INSTALL FOR ROOFTOP INSTALLATION)
 - D. TOWERS, MONOPOLES
 - TOWER LIGHTING
 - GENERATORS & LIQUID PROPANE TANK
 - ANTENNA STANDARD BRACKETS, FRAMES AND PIPES FOR MOUNTING ANTENNAS (INSTALLED BY OTHERS)
 - TRANSMISSION LINE
 - TRANSMISSION LINE JUMPERS
 - TRANSMISSION LINE CONNECTORS WITH WEATHERPROOFING KITS
 - TRANSMISSION LINE GROUND KITS
 - HANGERS
 - HOISTING GRIPS O. BTS EQUIPMENT
- 2 THE CONTRACTOR IS RESPONSIBLE TO PROVIDE ALL OTHER MATERIALS FOR THE COMPLETE INSTALLATION OF THE SITE INCLUDING, BUT NOT LIMITED TO, SUCH MATERIALS AS FENCING, STRUCTURAL STEEL SUPPORTING SUB-FRAME FOR PLATFORM, ROOFING LABOR AND MATERIALS GROUNDING RINGS GROUNDING WIRES COPPER-CLAD OR XIT CHEMICAL GROUND ROD(S), BUSS BARS, TRANSFORMERS AND DISCONNECT SWITCHES WHERE APPLICABLE, TEMPORARY ELECTRICAL POWER, CONDUIT, LANDSCAPING COMPOUND STONE, CRANES, CORE DRILLING, SLEEPERS AND RUBBER MATTING, REBAR, CONCRETE CAISSONS, PADS AND/OR AUGER MOUNTS, MISCELLANEOUS FASTENERS, CABLE TRAYS, NON-STANDARD ANTENNA FRAMES AND ALL OTHER MATERIAL AND LABOR REQUIRED TO COMPLETE THE JOB ACCORDING TO THE DRAWINGS AND SPECIFICATIONS. IT IS THE POSITION OF AT&T MOBILITY TO APPLY FOR PERMITTING AND CONTRACTOR RESPONSIBLE FOR PICKUP AND PAYMENT OF REQUIRED PERMITS
- ALL WORK SHALL CONFORM TO ALL CURRENT APPLICABLE FEDERAL, STATE, AND LOCAL CODES, INCLUDING ANSI/EIA/TIA-222, AND COMPLY WITH ATC CONSTRUCTION SPECIFICATIONS
- CONTRACTOR SHALL CONTACT LOCAL 811 FOR IDENTIFICATION OF UNDERGROUND UTILITIES PRIOR TO START OF CONSTRUCTION
- CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING ALL REQUIRED INSPECTIONS.
- ALL DIMENSIONS TO, OF, AND ON EXISTING BUILDINGS, DRAINAGE STRUCTURES, AND SITE IMPROVEMENTS SHALL BE VERIFIED IN FIELD BY CONTRACTOR WITH ALL DISCREPANCIES REPORTED TO THE ENGINEER.
- DO NOT CHANGE SIZE OR SPACING OF STRUCTURAL ELEMENTS 7
- DETAILS SHOWN ARE TYPICAL; SIMILAR DETAILS APPLY TO SIMILAR CONDITIONS UNLESS 8
- THESE DRAWINGS DO NOT INCLUDE NECESSARY COMPONENTS FOR CONSTRUCTION 9. SAFETY WHICH SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR
- CONTRACTOR SHALL BRACE STRUCTURES UNTIL ALL STRUCTURAL ELEMENTS NEEDED 10. FOR STABILITY ARE INSTALLED. THESE ELEMENTS ARE AS FOLLOWS: LATERAL BRACING, ANCHOR BOLTS, ETC.
- CONTRACTOR SHALL DETERMINE EXACT LOCATION OF EXISTING UTILITIES. GROUNDS 11. DRAINS, DRAIN PIPES, VENTS, ETC, BEFORE COMMENCING WORK
- INCORRECTLY FABRICATED, DAMAGED, OR OTHERWISE MISFITTING OR NONCONFORMING MATERIALS OR CONDITIONS SHALL BE REPORTED TO THE AT&T 12. MOBILITY REP PRIOR TO REMEDIAL OR CORRECTIVE ACTION, ANY SUCH REMEDIAL ACTION SHALL REQUIRE WRITTEN APPROVAL BY THE AT&T MOBILITY REP PRIOR TO PROCEEDING
- EACH CONTRACTOR SHALL COOPERATE WITH THE AT&T MOBILITY REP, AND 13. COORDINATE HIS WORK WITH THE WORK OF OTHERS
- 14. CONTRACTOR SHALL REPAIR ANY DAMAGE CAUSED BY CONSTRUCTION OF THIS ROJECT TO MATCH EXISTING PRE-CONSTRUCTION CONDITIONS TO THE SATISFACTION OF THE AT&T MOBILITY CONSTRUCTION MANAGER.
- 15 ALL CABLE/CONDUIT ENTRY/EXIT PORTS SHALL BE WEATHERPROOFED DURING INSTALLATION USING A SILICONE SEALANT
- WHERE EXISTING CONDITIONS DO NOT MATCH THOSE SHOWN IN THIS PLAN SET, 16. CONTRACTOR SHALL NOTIFY THE AT&T MOBILITY REP AND ENGINEER OF RECORD ΙΜΜΕΡΙΔΤΕΙ Υ
- CONTRACTOR SHALL ENSURE ALL SUBCONTRACTORS ARE PROVIDED WITH A COMPLETE AND CURRENT SET OF DRAWINGS AND SPECIFICATIONS FOR THIS PROJECT. 17.
- CONTRACTOR SHALL REMOVE ALL RUBBISH AND DEBRIS FROM THE SITE AT THE END OF 18. FACH DAY
- 19. CONTRACTOR SHALL COORDINATE WORK SCHEDULE WITH AMERICAN TOWER CORPORATION (ATC) AND TAKE PRECAUTIONS TO MINIMIZE IMPACT AND DISRUPTION OF OTHER OCCUPANTS OF THE FACILITY.
- CONTRACTOR SHALL FURNISH AT&T MOBILITY AND AMERICAN TOWER CORPORATION 20. (ATC) WITH A PDF MARKED UP AS-BUILT SET OF DRAWINGS UPON COMPLETION OF WORK

PRIOR TO SUBMISSION OF BID, CONTRACTOR SHALL COORDINATE WITH AT&T MOBILITY 21. REP TO DETERMINE WHAT, IF ANY, ITEMS WILL BE PROVIDED. ALL ITEMS NOT PROVIDED SHALL BE PROVIDED AND INSTALLED BY THE CONTRACTOR. CONTRACTOR WILL INSTALL ALL ITEMS

PROVIDED

PRIOR TO SUBMISSION OF BID. CONTRACTOR SHALL COORDINATE WITH AT&T MOBILITY 22 REP TO DETERMINE IF ANY PERMITS WILL BE OBTAINED BY CONTRACTOR. ALL REQUIRE PERMITS NOT OBTAINED BY AT&T MOBILITY MUST BE OBTAINED, AND PAID FOR, BY THE CONTRACTO

23. CONTRACTOR SHALL INSTALL ALL SITE SIGNAGE IN ACCORDANCE WITH AT&T MOBILITY SPECIFICATIONS AND REQUIREMENTS.

CONTRACTOR SHALL SUBMIT ALL SHOP DRAWINGS TO AT&T MOBILITY FOR REVIEW AND APPROVAL PRIOR TO FABRICATION.

25 ALL FOUIPMENT SHALL BE INSTALLED ACCORDING TO MANUFACTURER'S SPECIFICATIONS AND LOCATED ACCORDING TO AT&T MOBILITY SPECIFICATIONS, AND AS SHOWN IN THESE PLANS.

26. THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE PROJECT DESCRIBED HEREIN. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL THE CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES AND PROCEDURES AND FOR COORDINATING ALL PORTIONS OF THE WORK UNDER THE CONTRACT

CONTRACTOR SHALL NOTIFY AT&T MOBILITY, REP A MINIMUM OF 48 HOURS IN ADVANCE 27. CONTING CONCRETE OR BACKFILLING ANY UNDERGROUND UTILITIES, FOUNDATIONS OR OF POURING CONCRETE OR BACKFILLING ANY UNDERGROUND UTILITIES, FOUNDATIONS OR SEALING ANY WALL, FLOOR OR ROOF PENETRATIONS FOR ENGINEERING REVIEW AND

28. WHEN THE PROJECT SCOPE REQUIRES THE USE OF THE SAFETY CLIMB, THE GENERAL CONTRACTOR SHALL ENSURE THE SAFETY CLIMB IS FREE OF OBSTRUCTIONS, NOT RUBBING ON OR TRAPPED BY ANY INSTALLED CUSTOMER EQUIPMENT. IS VISUALLY TAUT. MEETS MANUFACTURER INSTALLATION SPECIFICATIONS, AND IS FIRMLY SECURED AT ALL CABLE GUIDE LOCATIONS UPON PROJECT COMPLETION.

29. COMPLETION OF PROJECT SHALL NOT OBSTRUCT, TRAP, LOOSEN, OR OTHERWISE CAUSE FAILURE TO MEET MANUFACTURER INSTALLATION REQUIREMENTS FOR THE SAFETY

CONTRACTOR SHALL BE RESPONSIBLE FOR SITE SAFETY INCLUDING COMPLIANCE WITH ALL APPLICABLE OSHA STANDARDS AND RECOMMENDATIONS AND SHALL PROVIDE ALL NECESSARY SAFETY DEVICES INCLUDING PPE AND PPM AND CONSTRUCTION DEVICES SUCH AS WELDING AND FIRE PREVENTION, TEMPORARY SHORING, SCAFFOLDING, TRENCH BOXES/SLOPING, BARRIERS, ETC.

31. THE CONTRACTOR SHALL PROTECT AT HIS OWN EXPENSE, ALL EXISTING FACILITIES AND SUCH OF HIS NEW WORK LIABLE TO INJURY DURING THE CONSTRUCTION PERIOD. ANY DAMAGE CAUSED BY NEGLECT ON THE PART OF THIS CONTRACTOR OR HIS REPRESENTATIVES, OR BY THE ELEMENTS DUE TO NEGLECT ON THE PART OF THIS CONTRACTOR OR HIS REPRESENTATIVES, EITHER TO THE EXISTING WORK, OR TO HIS WORK OR THE WORK OF ANY OTHER CONTRACTOR, SHALL BE REPAIRED AT HIS EXPENSE TO THE OWNER'S SATISFACTION.

ALL WORK SHALL BE INSTALLED IN A FIRST CLASS, NEAT AND WORKMANLIKE MANNER BY MECHANICS SKILLED IN THE TRADE INVOLVED. THE QUALITY OF WORKMANSHIP SHALL BE SUBJECT TO THE APPROVAL OF THE AT&T MOBILITY REP. ANY WORK FOUND BY THE AT&T MOBILITY REP TO BE OF INFERIOR QUALITY AND/OR WORKMANSHIP SHALL BE REPLACED AND/OR REWORKED AT CONTRACTOR EXPENSE UNTIL APPROVAL IS OBTAINED.

IN ORDER TO ESTABLISH STANDARDS OF QUALITY AND PERFORMANCE, ALL TYPES OF MATERIALS LISTED HEREINAFTER BY MANUFACTURER'S NAMES AND/OR MANUFACTURER'S CATALOG NUMBER SHALL BE PROVIDED BY THESE MANUFACTURERS AS SPECIFIED.

AT&T MOBILITY FURNISHED EQUIPMENT SHALL BE PICKED-UP AT THE AT&T MOBILITY WAREHOUSE, NO LATER THAN 48HR AFTER BEING NOTIFIED INSURED, STORED, UNCRATE, PROTECTED AND INSTALLED BY THE CONTRACTOR WITH ALL APPURTENANCES REQUIRED TO PLACE THE EQUIPMENT IN OPERATION, READY FOR USE, THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE EQUIPMENT AFTER PICKING IT UP.

35. AT&T MOBILITY OR HIS ARCHITECT/ENGINEER RESERVES THE RIGHT TO REJECT ANY EQUIPMENT OR MATERIALS WHICH, IN HIS OWN OPINION ARE NOT IN COMPLIANCE WITH THE CONTRACT DOCUMENTS, EITHER BEFORE OR AFTER INSTALLATION AND THE EQUIPMENT SHALL BE REPLACED WITH EQUIPMENT CONFORMING TO THE REQUIREMENTS OF THE CONTRACT DOCUMENTS BY THE CONTRACTOR AT NO COST TO AT&T MOBILITY OR THEIR ARCHITECT/ENGINEER

SPECIAL CONSTRUCTION ANTENNA INSTALLATION NOTES:

1 WORK INCLUDED:

В.

C.

A. ANTENNA AND COAXIAL CABLES ARE FURNISHED BY AT&T MOBILITY UNDER A SEPARATE CONTRACT. THE CONTRACTOR SHALL ASSIST ANTENNA INSTALLATION CONTRACTOR IN TERMS OF COORDINATION AND SITE ACCESS. ERECTION SUBCONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF PERSONNEL

- INSTALL ANTENNAS AS INDICATED ON DRAWINGS AND AT&T MOBILITY SPECIFICATIONS.
- INSTALL GALVANIZED STEEL ANTENNA MOUNTS AS INDICATED ON DRAWINGS.
- INSTALL FURNISHED GALVANIZED STEEL OR ALUMINUM WAVEGUIDE. D

E CONTRACTOR SHALL PROVIDE FOUR (4) SETS OF SWEEP TESTS USING ANRITZU-PACKARD 8713B RF SCALAR NETWORK ANALYZER. SUBMIT FREQUENCY DOMAIN REFLECTOMETER(FDR) TESTS RESULTS TO THE PROJECT MANAGER, SWEEP TESTS SHALL BE AS PER ATTACHED RFS "MINIMUM FIELD TESTING RECOMMENDED FOR ANTENNA AND HELIAX COAXIAL CABLE SYSTEMS" DATED 10/5/93. TESTING SHALL BE PERFORMED BY AN INDEPENDENT TESTING SERVICE AND BE BOUND AND SUBMITTED WITHIN ONE WEEK OF WORK COMPLETION.

INSTALL COAXIAL CABLES AND TERMINATING BETWEEN ANTENNAS AND EQUIPMENT PER MANUFACTURER'S RECOMMENDATIONS, WEATHERPROOF ALL CONNECTIONS BETWEEN THE

ANTENNA AND EQUIPMENT PER MANUFACTURER'S REQUIREMENTS. TERMINATE ALL COAXIAL CABLE THREE (3) FEET IN EXCESS OF ENTRY PORT LOCATION UNLESS OTHERWISE STATED.

G. ANTENNA AND COAXIAL CABLE GROUNDING:

ALL EXTERIOR #6 GREEN GROUND WIRE "DAISY CHAIN" CONNECTIONS ARE TO BE WEATHER SEALED WITH RFS CONNECTORS/SPLICE WEATHERPROOFING KIT #221213 OR FOUAL

ALL COAXIAL CABLE GROUNDING KITS ARE TO BE INSTALLED ON STRAIGHT RUNS OF COAXIAL CABLE (NOT WITHIN BENDS



ALL DISCREPANCIES FROM WHAT IS SHOWN ON THESE CONSTRUCTION DRAWINGS SHALL BE COMMUNICATED TO ATC ENGINEERING IMMEDIATELY FOR CORRECTION OR RE-DESIGN. FAILURE TO COMMUNICATE DIRECTLY WITH ATC ENGINEERING OR ANY CHANGES FROM THE DESIGN CONDUCTED WITHOUT PRIOR APPROVAL FROM ATC ENGINEERING SHALL BE THE SOLE **RESPONSIBILITY OF THE GENERAL CONTRACTOR.**

2018 APPENDIX B **BUILDING CODE SUMMARY FOR ALL COMMERCIAL PROJECTS**


(EXCEPT 1 AND 2-FAMILY DWELLINGS AND TOWNHOUSES)
(Reproduce the following data on the building plans sheet 1 or 2)

Name of Project:					
Address: 2305 NC 87				-	de
	d Agent: AARON DIAL				AaronDial@AmericanTower.com
Owned By:		y/County		Sta	te
Code Enforcement	nt Jurisdiction: 🗌 City	У	County HAR	NETT Sta	te
CONTACT:					
DESIGNER Architectural	FIRM	NAME	LICENSE #	TELEPHONE # ()	E-MAIL
Civil	TEP ENGINEERING, PLLC	Joshua H. Carden	048226	() 661-6351	jcarden@tepgroup.net
Electrical	TEP ENGINEERING, PLLC	Mark S. Quakenbush	042109	(<u>919</u>)661-6351	mquakenbush@tepgroup.net
Fire Alarm				()	
Plumbing				()	
Mechanical	ipe			()	
Structural	-				
	>5' High			()	
Other				()	
("Other" should i	nclude firms and individua	als such as truss, p	precast, pre-engine	ered, interior desi	gners, etc.)
CONSTRU RENOVAT	☐ 1 st Tin ☐ Shell/4 procec ☐ Phased possib ING BUILDING CODE: CTED: (date)	he Interior Comple Core - Contact the lures and requiren d Construction - S le additional proce EXISTING: [Alteration: [CURREN PROPOS 4.5): Current: []	etion blocal inspection j hents hell/Core- Contac edures and require Prescriptive Level I Historic Proper NT OCCUPANC SED OCCUPANC	t the local inspect ments Repair Level II rty Y(S) (Ch. 3): CY(S) (Ch. 3): I [] IV	ssible additional ion jurisdiction for Chapter 14 Level III Change of Use
BASIC BUILDI Construction Ty (check all that ap Sprinklers: Standpipes: Fire District: Special Inspectio	pe: I-A ply) I-B No Partial Ye No Yes Class No Yes Class	I III Flood Hazard A Yes (Contact th		t Dry Ves jurisdiction for a	□ V-A □ V-B PA 13D dditional

	Gross Building Area Table	
Floor	EXISTING (SQ FT) NEW (SQ FT)	SUB-TOTAL
3 rd Floor	N/A	
2 nd Floor	N/A N/A	
Mezzanine 1 st Floor	225 SQ FT EQUIPMENT PAD	
Basement	N/A	
TOTAL	225 SQ FT EQUIPMENT PAD	
Buimour Ocour	ALLOWABLE AREA	alaat ana Salaat ana Salaat ana
	ancy Classification(s): <u>Select one</u> <u>Select</u>	elect one <u>Select one</u> <u>Select one</u>
Assembly	□ A-1 □ A-2 □ A-3 □ A-4 □ A-5	
Business Educational		
Factory	□ F-1 Moderate □ F-2 Low	
Hazardous	H-1 Detonate H-2 Deflagrate H-3 Combust	H 4 Health 🗌 H 5 HPM
	\square I-1 Condition \square 1 \square 2	
mstitutional	\square I-2 Condition \square 1 \square 2	
	$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	
Mercantile		
Residential	\square R-1 \square R-2 \square R-3 \square R-4	
Storage	S-1 Moderate S-2 Low High-piled	
2101080	Parking Garage Open Enclosed Repair Garage	ge
Utility and N	Miscellaneous	>-
•	pancy Classification(s): NA	
Incidental Uses		
	hapter 4 – List Code Sections): N/A	
	ons: (Chapter 5 – List Code Sections): N/A	
-	$\begin{array}{c c} \text{Inst Code Sections).} & \underline{\text{MA}} \\ \text{Icy:} & \square \text{ No } & \square \text{ Yes } & \text{Separation:} \\ \underline{\text{max}} & Hr. \\ \end{array}$	Examples
∐ Non-	-Separated Use (508.3) - The required type of construction fo	
		ons for each of the applicable The most restrictive type of
	construction, so determi	to the entire building.
	arated Use (508.4) - See below for area calcul be such that the sum of the su	y, the area of the occupancy shall tual floor area of each use divided by
	the allowable floor	not exceed 1.
1-4	al Area of Occupancy A +	$B \leq 1$
	arated Use (508.4) - See below for area calcul be such that the sum of the allowable floor al Area of Occupancy A + A A A A A A A A A A A A A A A A A	$\frac{D}{R}$
11110 1140		
	+ 	$+ \dots = _ \le 1.00$
2018 NC Adminie	strative Code and Policies	
No Aumina		

	Gr	oss Building Area Table	
Floor	EXISTING (SQ FT)	NEW (SQ FT)	SUB-TOTAL
3 rd Floor	N/A		
2 nd Floor	N/A		
Mezzanine	N/A		
l st Floor	225 SQ FT EQUIPMENT PAD		
Basement	N/A		
TOTAL	225 SQ FT EQUIPMENT PAD		
	P	ALLOWABLE AREA	
rimary Occupar	cy Classification(s): <u>Select</u>	one Select one Select one	e <u>Select one</u> <u>Select one</u> <u>Select one</u>
Assembly [A-1 A-2 A-3	🗌 A-4 🗌 A-5	
Business [
Educational [
Factory [F-1 Moderate F-2 Lo)W	
Hazardous [H-1 Detonate H-2 D	eflagrate 🗌 H-3 Combust	H-4 Health H-5 HPM
Institutional [I-1 Condition 1	2	
[I-2 Condition 1] 2	
[I-3 Condition 1	2 3 4	5
[I-4		
Mercantile [
Residential [🗌 R-4	
Storage [S-1 Moderate S-2 I	Low High-piled	
-	Parking Garage 🔲 Open		Jarage
Utility and Mi		1	-
•	ancy Classification(s): <u>N/A</u>		
cidental Uses (7			
·	pter 4 – List Code Sections	s)• N/A	
	s: (Chapter 5 – List Code S		
	y: \square No \square Yes		Execution
		_	-
🗌 Non-S	appl	ying the height and area l'	
Separa	ated Use (508.4) - See below be such th the allowa	at the sum of 🔊 🔊	y, the area of the occupancy shall ctual floor area of each use divided by nall not exceed 1.
	<u>Area of Occupancy A</u> + Area of Occupancy A	R Occup	$\frac{ncy B}{ancy B} \leq 1$
	+	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	$ + \leq 1.00$
		\checkmark	
)18 NC Administr	ative Code and Policies		



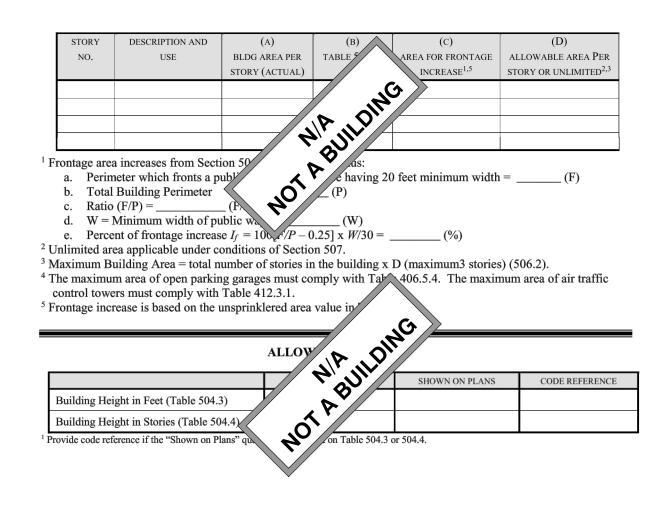

	FIRE]	PROTE	CTION REQU	JIREMENT	S		
BUILDING ELEMENT	FIRE SEPARATION DISTANCE (FEET)	REQ'D	RATING PROVIDY (W/ REP NIAJILD ABUILD	DETAIL # AND TT #	DESIGN # FOR RATED ASSEMBLY	SHEET # FOR RATED PENETRATION	SHEET # FOR RATED JOINTS
Structural Frame,				N/			
including columns, girders,			Q, q				
trusses		-//	41. IIV	1			
Bearing Walls			` & /-				
Exterior North			P	_			
East		റ്	` //				
West	\longrightarrow	4	//				
South			1				
Interior				\sim			
Nonbearing Walls and Partitions							
Exterior walls				(1)			
North				40/-			
East				·//			
West			A1. 11				
South			$\cdot \circ$				
Interior walls and partitions		/	\				
Floor Construction Including supporting beams and joists		NO	NIA JILD				
Floor Ceiling Assembly							
Columns Supporting Floors							
Roof Construction, including supporting beams and joists							
Roof Ceiling Assembly							
Columns Supporting Roof							
Shaft Enclosures - Exit							
Shaft Enclosures - Other							
Corridor Separation Occupancy/Fire Barrier Separat	ion						
Party/Fire Wall Separation	1011						
Smoke Barrier Separation				1			
Smoke Partition				1			
Tenant/Dwelling Unit/ Sleeping Unit Separation							
Incidental Use Separation							
Indicate section number perm	itting reduction						

2018 NC Administrative Code and Policies

AMERICAN TOW PLANS PREPARED BY:	SIN [®]
	P
TEP ENGINEERING, PLLC 326 TRYON ROAD RALEIGH, NC 27603-3530 OFFICE: (919) 661-6351 www.tepgroup.net N.C. LICENSE #P-1403 TEP IS A FAMILY OF COMPANIES LICENSED TO PROVIDE DIF DIFFERENT JURISDICTIONS DEPENDING ON THE JURISDICTIONS DIFFERENT JURISDICTIONS DEPENDING ON THE JURISDICTIONS DIFFERENT JURISDICTIONS DEPENDING ON THE JURISDICTIONS COMPANY.TEP ENGINE CAROLINA PROFESSIONAL LIMITED LABILITY OCMPANY. LIC. A NEW YORK PROFESSIONAL LIMITED LABILITY CONTRACTOR SERVICES AND REP ROVIDED BY TEP OPCC LIMITED LABILITY COMPANY. WE ACQUIRE THE REQUISIT STATE. ADDITIONAL INFORMATION CAN BE OBTAINED FROM	TION, PROFESSIONAL VIDED BY TEP OPCO ERING, LLC, A NORTH R M&H ENGINEERING, COMPANY. GENERAL ULC, A DELAWARE E LICENSES IN EACH
REV. DESCRIPTION E	BY DATE
100% CONSTRUCTION A 100% CONSTRUCTION S	
$\overline{\bigtriangleup}$	
ATC SITE NUMBER: 21274	Ļ
ATC SITE NAME: SPOUT SPRING	GS NC1
AT&T MOBILITY SITE NUMB	ER:
SINC006548	
AT&T MOBILITY SITE NAM	≣:
368-218	
SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332	
	P-1403
TEP Engineering, PLLC TH CARO, FESSION SEAL 043134	All And Asia
SEAL:	05/14/25
STA 🥞	ЯТ
DATE DRAWN: 05/14/25	
ATC JOB NO: 14884053	
CUSTOMER NAME: 368-218 CUSTOMER ID: SINC006548	
APPENDIX B	
SHEET NUMBER:	REVISION:
G-004	1

PERCENTAGE OF WALL O' NG CALCULATIONS Fire Separation Distance Degree of openings E area Actual shown on plans	ACCESSIBLE DWELLU'G UNITS (SECTION 1
FIRE SEPARATION DISTANCE (FEET) FROM PROPERTY LINES DEGREE OF OPENINGS PROTECTION (TABLE 705.8) PROTECTION (TABLE 705.8) PROTECTION (%) (%) PROTECTION (%)	Total Units Accessible Units Type A Units Type A Units Type A Units Required Units Provided Required Inits
LIFE SA Y Emergency Lighting: No Exit Signs: No Yes Fire Alarm: No Yes Smoke Detection Systems: No Panic Hardware: No	LOT OR PARKING AREA TOTAL # OF PARKING SI REQUIRED # OF ACCESSIBLE SPACES PROVIDED Negular with S' ACCESS AISLE VAN SPACES WITH 132" ACCESS VAN SPACES WITH 132" ACCESS TOTAL Image: Constraint of the second s
LIFE SAFETY PLAN REQUIREMENTS Life Safety Plan Sheet #:	PLUMBING FIXTURE TABLE WEMENTS Image: Construction of the structure of the stru

2018 NC Administrative Code and Policies


UNITS				
В	TYPE B		Т	OTAL
	UNITS	A		SIBLE UNITS
QUIRED	Provided		PR	OVIDED
		1		
G				
BLE SPACES P	ROVIDED			TOTAL #
VAN SPA	CES WITH			CCESSIBLE
2" ACCESS	8' ACCES			PROVIDED
AISLE	AISLE			
	queuma			
ZS ZE UNISEX	SHOWERS /TUBS	REGUI		FOUNTAINS
SE ONISEA	, , , 1000	REGU	LAK	ACCESSIBLE
S				
DPI, DHH	IS, etc., desc	ribe b	elow)
	<u>.</u>			



The following data shall be considered minimum and any and any project information for the plan data sheet. If performance method, state the annual energy cost proposed design. Existing building envelope complies with the required to meet the energy code shall project information for the plan data sheet. The rence design vs annual energy cost for the proposed design. Existing building envelope complies with the required to meet the energy cost for the proposed design. Existing building envelope complies with the required to meet the energy cost for the proposed design. Existing building envelope complies with the required to meet the energy cost for the proposed design. Existing building envelope complies with the required to meet the energy cost for the proposed design. Existing building envelope complies with the required to meet the energy cost for the proposed design. Existing building envelope complies with the required to meet the energy cost for the proposed design. Existing building envelope complies with the required to meet the energy cost for the proposed design. Existing building envelope complies with the required to meet the energy cost for the proposed design. Existing building envelope complies with the required to meet the energy cost for the proposed design. Existing building envelope complex with the required to meet the energy cost for the proposed design. Existing building envelope complex with the required to meet the energy cost for the proposed design. Existing building envelope complex with the required to meet the energy cost for the proposed design. Existing building envelope complex with the required to meet the energy cost for the proposed design. Existing building envelope complex with the required to meet the energy cost for the proposed design. Existing building envelope complex with the required to meet the energy cost for the proposed design. Existing building envelope complex with the required tother envelope complex with the required to the envelope complex w	Live Loads: Roof psf Mezzanine psf Floor psf Ground Snow Load:
Method of Compliance: Energy de Performance Prescriptive ASHRAE 90.1 Performance Prescriptive (If "Other" specify source here) Prescriptive THERMAL ENVELOPE (Prescriptive method only) Roof/ceiling Assembly (each assembly) Description of assembly:	Mezzanine psf Floor psf Ground Snow Load:psf
Method of Compliance: Energy de Performance Prescriptive ASHRAE 90.1 Performance Prescriptive (If "Other" specify source here) Prescriptive THERMAL ENVELOPE (Prescriptive method only) Roof/ceiling Assembly (each assembly) Description of assembly:	
(If "Other" specify source here) THERMAL ENVELOPE (Prescriptive method only) Roof/ceiling Assembly (each assembly) Description of assembly: U-Value of total assembly:	Wind Load: Basic Wind Speed Exposure Category SCE-7) SEISMIC DESIGN CATEGORY: NALILITIE D Provide the following Seismic Design P Risk Category (Table 1604 Nalilitie D
Roof/ceiling Assembly (each assembly) Description of assembly: U-Value of total assembly:	SEISMIC DESIGN CATEGORY:
Description of assembly: U-Value of total assembly:	Provide the following Seismic Design Pr Risk Category (Table 1604
R-Value of insulation:	Spectral Response Accel %g S1%g
Skylights in each assembly:	Site Classification (ASCE 7)
U-Value of skylights in each assemb ¹	Data Source: dd Test Presumptive Historical I Basic structural system Bearing Wall Dual w/Special Mor
Exterior Walls (each assembly)	Building Frame Dual w/Intermediate
Exterior Walls (each assembly) Description of assembly: U-Value of total assembly: R-Value of insulation: Openings (windows or doors - U-Value of assembly Solar heat gain projection for Door R-Va	Image: Simplified Inverted Pendulum Analysis Procedure: Simplified Equivalent Lateral Force Architectural, Mechanical, Components anchored? Yes No
Openings (windows or doors U-Value of assem Solar host gain	LATERAL DESIGN CONTROL: Earthquake Wind
Solar heat gain projection f	SOIL BEARING CAPACITIES:
Door R-Va Walls below grade (each assembly	Field Test (provide copy of test report) psf Presumptive Bearing capacity psf Pile size, type, and capacity
Description of assembly:	
U-Value of total assembly: R-Value of insulation:	
Floors over unconditioned space (each assembly)	
Description of assembly:	
U-Value of total assembly:	
Floors slab on grade	
Description of assembly: U-Value of total assembly: R-Value of insulation: Horizontal/vertical requirement: slab heated:	

2018 NC Administrative Code and Policies

2018 NC Administrative Code and Policies

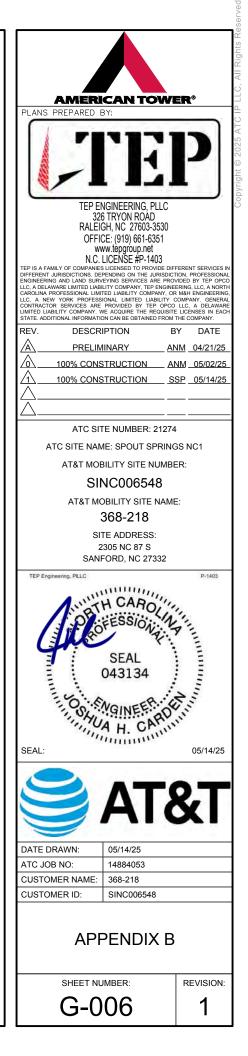

ENERGY SUMMARY ENERGY REQUIREMENTS:	BUILDING CODE SU
The following data shall be considered minimum and any special attribute required to meet the energy code shall also be provided. Each Designer shall furnish the required portions of the project information for the plan data sheet. If performance method, state the annual energy cost for the standard reference design vs annual energy cost for the proposed design.	(PROVIDE O DESIGN LOADS:
Existing building envelope complies with code: No Yes (The remainder of this section is not applicable)	Importance Factors: S S
Exempt Building: No Yes (Provide code or statutory reference)	Live Loads:
	Ν
Climate Zone: 3A 4A 5A	F
Climate Zone: 3A 4A 5A Method of Compliance: Energy Code ASHRAE 90.1 (If "Other NICHTONIC Prescriptive THERMAL ENVELOPE (Prescriptive Roof/ceiling Assembly (each Description of assembly ULValue of total assembly	Ground Snow Load:
(If "Other" (If" (If" (If" (If" (If" (If" (If" (If	Wind Load: Basic Expos
THERMAL ENVELOPE (Prescriptive	Linput
Roof/ceiling Assembly (each	SEISMIC DESIGN CATEGOR
Description of assembly	Provide the following Seismic Design
	Risk Category (Table 1604 Spectral Response Acceler
R-Value of insulation:	
Skylights in each assembly: U-Value of skylight:	Site Classification (ASCE 7 Data Sourc
total square footage of skylights in each assembly:	Basic structural system
Exterior Walls (each assembly)	
Description of assembly:	
U-Value of total assembly:	Analysis Procedure:
R-Value of insulation: Openings (windows or doors with glazing)	Architectural, Mechanical
U-Value of assembly:	LATERAL DESIGN CONTROL:
Solar heat gain coefficient:	
projection factor:	SOIL BEARING CAPACITIES:
Door R-Values:	Field Test (provide copy of Presumptive Bearing capaci
Walls below grade (each assembly)	Pile size, type, and capacity
Description of assembly:	
U-Value of total assembly:	
R-Value of insulation:	
Floors over unconditioned space (each assembly)	
Description of assembly:	
U-Value of total assembly: R-Value of insulation:	
Floors slab on grade	
Description of assembly:	
U-Value of total assembly:	
R-Value of insulation:	
Horizontal/vertical requirement:	
slab heated:	

2018 APPENDIX B DING CODE SUMMARY FOR ALL COMMERCIAL PROJECTS STRUCTURAL DESIGN


(PROVIDE ON THE STRUCTURAL SHEETS IF APPLICABLE)


Importance Factors:	Snow (I _s) Seismic (I _E)				
Live Loads:	Roof Mezzanine Floor		T C		
Ground Snow Load:	ps				
	usic Wind S sposure C		mph (AS	CE-7)	
EISMIC DESIGN CATEGOR	<u>ک</u> ک	в□с	🗌 D		
rovide the following Seismic De Risk Category (Table 16 Spectral Response Acce		□п □Ш Ss%		S1	
Site Classification (ASC Data So	· =	$\square B \square C$ Test $\square Pr$	D Desumptive	E E Histo	F Forical D
Basic structural system Analysis Procedure:	🗌 Buildi	ng Wall ing Frame ent Frame		w/Specia w/Interm rted Pend	nediate ulum
Architectural, Mechani					100
ATERAL DESIGN CONTRO	L: Earthquake	e 🗌 🛛 Wir	nd 🗌		
OIL BEARING CAPACITIES	:				
Field Test (provide copy Presumptive Bearing cap			psf		


2018 NC Administrative Code and Policies

2018 NC Administrative Code and Policies

____%g Data oment Frame ate R/C or Special Steel Dynamic

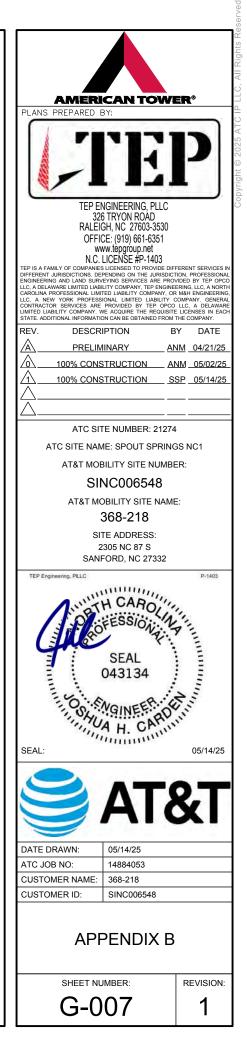

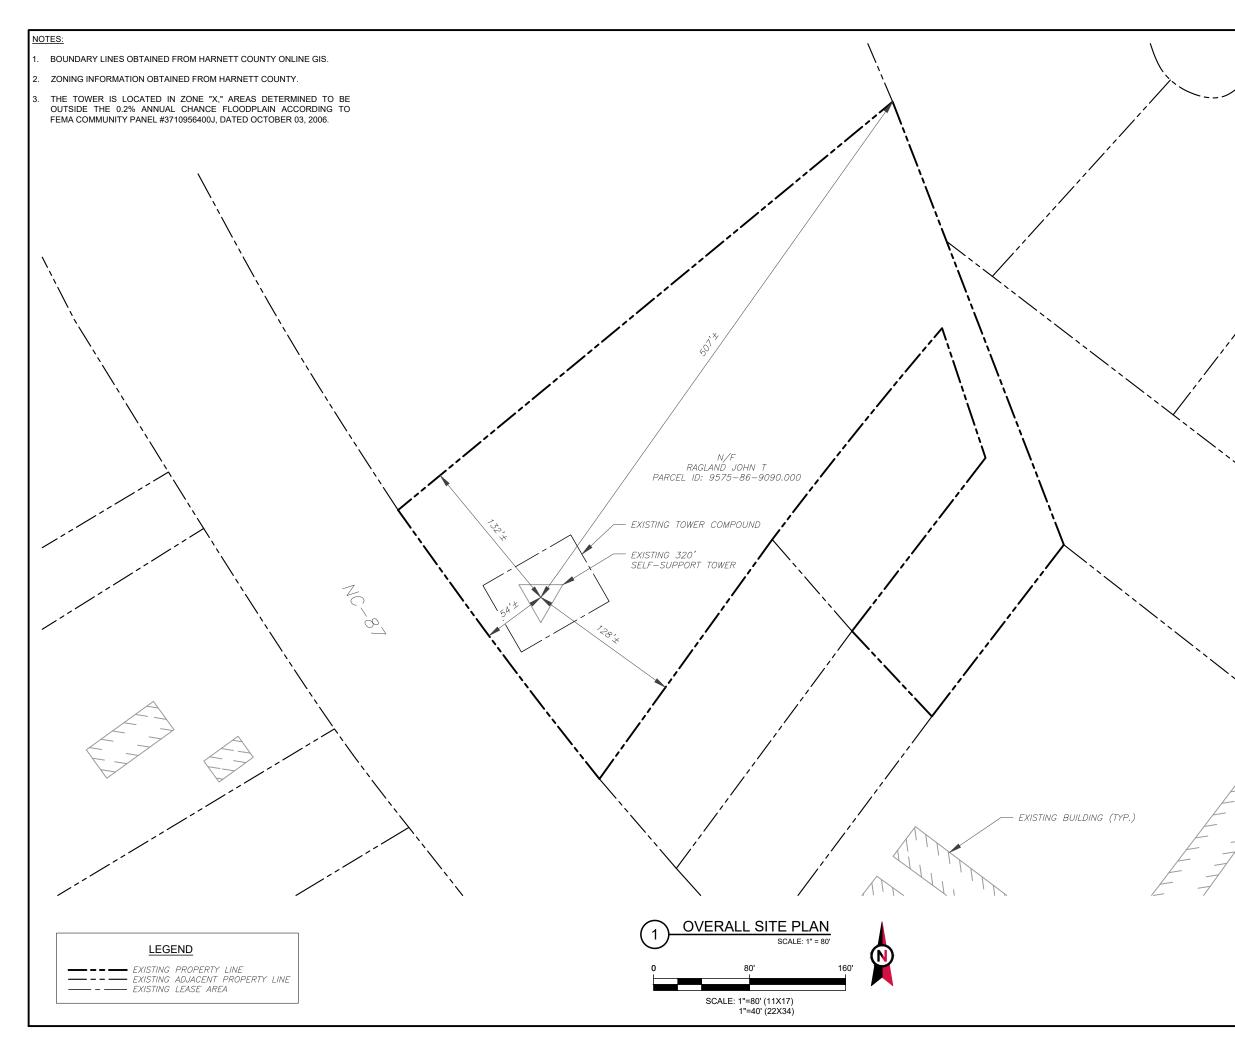

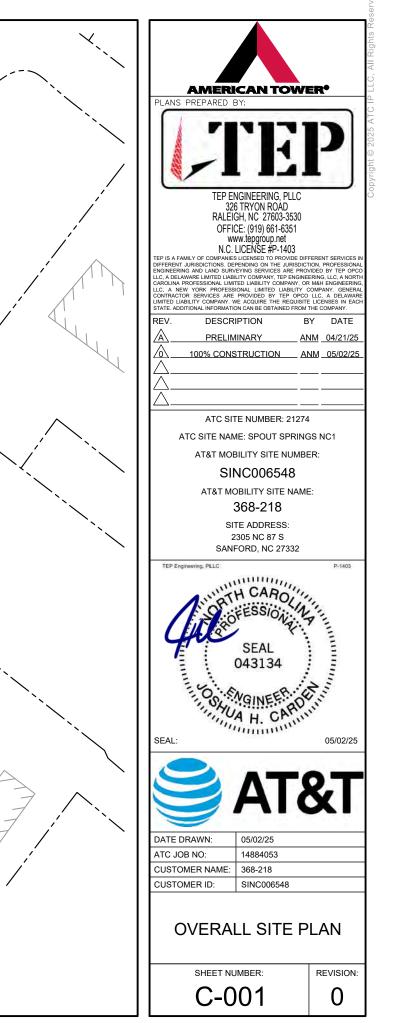


SITE PLAN NOTES:


- I. THIS SITE PLAN REPRESENTS THE BEST PRESENT KNOWLEDGE AVAILABLE TO THE ENGINEER AT THE TIME OF THIS DESIGN. THE CONTRACTOR SHALL VISIT THE SITE PRIOR TO CONSTRUCTION AND VERIFY ALL EXISTING CONDITIONS RELATED TO THE SCOPE OF WORK FOR THIS PROJECT.
- ICE BRIDGE, CABLE LADDER, COAX PORT, AND COAX CABLE ARE SHOWN FOR REFERENCE ONLY. CONTRACTOR SHALL CONFIRM THE EXACT LOCATION OF ALL PROPOSED AND EXISTING EQUIPMENT AND STRUCTURES DEPICTED ON THIS PLAN. BEFORE UTILIZING EXISTING CABLE SUPPORTS, COAX PORTS, INSTALLING NEW PORTS OR ANY OTHER EQUIPMENT, CONTRACTOR SHALL VERIFY ALL ASPECTS OF THE COMPONENTS MEET THE ATC SPECIFICATIONS.

	LEGEND
8	GROUNDING TEST WELL
ATS	AUTOMATIC TRANSFER SWITCH
В	BOLLARD
CSC	CELL SITE CABINET
D	DISCONNECT
E	ELECTRICAL
F	FIBER
GEN	GENERATOR
G	GENERATOR RECEPTACLE
HH, V	HAND HOLE, VAULT
IB	ICE BRIDGE
к	KENTROX BOX
LC	LIGHTING CONTROL
М	METER
PB	PULL BOX
PP	POWER POLE
т	TELCO
TRN	TRANSFORMER
×	CHAINLINK FENCE


PROPOSED CABLE NOTES:

- ESTIMATED LENGTH OF PROPOSED CABLE IS <u>380</u>'. ESTIMATED LENGTH OF CABLE WAS PROVIDED BY CUSTOMER OR CALCULATED BY ADDING THE RAD CENTER AND THE DISTANCE FROM THE SHELTER ENTRY PLATE TO THE TOWER (ALONG THE ICE BRIDGE) AND A SAFETY FACTOR MEASUREMENT OF 15% (OF THE TWO PREVIOUS VALUES), CDS DEFER TO GREATEST CABLE LENGTH.
- ROUTE PROPOSED CABLES ALONG SAME PATH AS EXISTING CABLES AND IN ACCORDANCE WITH STRUCTURAL ANALYSIS. WHERE POSSIBLE UTILIZE EXISTING CABLE SUPPORT STRUCTURES AS PROVIDED FOR CARRIER TO ADEQUATELY SECURE CABLES, USING EITHER APPROPRIATELY SIZED STAINLESS STEEL SNAP-INS OR MOUNTING HARDWARE AND BRACKETS AS SPECIFIED BY CABLE MANUFACTURER. OTHERWISE, ATTACH CABLES TO HORIZONTAL OR DIAGONAL TOWER MEMBERS USING PROPOSED STAINLESS STEEL ADAPTERS (DO NOT ATTACH TO TOWER LEG).

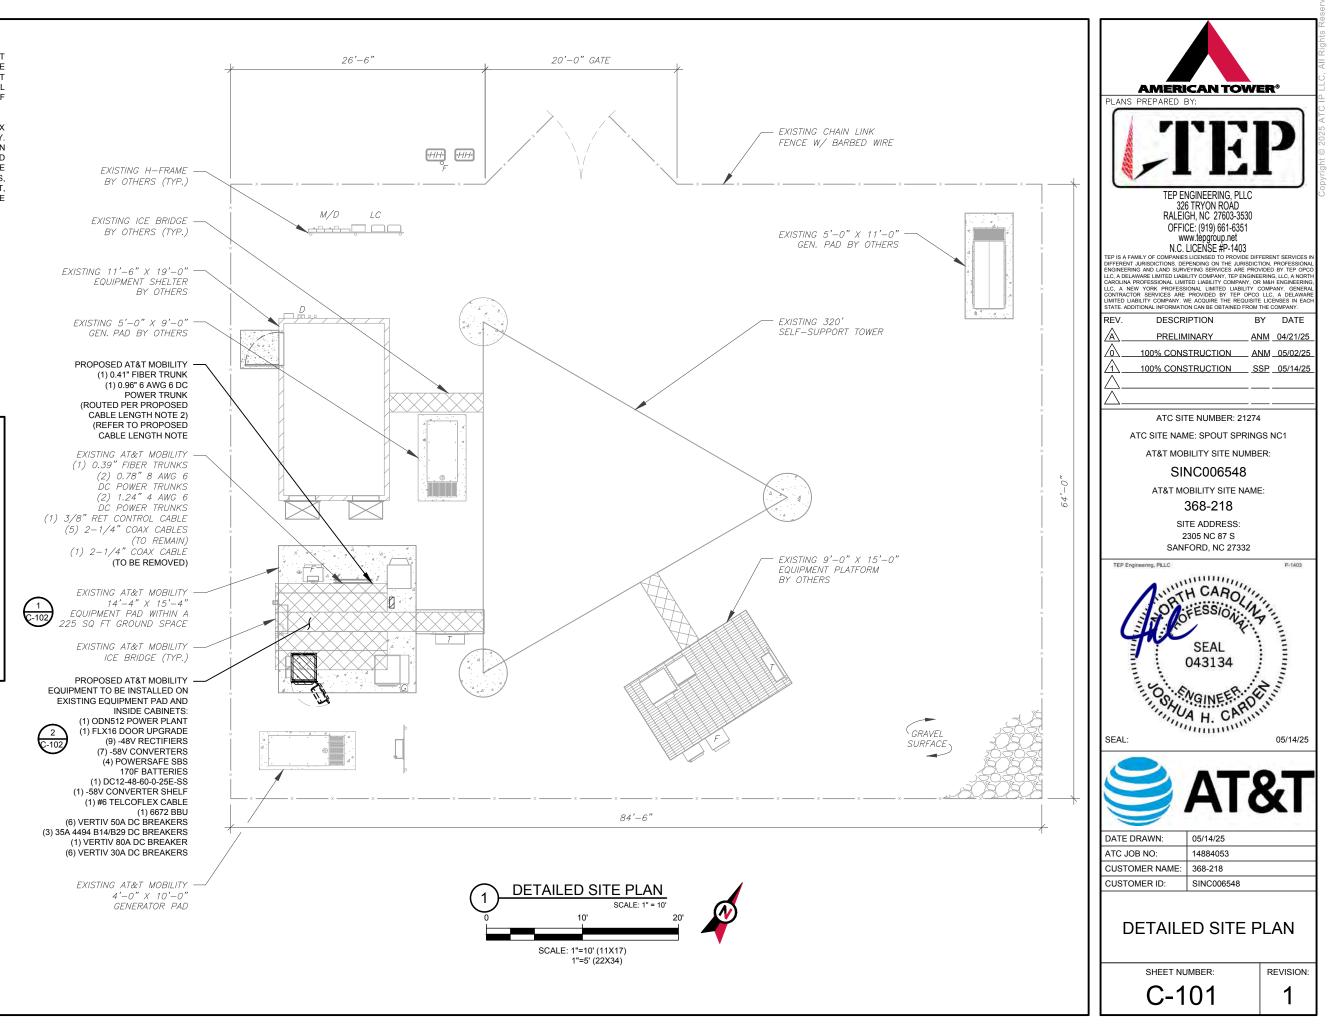

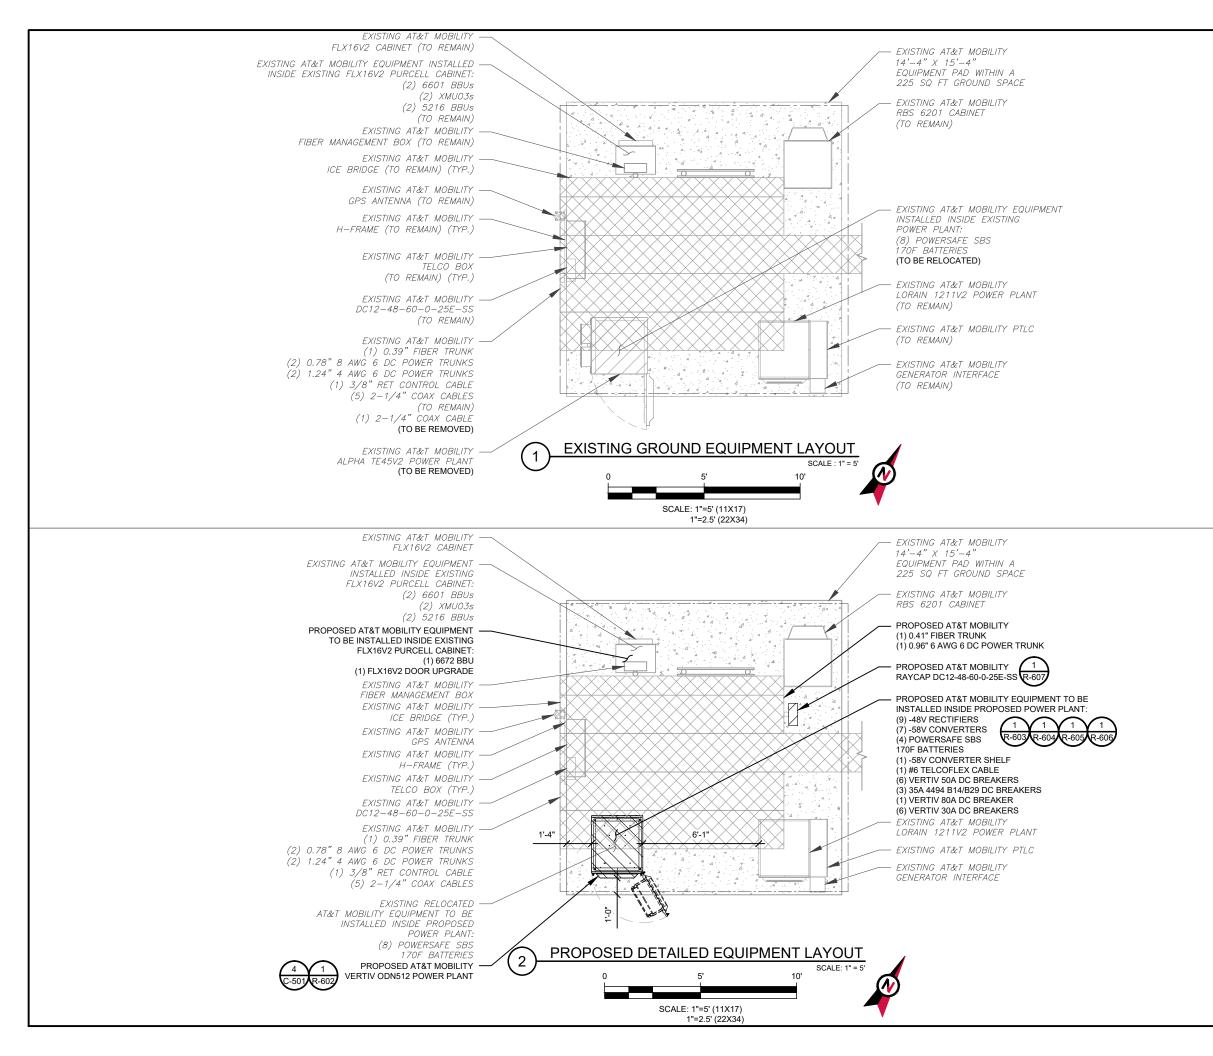



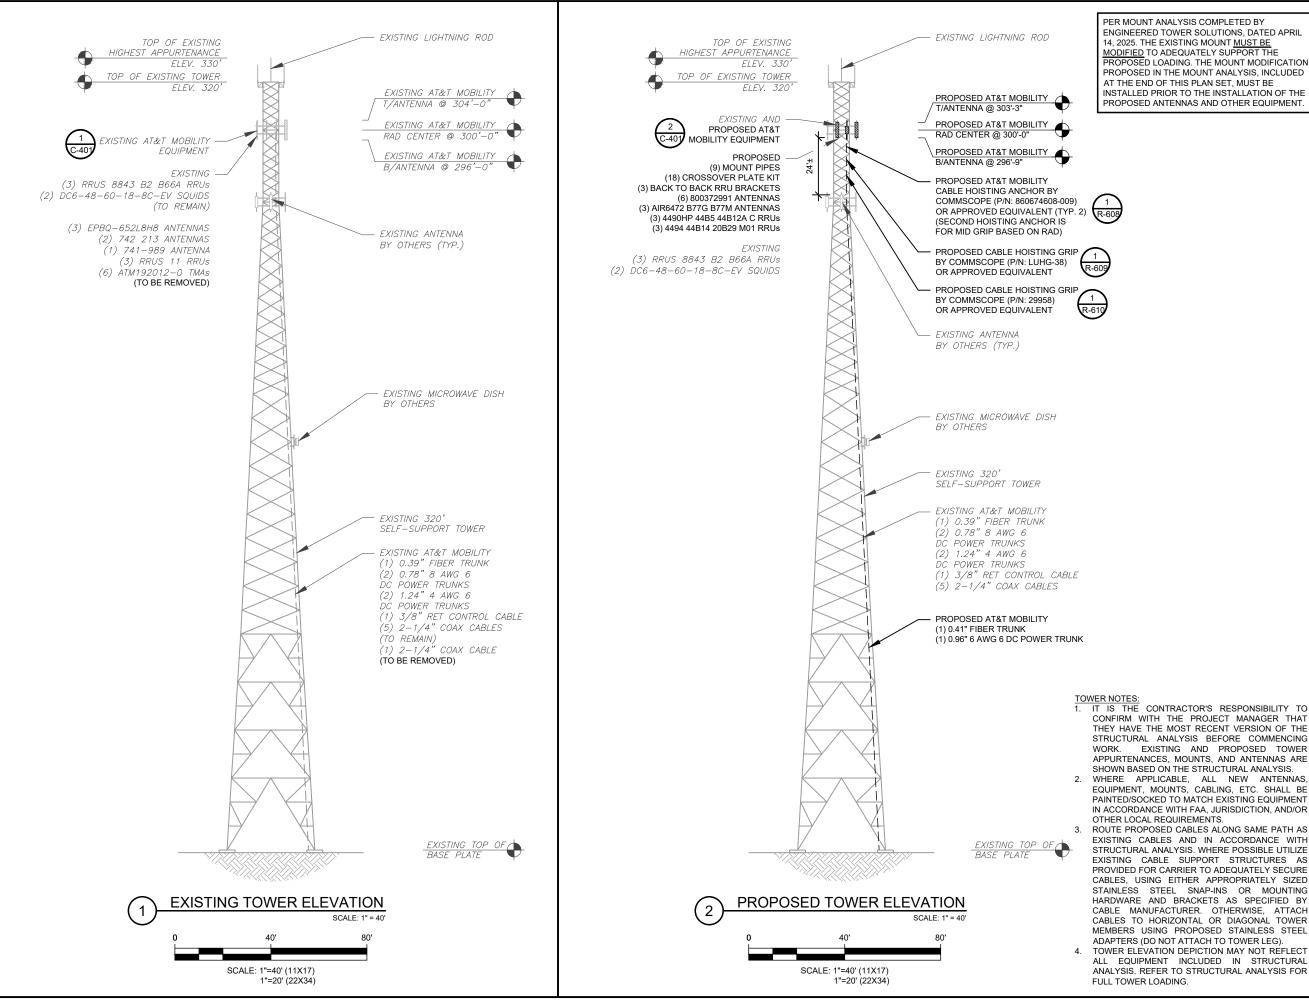

PER MOUNT ANALYSIS COMPLETED BY ENGINEERED TOWER SOLUTIONS, DATED APRIL 14, 2025. THE EXISTING MOUNT MUST BE MODIFIED TO ADEQUATELY SUPPORT THE PROPOSED LOADING. THE MOUNT MODIFICATION PROPOSED IN THE MOUNT ANALYSIS, INCLUDED AT THE END OF THIS PLAN SET, MUST BE INSTALLED PRIOR TO THE INSTALLATION OF THE PROPOSED ANTENNAS AND OTHER FOUIPMENT


CONFIRM WITH THE PROJECT MANAGER THAT THEY HAVE THE MOST RECENT VERSION OF THE STRUCTURAL ANALYSIS BEFORE COMMENCING WORK. EXISTING AND PROPOSED TOWER APPURTENANCES, MOUNTS, AND ANTENNAS ARE SHOWN BASED ON THE STRUCTURAL ANALYSIS.

WHERE APPLICABLE, ALL NEW ANTENNAS, EQUIPMENT, MOUNTS, CABLING, ETC. SHALL BE PAINTED/SOCKED TO MATCH EXISTING EQUIPMENT IN ACCORDANCE WITH FAA, JURISDICTION, AND/OR OTHER LOCAL REQUIREMENTS.

ROUTE PROPOSED CABLES ALONG SAME PATH AS EXISTING CABLES AND IN ACCORDANCE WITH STRUCTURAL ANALYSIS. WHERE POSSIBLE UTILIZE EXISTING CABLE SUPPORT STRUCTURES AS PROVIDED FOR CARRIER TO ADEQUATELY SECURE CABLES, USING EITHER APPROPRIATELY SIZED STAINLESS STEEL SNAP-INS OR MOUNTING HARDWARE AND BRACKETS AS SPECIFIED BY CABLE MANUFACTURER. OTHERWISE, ATTACH CABLES TO HORIZONTAL OR DIAGONAL TOWER MEMBERS USING PROPOSED STAINLESS STEEL ADAPTERS (DO NOT ATTACH TO TOWER LEG).

TOWER ELEVATION DEPICTION MAY NOT REFLECT ALL EQUIPMENT INCLUDED IN STRUCTURAL ANALYSIS. REFER TO STRUCTURAL ANALYSIS FOR



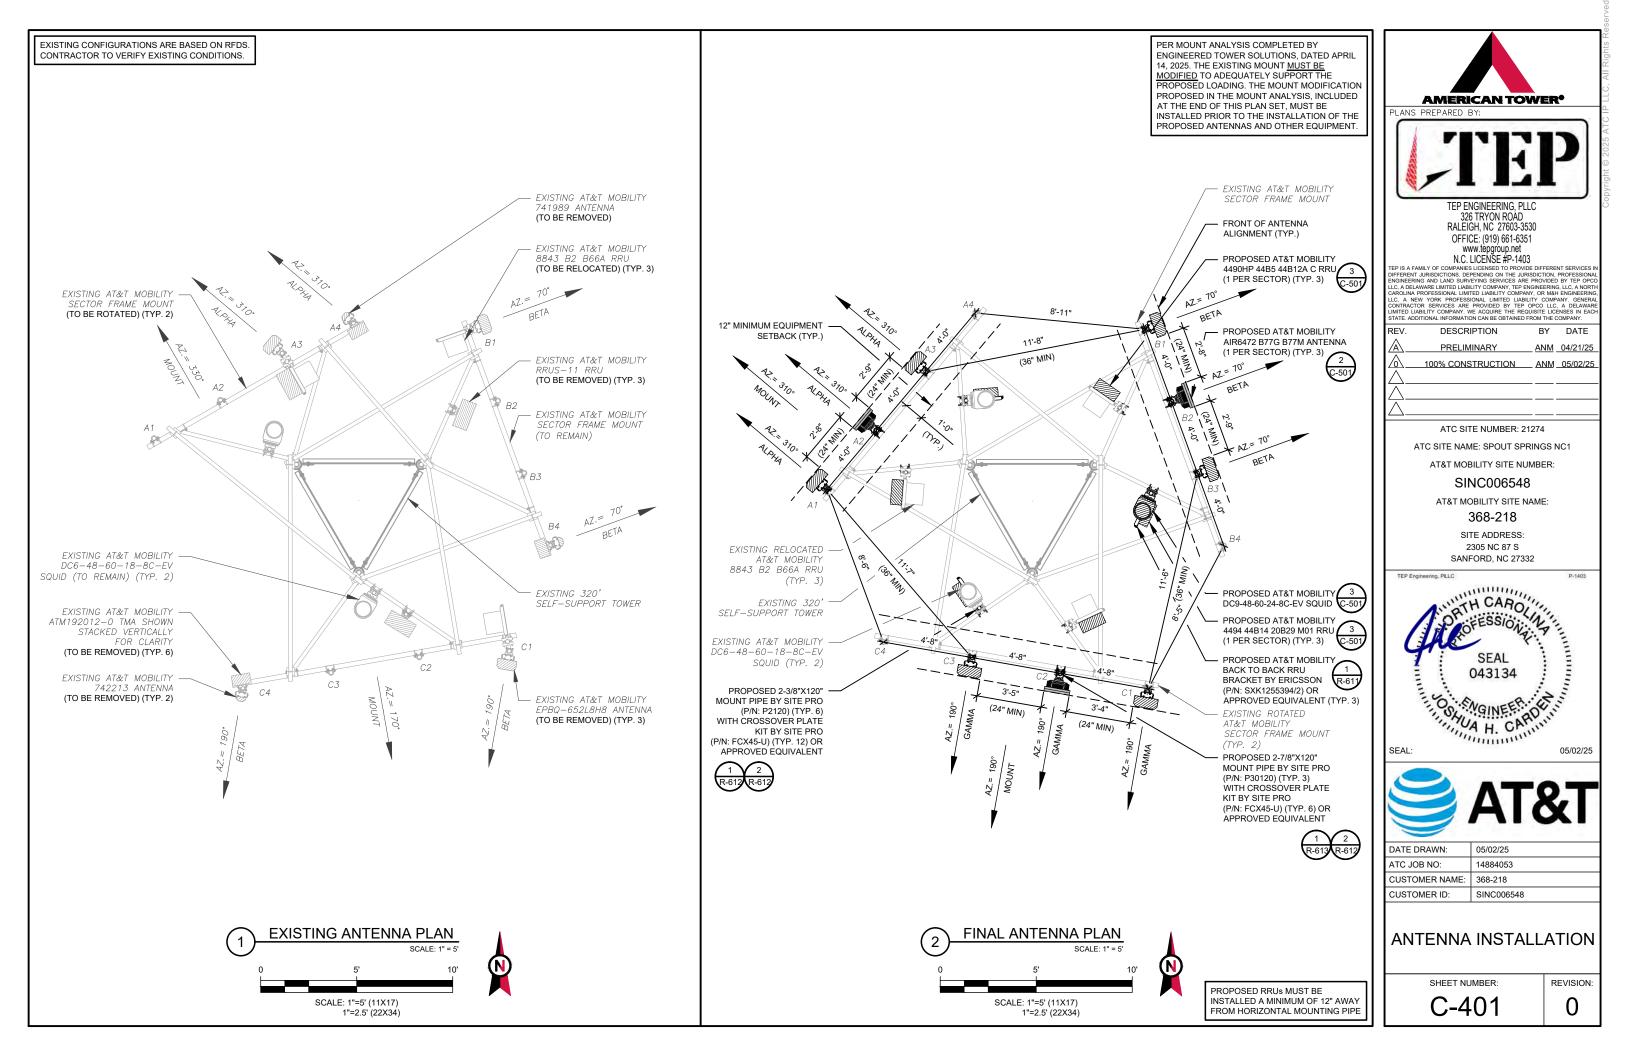

				EXISTING A	NTENNA SCHEDULE			
LO	LOCATION ANTENNA SUMMARY NON ANTENNA SUMMARY							
SECTOR RAD AZ POS		ANTENNA	BAND	STATUS	ADDITIONAL TOWER MOUNTED EQUIPMENT	STATUS		
			A1	_	_	-	-	-
			A2	_	_	-	-	-
ALPHA 300' 310	310°	A3	EPBQ-652L8H8	_	RMV	(1) RRUS 11 (1) 8843 B2 B66A	RMV REL	
			A4	741989	_	RMV	(2) ATM192012-0	RMV
			B1	EPBQ-652L8H8	_	REL	(1) RRUS 11 (1) 8843 B2 B66A	RMV REL
BETA	300'	70°	B2	-	_	-	-	-
			B3	-	_	-	-	-
			B4	742213	_	RMV	(2) ATM192012-0	RMV
			C1	EPBQ-652L8H8	-	REL	(1) RRUS 11 (1) 8843 B2 B66A	RMV REL
GAMMA	300'	190°	C2	-	_	-	_	-
			C3	-	_	-	-	-
			C4	742213	_	RMV	(2) ATM192012-0	RMV

	NOTES					FIN	IAL ANTENNA SCHEDULE			
	1. GC TO VERIFY THE FINAL RFDS	LO	CATION			ANTE	NNA SUMMARY		NON ANTENNA SUMMA	RY
US	MATCHES THE FINAL CONSTRUCTION DRAWINGS. GC	SECTOR	RAD	AZ	POS	ANTENNA	BAND	STATUS	ADDITIONAL TOWER MOUNTED EQUIPMENT	STATUS
	TO NOTIFY ATC PM OF ANY DISCREPANCY PRIOR TO INSTALLING THE EQUIPMENT.				A1	800372991	LTE 700/LTE 850/LTE AWS/ LTE 1900	ADD	(1) 8843 B2 B66A (1) 4490HP 44B5 44B12A C	RMN ADD
/	2. GC TO CAP ALL UNUSED PORTS.	ALPHA	300'	310°	A2	AIR6472 B77G B77M	5G CBAND/5G DOD	ADD	-	-
	3. CONFIRM SPACING OF PROPOSED EQUIP DOES NOT CAUSE TOWER				A3	800372991	LTE 700 (FNET)	ADD	(1) 4494 44B14 20B29 M01	ADD
V	CONFLICTS NOR IMPEDE TOWER				A4	-	-	-	-	-
V _	CLIMBING PEGS. 4. THE ANTENNA ORIENTATION PLAN IS A SCHEMATIC. ATC DID NOT				B1	800372991	LTE 700/LTE 850/LTE AWS/ LTE 1900	ADD	(1) 8843 B2 B66A (1) 4490HP 44B5 44B12A C	RMN ADD
	CONFIRM EXISTING SITE	BETA	300'	70°	B2	AIR6472 B77G B77M	5G CBAND/5G DOD	ADD	-	-
	CONDITIONS INCLUDING, BUT NOT LIMITED TO, ANTENNA AZIMUTHS,				B3	800372991	LTE 700 (FNET)	ADD	(1) 4494 44B14 20B29 M01	ADD
V	MOUNT CONFIGURATIONS AND				B4	-	-	-	-	-
v _	TOWER ORIENTATION. SCALES SHOWN ARE FOR REFERENCE ONLY AND EXISTING DIMENSIONS				C1	800372991	LTE 700/LTE 850/LTE AWS/ LTE 1900	ADD	<i>(1) 8843 B2 B66A</i> (1) 4490HP 44B5 44B12A C	RMN ADD
	ARE APPROXIMATE. THE	GAMMA	300'	190°	C2	AIR6472 B77G B77M	5G CBAND/5G DOD	ADD	-	-
	CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO				C3	800372991	LTE 700 (FNET)	ADD	(1) 4494 44B14 20B29 M01	ADD
V	INSTALLATION AND NOTIFY ATC				C4	-	-	-	-	-
	OF ANY DISCREPANCIES. 5. CONTRACTOR TO ENSURE PROPER SEPARATION IN ACCORDANCE WITH AT&TS FIRSTNET REQUIREMENTS.									
	STATUS ABBREVIATIONS									

STATUS ABBREVIATIONS
RMV: TO BE REMOVED
RMN: TO REMAIN
REL: TO BE RELOCATED
ADD: TO BE ADDED


CABLE LENGTHS FOR JUMPERS
JUNCTION BOX TO RRU: 15' RRU TO ANTENNA: 10'

EXISTING FIBER DISTRIBUTION	I/SQUID	EXISTING CABLING SUMMARY							
MODEL NUMBER	STATUS	COAX	DC / RET	FIBER	STATUS				
(2) DC6-48-60-18-8C-EV	RMN	(5) 2-1/4"	(2) 0.78" 8 AWG 6	(1) 0.39"	RMN				
_	-	-	(2) 1.24" 4 AWG 6	-	RMN				
_	-	—	(1) 3/8" RET	—	RMN				
_	-	(1) 2-1/4"	-	_	RMV				

FINAL FIBER DISTRIBUTION	/SQUID		FINAL CABLING SUM	MARY	
MODEL NUMBER	STATUS	COAX	DC	FIBER	STATUS
(2) DC6-48-60-18-8C-EV	RMN	(5) 2-1/4"	(2) 0.78"8 AWG 6	(1) 0.39"	RMN
-	-	-	(2) 1.24" 4 AWG 6	-	RMN
-	-	-	(1) 3/8" RET	-	RMN
(1) DC9-48-60-24-8C-EV	ADD	-	(1) 0.96" 6 AWG 6	(1) 0.41"	ADD

1 EQUIPMENT SCHEDULES

REV. DESCRIPTION BY DAT PRELIMINARY ANN 04/21 ATC SITE NUMBER: 21274 ATC SI	
The control of the co	
ATC SITE NUMBER: 21274 ATC SI]
REV. DESCRIPTION BY DAT PRELIMINARY ANM 04/21 100% CONSTRUCTION ANM 05/02 ATC SITE NUMBER: 21274 ATC SITE NUMBER: 21274 ATC SITE NAME: SPOUT SPRINGS NC1 AT&T MOBILITY SITE NUMBER: SINC006548 AT&T MOBILITY SITE NAME: 368-218 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLLC P-14 P-14 SEAL 043134 USA BASE SEAL: 05/02	IONAL OPCO NORTH ERING, NERAL WARE EACH
ATC SITE NUMBER: 21274 ATC SITE NAME: SPOUT SPRINGS NC1 AT&T MOBILITY SITE NUMBER: SINCO06548 AT&T MOBILITY SITE NAME: 368-218 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLLC P-ref	
ATC SITE NUMBER: 21274 ATC SITE NAME: SPOUT SPRINGS NC1 AT&T MOBILITY SITE NUMBER: SINC006548 AT&T MOBILITY SITE NAME: 368-218 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLLC P-14 MARCOLOGY SEAL O43134 SEAL O43134 SEAL O5/02 SEAL: O5/02	/25
ATC SITE NAME: SPOUT SPRINGS NC1 AT&T MOBILITY SITE NUMBER: SINC006548 AT&T MOBILITY SITE NAME: 368-218 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLIC VIA CAROUND SEAL SEAL O43134 SEAL O43134 SEAL O43134	2/25
ATC SITE NAME: SPOUT SPRINGS NC1 AT&T MOBILITY SITE NUMBER: SINC006548 AT&T MOBILITY SITE NAME: 368-218 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLIC P140 CAROUT SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134	
ATC SITE NAME: SPOUT SPRINGS NC1 AT&T MOBILITY SITE NUMBER: SINC006548 AT&T MOBILITY SITE NAME: 368-218 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLIC P140 CAROUT SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134	
ATC SITE NAME: SPOUT SPRINGS NC1 AT&T MOBILITY SITE NUMBER: SINC006548 AT&T MOBILITY SITE NAME: 368-218 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLIC P140 CAROUT SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134	
AT&T MOBILITY SITE NUMBER: SINC006548 AT&T MOBILITY SITE NAME: 368-218 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering. PLLC PLAN SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134	
SINCOD6548 AT&T MOBILITY SITE NAME: 368-218 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLLC P-14 CAROLINIC SEAL 043134 043134 SEAL 043134 SEAL 043134 043134 043134 043134 043134 043134 043134	
AT&T MOBILITY SITE NAME: 368-218 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLC P140 P14	
368-218 SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLLC PLAN THE CAROL OF ESSION SEAL 043134 USSINEERIN DET SEAL 05/02 SEAL 05/02 SEAL 05/02 SEAL 05/02	
SITE ADDRESS: 2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLIC P-140 TH CAROLINIC SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL 043134 SEAL	
2305 NC 87 S SANFORD, NC 27332 TEP Engineering, PLLC P-14 TH CAROLINI, H CAROL	
SANFORD, NC 27332	
TEP Engineering, PLLC P14	
SEAL 043134 SEAL: 05/02 SEAL: 05/02 SEAL: 05/02	2
DATE DRAWN. 05/02/25	
ATC JOB NO: 14884053	
CUSTOMER NAME: 368-218	
CUSTOMER ID: SINC006548	
ANTENNA SCHEDULE	
SHEET NUMBER: REVISIO	
	DN:
C-402 0	DN:

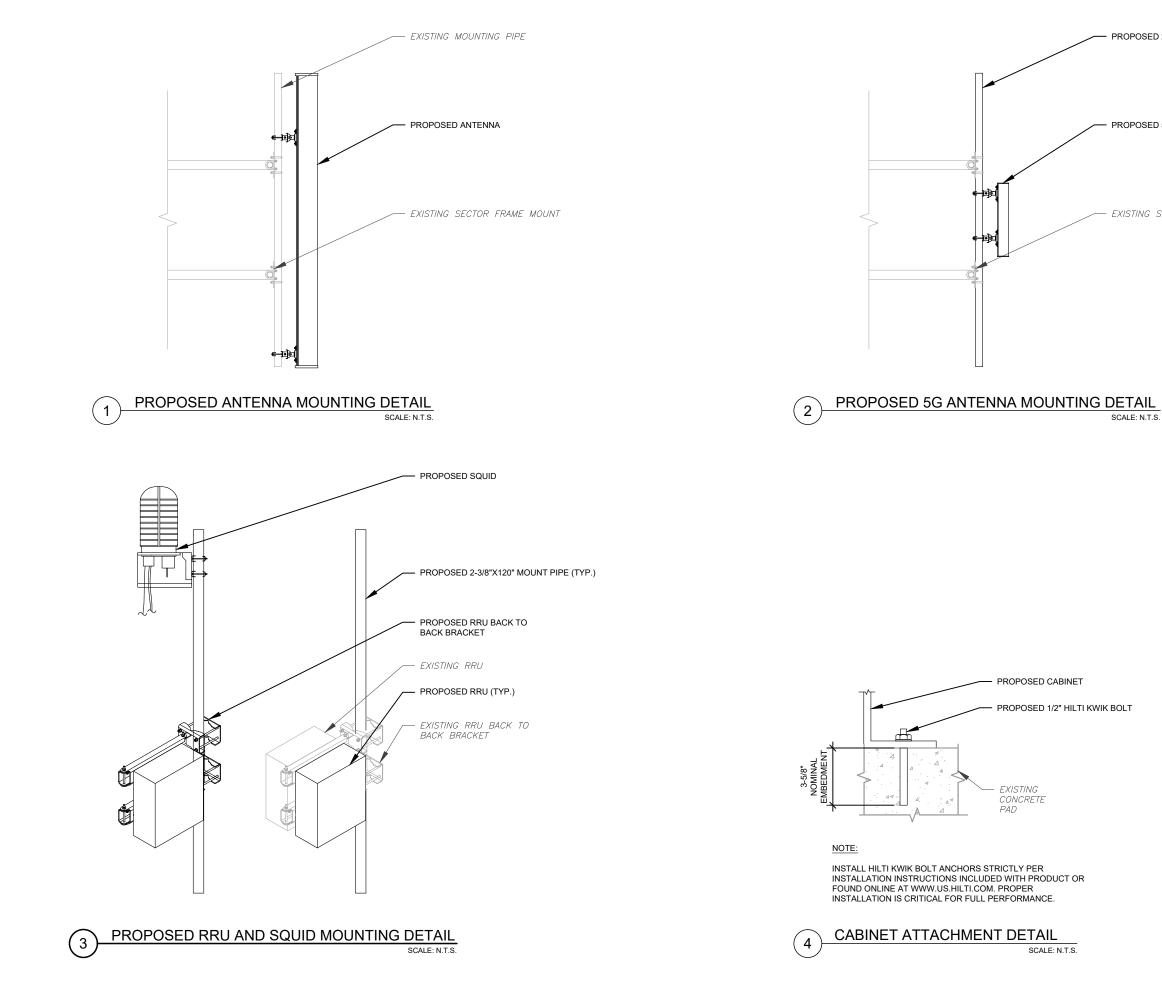

PROPOSED 5G ANTENNA

EXISTING SECTOR FRAME MOUNT




					OLTS, 1-PH						
	MAIN	BREA	KER RAT	ING (A) :	20	0	SYS	TEM VO	LTAGE	(V): 24	40
DESCRIPTION	VA	c/nc	BKR	POSN	L1	L2	POSN	BKR	c/nc	VA	DESCRIPTION
PCU #1 / OFF	0	nc	40/2	1	720		2	15/2	nc	720	PRI HETA
PC0 #17 0FF	0	nc	40/2	3		720	4	15/2	nc	720	PRINCIA
PCU #2 / OFF	0	nc	40/2	5	0		6	15/2	nc	0	GRW1 HETA / OF
PC0 #27 0FF	0	nc	40/2	7		0	8	15/2	nc	0	GRWTHETA/ OF
PCU #3 / OFF	0	nc	40/2	9	0		10	15/2	nc	0	GRW2 HETA / OF
PC0 #37 OFF	0	nc	40/2	11		0	12	15/2	nc	0	GRWZ HETA/ OF
	0	nc	40/2	13	960		14	20/2	C	960	A/C
PCU #4 / OFF	0	nc	40/2	15		960	16	20/2	C	960	A/C
PCU #5	972	C	40/2	17	972		18	20/1	nc	0	RECEPTS / OFF
PCU #5	972	C	40/2	19		972	20	15/2	nc	0	BBU HVAC / OFF
PCU #6 / OFF	0	nc	40/2	21	0		22	15/2	nc	0	DOU NVAC / OFF
PC0 #07 0FF	0	nc	40/2	23		180	24	20/1	nc	180	AUX UPC GFI
GFI	180	nc	15/1	25	2100	2 2 3	26	20/1	nc	1920	A.T.S.
TE45	6000	С	105/0	27		7000	28	20/1	nc	1000	BLOCK HEATER
1E40	6000	С	125/2	29	6650	1.1.5	30	20/1	nc	650	BATT CHARGER
		PHAS	E TOTAL	_S (VA):	11402	9832					
		PHA	SE TOTA	ALS (A):	95	82			-		
CURRENT PER F	PHASE W/ 12	5% Co	ntinuous I	Loads(A):	112	98	Amperes	phase ca	annot e	xceed main	breaker rating
		PAN	VEL TOT	AL (VA):	212	34		Lege	nd: c =	continuous,	nc = non-continuous
PANEL TO	TAL W/ 125%	Contin	uous Loa	ds (VA):	252	00					


EXISTING AC PANEL SCHEDULE (1)


SCALE: N.T.S.

			1.1.1		VER PANE		and the second second					
	MAIN	BREA	KER RA	TING (A) :	20	0	SYS	TEM VO	LTAGE	(V): 24	0	
DESCRIPTION	VA	c/nc	BKR	POSN	L1	L2	POSN	BKR	c/nc	VA	DESCRIPTION	
VERTIV RECTIFIER #1 & #2	1380	nc	40/2	1	2100		2	15/2	nc	720	PRI HETA	
VERTIVIZECTIFIER #1 & #2	1380	nc	40/2	3		2100	4	15/2	nc	720	FRINEIA	
/ERTIV RECTIFIER #3 & #4	1380	nc	40/2	5	1380	And in case of the local division of the loc	6	15/2	nc	0	SPARE / OFF	
VERTIV RECTIFIER #3 & #4	1380	nc	40/2	7		1380	8	15/2	nc	0	SFARE / OFF	
/ERTIV RECTIFIER #5 & #6	1380	nc	40/2	9	1380		10	15/2	nc	0	SPARE / OFF	
VERTIV RECTIFIER #5 & #6	1380	nc	40/2	11		1380	12	15/2	nc	0	SPARE / UFF	
/ERTIV RECTIFIER #7 & #8	1380	nc	40/2	13	2340		14	20/2	С	960	A/C	
VERTIV RECTIFIER #1 & #0	1380	nc	40/2	15		2340	16	20/2	С	960	A/C	
VERTIV RECTIFIER #9	690	С	40/2	17	690		18	20/1	nc	0	SPARE / OFF	
VERTIV RECTIFIER #5	690	С	40/2	19		690	20	15/2	nc	0	SPARE / OFF	
SPARE / OFF	0	nc	40/2	21	0		22	15/2	nc	0	SPARE / UFF	
SPARE / OFF	0	nc	40/2	23		180	24	20/1	nc	180	AUX UPC GFI	
GFI	180	nc	15/1	25	2100		26	20/1	nc	1920	A.T.S.	
SPARE / OFF	0	C	125/2	27		1000	28	20/1	nc	1000	BLOCK HEATER	
SFARE / OFF	0	C	125/2	29	650		30	20/1	nc	650	BATT CHARGER	
		PHAS	E TOTA	LS (VA):	10640	9070	1	1.0	2.120			
		PHA	SE TOT	ALS (A):	89	76						
CURRENT PER PHASE W/ 125% Continuous Loads(A):					92	79	Amperes/phase cannot exceed main breaker rating					
PANEL TOTAL (VA):					197	10		Lege	nd: c =	continuous,	nc = non-continuous	
PANEL TOTAL	W/ 125%	Contin	uous Loa	ds (VA):	205	35			1.5			


PROPOSED AC PANEL SCHEDULE (2)SCALE: N.T.S.

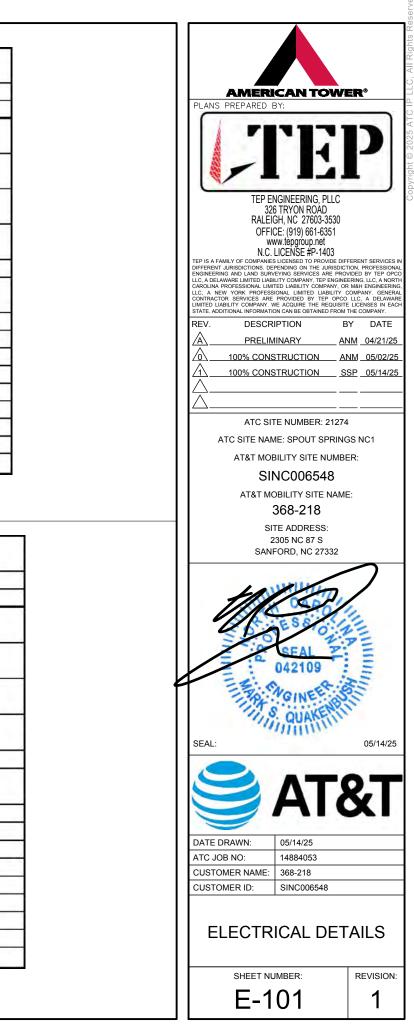


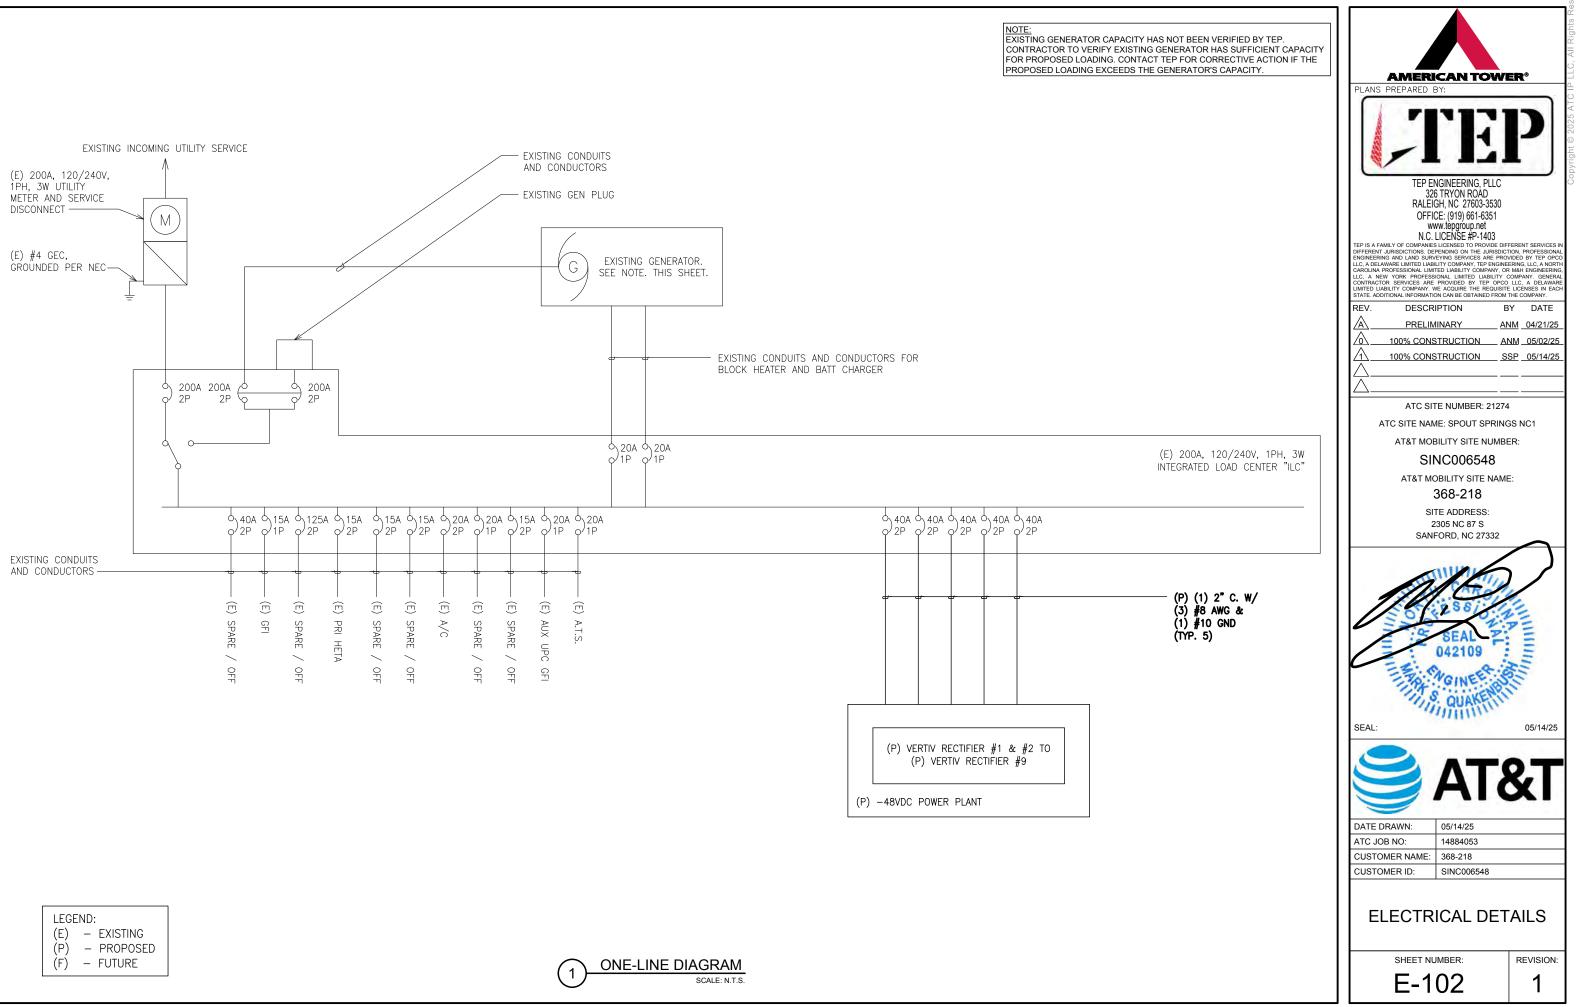


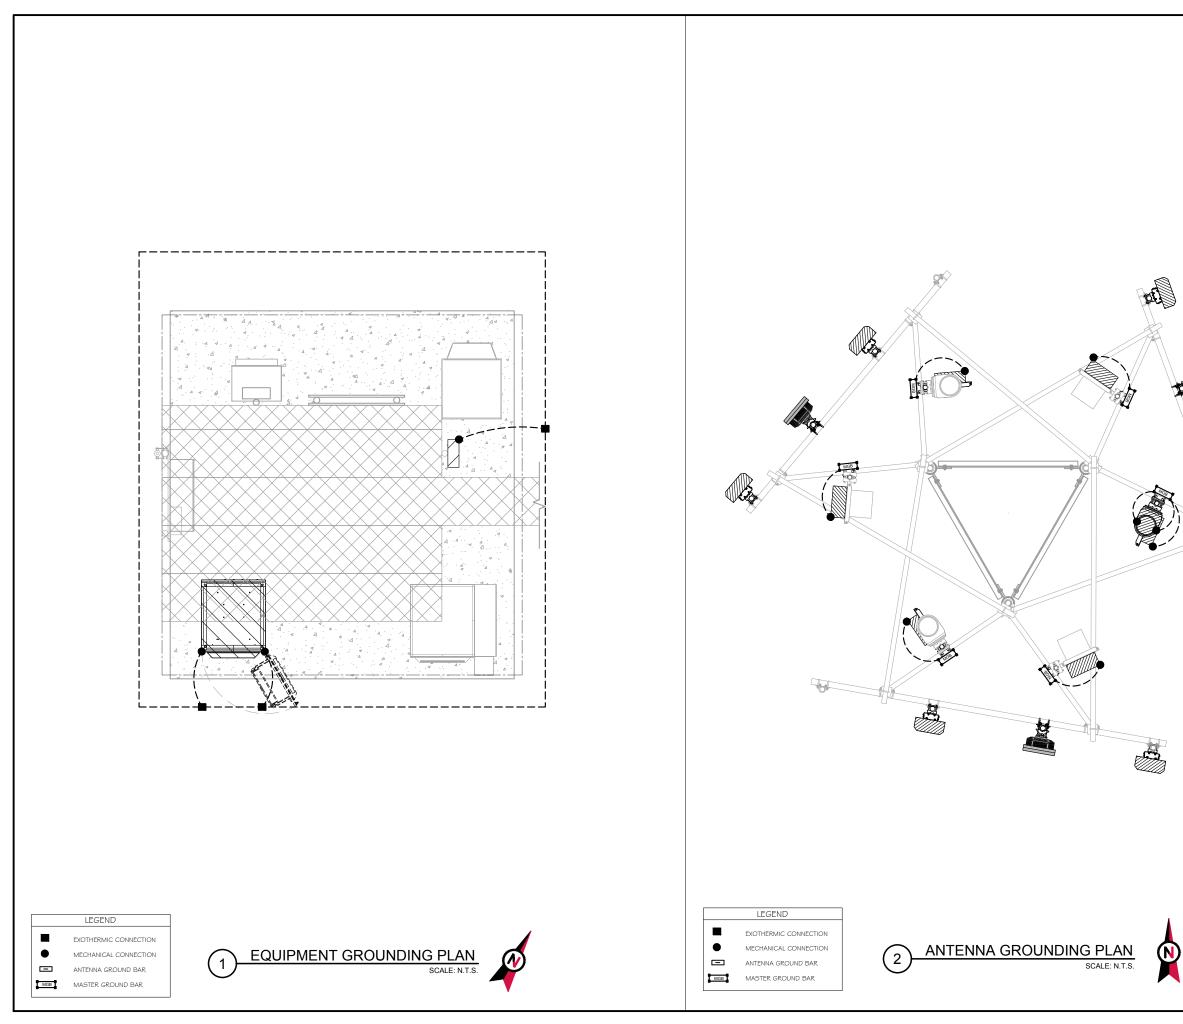





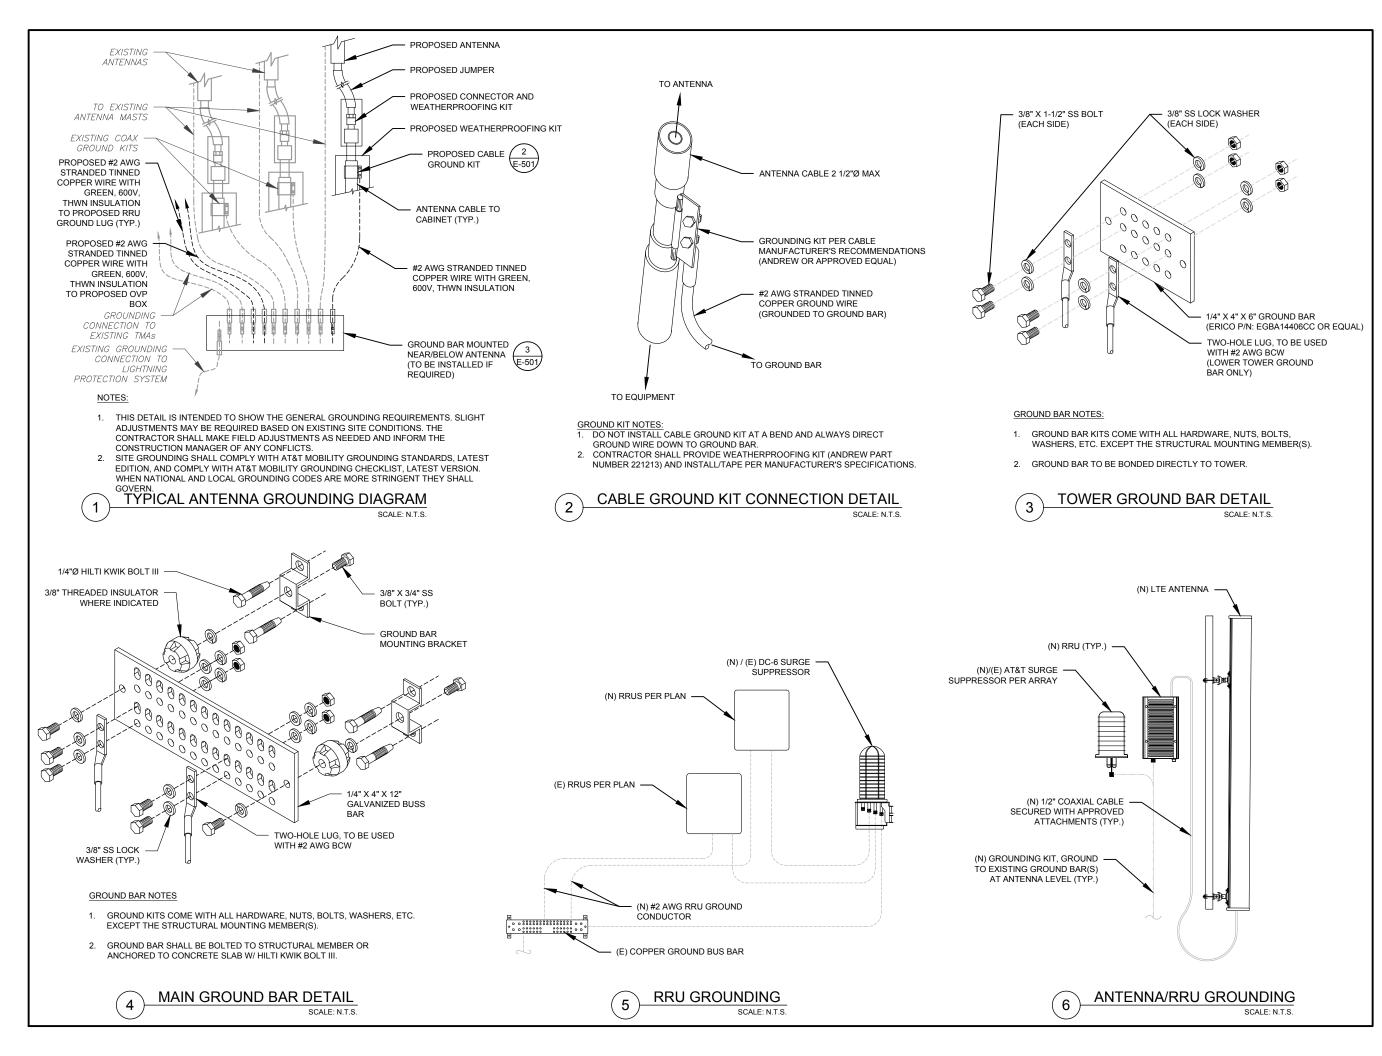

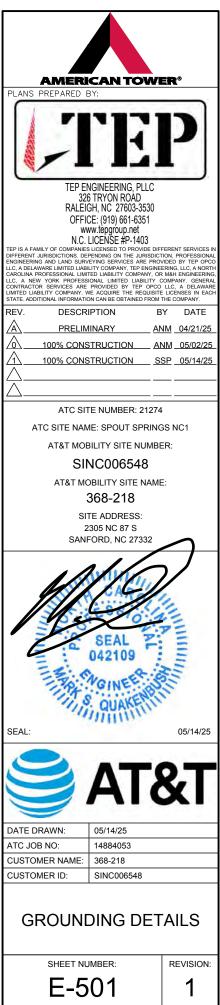

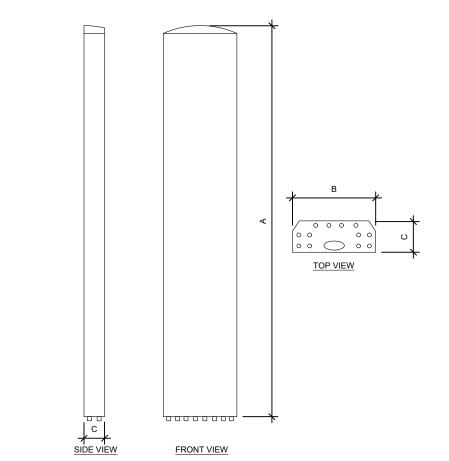





RRU	SPECIFICAT	IONS		
RRU MODEL	А	В	С	WEIGI (LBS
RADIO 4490HP 44B5 44B12A C	20.6"	15.6"	7.0"	65.0
RADIO 4494 44B14 20B29 M01	17.5"	15.1"	5.6"	57.3


С

SIDE VIEW

TOP VIEW

В

FRONT VIEW



RAYCAP SPECIFICATIONS										
RAYCAP MODEL	А	В	С	WEIGHT (LBS)						
DC9-48-60-24-8C-EV	25.9"	12.4"	9.7"	18.5						

EQUIPMENT SPECIFICATIONS (**-**

SCALE: N.T.S.

GHT S)	
.0	
.3	

	. .
SUPPLEMENT	٦L
SHEET NUMBER:	REVISION:
R-601	-



VERTIV[™] XTE 601P ENCLOSURE, NETSURE 512 POWER SYSTEM

Description

This outdoor power solution includes a NetSure™ 512 DC Power System and an environmentally controlled Vertiv XTE 601P enclosure that offers separate individuallycooled chambers for power equipment and batteries. Temperature is monitored with an Environmental Control Unit (ECU) that adjusts thermal settings to maintain ideal conditions within each chamber, while simultaneously decreasing system power consumption and noise. All DC power-feed cables to customer equipment are surge protected at the distribution bus. The battery chamber houses 3 shelves of front-post VRLA batteries and SAFT batteries up to 180 Ah in size.

NetSure 512 DC Power System

- eSure[™] rectifiers provide high energy efficiency
- Great output power at high temperatures
- Advanced remote monitoring with NCU controller

Vertiv[™] XTE Enclosure

- Separate temperature-controlled zones for power and batteries
- Door-mounted cooling system & rear cable-entry compartment

Technical Specifications

DC POWER SYSTEM FEATURES	
Nominal System Voltage	-48 VDC or +24 VDC
Control	NCU controller
RATED OUTPUT CAPACITY - MAXIMI	JM CONFIGURATION
	525 amps at -48 VDC plus redundancy 400 amps at +24 VDC plus redundancy
	Top: Wired for (16) +24 V and (13) -48 V bullet positions Bottom: (30) -48 V bullet positions
ENVIRONMENTAL	
Operating Temperature	-40 °F to 115 °F (-40 °C to 46 °C) continuous operation
Humidity	0 to 95%, non-condensing
THERMAL SOLUTIONS	
	2500 watt door-mounted heat exchanger, 2 RU available space for surge protection
Battery Chamber	Fan cooled, fresh air ventilation; holds up to (3) battery strings
EQUIPMENT	
Ground Bar	10 positions
Terminal Block	12-position Phoenix alarm block, 32-position Phoenix alarm bunching block
SAFETY	
DC Power System	UL 1801 Listed (US & Canada), NEBS Level 3
Enclosure	GR-487, UL 60950, and Seismic Zone 4 compliant

Ordering Process

Follow the steps below for each DC power system required.

- 1. Order -48VDC 2000 watt rectifiers. guantity as required, NEQ.15930 (1R482000E3).
- 2. Order -48VDC to +24VDC 1500 watt converters, quantity as required, NEQ.15929 (1C48241500).
- 3. Order load circuit breakers and GMT fuse module NEQ.15981 (549017) as required per Bullet Nose Type Circuit Breakers on page 17 and GMT Fuse Modules on page 18.

If required, for each single pole load circuit breaker ordered, order single pole 90 degree lug adapter kit NEQ.15152 (545405).

If required, for each two-pole load circuit breaker ordered, order two-pole 90 degree lug adapter kit NEQ.15982 (545404).

If required, for each three-pole load circuit breaker ordered, order three-pole 90 degree lug adapter kit NEQ.15983 (545571).

4. Order additional temperature probes as desired. The base power plant includes (4) temperature probes.

If more than (4) temperature probes are desired, order NEQ.15984 (547490) SMTEMP Module. Each module can accommodate (8) temperature probes. A maximum of (8) SMTEMP modules can be accommodated per system.

Order temperature probes, quantity as required.

Choose:

NEQ.15985 (552992), 10.3 meter length NEQ.15986 (556155), 3.3 meter length

Example: If (20) total temperature probes are desired, order (2) SMTEMP modules and (16) temperature probes.

Order temperature probe extensions if initial length is not adequate, 10 meter length. Quantity as required. NEQ.15987 (04119122).

5. If DC generator disconnect breaker is required, order DC generator input connection kit, NEQ.20070 (564898) and 400 A bullet breaker NEQ.20063 (150860).

Vertiv[™] XTE 601P Ordering Information

AT&T NUMBER	VERTIV [™] NUMBER	DESCRIPTION
Outdoor DC Powe	r System	
NEQ.19918*	F2016064	Vertiv XTE 601P, 512, 752 lbs.
Equipped with:	F1011032	Enclosure (72"H x 32"W x 39"D)
	582137000ZZ007	NetSure 512, -48 VDC/+24 VDC, (43) -48 V load breaker positions, (16) +24 V load breaker positions, LVBD capability
	58213700027	(1) Two row distribution cabinet
	58213700030	(4) Rectifier shelves 3 right positions can be used for -48V to +24V converters
	582137000AC	(1) (30) position -48 VDC distribution panel
	582137000DJ	(1) (13) -48 V & (16) +24 V position dist. panel
	1M830DNA559478	(1) NCU controller
	552992	(2) Temperature probes
	556155	(2) Temperature probes
	541308	(2) Alarm cables
	58213700070	(1) Extended interface board
	549017	(1) GMT fuse option board
		2500 watt door-mounted heat exchanger
		12-pair Phoenix alarm block
		32-pair Phoenix alarm bunching block
		Strikesorb DC surge protection
		(3) 100 amp DC battery disconnects
		Battery heater pads included
		Duplex AC convenience outlet
		10-position ground bar
AT&T NUMBER	VERTIV NUMBER	DESCRIPTION

Accessories		
NEQ.15998	F1010598	4" mounting plinth
NEQ.15930	1R482000E3	Rectifier, NetSure 512, -48 VDC, 40 A/2000 W
NEQ.15929	1C48241500	(1) Converter, high efficiency, -48 VDC to +24 V
NEQ.15984	547490	SM-TEMP, 8-input temperature module
NEQ.15985	552992	Temperature probe, 10.3 meters
NEQ.15986	556155	Temperature probe, 3.3 meters
NEQ.15987	04119122	Temp probe extension, 10 meters
NEQ.15988	552822	Temp probe sensor, 0.3 meter
NEQ.19291	1M830DNA560273	NCU controller field retrofit
NEQ.15992	MA4C5U31	IB2, Customer Interface Board
NEQ.15993	548120	EIB, Extended Interface Board
NEQ.20070	564898	DC generator disconnect breaker kit NOTE: 400 A bullet breaker is sold separately.
NEQ.20063	150860	400 A bullet breaker, 4-pole
NEQ.TBD	564354	Distribution position conversion kit for top row.
NEQ.TBD	564997	DC generator wrap around Kit
		Bullet nose type circuit breakers - page 17
Batteries		
NEQ.12090	N/A	155 Ah GNB battery (not supplied by Vertiv; sou
NEQ.14983	N/A	48 V SAFT battery string, 80-94743-01, 38 X Te (not supplied by Vertiv; sourced through EPL)

* 1200 watts at 65°C

Vertiv | DC Power Systems, Outdoor Enclosures & Services | AT&T Ordering Guide (RI06/19)

Vertiv | DC Power Systems, Outdoor Enclosures & Services | AT&T Ordering Guide (RI06/19)

PROPOSED NETSURE 512 POWER PLANT DETAIL 1 SCALE : N.T.S

CREATED BY OTHERS AND PROVIDED	
T OF THE CUSTOMER WITHOUT EDIT.	

BY OTHERS AND PROVIDED	

28

SHEET NUMBER:	
R-602	

REVISION: -

SUPPLEMENTAL


changer block A/2000 W /DC to +24 VDC, 62.5 A/1500 W, 4.4 lbs.* dule separately for top row. All -48VDC positions. page 17 ov Vertiv; sourced through EPL) 43-01, 38 X TelX 180 NiCd

Vertiv[™] NetSure[™] DCS48/58-600 Converter System System Application Guide

SYSTEM OVERVIEW

Description: -48 VDC to -58 VDC @ up to 600 Amperes Converter System

The Vertiv™ NetSure™ DCS48/58-600 Converter System is a complete integrated converter system containing -48 VDC to -58 VDC converters, intelligent control, metering, monitoring, and distribution. The converter system is designed for operation with the positive output grounded.



This system consists of the following components.

DC Distribution Cabinet

The base system includes one (1) distribution cabinet, which provides DC distribution through fuses and/or circuit breakers. The distribution cabinet can be equipped either with a 1-row, 26-position bullet nose type circuit breaker and TPS/TLS fuseholder distribution panel or a distribution panel equipped with four (4) GJ/218 type circuit breaker positions. The distribution cabinet may be equipped with a load disconnect contactor.

A field installed only expansion distribution cabinet is available which provides DC distribution through fuses and/or circuit breakers. The expansion distribution cabinet is equipped with a 1-row, 26-position bullet nose type circuit breaker and TPS/TLS fuseholder distribution panel. The expansion distribution cabinet may be equipped with a load disconnect contactor.

Controller

NCU (NetSure[™] Control Unit) Controller: The NCU controller provides power system control, converter module control, metering functions, monitoring functions, local/remote alarm functions, and connections for binary inputs and programmable relay outputs. The system also accepts up to two (2) temperature probes to monitor ambient and/or battery temperature. The controller also provides data acquisition and system alarm management. The controller contains a color TFT display and keypad for local access. The controller provides an Ethernet port and comes with comprehensive webpages for local/remote access. The controller has SNMP V3 capability for remote system management. The controller supports software upgrade via its USB port. Refer to the NCU Controller Instructions (UM1M830BNA) for more information.

• Converter Module Mounting Shelf (Spec. No. 588705300)

The system contains two (2) Spec. No. 588705300 converter module mounting shelves, each of which houses the converter modules. The top converter module mounting shelf also houses the NCU controller.

A field installed only expansion converter module mounting shelf is available. Up to two (2) expansion converter module mounting shelves can be installed in an existing system.

-48 VDC to -58 VDC Converter Modules

The system accepts 2000 watt peak, 1600 watt average converter modules to provide -58 VDC load power. Refer to the Converter Instructions (UM1C48582000P3) for more information.

Spec. No: 584641000 Model No: DCS48/58-600 Proprietary and Confidential © 2023 Vertiv Group Corp. Page 1

SAG584641000 Revision A, January 27, 2023

VERTIV

Spec. No: 584641000 . Model No: DCS48/58-600 Proprietary and Confidential © 2023 Vertiv Group Corp. Page 2

Vertiv[™] NetSure[™] DCS48/58-600 Converter System System Application Guide

General Converter Systems Specifications

See detailed specifications on page 41.

Family: Spec. No.: Model: DC Input Voltage: DC Output Voltage:

DC Output Capacity: 1C48582000P3 Converter Rating: Agency Approval:

Mounting Type: Mounting Depth: Mounting Height: Access:

Control: Color:

Environment

NetSure™ 584641000 DCS48/58-600 Nominal -48 VDC (-41 VDC to -58.5 VDC). Nominal -57 VDC, positive ground. Output voltage is adjustable from -56.0 VDC to -58.0 VDC via the system controller. 600 A maximum See UM1C48582000P3 UL Listed to UL/CSA 62368-1 (cULus), Meets NEBS Level 1 Nominal 23" Relay Rack or Equipment Rack Mounting See "Overall Dimensions" on page 43. See "Overall Dimensions" on page 43. Front and Rear for Installation, Expansion, and Maintenance. Front for Operation. Microprocessor Faceplates: Textured Gray Other Surfaces: Bright Zinc -40 °C to +65 °C (-40 °F to +149 °F)

PROPOSED -58V CONVERTER SHELF DETAIL SCALE : N.T.S.



SHEET NUMBER:

SUPPLEMENTAL

Revision A, January 27, 2023

SAG584641000

eSure[™] Rectifier

R48-2000e3

Benefits

- Optimize the amount of energy delivered and reduce power consumption with over 96% efficiency.
- Increase space for revenue generating equipment with modules that pack more power in a small space with high power density.
- Facilitate easy maintenance, expansion and system changes with hot swappable capabilities.
- Enjoy increased reliability and active load sharing with Digital Signal Processing (DSP) which translates into fewer components and optimized operation.
- Appreciate the flexibility to utilize in a variety of applications with a wide input voltage range of 85 VAC to 300 VAC and full power output at temperatures from -40°C to +65°C.

In addition to reducing power consumption and lowering operating cost, eSure[™] high-efficiency rectifiers offer superior performance and uncompromised reliability.


VERTIV.

Description

The 2000 watt high-efficiency eSure rectifier (model R48-2000e3) converts standard AC supply voltages into stable nominal -48 VDC voltage that is adjustable to application needs. This constant power rectifier designed with the latest patented switch-mode technology, uses DSP (Digital Signal Processing) for efficient operation.

The R48-2000e3 can be connected in parallel with other rectifiers and converters to support a variety of telecom applications. Unified remote management and control of the power system is enabled when combined with a Vertiv[™] controller.



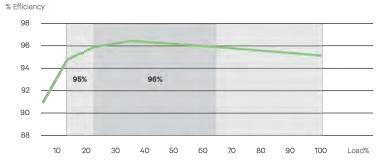

R48-2000e3 Efficiency Curve at 250 VAC Nominal

eSure[™] Rectifier

Technical Specifications

Disconnection at 415 VAC

Mains fuses in both lines

AC Input

Frequency

Power Factor

Protection

Maximum Current

Voltage

ions	Figures
R48-2000E3	% Watts
85 VAC to 300 VAC (see figure 1), 187 VAC to 264 VAC (nominal)	120
45 Hz to 65 Hz	100
12 A	80
>0.99 from 50 to 100% load	60
High and low voltage protection, surge and lightning protection Adapts to poor quality grid (voltage dip, weak mains)	40
Disconnection at 415 VAC	20

٥L

VDC

0 5

% Watts

DC Output	
Voltage	-42 VDC to -58 VDC
Maximum Power	2000 W
Maximum Current	42 A @ -48 VDC, limit set point 0 to 42 A (see figure 2)
Peak Efficiency	96.2%
Protection	Fuse for reverse connection and back feeding protection High voltage shutdown High temperature protection
Control and Monitoring	
Converter Alarm and Signaling	Alarm and status reported via CAN bus to system controller
Visual Indications	Green LED: Normal Operation Yellow LED: Alarm Red LED: Failure

Operating	-40°C to 80°C / -40°F to +176°F (see figure 3 for derating)
Temperature Derating	Full output power up to +65°C at input voltage range 200 to 250 VAC (see figure 3)
Storage	-40°C to +70°C / -40°F to +158°F
Relative Humidity	0 to 95%
Altitude	Full output power up to +65°C at input voltage range @200~ 250 VAC

Dimensions (H x W x D)	41 x 84.5 x 252.5 (mm) / 1.61 x 3.33 x 9.94 (inches)
Mechanics	
Environment	REACH, RoHS, WEEE
EMC	EN55022, CISPR22, ETSI EN300 286: 2005, FCC CFR 47 Part 15, Telcordia GR-1089-CORE issue 6 (Class B conducted and radiated)
Safety	60950-1 (EN, IEC and UL)

Ordering Information

-	Model Number	Description
	1R482000E3	eSure™ rectifier, -48 VDC, 2000 W


Vertiv.com Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA


1.13 kg / 2.49 lbs

© 2020 Verity Group Corp. All rights reserved. Verity^w and the Verity logo are trademarks or registered trademarks or Verity Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners precaution has been taken to ensure accuracy and completeness here, Verity Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other offers are subject to change at Verity's and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other offers are subject to change at Verity's and disclaims and the complexity of the subject of th

R48-2000E3 (R06/20)

Weight



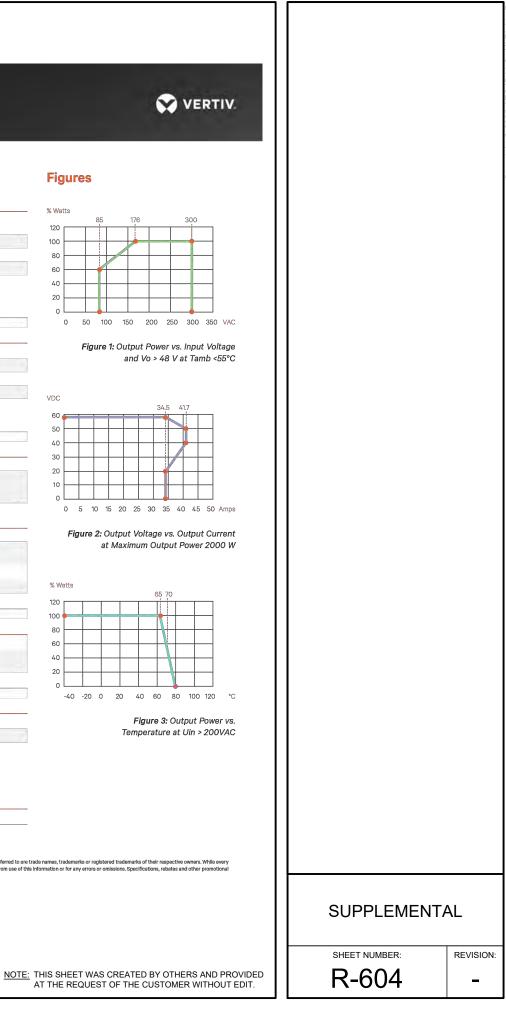

Vertiv[™] eSure[™] Converter

C48/58 -2000P3

Key Benefits

2000 W Peak / 1600 W Average

and lower operating costs with

Converter, 48 to 58 VDC,

Reduce power consumption

• Easily add capacity with hot

• Ensure high availability with

41 VDC to 58 VDC.

from -40°C to +65°C.

wide input voltage range from

• Power your 5G sites in the harsh

environments with operation

• Enjoy peace of mind with high

quality UL recognized design.

pluggable interchangeable

95% peak efficiency.


components.

Easily support higher power 5G remote radios on cell towers with modular 2000 watt eSureTM power extend converters.

Description

The Vertiv™ eSure™ C48/58-2000P3 high-efficiency converter is designed to operate from a nominal -48 VDC source to provide nominal -58 VDC load power, which is adjustable to application needs up to 2000 watts peak, 1600 watts average. This constant power converter designed with the latest patented switchmode technology, uses digital signal processing (DSP) for efficient operation.

The eSure C48/58-2000P3 DC to DC converter is ideal for feeding high power remote radio heads (RRHs). 58 VDC is regulated over a wide input range to minimize voltage drop in the cable feeding the RRH and sustain operation to end of battery discharge. When redundancy is critical or loads are high, multiple eSure C48/58-2000P3 converters can be connected in parallel to support a variety of telecom applications. Unified remote management and control of the power system is enabled when combined with a Vertiv™ NetSure™ controller.

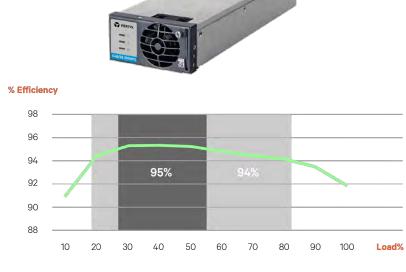

C48/58-2000P3 Efficiency Curve at 53.5 VDC Nominal Input

1

Vertiv[™] eSure[™] Converter

Technical Specifications

VERTIV.

Fi	αι	Jr	es	

DC Input	C48/58-2000P3
Voltage	41 VDC to 58.5 VDC, 48 VDC (nominal)
Maximum Current	53 A
DC Output	
Voltage	56 VDC to 58 VDC
Maximum Power	2000 W peak, 1600 W average
	at 40°C, 1280 W average at 65°C
Maximum Current 35.7 A at 2000 W peak (see figure 1), 28.6 A at 1600 W average, 22.9 A at 1280 W average, all at 56 VDC	
Peak Efficiency	>95%
Noise	< 250mV pk-pk; < 20mV rms; <38 dBrnC
Control and Monitoring	
Alarms and Signaling	Alarm and status reported via CAN bus to system controller
Visual Indications	Green LED: Normal Operation Yellow LED: Alarm Red LED: Failure Flashing Red LED: Fan Failure
Environmental	
Operating Temperature	-40°C to +80°C / -40°F to +176°F (see figure 2)
Storage Temperature	-40°C to +85°C / -40°F to +185°F
Relative Humidity	0 to 90%
Altitude	2000 m / 6560 ft at full power
Standards Compliance	
Safety	UL62368-1, EN62368-1, IEC62368-1
EMC	FCC CFR 47 Part 15 Class A conducted and Class B radiated
Environment	REACH, ROHS
Mechanics	
Dimensions (H x W x D)	41 x 84.5 x 252.5 mm / 1.61 x 3.33 x 9.94 inches
Weight	1.13 kg / 2.49 lbs

Ordering Information

Part Number	Description	
1C48582000P3	eSure™ converter, -48 to -58 VDC, 2000 W peak / 1600 W average	


Vertiv.com | Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA

© 2024 Vertiv Group Corp. All rights reserved. Vertiv[™] and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.

C48/58-2000P3 (02/2024)

PROPOSED -48/-58V DC CONVERTER DETAIL SCALE : N.T.S.

-40 -20

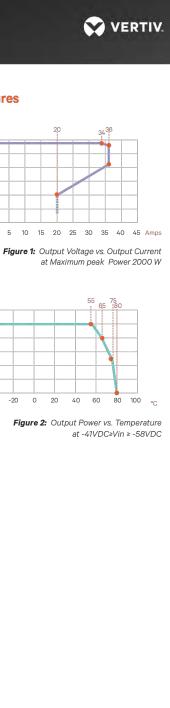

NOTE: THIS SHEET WAS CREATED BY OTHERS AND PROVIDED AT THE REQUEST OF THE CUSTOMER WITHOUT EDIT.



SHEET NUMBER:

REVISION: -

SUPPLEMENTAL

connect@alpinepowersystems.com \$ 877-993-8855





The PowerSafe® SBS® Front Terminal battery further extends the technical leadership of PowerSafe SBS battery product line: not only do PowerSafe SBS Front Terminal monoblocs retain the benefits typically associated with Thin Plate Pure Lead (TPPL) Technology such as long life, high energy density, superior shelf life, etc., they also deliver exceptional cyclic performance in both float and fast charge applications, even in the hottest and harshest operating environments.

Click to view product web page

Where conventional Valve Regulated Lead Acid (VRLA)/Absorbed Glass Mat (AGM) batteries struggle to cope with harsh conditions and frequent power outages, cutting edge (TPPL) technology makes PowerSafe 12V batteries the perfect solution for the challenging operating conditions of today's telecommunication networks.

PowerSafe SBS batteries are designed to high quality standards and a unique manufacturing methods means superior energy and power, high performance and proven reliability, there is no substitute to PowerSafe SBS Front Terminal batteries.

Features and Benefits

- Capacity range 31-190Ah
- 12V monobloc configurations
- Multiple string configurations available
- Two year shelf life
- SR4228 compliant
- Proven long service life
- High energy density and cycling capability

OWER SYST A Division of TFI, Inc. est 1963

Construction

• Robust positive plates are designed to prolong service

electrolyte is absorbed within the AGM, preventing acid

Container and cover in flame retardant UL94-V0

material, highly resistant to shock and vibration

Terminals are stainless steel front access with top

access copper alloy insert. Top and front access

Self-regulating one way pressure relief valves prevents ingress of atmospheric oxygen

terminations provide maximum conductivity

life and enhance corrosion resistance

spills in case of accidental damage

connect@alpinepowersystems.com \$ 877-993-8855

Installation and Operation

- Space efficient footprint
- VRLA design, reduces maintenance requirements Separators are low resistance microporous (AGM). The Lifting handles for easy handling
 - Greater than 10 year life expectancy in float service at 77°F (25°C)
 - Increased active material surface area yields great cycling capability
 - Operating temperature: -40°F (-40°C) to 122°F (50°C) Recommended temperature: 68°F (20°C) to 86°F (30°C)

	Nominal Ca	pacity (Ah)	Nominal Dimensions					
Cell Type	10 hr rate to 1.80Vpc @20°C	8 hr rate to 1.75Vpc @77°F	Len in	gth mm	Wi in	dth mm	He	eight mm
SBS B8F	31	31	11.9	303	3.8	97	6.3	159
SBS B10F	38	38	11.9	303	3.8	97	7.2	184
SBS B14F	62	62	11.9	303	3.8	97	10.4	264
SBS C11F	92	91	16.4	417	4.1	105	10.1	256
SBS 100F	100	100	15.6	395	4.3	108	11.3	28
SBS 112F	112	112	22.1	561	4.9	125	9.0	228
SBS 145F	145	145	17.9	455	6.8	173	9.4	238
SBS 165F	165	165	17.9	455	6.8	173	10.8	273
SBS 170F	170	170	22.1	561	4.9	125	11.1	283
SBS 190F	190	190	22.1	561	4.9	125	12.4	310







Publication No: US-SBSF-RS-004 - January 2014

Battery Services for Backup

- · Battery Installation
- Capacity and Acceptance
- Preventative Maintenance

backup power telecom www.alpinepowersystems.c

PROPOSED POWERSAFE SBS 170F BATTERY DETAIL 1

SCALE : N.T.S.

 Standards Meets criteria for "non-spillable" batteries Complies with Telcordia" SR-4228, Network Equipment Building System (NEBS™) Criteria Levels The management systems governing the manufacture of this product are ISO 9001:2008 and ISO 14001:2004 certified 		Copyright © 2025 ATC IP LLC, All Rights
Weight - Volumes Height Unpacked Ibs kg 6.3 159 22.7 10.3 7.2 184 28.2 12.8 10.4 264 42.0 19.1 10.1 256 61.6 28.0 11.3 287 71.9 32.6 9.0 228 90.4 41.1 9.4 238 105.0 47.7		
10.8 273 117.4 53.3 11.1 283 115.7 52.5 12.4 316 132.3 60.0		
SBS 145F - 190F		
Backup Power		
ance		
ecom motive power <u>ystems.com</u>		
	SUPPLEMENTAL	
THIS SHEET WAS CREATED BY OTHERS AND PROVIDED AT THE REQUEST OF THE CUSTOMER WITHOUT EDIT.	SHEET NUMBER: REVISION: -	

DATA SHEET DC Surge Protection Solutions for Base Station - Outdoor Rated DC12-48-60-0-25E **Overvoltage Protection and Power Management Junction Box**

Base Protection - Outdoor

Strikesorb°

The DC12-48-60-0-25E is designed to be the most robust lightning and power surge protector available for distributed node B or e-node B applications. The flexible design provides electrical protection/cable management at the rooftop or base of sites. The solution employs the patented Strikesorb® 30-V1-HV surge protective device (SPD), capable of providing 60kA (8/20 µs) of surge capacity for up to 12 -48V DC circuits.

461.39

[569.03] 22.40



ships with Conduit Fittings installed

Features

- Provides protection for 12 individual -48V DC circuits at the base of sites
- Surge protection of 60kA 8/20 µs
- Maximum impulse current 5kA 10/350 µs
- Simplifies inter-connectivity and cable management for DC conductors
- UL 1449 4th Edition Type 2 protective device
- IEC 61643-11 Class I protection for DC applications
- Form C relay contacts included, allowing remote monitoring of suppressor status Patent pending

Benefits

www.raycap.com

[355.60] [509.52] 14.00 20.06

- Strikesorb modules are fully recognized to UL 1449 4th Edition, and IEC 61643-11 Safety Standards, meeting all intermediate and high current fault requirements to facilitate use in original equipment manufacturers (OEM) applications
- Strikesorb offers unique maintenance-free protection against direct lightning currents

1

• NEMA 4 enclosure allows for indoor or outdoor installation



SPECIFICATIONS DC Surge Protection Solutions for Base Stat DC12-48-60-0-25E **Overvoltage Protection and Power Management Junction**


Strikesorb[®]

ectrical		
Model Number		DC12-48-60-0-25E
CEQ / ANT Number		CEQ. 12659
Number of Circuits Protected		12
Surge Protective Device (SPD) Type per UL 1449 4	th Edition	Туре 2
Surge Protection Class as per IEC 61643-11		Class I
Nominal Operating DC Voltage [Un]		48 V
Nominal Discharge Current [In] per UL 1449 3rd Ed	ition	20 kA 8/20 µs
Maximum Surge Current [Imax] per IEC 61643-11		60 kA 8/20 µs
Maximum Impulse (Lightning) Current [I _{imp}] per IEC	61643-11	5kA 10/350 µs
Maximum Continuous Operating DC Voltage [U,] (N	ACOV)	75 VDC
Voltage Protection Level [Un] per IEC 61643-11		300 V
Voltage Protection Rating (VPR)		700 V
Suppression Technology		MOV
Strikesorb Module Type 2CA (UL 1449 4th edition)		30-V1-HV
Protection Modes:	Normal Mode	-48V to Return
	Common Mode	Return to Ground
echanical		
Connection Terminal (Alarm) Method		Form C Hardwired, #22 to #12 AWG [0.34 to 4
Connection Terminal (Suppression) Method		Compression lug 2 hole, #10, 5/8 pitch, 12-4 A
Connection Terminal (Terminal Block) Method	Copper	#14 to #2 AWG [2.5 to 35 mm ²]
	Aluminum	#12 to #2 AWG [4 to 35 mm ²]
Environmental Ingress Protection (IP) Rating		IP 68
Operating Temperature (°C)		-40° C to +100° C
Storage Temperature (°C)		-70° C to +80° C
Cold Temperature Cycling IEC 61300-2-22		-30° C to +60° C 200 hrs @5 PSI
Resistance to Aggressive Materials CEI IEC 61073-	-2	Including Acids and Bases
UV Protection ISO 4892-2 Method A		Xenon-Arc 2160 hrs
Enclosure Type		Outdoor - NEMA 4 Rated
Enclosure Dimensions (L x W x H)		18.17"×20.06"×6.37" [461.39×509.52×161.7]
Weight		56.3 lbs [25.54 kg]
Combined Wind Loading	Sustained	135.3 lbs [602 N]
	Gust	228.6 lbs [1016 N]
tional Product Configurations		
Conduit Fittings		3- 2" Conduit Fittings, 2- 21/2" Conduit Fittings, -
Cable Glands (kit included)		3- NPT 1" Cable Glands, 2- M75 Cable Glands,
andards Compliance & Certifications		
Strikesorb modules are compliant to the following S	urge Protection	Device Standards:

Strikesorb modules are compliant to the following Surge Protection Device Standards: Standards: UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.4 IEEE C62.45: 2002, NEMA-LS-1 Certifications: UL, VDE, CE

Raycap


www.raycap.com



G02-00-267 150115

SCALE : N.T.S.

					ese
					LLC, All Rights Rese
					Righ
					AIIA
					Û.
					Copyright © 2025 ATC IP
Station - Outdoor Rated					25 A
					20,
nction Box					ht ©
					yrig
					Cop
34 to 4 mm ²]					
12-4 AWG [3.31-21 mm ²]					
×161.71 mm]					
ttinge 1, 18 Conduit Fitting					
ittings, 1- 1" Conduit Fitting Glands, 3- M63 Cable Glands					
E C62.41: 2002,					
AWG=American Wire Gauge					
c 🕀 us c 🍽 us 🚵 C E					
-					
G02-00-267 150115					
		SUPPLE	MENT	AL	
		01/222		DE1 (101-51)	
				REVISION:	
ET WAS CREATED BY OTHERS AND PROVIDED		R-607	7	_	
EQUEST OF THE CUSTOMER WITHOUT EDIT.	11	1,001			

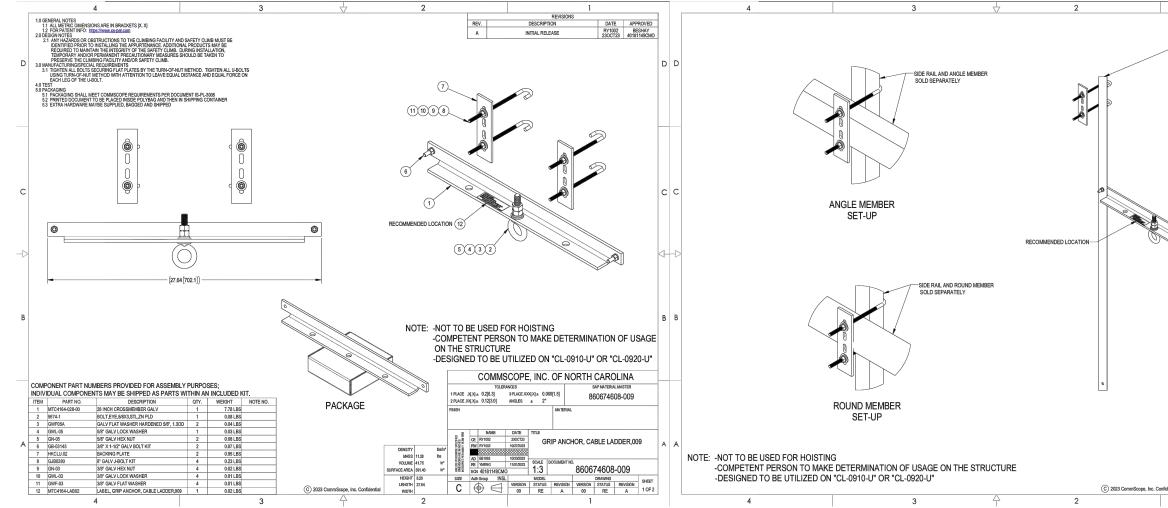

NOTE: THIS SHEET WAS AT THE REQUEST

			<
			-
			C F
			c (i
1			
CL-0910-U OR CL-0920-U SOLD SEPARATELY			
	D		
	С		
	⊲-		
	в		
COMMSCOPE, INC. OF NORTH CAROLINA			
GRIP ANCHOR, CABLE LADDER,009	A		
C 1:5 DOCUMENT NO. B860674608-009			
ential ent			
1			
		SUPPLEMENTA	AL
		SHEET NUMBER:	REVISION:
CREATED BY OTHERS AND PROV	IDED	R-608	_
T OF THE CUSTOMER WITHOUT ED	IT.		-

LUHG-38



Lace-up Hoisting Grip for HELIAX® 0.40-0.56 in (10.2-14.2 mm) cable including all RFFT discrete trunk series cables

Product Classification		Weight, gross
Product Type	Hoisting grip	Regulatory Co
Product Brand	HELIAX®	Agency
Ordering Note	CommScope® standard product (Global)	CHINA-ROHS
General Specifications		REACH-SVHC
		ROHS
Attachment Spacing Intervals	60.96 m 200 ft	UK-ROHS
Hoisting Grip Type	Lace-up hoisting grip	
Installation Tool	Required, not included	
Support Clamp	Not included	
Тооl Туре	Hoisting grip	
Dimensions		
Grip Length, minimum	152.4 mm 6 in	
Leader Length, minimum	165.1 mm 6.5 in	
Compatible Diameter, maximum	14.2 mm 0.559 in	
Compatible Diameter, minimum	10.2 mm 0.402 in	
Nominal Size	3/8 in	
Electrical Specifications		
Return Loss Effect, maximum	0.1 dB	
DTF Effect, maximum	0.1 dB	
Material Specifications		
Material Type	Stainless steel	
Mechanical Specification	าร	
Pull Load Capacity	90.718 kg 200 lb	

1

LUHG-38

Packaging and Weights

Height, packed	55.88 mm 2.2 in
Width, packed	266.7 mm 10.5 in
Length, packed	266.7 mm 10.5 in
Packaging quantity	1
Weight, gross	0.04 kg 0.088 lb

Compliance/Certifications

ncy	Classification
NA-ROHS	Below maximum concentration value
CH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
IS	Compliant
ROHS	Compliant

Page 1 of 2

©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: January 14, 2025

COMMSCOPE®

©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: January 14, 2025

PROPOSED COMMSCOPE CABLE HOISTING GRIP DETAIL

SCALE : N.T.S.

COMMSCOPE



REVISION: -

SUPPLEMENTAL

Page 2 of 2

29958



Lace-up Hoisting Grip for HELIAX® 0.75-0.99 in (19-25.1 mm) cables and elliptical waveguide 85, 90, 127A, 132-144, PWRT-606-S

Product Classification

Compatible Diameter, minimum

Electrical Specifications

Material Specifications

Mechanical Specifications

Return Loss Effect, maximum

DTF Effect, maximum

Nominal Size

Material Type

Pull Load Capacity

Product Type	Hoisting grip
Product Brand	HELIAX®
Ordering Note	CommScope® non-standard product
General Specifications	
Attachment Spacing Intervals	60.96 m 200 ft
Hoisting Grip Type	Lace-up hoisting grip
Support Clamp	Not included
Tool Type	Hoisting grip
Dimensions	
Grip Length, minimum	508 mm 20 in
Leader Length, minimum	152.4 mm 6 in
Compatible Diameter, maximum	25.1 mm 0.988 in

19 mm | 0.748 in

5/8 in

0.1 dB

0.1 dB

Stainless steel

226.796 kg | 500 lb

29958

Packaging and Weights

Height, packed	55.88 mm 2.2 in
Width, packed	236.22 mm 9.3 in
Length, packed	236.22 mm 9.3 in
Packaging quantity	1
Weight, gross	0.3 kg 0.661 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



Page 1 of 2

affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 21, 2024

COMMSCOPE°

1

affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 21, 2024

PROPOSED COMMSCOPE CABLE HOISTING GRIP DETAIL SCALE : N.T.S.




SHEET NUMBER:

SUPPLEMENTAL

Page 2 of 2



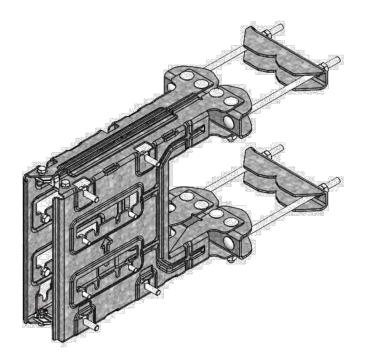

SXK 125 5394/2

Universal B2B Bracket CC110

Universal B2B Bracket CC110 is designed for installation of back to back ERS on any supporting structure i.e. pole, mast, tower leg etc. It is Low PIM bracket. When installed properly, it meets the requirements of installation in High Risk PIM Zones. Static and dynamic testing was conducted as per IEC 61000-4-3: 2020 PRV and ITU-R SM-329.

Robustness

The Universal B2B Bracket CC110 kit supports for installation of back to back ERS weight upto 50 kg on each side simultaneously. It supports the ERS mounting on pole, mast, tower leg or square tube. Easy installation due to use of carriage bolts for mounting on the supporting structure and key holes for ERS in the bracket. Bush separators has been provided to avoid any contact of arms with each other.

Quality

All components of the assembly are made of galvanized High Tensile Steel, which supports corrosion resistance.




Ericsson | SXK 125 5394/2

Technical specification

Functional Description SXK 125 5394/2

Universal B2B Bracket CC110 kit supports installation of ERS back to back with Centre to Centre distance of 30mm x 110mm, 80mm x 110mm and 110mm x 110mm. It also supports two RRUs (back to back) with Centre to Centre distance of 146mm x 264.5 mm (old generation ERS). ERS or RRU are mounted back to back in portrait position on any supporting structure with ERS or RRU weight up to 50kg on each side.







Universal			
Universal	BSR BLOCK	ket CC110	
SXK 125 5	394/2		
Profile	М	inimum	Maximum
Circular tu			Ø120 mm (4.7 inch)
60º Angle			ng 115 mm Oper (4.5 inch)
90º Angle	35	5 x 35 mm	112 x 112 mn
Square tu	be 35	5 x 35 mm	80 x 80 mm
Brackets	н	ligh Tensile S	Steel, Galvanized
Fasteners	G	Grade 8.8 Gal	lvanized & A4
Bush Sepo	arators C	Composite me	aterial(PBT+PET)-C
M8 ISO, 1	3mm torqı	ue wrench (1	.0-22 Nm)
M10 ISO,	16mm & 1	7mm torque	wrench (15-25 Nm
Maximum	wind spee	ed	67 m/s (240 km/l
Survival w	ind speed		90 m/s (324 Km/
Maximum	equipmen	nt weight	2 x 50 Kg (2 x 110
Length	Width	Height	Package Weight
			10.4 Kg
(18.9 in)	(14.2 in)	(3.2 in)	(22.9 lbs)
	Profile Circular tu 60° Angle 90° Angle Square tu Brackets Fasteners Bush Sepc M8 ISO, 1: M10 ISO, 7 Maximum Survival w Maximum Length 480 mm	Circular tube Ø (1 60° Angle 3! (1 90° Angle 3! (1 Square tube 3! (1 Square tube 3! (1 Brackets H Fasteners 0 Bush Separators 0 M8 ISO, 13mm torqu M10 ISO, 16mm & 1 Maximum wind speed Maximum equipmer Length Width 480 mm 360 mm	ProfileMinimumCircular tubeØ25 mm (1 inch)60° Angle35 mm Openir (1.4 inch)90° Angle35 x 35 mm (1.4 X 1.4 inch)90° Angle35 x 35 mm (1.4 X 1.4 inch)Square tube35 x 35 mm (1.4 X 1.4 inch)BracketsHigh Tensile S Grade 8.8 Gal Bush SeparatorsM8 ISO, 13mm torque wrench (1 M10 ISO, 16mm & 17mm torqueMaximum wind speed Survival wind speed Maximum equipment weightLengthWidth 360 mmHeight 480 mm

ericsson.com

PROPOSED RRU BACK TO BACK BRACKET DETAIL

SCALE: N.T.S.

Reserv
Rights
M
LLC,
∟
ATC
2025
0
Copyright

May 2021 2 enina ch) ch) -GF30 m) /h, 149 mph)

n/h, 201 mph) 10.2 lbs) Product Weight

10.0 Kg (22.0 lbs)

287 01- SXK 125 5394/2, Rev. A ©Ericsson AB 2021

NOTE: THIS SHEET WAS CREATED BY OTHERS AND PROVIDED AT THE REQUEST OF THE CUSTOMER WITHOUT EDIT.



REVISION: -

SUPPLEMENTAL

Pxxx: Bulk Pipe

SITE PRO A valmont 🌾 COMPANY

art#	Length	OD x Length (in)
	Schedu	ule 40
P260	5'-0"	2-3/8" x 60"
P263	5'-3"	2-3/8" x 63"
P272	6'-0"	2-3/8" x 72"
P284	7'-0"	2-3/8" x 84"
P296	8'-0"	2-3/8" x 96"
2108	9'-0"	2-3/8" x 108"
2120	10'-0"	2-3/8" x 120"
2126	10'-6"	2-3/8" x 126"
P2150	12'-6"	2-3/8" x 150"
P2174	14'-6"	2-3/8" x 174"
P2252	21'-0"	2-3/8" x 252"
P3072	6'-0"	2-7/8" x 72"
P3084	7'-0"	2-7/8" x 84"
>3096	8'-0"	2-7/8" x 96"
P30108	9'-0"	2-7/8" x 108"
P30120	10'-0"	2-7/8" x 120"
P30126	10'-6"	2-7/8" x 126"
P30150	12'-6"	2-7/8" x 150"
P30174	14'-6"	2-7/8" x 174"
P30252	21'-0"	2-7/8" x 252"
P360	5'-0"	3-1/2" x 60"
9372	6'-0"	3-1/2" x 72"
P384	7'-0"	3-1/2" x 84"
2396	8'-0"	3-1/2" x 96"
P3150	12'-6"	3-1/2" x 150"
93160	13'-4"	3-1/2" x 160"
93174	14'-6"	3-1/2" x 174"
93216	18'-0"	3-1/2" x 216"
>3252	21'-0"	3-1/2" x 252"
9472	6'-0"	4-1/2" x 72"
P4126	10'-6"	4-1/2" x 126"
P4252	21'-0"	4-1/2" x 252"



Features:

• Factory cut end, hot-dip galvanized pipe

Construction:

ASTM A53 Grade BSchedule 40 or Schedule 80

Design Criteria:


ASTM A53 Grade B (Yield Fy = 35 ksi [240 MPa]/ Tensile Fu = 60 ksi [415 MPa])
Hot dip galvanized in accordance with ASTM A123 requirements

Part#	Length	OD x Length (in)
	Schedule	e 80
P2252-80	21'	2-1/2" x 252"
P30126-80	10'-6"	2-7/8" x 126"
P30252-80	21'	2-7/8" x 252"
P3252-80	21'	3-1/2" x 252"



888-438-7761

PROPOSED PIPE MOUNT DETAIL 1 SCALE: N.T.S.

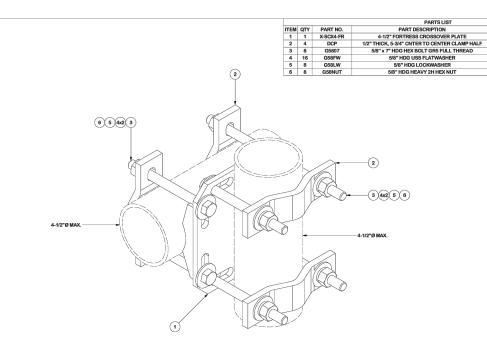

FINISH: HOT DIP GALVANIZED.					
	TOLERANCE NOTES TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAMED, SHEARED AND GAS CUT EDGES (± 0.007) DRILED AND GAS CUT HOLES (± 0.007) - NO CONING OF HOLES BENDS ARE ± 120 DEGREE: (± 0.0107) - NO CONING OF HOLES		RIPTIO	N Y-DUTY UNIVERSAL C	CROSSOVE
	ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")	CPD N	D.	DRAWN BY CMFL 9/14/2021	ENG. APPROV
	PROPREZARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAVENG ARE PROPRETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECHET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INCUSTINES IS STRONG VIEW OF REPEACH.	CLASS 87	SUB 02	DRAWING USAGE CUSTOMER	CHECKED BY

PROPOSED CROSSOVER PLATE KIT DET (2)

	9
	2
	ē
	0
h	Φ
	n
	S
	÷
	_
	0
	~
	ĸ
	_
	_
	\triangleleft
	~
	Û.
	1
	_
	0
	۵.
	()
	<u> </u>
	5
	\triangleleft
	S
	\sim
	0
	\sim
	\odot
	<u> </u>
	Ţ
	0
	<u> </u>
	>
	0
	$\overline{\circ}$
	ŏ
	\cup

IT INTER CLAMP HALF 8 1/8 in 0.23 9.45 FAILT INTER 0 7/0 7/0 7/3 5.84 WASHER 1/8 in 0.07 1.13 NIFE NUT 0.13 1.04 TOTAL WT. # 25.92 INT INT INT INT INT INT INT INT INT INT	MBP HALF 018 in 2.38 9.45 NEAD 1/8 in 0.07 1.13 0.03 0.21 1.13 0.13 1.04 107 KL WT.# 25.62 TOTAL WT.# 25.62 100 KL WT.# 25.62 TOTAL WT.# 25.62 100 KL WT.# 100 KL WT.# Valence V Segment WT. Note Note Note Note Note Note Note Note	IT Important Meta 0.10 in 2.38 9.46 SHER TALL THREAD 7 in 0.70 5.64 WASHER 1/9 in 0.07 1.13 SHER 0.13 1.04 HEX NUT 0.13 1.04 TOTAL WY.# 25.62	OVER PLATE	8.15	8.15		
TWASHER 1/8 in 0.07 1.13 VASHER 0.03 0.21 HHEX NUT 0.13 1.04 TOTAL WT.# 25.62	1/8 in 0.07 1.13 0.13 1.04 TOTAL WT. # 25.62		CENTER CLAMP HALF	8 1/8 in 2.36	9.45		
KIT Verment V Convert Verment	0.03 0.21 Image: Constraint of the second		R5 FULL THREAD	7 in 0.70	5.64		
Image: Argenting of the curve of the cu	TOTAL WT.# 25.62 Image: State of the state of		ASHER				
KIT	VITION FCX45-U	KIT Exemple Section Se	HEX NUT				
VAL PART NO.							
L PART NO.							
PART NO.							
L PART NO.							
AL PART NO.							
AL PART NO.							
AL PART NO.							
L PART NO.							
AL PART NO.							
AL PART NO.							
AL PART NO.							
AL PART NO.							
AL PART NO.							
AL PART NO.							
AL PART NO.							
AL PART NO.							
AL PART NO.							
AL PART NO.							
AL PART NO.			STTE	1 <u>k</u>	cations: w York, NY		
/AL PART NO.				Engineering At Support Team: Lo 1-888-753-7446 Ph	lanta, GA s Angeles, CA /mouth, IN lem. OR		
FCX45-U of B	FCX45-U	FCX45-U			1 PAGE		
FCX45-U				FCX45-U	<u>→</u> ``		
							Δ
						SUFFLEIVIEINT	
	SUPPLEMENTA						
	SUPPLEMENTA					0	Т
NL.	SUPPLEMENTA	IL					
N.T.S. SHEET NUMBER:	SHEET NUMBER:	IL N.T.S. SHEET NUMBER:	S CREATED BY	OTHERS AND P	ROVIDED	D 610	
N.T.S. SHEET NUMBER:	SHEET NUMBER:	IL N.T.S. SHEET NUMBER:					
NL.	SHEET NUMBER:	IL N.T.S. SHEET NUMBER:					

LENGTH UNIT WT. NET WT.



Pxxx: Bulk Pipe

Part#	Length	OD x Length (in)
	Schedu	le 40
P260	5'-0"	2-3/8" x 60"
P263	5'-3"	2-3/8" x 63"
P272	6'-0"	2-3/8" x 72"
P284	7'-0"	2-3/8" x 84"
P296	8'-0"	2-3/8" x 96"
P2108	9'-0"	2-3/8" x 108"
P2120	10'-0"	2-3/8" x 120"
P2126	10'-6"	2-3/8" x 126"
P2150	12'-6"	2-3/8" x 150"
P2174	14'-6"	2-3/8" x 174"
P2252	21'-0"	2-3/8" x 252"
P3072	6'-0"	2-7/8" x 72"
P3084	7'-0"	2-7/8" x 84"
P3096	8'-0"	2-7/8" x 96"
P30108	9'-0"	2-7/8" x 108"
P30120	10'-0"	2-7/8" x 120"
P30126	10'-6"	2-7/8" x 126"
P30150	12'-6"	2-7/8" x 150"
P30174	14'-6"	2-7/8" x 174"
P30252	21'-0"	2-7/8" x 252"
P360	5'-0"	3-1/2" x 60"
P372	6'-0"	3-1/2" x 72"
P384	7'-0"	3-1/2" x 84"
P396	8'-0"	3-1/2" x 96"
P3150	12'-6"	3-1/2" x 150"
P3160	13'-4"	3-1/2" x 160"
P3174	14'-6"	3-1/2" x 174"
P3216	18'-0"	3-1/2" x 216"
P3252	21'-0"	3-1/2" x 252"
P472	6'-0"	4-1/2" x 72"
P4126	10'-6"	4-1/2" x 126"
P4252	21'-0"	4-1/2" x 252"

SITE PRO

A valmont 🌾 COMPANY

Features:

Factory cut end, hot-dip galvanized pipe

Construction:

- ASTM A53 Grade BSchedule 40 or Schedule 80

Design Criteria:

- ASTM A53 Grade B (Yield Fy = 35 ksi [240 MPa]/ Tensile Fu = 60 ksi [415 MPa])
 Hot dip galvanized in accordance with ASTM A123 requirements

Part #	Length	OD x Length (in)
	Schedu	ile 80
P2252-80	21'	2-1/2" x 252"
P30126-80	10'-6"	2-7/8" x 126"
P30252-80	21'	2-7/8" x 252"
P3252-80	21'	3-1/2" x 252"

SitePro1.com

888-438-7761







REVISION: -

SUPPLEMENTAL



This report was prepared for American Tower Corporation by



Antenna Mount Analysis Report

Mount Type : (1) 15.0 ft & (2) 13.0 ft Sector Frame ATC Asset Name : SPOUT SPRINGS NC1 ATC Asset Number : 21274 Engineering Number : 14884053_C8_01 ETS, PLLC Job Number : 25134852.STR.0164 Mount Elevation : 300.0 ft Carrier Site Name : 368-218 Carrier Site Number : 368-218 Carrier Site Number : 2305 NC 87 South Site Location : 3030.0 ft County : Harnett Date : April 14, 2025 Max Usage : 48% Prepared By: : Reviewed By: J. Scott Hilgoe, PE : Sect Page Prepared By: Reviewed By:			
ATC Asset Number : 21274 Engineering Number : 14884053_C8_01 ETS, PLLC Job Number : 25134852.STR.0164 Mount Elevation : 300.0 ft Carrier : AT&T Mobility Carrier Site Name : 368-218 Carrier Site Number : WSVWN0055007 Site Location : 2305 NC 87 South Sanford, NC 27332 35.27725912, -79.07085941 County : Harnett Date : April 14, 2025 Max Usage : 48% Result : Contingent Pass Prepared By: Reviewed By: J. Scott Hilgoe, PE Bach Tran, El Reviewed By: J. Scott Hilgoe, PE	Mount Type	:	(1) 15.0 ft & (2) 13.0 ft Sector Frame
Engineering Number : 14884053_C8_01 ETS, PLLC Job Number : 25134852.STR.0164 Mount Elevation : 300.0 ft Carrier : AT&T Mobility Carrier Site Name : 368-218 Carrier Site Number : WSVWN0055007 Site Location : 2305 NC 87 South Sanford, NC 27332 35.27725912, -79.07085941 County : Harnett Date : April 14, 2025 Max Usage : 48% Result : Contingent Pass Prepared By: Bach Tran, El : Reviewed By: J. Scott Hilgoe, PE Firm# P-1016	ATC Asset Name	:	SPOUT SPRINGS NC1
ETS, PLLC Job Number : 25134852.STR.0164 Mount Elevation : 300.0 ft Carrier : AT&T Mobility Carrier Site Name : 368-218 Carrier Site Number : WSVWN0055007 Site Location : 2305 NC 87 South Sanford, NC 27332 35.27725912, -79.07085941 County : Harnett Date : April 14, 2025 Max Usage : 48% Result : Contingent Pass Prepared By: Reviewed By: J. Scott Hilgoe, PE Bach Tran, El Reviewed By: J. Scott Hilgoe, PE	ATC Asset Number	:	21274
Mount Elevation:300.0 ftCarrier:AT&T MobilityCarrier Site Name:368-218Carrier Site Number:WSVWN0055007Site Location:2305 NC 87 South Sanford, NC 27332 35.27725912, -79.07085941County:Harnett OateDate:April 14, 2025Max Usage:48%Result:Contingent PassPrepared By: Bach Tran, ElReviewed By: J. Scott Hilgoe, PE J. Scott Hilgoe, PE J. Scott Hilgoe, PE J. Scott Hilgoe, PE DateFirm# P-1016	Engineering Number	:	14884053_C8_01
Carrier:AT&T MobilityCarrier Site Name:368-218Carrier Site Number:WSVWN0055007Site Location:2305 NC 87 South Sanford, NC 27332 35.27725912, -79.07085941County:HarnettDate:April 14, 2025Max Usage:48%Result:Contingent PassPrepared By: Bach Tran, El:Reviewed By: J. Scott Hilgoe, PE Dete MarketPrepared By: Bach Tran, El::Prepared By: Bach Tran, El::Prepared By: Bach Tran, El::Prepared By: Bach Tran, El::Prepared By: Bach Tran, El::: <td>ETS, PLLC Job Number</td> <td>:</td> <td>25134852.STR.0164</td>	ETS, PLLC Job Number	:	25134852.STR.0164
Carrier Site Name : 368-218 Carrier Site Number : WSVWN0055007 Site Location : 2305 NC 87 South Sanford, NC 27332 35.27725912, -79.07085941 County : Harnett Date : April 14, 2025 Max Usage : 48% Result : Contingent Pass Prepared By: Bach Tran, El : Scott Hilgoe, PE Structure I Generation Measure	Mount Elevation	:	300.0 ft
Carrier Site Number : WSVWN0055007 Site Location : 2305 NC 87 South Sanford, NC 27332 35.27725912, -79.07085941 County : Harnett Date : April 14, 2025 Max Usage : 48% Result : Contingent Pass Prepared By: Bach Tran, El : South Hilgoe, PE From # P-1016	Carrier	:	AT&T Mobility
Site Location : 2305 NC 87 South Sanford, NC 27332 35.27725912, -79.07085941 County : Harnett Date : April 14, 2025 Max Usage : 48% Result : Contingent Pass Prepared By: Bach Tran, El Reviewed By: J. Scott Hilgoe, PE	Carrier Site Name	:	368-218
Sanford, NC 27332 35.27725912, -79.07085941 County : Harnett Date : April 14, 2025 Max Usage : 48% Result : Contingent Pass Prepared By: Reviewed By: Bach Tran, El . Scott Hilgoe, PE Firm# P-1016	Carrier Site Number	:	WSVWN0055007
S5.27725912, -79.07085941 County : Harnett Date : April 14, 2025 Max Usage : 48% Result : Contingent Pass Prepared By: Bach Tran, El Reviewed By: J. Scott Hilgoe, PE Status Firm# P-1016	Site Location	:	2305 NC 87 South
County : Harnett Date : April 14, 2025 Max Usage : 48% Result : Contingent Pass Prepared By: Bach Tran, El Reviewed By: J. Scott Hilgoe, PE Firm# P-1016			Sanford, NC 27332
Date : April 14, 2025 Max Usage : 48% Result : Contingent Pass Prepared By: Reviewed By: Bach Tran, El Scott Hilgoe, PE Firm# P-1016			35.27725912, -79.07085941
Max Usage : 48% Result : Contingent Pass Prepared By: Reviewed By: Bach Tran, El J. Scott Hilgoe, PE Firm# P-1016	County	:	Harnett
Result : Contingent Pass 041389 Prepared By: Reviewed By: 041389 Bach Tran, El J. Scott Hilgoe, PE Firm# P-1016	Date	:	April 14, 2025
Prepared By: Reviewed By: Bach Tran, El J. Scott Hilgoe, PE Firm# P-1016	Max Usage	:	48%
Bach Tran, El J. Scott Hilgoe, PE Firm# P-1016	Result	:	Contingent Pass
	Bach Tran, El		J. Scott Hilgoe, PE Firm# P-1016



Introduction

The purpose of this report is to summarize results of the antenna mount analysis performed for AT&T Mobility at 300.0 ft.

Supporting Documents

Mount Analysis	Mastec Engineering Project #16807-MNO1, dated December 2
Scoping Form	FA # 10017390 dated January 9, 2025
Photos	Site photos from 2020

Analysis

This antenna mount was analyzed using RISA-3D v22 analysis software.

Basic Wind Speed:	117 mph (3-Second Gust, Vult)
Basic Wind Speed w/ Ice:	37 mph (3-Second Gust) w/ 0.63" radial ice concurrent
Codes:	ANSI/TIA-222-I
Structure Class:	П
Exposure Category:	В
Topographic Procedure:	Method 1
Topographic Feature:	Flat
Crest Height:	0 ft
Crest Length:	0 ft
Spectral Response:	S _{ms} = 0.270, S _{m1} = 0.160
Site Class:	D
Live Loads:	Lm = 500 lbs, Lv = 250 lbs

*Live Load(s) reduction is confirmed to either not govern or not be ap

Conclusion


Based on the analysis results, the antenna mount meets the requirements per the applicable codes listed above provided the modifications listed below are completed:

- Install (6) Site Pro 1 #P2120, 2.0 SCH 40 x 10'-0", A53 Gr.B (ANT.55993, or approved equivalent) mount pipe to be located 12 +/- 3 inches from the tower connection on left and right mount arm on all sectors. Connect with Site Pro 1 FCX45-U (ANT.56006, or approved equivalent) crossover kits.
- Install (3) Site Pro 1 #P30120, 2.5 SCH 40 x 10'-0", A53 Gr.B (ANT.16008 or approved equivalent) mount pipe on position 2. Connect to horizontal pipe with Site Pro 1 FCX45-U (ANT.56006, or approved equivalent) crossover kits.
- Relocate remaining mount pipes to match antenna spacing requirements per 2024 AT&T Macro Build Standards.

The rough cost estimate, pre-MOD design, is estimated to be ≤10k. No structural failures were addressed with the noted contingencies. Contingencies address Carrier's antenna spacing requirements.

Engineered Tower Solutions, PLLC – 3227 Wellington Ct, Raleigh, NC 27615 - 919.782.2710 Office - www.engineeredtowersolutions.com

Engineered Tower Solutions. PLLC – 3227 Wellington Ct. Raleigh. NC 27615 - 919.782.2710 Office - www.engineeredtowersolutions.com



Eng. Number 14884053_C8_01 April 14, 2025 Page 3

28, 2018	



REVISION: -