

1011 N Causeway Blvd, Suite 19 ◆ Mandeville, Louisiana 70471 ◆ Phone: 985.624.5001 ◆ Fax: 985.624.5303

October 2021

Property Owner: Raymond Cole

Property Address: 1175 Moores Chapel Road, Lillington, North Carolina 27546

RE: Photovoltaic System Roof Installations

I have reviewed the existing structure referenced above to determine the adequacy of the existing structure support the proposed installation of an array of solar panels on the roof.

Based on my review, the existing structure is adequate to support the proposed solar panel installation. This assessment is based on recent on-site inspection by SunPro Solar inspectors and photographs of the existing structure. The photovoltaic system is designed to withstand uplift and downward forces; our assessment is regarding the structure's support of the array. Stresses induced by the introduction of individual mount loads on the rafters are within acceptable limits as shown on the attached calculations. The structural considerations used in our review and assessment include the following:

Evaluation Criteria:

Applied Codes: ASCE 7-10 PEBC 2018 "NETC 2018 """P GE 2017

Risk Category: II

Design Wind Speed (3-second gust): 117 MPH

Wind Exposure Category: C Ground Snow Load: 15 PSF Seismic Design Category: D

Existing Structure:

Roof Material: Shingle

Roofing Structure: 2x4 rafters @ 24" O.C.

Roof Slope: 4/12

Connection of Array to Structure:

Manufacturer: UNIRAC Mount: Flashloc Comp Kit

Mounting Connection: Flashloc Comp Kit 5/16" lag screw w/min 2.5" embedment into framing

Zone 1: 2 rails 4'-0" o.c. mounts Zone 2: 2 rails 4'-0" o.c. mounts Zone 3: 2 rails 2'-0" o.c. mounts SEAL ONLY DIFFERNT Ancol.

10/27/2021

North Carolina Firm No. C4113 Principal Engineering, Inc.

Effect of the Solar Array on Structure Loading:

Gravity Loads:

Per IBC Section 1607.12.5.1, the areas of the roof where solar panels are located are considered inaccessible, and therefore not subject to roof live loading. Live load in these areas is replaced by the dead load of the solar array, 3 psf. The total gravity load on the structure is therefore reduced and the structure may remain unaltered. Connections of the mounts to the underlying structure are to be installed in a staggered pattern, except at the array ends, to distribute the loading evenly to the roof structure. The stresses within the rafters due to the introduction of discrete mount loads are within acceptable limits, as shown on the attached calculations.

Wind Load:

The solar panel array will be flush mounted (no more than 6" above the surrounding roof surface, and parallel to the roof surface. Any additional wind loading on the structure due to the presence of the array is negligible. The array structure is designed by the manufacturer to withstand uplift and downward forces resulting from wind and snow loads. The attached calculations verify the capacity of the connection of the solar array to the roof to resist uplift due to wind loads, the governing load case.

Snow Load:

The reduced friction of the glass surface of the solar panels allows for the lower slope factor (C_s) per Section 7.4 of ASCE 7-10 resulting in a reduced design snow load for the structure. This analysis conservatively considered the snow load to be unchanged.

Seismic Load:

Analysis shows that additional seismic loads due to the array installation will be small. Even conservatively neglecting the wall materials, the solar panel installation represents an increase in the total weight of the roof and corresponding seismic load of less than 10%. This magnitude of additional forces meets the requirements of the exception in Section 11B.4 of ASCE 7-10 . The existing lateral force resisting system of the structure is therefore allowed to remain unaltered.

SEAL O41743

SEAL O41743

MGINE CO.

10/27/2021

North Carolina Firm No. C4112

North Carolina Firm No. C4113 Principal Engineering, Inc.

Page 3 of 3

Conclusion:

To the best of my professional knowledge and belief, the subject construction and photovoltaic system installation will be in compliance with all state and local building codes and guidelines in effect at the time of our review.

Limitations:

Engineer's assessment of the existing structure is based on recent field reports and current photographs of the elements of the structure that were readily accessible at the time of inspection. The design of the solar panel racking (mounts, rails, connectors, etc.), connections between the racking and panels, and electrical engineering related to the installation are the responsibility of others. The photovoltaic system installation must be by competent personnel in accordance with manufacturer recommendations and specifications and should meet or exceed industry standards for quality. The contractor is responsible for ensuring that the solar array is installed according to the approved plans and must notify the engineer of any undocumented damage or deterioration of the structure, or of discrepancies between the conditions depicted in the approved plans and those discovered on site so that the project may be reevaluated and altered as required. Engineer does not assume any responsibility for improper installation of the proposed photovoltaic system.

SEAL 041743

SEAL 041743

SEAL 041743

MOINTERN Nanco 1.

10/27/2021

North Carolina Firm No. C4113

Principal Engineering, Inc.

Uplift and Wind Downforce Calculation Summary (ASCE 7-10)

Mount, Rack, & Panel Proportioning

Property Owner:	Raymond Cole	Individual Panel Dimensions		
Project Address:	1175 Moores Chapel Road	Length (in)	Width (in)	Area (sf)
City, State:	Illington, North Carolina 27546	77	39	20.85

Wind Load Calculation Summary (ASCE 7-10 C&C Provisions)					
Building Chara	Building Characteristics, Design Input, and Adjustment Factors				
Roof Dimensions: Length (b):	93 ft.				
Width (w):	32 ft.	Least Dimension: 32 ft.			
Roof Height (h):	25 ft.	Must be less than 60 ✓			
Pitch: 4 on 12 =	18.4°	Must be less than 45° ✓			
Roof Configuration	Gable				
Roof Structure:	2x Rafters				
Roof material:	Plywood				
Ultimate Wind Speed (mph):	117	From ASCE 7-10, Fig. 26.5			
Exposure Category:	С	Para 26.7.3			
Directionality Factor, K _d	0.85	Table 26.6-1			
Risk Category:	2	Table 1.5-2			
Exposure Coefficient, K _z	1.09	Table 30.3-1			
Topographic Adj., K _{zt}	1	Fig. 26.8-1			
Effective Wind Area (sf):	21	(Area per individual panel)			
Velocity Pressure (psf), q _h :	32.47	psf, Eq. 30.3-1			
Internal Pressure Coeff, GC _{pi}	0.18	Table 26.11-1			

Roof Zone Strip (a), in ft, Fig. 30.5-1, Note 5		
1 - Least Roof Horizontal Dimension (L or W) x 0.10		
2 - Roof Height x 0.4		
3 - Least Roof Horizontal Dimension (L or W) x 0.04		
4 - Lesser of (1) and (2)		
5 - Greater of (3) and (4)		
6 - Greater of (5) and 3 feet		

SEAL O41743

SEAL O41743

JENNER ON THE CONTRACT OF THE CONTRA

North Carolina Firm No. C4113 Principal Engineering, Inc.

Net Design Wind Pressures					
(ASCE 7, Eq. 30.4.1; Load Factor for ASD = 0.6, per ASCE 7, 2.4.1)					
	Uplift	(-psf)) Down (psf)		
	GC_p	Pressure	GC_p	Pressure	Description of Zone
Zone 1	-0.88	-20.6	0.40	16.0	Interior Roof Area, >(a) ft from edge
Zone 2	-1.53	-33.2	0.40	16.0	Strip of (a) ft wide at roof edge
Zone 3	-2.40	-50.2	0.39	16.0	Corner intersection of Zone 2 strips

Snow Load				
Ground Snow Load, p _g	15.0	From ASCE 7 or AHJ		
Terrain Category:	С	Para 6.5.6.3		
Exposure	Fully			
Exposure FactorCe	0.9	Table 7-2		
Thermal Factor, Ct	1.0	Table 7-3		
Importance Factor, I _s	1.0	Table 1.5.2		
Roof Configuration	Gable			
Roof Slope	18.4°			
Distance from Eave to Ridge	16.0			
p _m , Minimum required Snow Load	N/A	Para. 7.3.4		
pf, Calculated Snow Load	9.45	Eq. 7.3-1		
pf, Design Snow Load	9.45 psf			

SEAL OHITAS SEAL OHITAS NOINE North Carolina Firm No. C4112

North Carolina Firm No. C4113 Principal Engineering, Inc.

Manual Calastian and Caratina				
		iviount Se	election and Spacing	
Manufacti	urer:	Unirac	Perpendicular Panel Orientation	
Mount:		Flashloc Comp Kit	Allowable Arrangement by Uplift Pressure	
Substrate:		Wood Rafters	< 37 psf: 2 rails, mounts @ 4'-0" o.c.	
Connector	·:	5/16" x 4" Lag Screw	37 to 75 psf: 2 rails, mounts @ 2'-0" o.c.	
			75 to 112 psf: 3 rails, mounts @ 2'-0" o.c.	
Allowable	Uplift:	480 max.	112 to 150 psf: 4 rails, mounts @ 2'-0" o.c.	
Required Mount Layout		lount Layout	> 150 psf : Mount capacity exceeded	
Zone 1	2 rails, mou	ınts @ 4'-0" o.c.		
Zone 2 2 rails, mounts @ 4'-0" o.c.		ınts @ 4'-0" o.c.		
Zone 3 2 rails, mounts @ 2'-0" o.c.		unts @ 2'-0" o.c.		
	(Allowable loads are based on	individual mount failure before rail failure)	



NEW PHOTOVOLTAIC SYSTEM 13.50 KW DC 1175 MOORES CHAPEL RD, LILLINGTON, NC 27546

GENERAL NOTES

1.1.1 PROJECT NOTES:

1703 OR UL 1741 ACCESSORY

1.1.2 THIS PHOTOVOLTAIC (PV) SYSTEM SHALL COMPLY WITH THE NATIONAL ELECTRIC CODE (NEC) ARTICLE 690, ALL MANUFACTURERS'S LISTING AND INSTALLATION INSTRUCTIONS, AND THE RELEVANT CODES AS SPECIFIED BY THE AUTHORITY HAVING JURISDICTION'S (AHJ) APPLICABLE CODES.

- 1.1.3 THE UTILITY INTERCONNECTION APPLICATION MUST BE APPROVED AND PV SYSTEM INSPECTED PRIOR TO PARALLEL OPERATION
- 1.1.4 GROUND FAULT DETECTION AND INTERRUPTION (GFDI) DEVICE IS INTEGRATED WITH THE MICRO-INVERTER IN ACCORDANCE WITH NEC 690.41(B) 1.1.5 ALL PV SYSTEM COMPONENTS; MODULES, UTILITY-INTERACTIVE INVERTERS, AND SOURCE CIRCUIT COMBINER BOXES ARE IDENTIFIED AND LISTED FOR USE IN PHOTOVOLTAIC SYSTEMS AS REQUIRED BY NEC 690.4: PV MODULES: UL1703, IEC61730, AND IEC61215, AND NFPA 70 CLASS C FIRE INVERTERS: UL 1741 CERTIFIED, IEEE 1547, 929, 519 COMBINER BOX(ES): UL
- 1.1.6 MAX DC VOLTAGE CALCULATED USING MANUFACTURER PROVIDED TEMP COEFFICIENT FOR VOC. IF UNAVAILABLE, MAX DC VOLTAGE CALCULATED ACCORDING TO NEC 690.7.
- 1.1.7 ALL INVERTERS, PHOTOVOLTAIC MODULES, PHOTOVOLTAIC PANELS, AND SOURCE CIRCUIT COMBINERS INTENDED FOR USE IN A PHOTOVOLTAIC POWER SYSTEM WILL BE IDENTIFIED AND LISTED FOR THE APPLICATION PER 690.4. SHALL BE INSTALLED ACCORDING TO ANY INSTRUCTIONS FROM LISTING OR LABELING [NEC 110.3].
- 1.1.8 ALL SIGNAGE TO BE PLACED IN ACCORDANCE WITH LOCAL BUILDING CODE. IF EXPOSED TO SUNLIGHT, IT SHALL BE UV RESISTANT. ALL PLAQUES AND SIGNAGE WILL BE INSTALLED AS REQUIRED BY THE NEC AND AHJ.

1.2.1 SCOPE OF WORK:

1.2.2 PRIME CONTRACTOR IS RESPONSIBLE FOR THE DESIGN AND SPECIFICATIONS OF THE GRID-TIED PHOTOVOLTAIC SYSTEM RETROFIT. PRIME CONTRACTOR WILL BE RESPONSIBLE FOR COLLECTING EXISTING ONSITE REQUIREMENTS TO DESIGN, SPECIFY, AND INSTALL THE EXTERIOR ROOF-MOUNTED PORTION OF THE PHOTOVOLTAIC SYSTEMS DETAILED IN THIS DOCUMENT

1.3.1 WORK INCLUDES:

- 1.3.2 PV RACKING SYSTEM INSTALLATION UNIRAC SOLAR
- 1.3.3 PV MODULE AND INVERTER INSTALLATION LG ELECTRONICS LG375N1C-A6 / ENPHASE IQ7PLUS-72-2-US INVERTER
- 1.3.4 PV EQUIPMENT ROOF MOUNT
- 1.3.5 PV SYSTEM WIRING TO A ROOF-MOUNTED JUNCTION BOX
- 1.3.6 PV LOAD CENTERS (IF INCLUDED)
- 1.3.7 PV METERING/MONITORING (IF INCLUDED)
- 1.3.8 PV DISCONNECTS
- 1.3.9 PV GROUNDING ELECTRODE & BONDING TO (E) GEC
- 1.3.10 PV FINAL COMMISSIONING
- 1.3.11 (E) ELECTRICAL EQUIPMENT RETROFIT FOR PV
- 1.3.12 SIGNAGE PLACED IN ACCORDANCE WITH LOCAL BUILDING CODE

PROJECT INFORMATION

OWNER

NAME: RAYMOND COLE

PROJECT MANAGER

NAME: SHAHIN HAYNES PHONE: 8665071461

CONTRACTOR NAME

MARC JONES CONSTRUCTION, LLC DBA SUNPRO SOLAR

PHONE: 5052180838



SCOPE OF WORK

SYSTEM SIZE: STC:36 X 375W= 13.50 kW DC

PTC: 36 x 347.3W = 12.50 kW DC (36) LG ELECTRONICS LG375N1C-A6 (36) ENPHASE IQ7PLUS-72-2-US

ATTACHMENT TYPE: ROOF MOUNT

MSP UPGRADE: NO

UTILITY METER UPGRADE: NO

AUTHORITIES HAVING JURISDICTION

BUILDING: HARNETT COUNTY ZONING: HARNETT COUNTY UTILITY: DUKE ENERGY METER NO: 338579759

DESIGN SPECIFICATION

OCCUPANCY:

CONSTRUCTION: SINGLE-FAMILY ZONING: RESIDENTIAL

GROUND SNOW LOAD: REFER STRUCTURAL LETTER WIND EXPOSURE: REFER STRUCTURAL LETTER WIND SPEED: REFER STRUCTURAL LETTER


APPLICABLE CODES & STANDARDS

BUILDING: IBC 2015, IRC 2015, NCBC 2018, NCRC 2018

ELECTRICAL: NEC 2017

FIRE: IFC 2015, NCFC 2018

VICINITY MAP

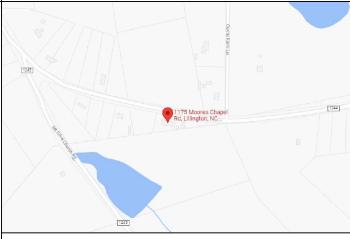

SATELLITE VIEW



SHEET INDEX

G-001	COVER PAGE
G-002	NOTES
A-101	SITE PLAN
A-102	ELECTRICAL PLAN
A-103	ATTACHMENT PLAN
A-104	STRUCTURAL PLAN
E-601	LINE DIAGRAM
E-602	ELECTRICAL CALCULATIONS
E-603	PLACARD
R-001	RESOURCE DOCUMENT
R-002	RESOURCE DOCUMENT
R-003	RESOURCE DOCUMENT
R-004	RESOURCE DOCUMENT
R-005	RESOURCE DOCUMENT
R-006	RESOURCE DOCUMENT
R-007	RESOURCE DOCUMENT
R-008	RESOURCE DOCUMENT

SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

RAYMOND COLE

1175 MOORES CHAPEL RD,LILLINGTON, NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC







North Carolina Firm No. C4113 Principal Engineering, Inc.

SHEET TITLE

COVER PAGE

4	DRAWN DATE	10/26/2021
	DRAWN BY	SHUBHAM

SHEET NUMBER

G-001

2.1.1 SITE NOTES:

- 2.1.2 A LADDER WILL BE IN PLACE FOR INSPECTION IN COMPLIANCE WITH CONVENTION IF THREE PHASE C OR L3- BLUE, OSHA REGULATIONS.
- 2.1.3 THE PV MODULES ARE CONSIDERED NON-COMBUSTIBLE AND THIS SYSTEM IS A UTILITY INTERACTIVE SYSTEM WITH NO STORAGE BATTERIES.
- 2.1.4 THE SOLAR PV INSTALLATION WILL NOT OBSTRUCT ANY PLUMBING, MECHANICAL, OR BUILDING ROOF VENTS.
- 2.1.5 PROPERACCESS AND WORKING CLEARANCE AROUND EXISTING AND PROPOSED ELECTRICAL EQUIPMENT WILL BE PROVIDED AS PERSECTION NEC 110.26.
- 2.1.6 ROOF COVERINGS SHALL BE DESIGNED, INSTALLED, AND MAINTAINED IN ACCORDANCE WITH THIS CODE AND THE APPROVED MANUFACTURER'S INSTRUCTIONS SUCH THAT THE ROOF COVERING SERVES TO PROTECT THE BUILDING OR STRUCTURE. 2.2.1 EQUIPMENT LOCATIONS:
- 2.2.2 ALL EQUIPMENT SHALL MEET MINIMUM SETBACKS AS REQUIRED BY 2.5.5 EQUIPMENT GROUNDING CONDUCTORS SHALLBE SIZED NEC 110.26.
- 2.2.3 WIRING SYSTEMS INSTALLED IN DIRECT SUNLIGHT MUST BE RATED MANUFACTORERS' INSTRUCTIONS. FOR EXPECTED OPERATING TEMPERATURE AS SPECIFIED BY NEC 690.31 2.5.6 EACH MODULE WILL BE GROUNDED USING WEEB (A),(C) AND NEC TABLES 310.15 (B)(2)(A) AND 310.15 (B)(3)(C).
- 2.2.4 JUNCTION AND PULL BOXES PERMITTED INSTALLED UNDER PV MODULES ACCORDING TO NEC 690.34.
- 2.2.5 ADDITIONAL AC DISCONNECT(S) SHALL BE PROVIDED WHERE THE INVERTER IS NOT WITHIN SIGHT OF THE AC SERVICING DISCONNECT. 2.2.6 ALL EQUIPMENT SHALL BE INSTALLED ACCESSIBLE TO QUALIFIED PERSONNEL ACCORDING TO NEC APPLICABLE CODES.
- 2.2.7 ALL COMPONENTS ARE LISTED FOR THEIR PURPOSE AND RATED FOR OUTDOOR USAGE WHEN APPROPRIATE.

2.3.1 STRUCTURAL NOTES:

- 2.3.2 RACKING SYSTEM & PV ARRAY WILL BE INSTALLED ACCORDING TO CODE-COMPLIANT INSTALLATION MANUAL. TOP CLAMPS REQUIRE A DESIGNATED SPACE BETWEEN MODULES. AND RAILS MUSTALSO EXTEND A MINIMUM DISTANCE BEYOND EITHER EDGE OF THE ARRAY/SUBARRAY, ACCORDING TO RAI MANUFACTURER'S INSTRUCTIONS.
- 2.3.3 JUNCTION BOX WILL BE INSTALLED PER MANUFACTURERS' SPECIFICATIONS. IF ROOF-PENETRATING TYPE, IT SHALL BE FLASHED & SEALED PER LOCAL REQUIREMENTS.
- 2.3.4 ROOFTOP PENETRATIONS FOR PV RACEWAY WILLBE COMPLETED AND SEALED W/ APPROVED CHEMICAL SEALANT PER CODE BY A LICENSED CONTRACTOR.
- 2.3.5 ALL PV RELATED ROOF ATTACHMENTS TO BE SPACED NO GREATER THAN THE SPAN DISTANCE SPECIFIED BY THE RACKING MANUFACTURER.
- 2.3.6 WHEN POSSIBLE, ALL PV RELATED RACKING ATTACHMENTS WILL BE STAGGERED AMONGST THE ROOF FRAMING MEMBERS.

2.4.1 WIRING & CONDUIT NOTES:

- 2.4.2 ALL CONDUIT AND WIRE WILL BE LISTED AND APPROVED FOR THEIR PURPOSE. CONDUIT AND WIRE SPECIFICATIONS AREBASED ON MINIMUM CODE REQUIREMENTS AND ARE NOT MEANT TO LIMIT UP-SIZING.
- 2.4.3 CONDUCTORS SIZED ACCORDING TO NEC 690.8, NEC 690.7.
- 2.4.4 VOLTAGE DROP LIMITED TO 1.5%.
- 2.4.5 DC WIRING LIMITED TO MODULE FOOTPRINT. MICROINVERTER WIRING SYSTEMS SHALL BE LOCATED AND SECURED UNDER THE ARRAY W/ SUITABLE WIRING CLIPS.

2.4.6 AC CONDUCTORS COLORED OR MARKED AS FOLLOWS: PHASE A OR L1- BLACK PHASE B OR L2- RED. OR OTHER YELLOW, ORANGE**, OR OTHER CONVENTION NEUTRAL-WHITE OR GREY IN 4-WIRE DELTA CONNECTED SYSTEMS THE PHASE WITH HIGHER VOLTAGE TO BE MARKED ORANGE [NEC 110.15].

2.5.1 GROUNDING NOTES:

2.5.2 GROUNDING SYSTEM COMPONENTS SHALL BE LISTED FOR THEIR PURPOSE, AND GROUNDING DEVISES EXPOSED TO THE ELEMENTS SHALL BE RATED FOR SUCH USE.

2.5.3 PV EQUIPMENT SHALL BE GROUNDED ACCORDING TO NEC 690.43 AND MINIMUM NEC TABLE 250.122.

2.5.4 METAL PARTS OF MODULE FRAMES, MODULE RACKING, AND ENCLOSURES CONSIDERED GROUNDED IN ACCORD WITH 250.134 AND 250.136(A).

ACCORDING TO NEC 690.45 AND MICROINVERTER

GROUNDING CLIPS AS SHOWN IN

MANUFACTURERDOCUMENTATION AND APPROVED BY THE AHJ. IF WEEBS ARE NOT USED. MODULE GROUNDING LUGS MUST BE INSTALLED AT THE SPECIFIED GROUNDING LUG HOLES PER THE MANUFACTURERS' INSTALLATION REQUIREMENTS.

2.5.7 THE GROUNDING CONNECTION TO A MODULE SHALL BE ARRANGED SUCH THAT THE REMOVAL OFA MODULE DOES NOT INTERRUPT A GROUNDING CONDUCTOR TO ANOTHER MODULE. 2.5.8 GROUNDING AND BONDING CONDUCTORS, IF INSULATED, SHALL BE COLORED GREEN OR MARKED GREEN IF #4 AWG OR LARGER [NEC 250.119]

2.5.9 THE GROUNDING ELECTRODE SYSTEM COMPLIES WITH NEC 690.47 AND NEC 250.50 THROUGH 250.106. IF EXISTING SYSTEM IS INACCESSIBLE, OR INADEQUATE, A GROUNDING ELECTRODE SYSTEM PROVIDED ACCORDING TO NEC 250, NEC 690.47 AND

2.5.10 GROUND-FAULT DETECTION SHALL COMPLY WITH NEC 690.41(B)(1) AND (2) TO REDUCE FIRE HAZARDS

2.6.1 DISCONNECTION AND OVER-CURRENT PROTECTION NOTES:

2.6.2 DISCONNECTING SWITCHES SHALL BE WIRED SUCH THAT WHENTHE SWITCH IS OPENED THE CONDUCTORS REMAINING ENERGIZED ARECONNECTED TO THE TERMINALS MARKED "LINE SIDE" (TYPICALLY THE UPPER TERMINALS). 2.6.3 DISCONNECTS TO BE ACCESSIBLE TO QUALIFIED UTILITY PERSONNEL, BE LOCKABLE, AND BE A VISIBLE-BREAK SWITCH 2.6.4 PV SYSTEM CIRCUITS INSTALLED ON OR IN BUILDINGS SHALL INCLUDE A RAPID SHUTDOWN FUNCTION TO REDUCE SHOCK HAZARD FOR EMERGENCY RESPONDERS IN ACCORDANCE WITH 690.12(A) THROUGH (D). 2.6.5 ALL OCPD RATINGS AND TYPES SPECIFIED ACCORDING TO NEC 690.8, 690.9, AND 240. 2.6.6 MICROINVERTER BRANCHES CONNECTED TO A SINGLE BREAKER OR GROUPED FUSES IN ACCORDANCE WITH NEC

2.6.7 IF REQUIRED BY AHJ, SYSTEM WILL INCLUDE ARC-FAULT

CIRCUIT PROTECTION ACCORDING TO NEC 690.11 AND

UL1699B.

2.7.1 INTERCONNECTION NOTES:

2.7.2 LOAD-SIDE INTERCONNECTION SHALL BE IN ACCORDANCE WITH [NEC 705.12 (B)] 2.7.3 THE SUM OF THE UTILITY OCPD AND INVERTER CONTINUOUS OUTPUT MAY NOT EXCEED 120% OF BUSBAR RATING [NEC 705.12(B)(2)(3)(b)]. 2.7.4 THE SUM OF 125 PERCENT OF THE POWER SOURCE(S) OUTPUT CIRCUIT CURRENT AND THE RATING OF THE OVERCURRENT DEVICE PROTECTING THE BUSBAR SHALL NOT EXCEED 120 PERCENT OF THE AMPACITY OF THE BUSBAR, PV DEDICATED BACKFEED BREAKERS MUST BE LOCATED OPPOSITE END OF THE BUS FROM THE UTILITY SOURCE OCPD INEC 705.12(B)(2)(3)]. 2.7.5 AT MULTIPLE ELECTRIC POWER SOURCES OUTPUT

COMBINER PANEL, TOTAL RATING OF ALL OVERCURRENT DEVICES SHALL NOT EXCEED AMPACITY OF BUSBAR. HOWEVER, THE COMBINED OVERCURRENT DEVICE MAY BE EXCLUDED ACCORDING TO NEC 705.12 (B)(2)(3)(C). 2.7.6 FEEDER TAP INTERCONECTION (LOADSIDE) ACCORDING TO NEC 705.12 (B)(2)(1) 2.7.7 SUPPLY SIDE TAP INTERCONNECTION ACCORDING TO NEC 705.12 (A) WITH SERVICE ENTRANCE CONDUCTORS IN ACCORDANCE WITH NEC 230.42 2.7.8BACKFEEDING BREAKER FOR ELECTRIC POWER SOURCES OUTPUT IS EXEMPT FROM ADDITIONAL FASTENING [NEC 705.12 (B)(5)].



22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

RAYMOND COLE

1175 MOORES CHAPEL RD, LILLINGTON, NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC







North Carolina Firm No. C4113 Principal Engineering, Inc.


SHEET TITLE

NOTES

DRAWN DATE 10/26/2021 DRAWN BY **SHUBHAM**

SHEET NUMBER

G-002

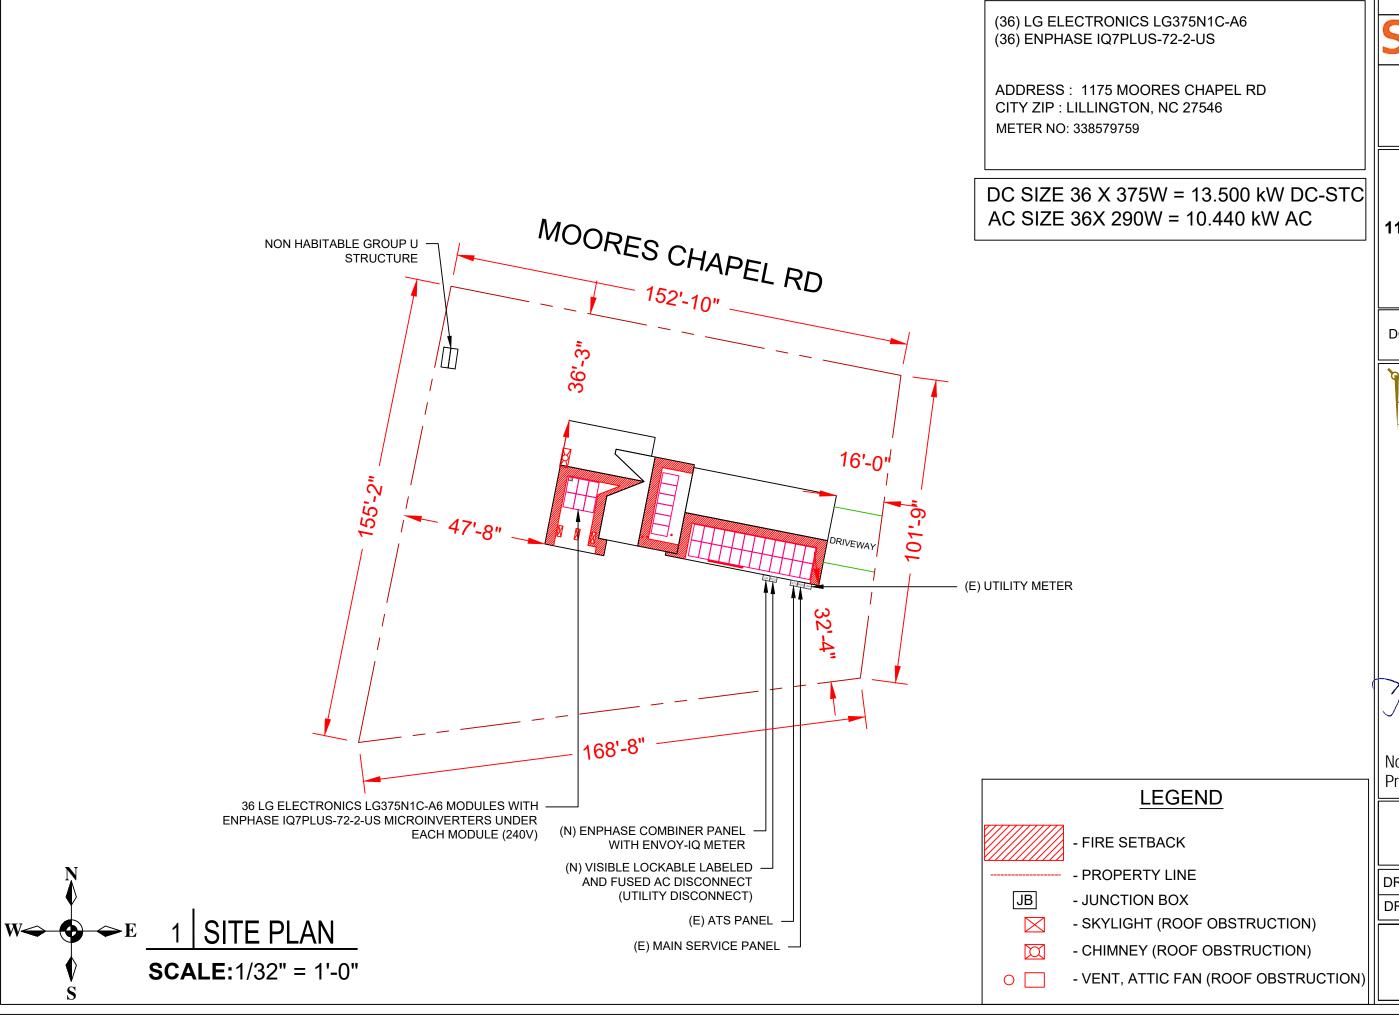

CONTRACTOR SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

RAYMOND COLE

1175 MOORES CHAPEL RD,LILLINGTON, NC 27546


COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 13.500 KW DC-(STC)
AC SIZE: 10.440 KW AC







North Carolina Firm No. C4113 Principal Engineering, Inc.


SHEET TITLE


SITE PLAN

DRAWN DATE	10/26/2021
DRAWN BY	SHUBHAM

SHEET NUMBER

A-101

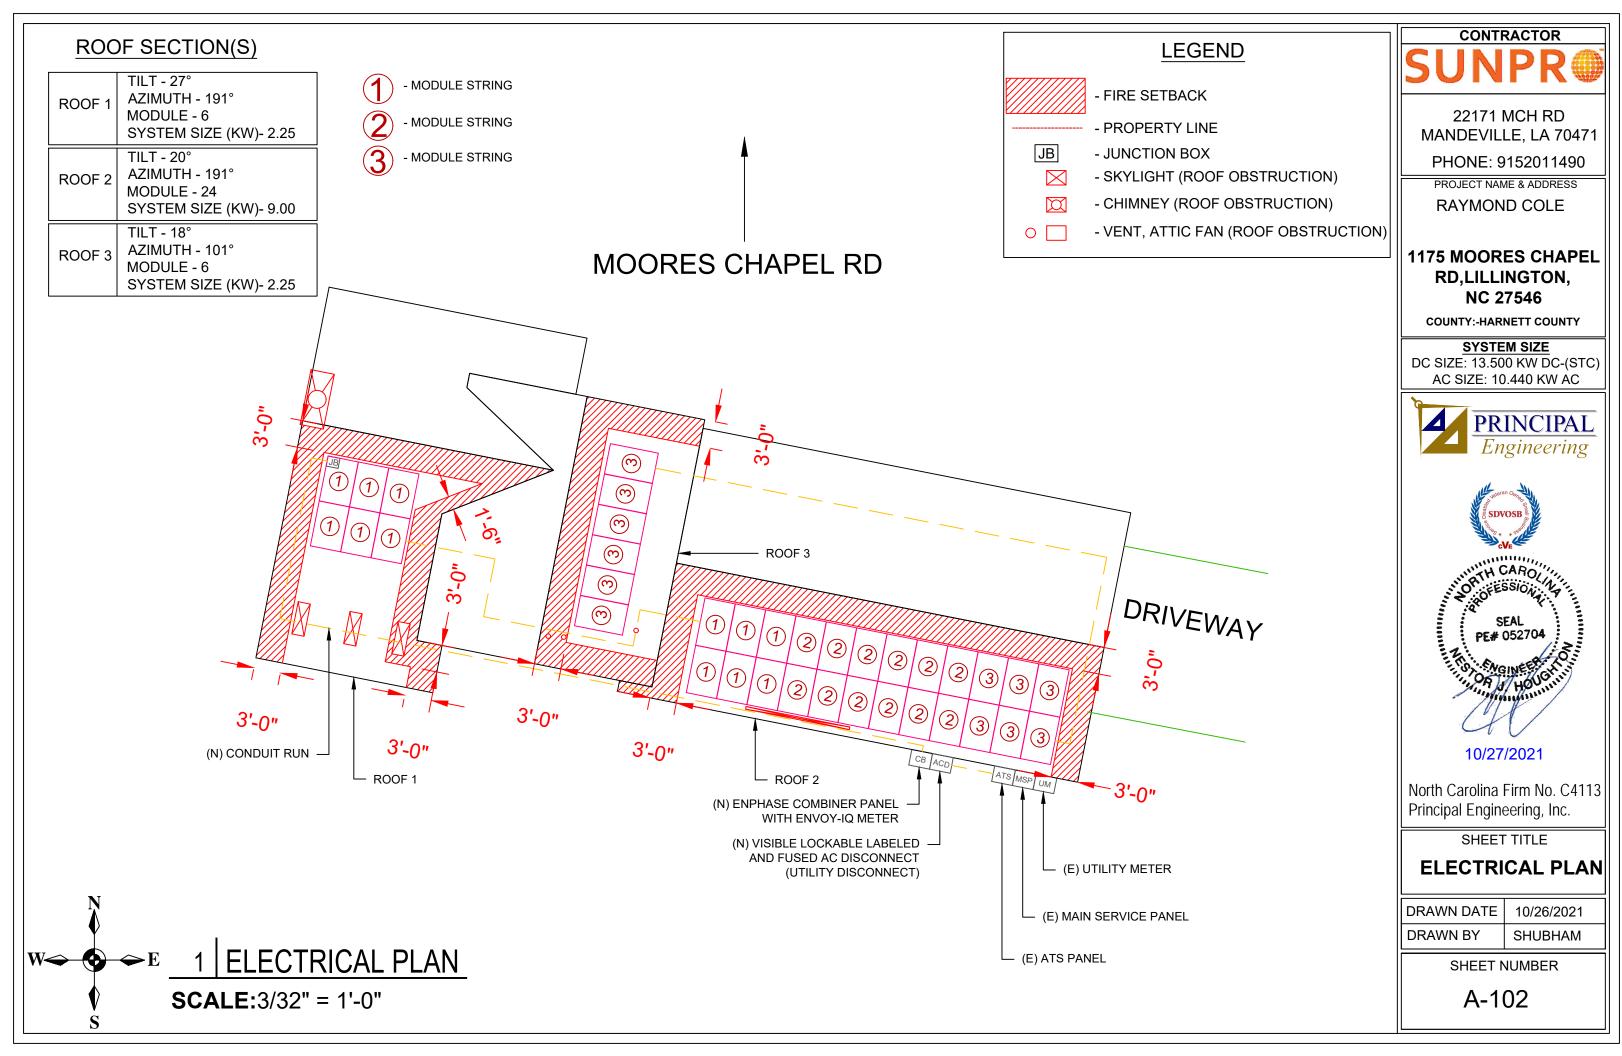

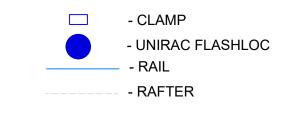


75 - TOTAL MOUNT

Note 1: Windspeed value is design 3-sec gust in accordance with ASCE 7-10, Risk Cat II


Note 2: a)Lag bolt shall be mounted into rafters b)Notify Engineer immediately if conditions differ or prevent installation per plan.

Note 3: Maximum rail cantilever distance beyond outermost mount is One-half the zone-specific mount spacing.


Note 4: Installer shall adjust mount spacing by zone to match prescribed values on engineer's calculation letter

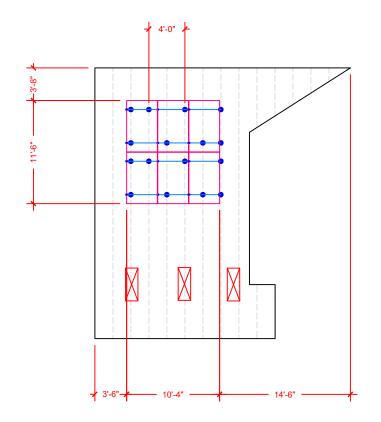

ARRAY 1 TILT- 27 DEG AZIMUTH - 191 DEG

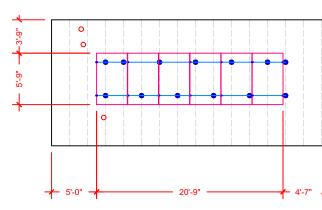


ARRAY 3 TILT- 18 DEG AZIMUTH - 101 DEG

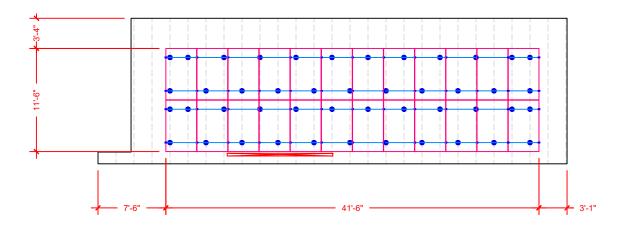

ARRAY 2 TILT- 20 DEG AZIMUTH - 191 DEG

ATTACHMENT PLAN

SCALE:3/32" = 1'-0"

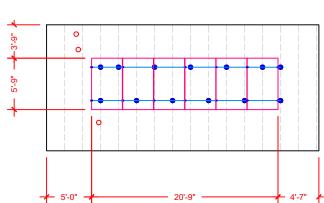

CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS **RAYMOND COLE**

1175 MOORES CHAPEL RD, LILLINGTON, NC 27546


COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC







North Carolina Firm No. C4113 Principal Engineering, Inc.

SHEET TITLE

ATTACHMENT PLAN

DRAWN DATE 10/26/2021 **DRAWN BY** SHUBHAM

SHEET NUMBER

A-103


SOLAR MODULE SPECIFICATIONS			
MANUFACTURER / MODEL #	LG ELECTRONICS LG375N1C-A6		
VMP	35.3V		
IMP	10.63A		
VOC	41.8V		
ISC	11.35A		
TEMP. COEFF. VOC	-0.26%/°C		
MODULE DIMENSION	68.50"L x 41.02"W x 1.57"D (In Inch)		

				$\overline{}$
INVERTER SPECIFICATIONS		WIRE /CONDUIT SCHEDULE		
MANUFACTURER / MODEL #	ENPHASE IQ7PLUS-72-2-US MICROINVERTER	TAG	DESCRIPTION	
MIN/MAX DC VOLT RATING	22V MIN/ 60V MAX	1	#12/2 ROMEX IN ATTIC/#12 THWN-2 ON	
MAX INPUT POWER	235W-440W	1	#12/2 ROMEX IN ATTIC/#12 THWN-2 ON EXTERIOR & (1)#6 THWN -2 / (GN)	
NOMINAL AC VOLTAGE RATING	240V/ 211-264V		, ,	
MAX AC CURRENT	1.21A		#6 THWN-2 & (1)#6 THWN-2 GROUND / (GN)	
MAX MODULES PER STRING	13 (SINGLE PHASE)		#6 THWN-2 & (1)#6 THWN-2 GROUND / (GN)	╽╠
MAX OUTPUT POWER	290 VA	4	(1)#6 BARE GROUND	

DC SIZE 36 X 375W = 13.500 kW DC-STC AC SIZE 36X 290W = 10.440 kW AC (GN) GENERAL CONDUIT NOTE:

CONDUIT TO BE UL LISTED FOR WET LOCATIONS AND UV PROTECTED (EX. -EMT,SCH 80 PVC OR RMC)*FMC MAYBE USED IN INDOOR APPLICATIONS WHERE PERMITTED BY NEC ART .348

METER NO: 338579759

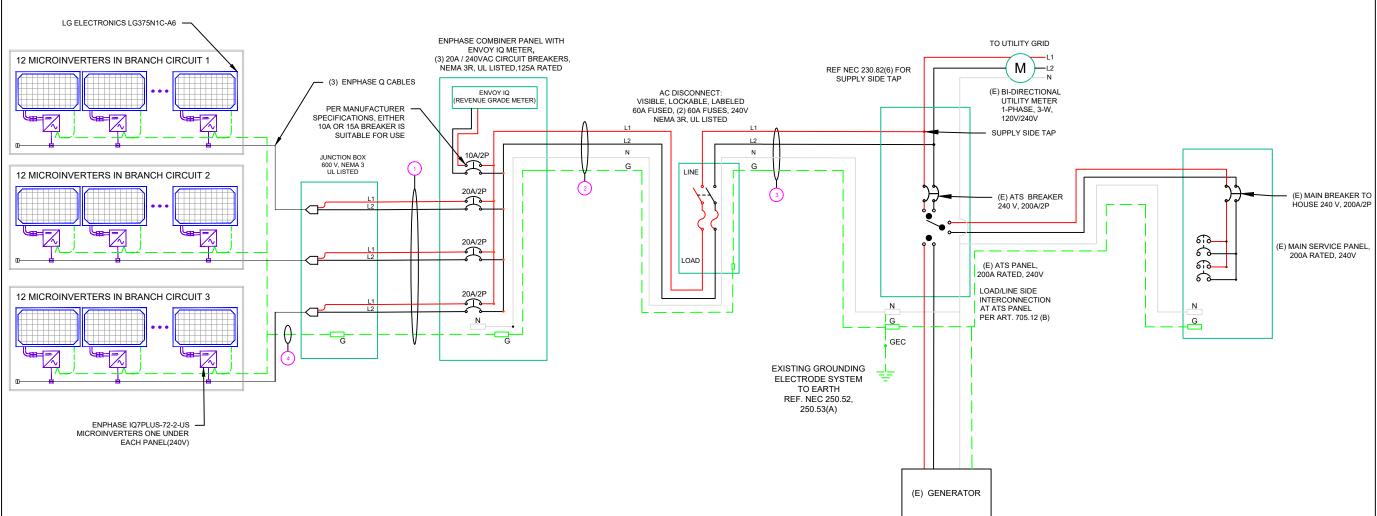

CONTRACTOR SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

RAYMOND COLE

1175 MOORES CHAPEL RD,LILLINGTON, NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC





North Carolina Firm No. C4113 Principal Engineering, Inc.

SHEET TITLE

LINE DIAGRAM

DRAWN DATE	10/26/2021
DRAWN BY	SHUBHAM

SHEET NUMBER

E-601

AMBIENT TEMPERATURE SPECS	
RECORD LOW TEMP	-10°
AMBIENT TEMP (HIGH TEMP 2%)	36°
CONDUIT HEIGHT	0.5"
CONDUCTOR TEMPERATURE RATE	90°

PERCENT OF VALUES	NUMBER OF CURRENT CARRYING CONDUCTORS
.80	4-6
.70	7-9
.50	10-20

CALCULATIONS:

- 1. CURRENT CARRYING CONDUCTOR
- (A) <u>BEFORE IQ COMBINER PANEL</u>
 AMBIENT TEMPERATURE (36)°C ...NEC 310.15(B)(3)(c)
 TEMPERATURE DERATE FACTOR 0.91 ...NEC 310.15(B)(2)(a)
 GROUPING FACTOR 0.8...NEC 310.15(B)(3)(a)

CONDUCTOR AMPACITY

- $= (INV O/P CURRENT) \times 1.25 / A.T.F / G.F ...NEC 690.8(B)$
- $= [(12 \times 1.21) \times 1.25] / [0.91 \times 0.8]$
- = 24.93A

SELECTED CONDUCTOR - #12 THWN-2 ...NEC 310.15(B)(16)

(B) AFTER IQ COMBINER PANEL
TEMPERATURE DERATE FACTOR - 0.91
GROUPING FACTOR - 1

CONDUCTOR AMPACITY

- $= (TOTAL INV O/P CURRENT) \times 1.25 / 0.91 / 1 ... NEC 690.8(B)$
- $= [(36 \times 1.21) \times 1.25] / [0.91 \times 1]$
- = 59.84 A

SELECTED CONDUCTOR - #6 THWN-2 ...NEC 310.15(B)(16)

2. PV OVER CURRENT PROTECTION ...NEC 690.9(B)

= TOTAL INVERTER O/P CURRENT x 1.25

 $= (36 \times 1.21) \times 1.25 = 54.45 \text{ A}$



22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

RAYMOND COLE

1175 MOORES CHAPEL RD,LILLINGTON, NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC





10/27/2021

North Carolina Firm No. C4113 Principal Engineering, Inc.

SHEET TITLE ELECTRICAL CALCULATIONS

DRAWN DATE 10/26/2021
DRAWN BY SHUBHAM

SHEET NUMBER

E-602




<u>LABEL 1</u> ON ALL CONDUITS SPACED AT MAX 10FT

! WARNING! ELECTRIC SHOCK HAZARD DO NOT TOUCH TERMINALS. TERMINALS ON BOTH LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITION

LABEL 5
AT EACH AC DISCONNECT



LABEL 9
AT UTILITY METER



LABEL 2 AT INVERTER



LABEL 6
AT EACH AC DISCONNECT



LABEL 10 AT UTILITY METER

SOLAR PV SYSTEM EQUIPPED WITH RAPID SHUTDOWN TURN RAPID SHUTDOWN SWITCH TO THE "OFF" POSITION TO SHUT DOWN PV SYSTEM AND REDUCE SHOCK HAZARD IN THE ARRAY


LABEL 3 AT INVERTER



PHOTOVOLTAIC
DC DISCONNECT

LABEL 4
AT DC DISCONNECT



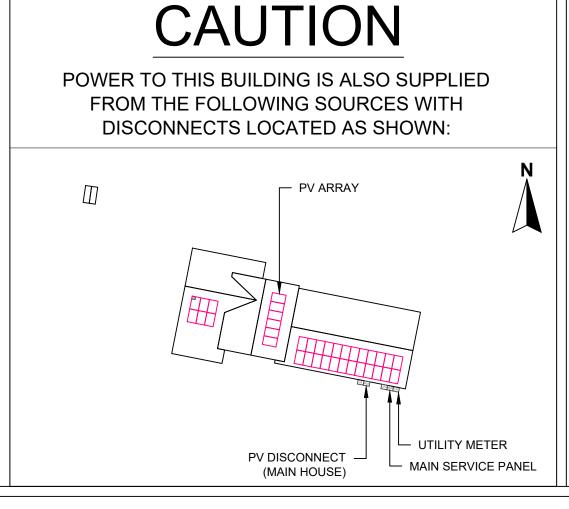



PHONE: 9152011490

PROJECT NAME & ADDRESS
RAYMOND COLE

1175 MOORES CHAPEL RD,LILLINGTON, NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC





North Carolina Firm No. C4113 Principal Engineering, Inc.

SHEET TITLE

PLACARD

DRAWN DATE 10/26/2021
DRAWN BY SHUBHAM

SHEET NUMBER


E-603

LG NeON[®]2

LG370N1C-A6

LG375N1C-A6

LG380N1C-A6 Preliminary



370W | 375W | 380W

The LG NeON® 2 is LG's best selling solar module and one of the most powerful and versatile modules on the market today. The cells are designed to appear all-black at a distance, and the performance warranty guarantees 90.6% of labeled power output at 25 years.









Features



Enhanced Performance Warranty

LG NeON® 2 has an enhanced performance warranty. After 25 years, LG NeON® 2 is guaranteed at least 90.6% of initial performance.



25-Year Limited Product Warranty

The NeON® 2 is covered by a 25-year limited product warranty. In addition, up to \$450 of labor costs will be covered in the rare case that a module needs to be repaired or replaced.



Solid Performance on Hot Days

LG NeON® 2 performs well on hot days due to its low temperature coefficient.



Roof Aesthetics

LG NeON® 2 has been designed with aesthetics in mind using thinner wires that appear all black at a distance.

When you go solar, ask for the brand you can trust: LG Solar

About LG Electronics USA, Inc.

LG Electronics is a global leader in electronic products in the clean energy markets by offering solar PV panels and energy storage systems. The company first embarked on a solar energy source research program in 1985, supported by LG Group's was experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX[®] series to the market, which is now available in 32 countries. The NeON[®] (previous MonoX[®] NeON), NeON[®]2, NeON[®]2 BiFacial won the "intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG's leadership and innovation in the solar industry.



LG370N1C-A6 | LG375N1C-A6



LG380N1C-A6

Cell Properties (Material/Type)	Monocrystalline/N-type
Cell Maker	LG
Cell Configuration	60 Cells (6 x 10)
Module Dimensions (L x W x H)	1,740mm x 1,042mm x 40mm
Weight	18.6 kg
Glass (Material)	Tempered Glass with AR Coating
Backsheet (Color)	White
Frame (Material)	Anodized Aluminium
Junction Box (Protection Degree)	IP 68 with 3 Bypass Diodes
Cables (Length)	1,100mm x 2EA
Connector (Type/Maker)	MC 4/MC

Certifications and Warranty

	IEC 61215-1/-1-1/2 : 2016, IEC 61730-1/2 : 2016 UL 61730-1 : 2017, UL 61730-2 : 2017
Certifications**	ISO 9001, ISO 14001, ISO 50001
	OHSAS 18001
Salt Mist Corrosion Test	IEC 61701:2012 Severity 6
Ammonia Corrosion Test	IEC 62716 : 2013
Module Fire Performance	Type 1 (UL 61730)
Fire Rating	Class C (UL 790, ULC/ORD C 1703)
Solar Module Product Warranty	25 Year Limited
Solar Module Output Warranty	Linear Warranty*

Temperature Characteristics


NMOT*	[°C]	42 ± 3	
Pmax	[%/°C]	-0.34	
Voc	[%/°C]	-0.26	
lsc	[%/°C]	0.03	

*NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m2. Ambient temperature 20°C.

Clasteian Describes (NIMOT)

LG370N1C-A6	LG375N1C-A6	
277	281	LG380N1C-A6 285
32.8	33.2	33.5
8.46	8.48	8.49
39.3	39.4	39,4
9.09	9.13	9.16
	32.8 8.46 39.3	32.8 33.2 8.46 8.48 39.3 39.4

I-V Curves



LG370-380N1C-A6_AUS.pdf

© 2020 LG Electronics USA, Inc. All rights reserved

LG NeON[®]2



Preliminary

Electrical Properties (STC*)

Model		LG370N1C-A6	LG375N1C-A6	LG380N1C-A6
Maximum Power (Pmax)	[W]	370	375	380
MPP Voltage (Vmpp)	[V]	34.9	35.3	35.7
MPP Current (Impp)	[A]	10.61	10.63	10.65
Open Circuit Voltage (Voc, ± 5%)	[V]	41.7	41.8	41.9
Short Circuit Current (Isc, ±5%)	[A]	11.31	11.35	11.39
Module Efficiency	[%]	20.4	20.7	21.0
Bifaciality Coefficient of Power	[%]		10	
Power Tolerance	[%]		0-+3	


^{*}STC (Standard Test Condition): Irradiance 1000 W/m², cell temperature 25°C, AM 1.5

Operating Conditions

Operating Temperature	[°C]	-40 ~+85	
Maximum System Voltage	[V]	1,000	
Maximum Series Fuse Rating	[A]	20	
Mechanical Test Load" (Front)	[Pa/psf]	5,400	
Mechanical Test Load* (Rear)	[Pa/psf]	4,000	

Packaging Configuration

Number of Modules per Pallet	[EA]	25
Number of Modules per 40' Container	[EA]	650
Number of Modules per 53' Container	[EA]	850
Packaging Box Dimensions (Lx WxH)	[mm]	1,790 x 1,120 x 1,213
Packaging Box Dimensions (Lx Wx H)	[in]	70.5 x 44.1 x 47.8
Packaging Box Gross Weight	[kg]	500
Packaging Box Gross Weight	[16]	1,102

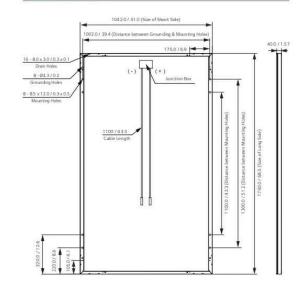

SHEET TITLE RESOURCE **DOCUMENT**

CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

RAYMOND COLE

1175 MOORES CHAPEL RD, LILLINGTON,

NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC

1	DRAWN DATE	10/26/2021
	DRAWN BY	SHUBHAM

SHEET NUMBER

Data Sheet Enphase Microinverters Region: AMERICAS

Enphase IQ 7 and IQ 7+ Microinverters

The high-powered smart grid-ready Enphase IQ 7 Micro™ and Enphase IQ 7+ Micro™ dramatically simplify the installation process while achieving the highest system efficiency.

Part of the Enphase IQ System, the IQ 7 and IQ 7+ Microinverters integrate with the Enphase IQ Envoy™, Enphase IQ Battery™, and the Enphase Enlighten™ monitoring and analysis software.

IQ Series Microinverters extend the reliability standards set forth by previous generations and undergo over a million hours of power-on testing, enabling Enphase to provide an industry-leading warranty of up to 25 years.



learn more about Enphase offerings, visit enphase.com

Easy to Install

- · Lightweight and simple
- · Faster installation with improved, lighter two-wire cabling
- Built-in rapid shutdown compliant (NEC 2014 & 2017)

Productive and Reliable

- · Optimized for high powered 60-cell and 72-cell* modules
- · More than a million hours of testing
- Class II double-insulated enclosure
- UL listed

Smart Grid Ready

- · Complies with advanced grid support, voltage and frequency ride-through requirements
- · Remotely updates to respond to changing arid requirements
- · Configurable for varying grid profiles
- Meets CA Rule 21 (UL 1741-SA)
- * The IQ 7+ Micro is required to support 72-cell modules.



Enphase IQ 7 and IQ 7+ Microinverters IQ7PLUS-72-2-US 235 W - 350 W + 235 W - 440 W + Commonly used module pairings Module compatibility 60-cell PV modules only 60-cell and 72-cell PV module 60 V Maximum input DC voltage 48 V Peak power tracking voltage 27 V - 37 V 27 V - 45 V 16 V - 60 V Operating range 16 V - 48 V Min/Max start voltage 22 V / 48 V 22 V / 60 V Max DC short circuit current (module Isc) 15 A 15 A Overvoltage class DC port DC port backfeed current 0 A PV array configuration 1 x 1 ungrounded array; No additional DC side protection required; AC side protection requires max 20A per branch circuit OUTPUT DATA (AC) 1Q 7 Microinverter 1Q 7+ Microinverter Peak output power 250 VA 295 VA Maximum continuous output power 240 VA 290 VA 208 V / 183-229 V Nominal (L-L) voltage/range² 240 V / 240 V / 208 V / 183-229 V 211-264 V 211-264 V 1.0 A (240 V) 1.15 A (208 V) 1.21 A (240 V) 1.39 A (208) Maximum continuous output current Nominal frequency 60 Hz 60 Hz 47-68 Hz 47 - 68 Hz Extended frequency range AC short circuit fault current over 3 cycles 5.8 Arms 5.8 Arms 13 (240 VAC) 11 (208 VAC) 16 (240 VAC) 13 (208 VAC) Maximum units per 20 A (L-L) branch circuit* Overvoltage class AC port III AC port backfeed current O.A. 0 A Power factor setting 1.0 1.0 Power factor (adjustable) 0.85 leading ... 0.85 lagging 0.85 leading ... 0.85 lagging EFFICIENCY @240 V @208 V @240 V @208 V Peak efficiency 97.6 % 97.6% 97.5% 97.3% CEC weighted efficiency 97.0 % 97.0 % MECHANICAL DATA -40°C to +65°C Ambient temperature range Relative humidity range 4% to 100% (condensing) Connector type (IQ7-60-2-US & IQ7PLUS-72-2-US) MC4 (or Amphenol H4 UTX with additional Q-DCC-5 adapter) Dimensions (WxHxD) 212 mm x 175 mm x 30.2 mm (without bracket) 1.08 kg (2.38 lbs) Weight Cooling Natural convection - No fans Approved for wet locations Pollution degree

Class II double-insulated, corrosion resistant polymeric enclosure

UL 62109-1, UL1741/IEEE1547, FCC Part 15 Class B, ICES-0003 Class B,

and DC conductors, when installed according manufacturer's instructions.

The AC and DC connectors have been evaluated and approved by UL for use as the load-break

This product is UL Listed as PV Rapid Shut Down Equipment and conforms with NEC-2014 and

NEC-2017 section 690.12 and C22.1-2015 Rule 64-218 Rapid Shutdown of PV Systems, for AC

Enlighten Manager and MyEnlighten monitoring options.

Both options require installation of an Enphase IQ Envoy.

1. No enforced DC/AC ratio. See the compatibility calculator at https://enphase.com/en-us/support/module-compatibility

NEMA Type 6 / outdoor

Power Line Communication (PLC)

disconnect required by NEC 690. CA Rule 21 (UL 1741-SA)

GAN/CSA-C22 2 NO. 107.1-01

Nominal voltage range can be extended beyond nominal if required by the utility.
 Limits may vary. Refer to local requirements to define the number of microinverters: per branch in your area.

To learn more about Enphase offerings, visit enphase.com

Enclosure

FEATURES Communication

Monitoring

Compliance

Disconnecting means

Environmental category / UV exposure rating

© 2019 Enphase Energy. All rights reserved. All trademarks or brands used are the property of Enphase Energy, Inc.



CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS **RAYMOND COLE**

1175 MOORES CHAPEL RD, LILLINGTON, NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC

> SHEET TITLE RESOURCE **DOCUMENT**

DRAWN DATE 10/26/2021 **DRAWN BY** SHUBHAM

SHEET NUMBER

Data Sheet Enphase Networking

Enphase IQ Combiner 3

(X-IQ-AM1-240-3)

The Enphase IQ Combiner 3™ with Enphase IQ Envoy™ consolidates interconnection equipment into a single enclosure and streamlines PV and storage installations by providing a consistent, pre-wired solution for residential applications. It offers up to four 2-pole input circuits and Eaton BR series busbar assembly.



To learn more about Enphase offerings, visit enphase.com

Smart

- Includes IQ Envoy for communication and control
- Flexible networking supports Wi-Fi, Ethernet, or cellular
- · Optional AC receptacle available for PLC bridge
- Provides production metering and optional consumption monitoring
- Supports Ensemble Communications Kit for communication with Enphase Encharge™ storage and Enphase Enpower™ smart switch

Simple

- · Reduced size from previous combiner
- Centered mounting brackets support single stud mounting
- · Supports back and side conduit entry
- Up to four 2-pole branch circuits for 240 VAC plug-in breakers (not included)
- 80 A total PV or storage branch circuits

Reliable

- Durable NRTL-certified NEMA type 3R enclosure
- · Five-year limited warranty
- UL listed



Enphase IQ Combiner 3

Weight

Compliance, Combiner

Compliance, IQ Envoy

MODEL NUMBER IQ Combiner 3 IQ Combiner 3 with Enphase IQ Envoy™ printed circuit board for integrated revenue grade PV X-IQ-AM1-240-3 production metering (ANSI C12.20 +/- 0.5%) and optional* consumption monitoring (+/- 2.5%). ACCESSORIES and REPLACEMENT PARTS (not included, order separately)

ELECTRICAL SPECIFICATIONS	
XA-ENV-PCBA-3	Replacement IQ Envoy printed circuit board (PCB) for Combiner 3
XA-PLUG-120-3	Accessory receptacle for Power Line Carrier in IQ Combiner 3 (required for EPLC-01)
XA-SOLARSHIELD-ES	Replace the default solar shield with this Ensemble Combiner Solar Shield to match the look and feel of the Enphase Enpower™ smart switch and the Enphase Encharge™ storage system
EPLC-01	Power line carrier (communication bridge pair), quantity - one pair
Circuit Breakers BRK-10A-2-240 BRK-15A-2-240 BRK-20A-2P-240	Supports Eaton BR210, BR215, BR220, BR230, BR240, BR250, and BR260 circuit breakers. Circuit breaker, 2 pole, 10A, Eaton BR210 Circuit breaker, 2 pole, 15A, Eaton BR215 Circuit breaker, 2 pole, 20A, Eaton BR220
Ensemble Communications Kit COMMS-KIT-01	Installed at the IQ Envoy. For communications with Enphase Encharge™ storage and Enphase Enpower™ smart switch. Includes USB cable for connection to IQ Envoy or Enphase IQ Combiner™ and allows wireless communication with Encharge and Enpower.
Consumption Monitoring* CT CT-200-SPLIT *Consumption monitoring is required for Enphase Storage Systems	Split core current transformers enable whole home consumption metering (+/- 2.5%).
Enphase Mobile Connect™ CELLMODEM-03 (4G/12-year data plan) CELLMODEM-01 (3G/5-year data plan) CELLMODEM-M1 (4G based LTE-M/5-year data plan)	

Rating	Continuous duty
System voltage	120/240 VAC, 60 Hz
Eaton BR series busbar rating	125 A
Max. continuous current rating (output to grid)	65 A
Max. fuse/circuit rating (output)	90 A
Branch circuits (solar and/or storage)	Up to four 2-pole Eaton BR series Distributed Generation (DG) breakers only (not included)
Max. continuous current rating (input from PV)	64 A
Max. total branch circuit breaker rating (input)	80 A of distributed generation / 95 A with IQ Envoy breaker included
Envoy breaker	10A or 15A rating GE Q-line/Siemens Type QP /Eaton BR series included
Production Metering CT	200 A solid core pre-installed and wired to IQ Envoy
MECHANICAL DATA	
Dimensions (WxHxD)	49.5 x 37.5 x 16.8 cm (19.5" x 14.75" x 6.63"). Height is 21.06" (53.5 cm with mounting bracke

Ambient temperature range	-40° C to +46° C (-40° to 115° F)
Cooling	Natural convection, plus heat shield
Enclosure environmental rating	Outdoor, NRTL-certified, NEMA type 3R, polycarbonate construction
Wire sizes	 20 A to 50 A breaker inputs: 14 to 4 AWG copper conductors 60 A breaker branch input: 4 to 1/0 AWG copper conductors Main lug combined output: 10 to 2/0 AWG copper conductors Neutral and ground: 14 to 1/0 copper conductors Always follow local code requirements for conductor sizing.
Altitude	To 2000 meters (6,560 feet)
INTERNET CONNECTION OPTIONS	
Integrated Wi-Fi	802.11b/g/n
Ethernet	Optional, 802.3, Cat5E (or Cat 6) UTP Ethernet cable (not included)
Cellular	CELLMODEM-M1 4G based LTE-M cellular modem (not included). Note that an Enphase Mobile Connect cellular modem is required for all Ensemble installations.
COMPLIANCE	

UL 60601-1/CANCSA 22.2 No. 61010-1

UL 1741, CAN/CSA C22.2 No. 107.1, 47 CFR, Part 15, Class B, ICES 003

Production metering: ANSI C12.20 accuracy class 0.5 (PV production)

To learn more about Enphase offerings, visit enphase.com

© 2021 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ Combiner 3, and other trademarks or service names are the trademarks of Enphase Energy, Inc. Data subject to change. 2021-05-20



SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS
RAYMOND COLE

1175 MOORES CHAPEL RD,LILLINGTON, NC 27546

COUNTY:-HARNETT COUNTY


SYSTEM SIZE


DC SIZE: 13.500 KW DC-(STC)
AC SIZE: 10.440 KW AC

RESOURCE DOCUMENT

DRAWN DATE 10/26/2021
DRAWN BY SHUBHAM

SHEET NUMBER

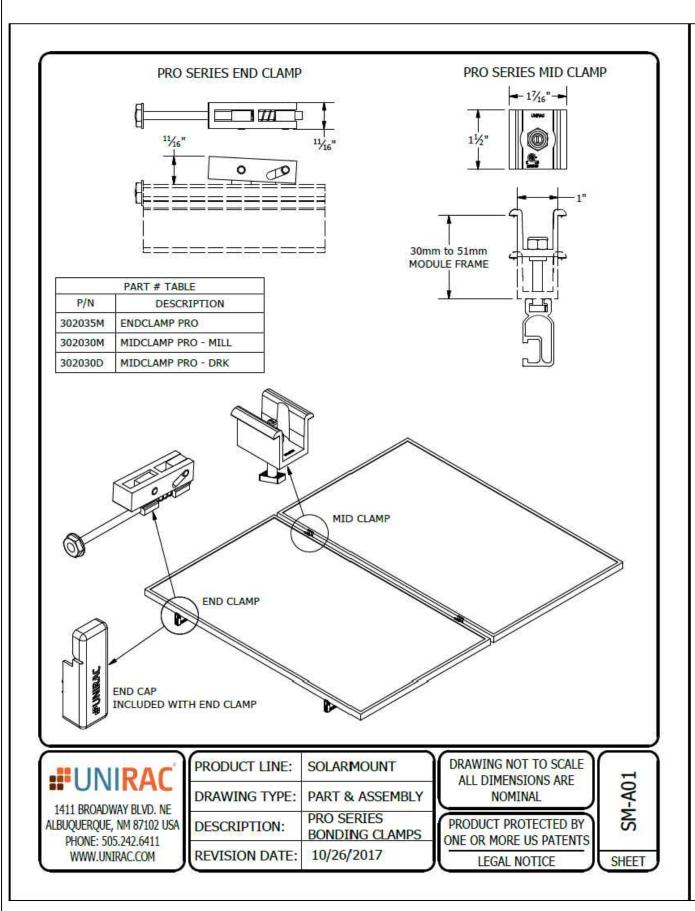

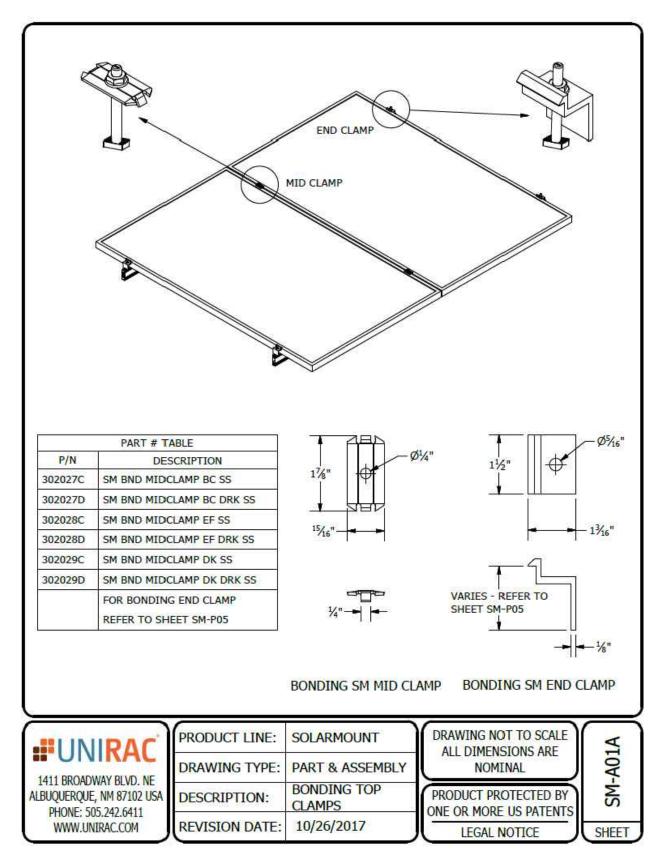

SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS
RAYMOND COLE

1175 MOORES CHAPEL

RD,LILLINGTON,
NC 27546
COUNTY:-HARNETT COUNTY


SYSTEM SIZE


DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC

SHEET TITLE RESOURCE DOCUMENT

DRAWN DATE 10/26/2021
DRAWN BY SHUBHAM

SHEET NUMBER

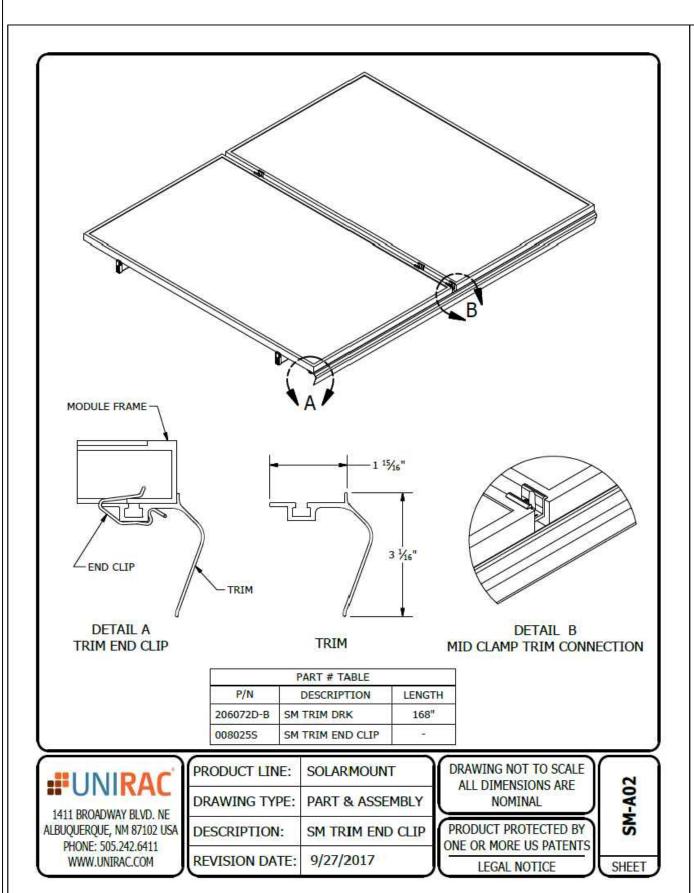

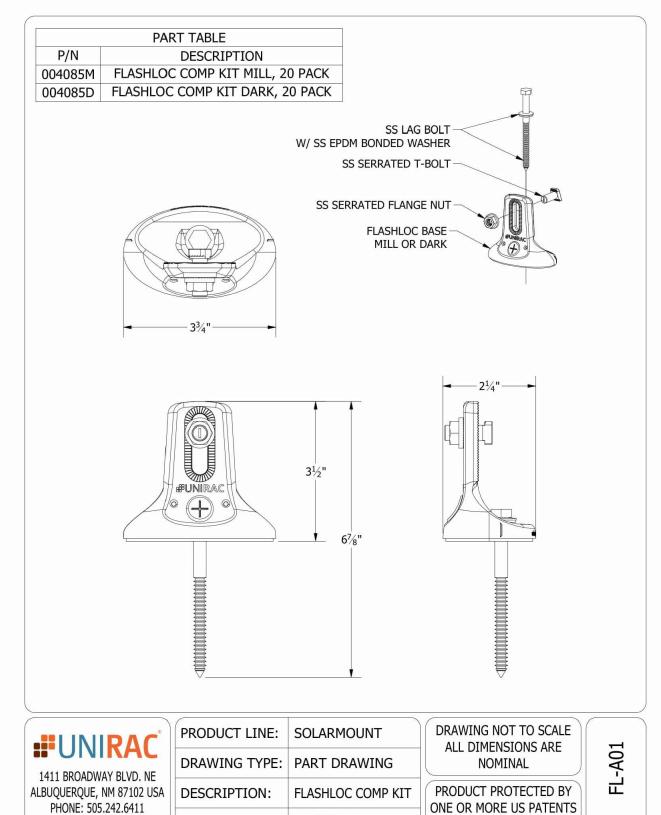

REVISION DATE: 10/3/2019

LEGAL NOTICE

SHEET

WWW.UNIRAC.COM

CONTRACTOR

SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

RAYMOND COLE

1175 MOORES CHAPEL RD,LILLINGTON, NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE


DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC


SHEET TITLE

RESOURCE DOCUMENT

DRAWN DATE 10/26/2021
DRAWN BY SHUBHAM

SHEET NUMBER

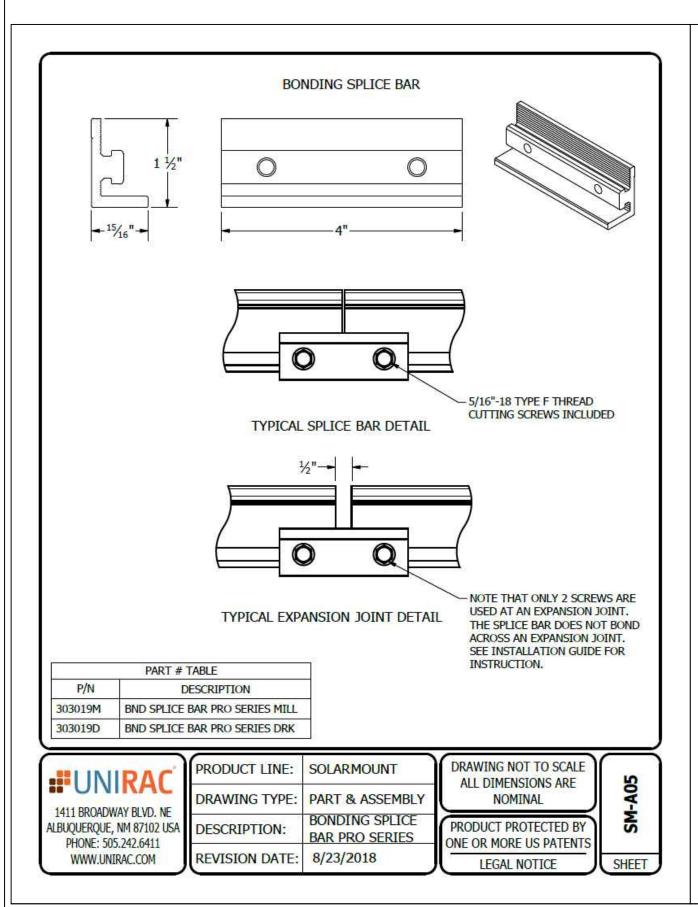

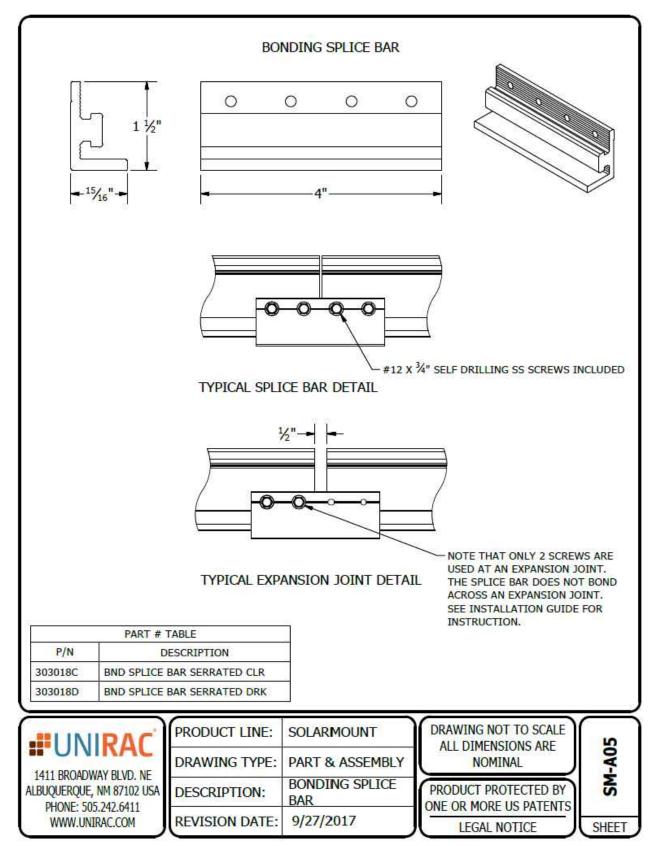

SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS
RAYMOND COLE

1175 MOORES CHAPEL RD,LILLINGTON, NC 27546

COUNTY:-HARNETT COUNTY


SYSTEM SIZE


DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC

SHEET TITLE RESOURCE DOCUMENT

DRAWN DATE 10/26/2021
DRAWN BY SHUBHAM

SHEET NUMBER

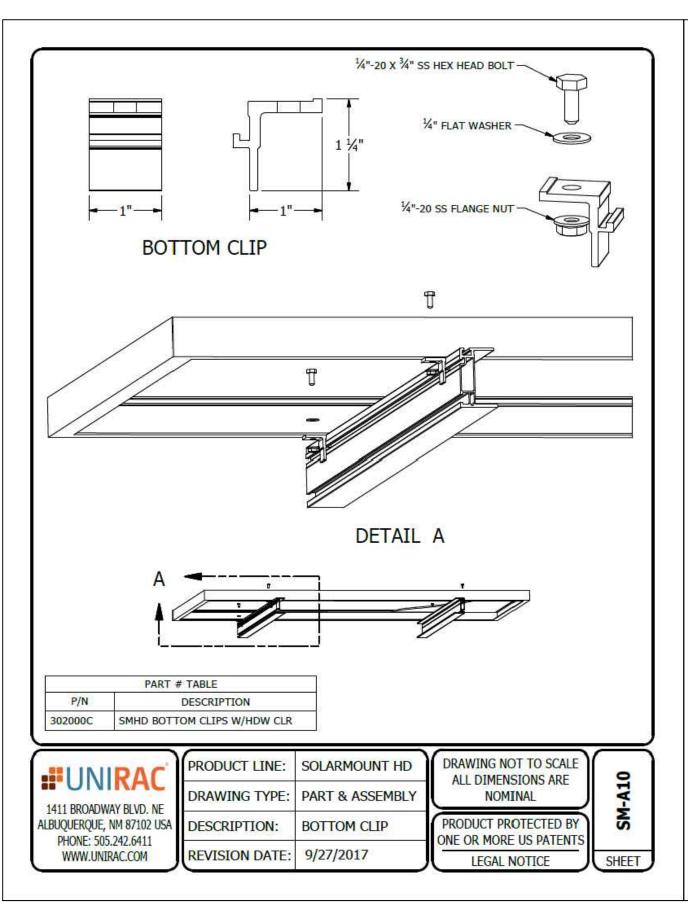

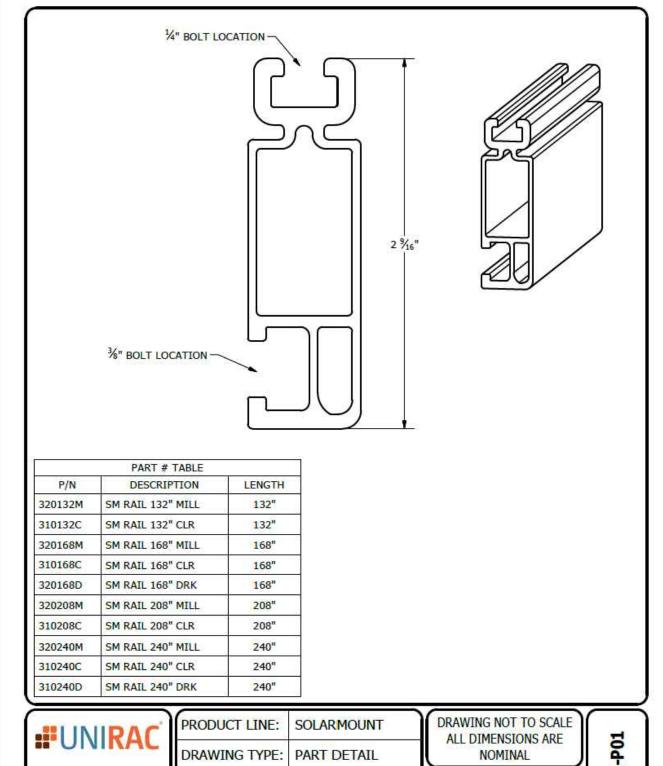

PART DETAIL

9/11/2017

STANDARD RAIL

NOMINAL

PRODUCT PROTECTED BY

ONE OR MORE US PATENTS

LEGAL NOTICE

SHEET

DRAWING TYPE:

DESCRIPTION:

REVISION DATE:

1411 BROADWAY BLVD. NE

ALBUQUERQUE, NM 87102 USA

PHONE: 505.242.6411

WWW.UNIRAC.COM

CONTRACTOR

22171 MCH RD

MANDEVILLE, LA 70471

PHONE: 9152011490 PROJECT NAME & ADDRESS

RAYMOND COLE

1175 MOORES CHAPEL

RD, LILLINGTON, NC 27546

COUNTY:-HARNETT COUNTY SYSTEM SIZE

DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC

SHEET TITLE

RESOURCE

DOCUMENT

SHEET NUMBER


R-007


10/26/2021

SHUBHAM

DRAWN DATE

DRAWN BY

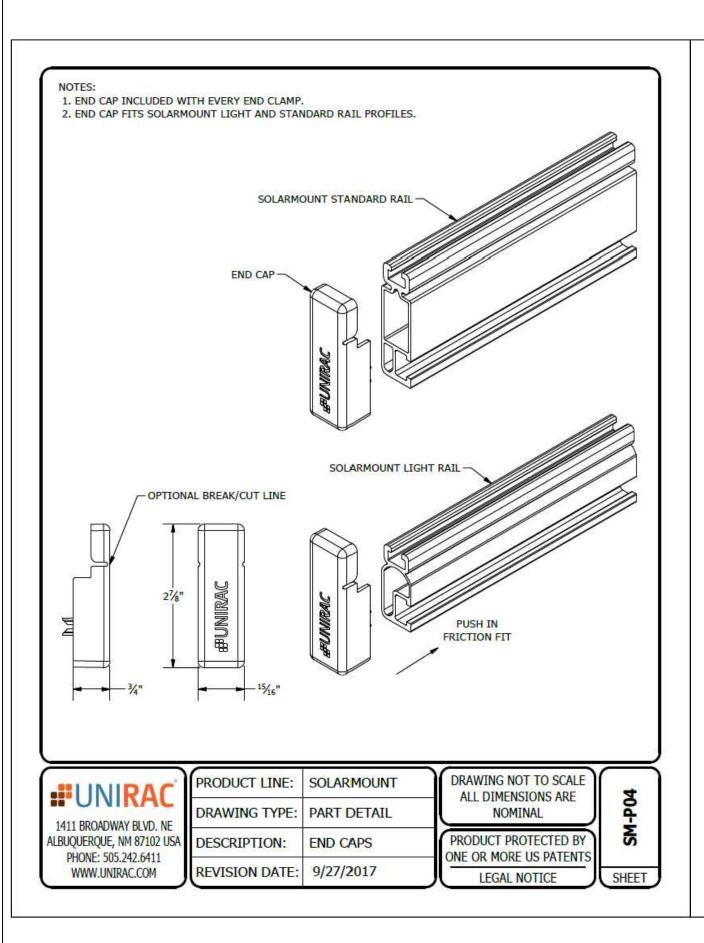

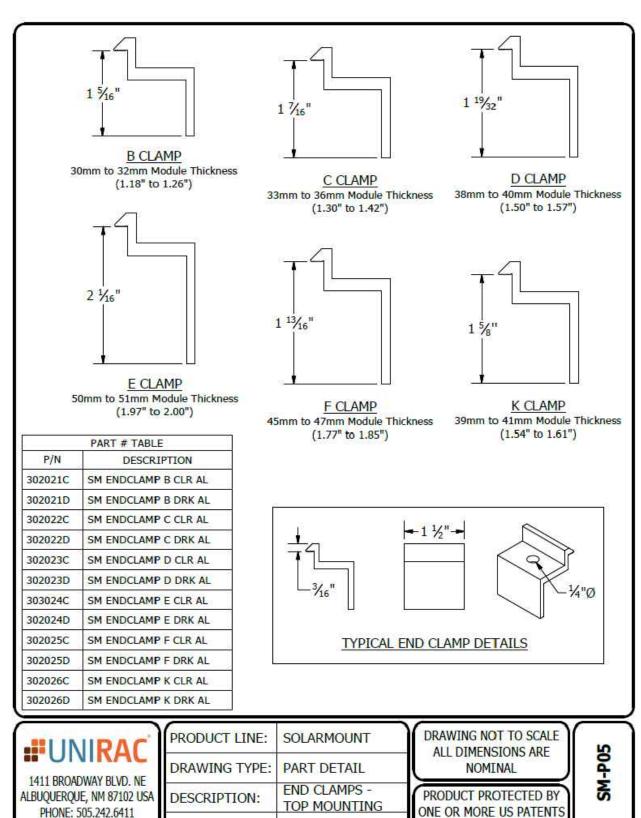

9/27/2017

LEGAL NOTICE

SHEET

REVISION DATE:

PHONE: 505.242.6411

WWW.UNIRAC.COM

CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

RAYMOND COLE

1175 MOORES CHAPEL RD, LILLINGTON, NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 13.500 KW DC-(STC) AC SIZE: 10.440 KW AC

SHEET TITLE **RESOURCE DOCUMENT**

DRAWN DATE 10/26/2021 **DRAWN BY SHUBHAM**

SHEET NUMBER