

1011 N Causeway Blvd, Suite 19 ◆ Mandeville, Louisiana 70471 ◆ Phone: 985.624.5001 ◆ Fax: 985.624.5303

October 2021

Property Owner: Cheryl Carmona

Property Address: 30 Salisbury Lane, Spring Lake, North Carolina 28390

RE: Photovoltaic System Roof Installations

I have reviewed the existing structure referenced above to determine the adequacy of the existing structure support the proposed installation of an array of solar panels on the roof.

Based on my review, the existing structure is adequate to support the proposed solar panel installation. This assessment is based on recent on-site inspection by SunPro Solar inspectors and photographs of the existing structure. The photovoltaic system is designed to withstand uplift and downward forces; our assessment is regarding the structure's support of the array. Stresses induced by the introduction of individual mount loads on the rafters are within acceptable limits as shown on the attached calculations. The structural considerations used in our review and assessment include the following:

Evaluation Criteria:

Applied Codes: ASCE 7-10 PEBC 2018 "NETC 2018 """P GE 2017

Risk Category: II

Design Wind Speed (3-second gust): 118 MPH

Wind Exposure Category: C Ground Snow Load: 10 PSF Seismic Design Category: D

Existing Structure:

Roof Material: Shingle

Roofing Structure: 2x6 rafters @ 24" O.C.

Roof Slope: 10/12

Connection of Array to Structure:

Manufacturer: UNIRAC Mount: Flashloc Comp Kit

Mounting Connection: Flashloc Comp Kit 5/16" lag screw w/min 2.5" embedment into framing

Zone 1: 2 rails 4'-0" o.c. mounts Zone 2: 2 rails 4'-0" o.c. mounts Zone 3: 2 rails 4'-0" o.c. mounts SEAL O41743

SEAL O41743

MGINERO

MOINERO

10/28/2021

North Carolina Firm No. C4113 Principal Engineering, Inc.

Effect of the Solar Array on Structure Loading:

Gravity Loads:

Per IBC Section 1607.12.5.1, the areas of the roof where solar panels are located are considered inaccessible, and therefore not subject to roof live loading. Live load in these areas is replaced by the dead load of the solar array, 3 psf. The total gravity load on the structure is therefore reduced and the structure may remain unaltered. Connections of the mounts to the underlying structure are to be installed in a staggered pattern, except at the array ends, to distribute the loading evenly to the roof structure. The stresses within the rafters due to the introduction of discrete mount loads are within acceptable limits, as shown on the attached calculations.

Wind Load:

The solar panel array will be flush mounted (no more than 6" above the surrounding roof surface, and parallel to the roof surface. Any additional wind loading on the structure due to the presence of the array is negligible. The array structure is designed by the manufacturer to withstand uplift and downward forces resulting from wind and snow loads. The attached calculations verify the capacity of the connection of the solar array to the roof to resist uplift due to wind loads, the governing load case.

Snow Load:

The reduced friction of the glass surface of the solar panels allows for the lower slope factor (C_s) per Section 7.4 of ASCE 7-10 resulting in a reduced design snow load for the structure. This analysis conservatively considered the snow load to be unchanged.

Seismic Load:

Analysis shows that additional seismic loads due to the array installation will be small. Even conservatively neglecting the wall materials, the solar panel installation represents an increase in the total weight of the roof and corresponding seismic load of less than 10%. This magnitude of additional forces meets the requirements of the exception in Section 11B.4 of ASCE 7-10 . The existing lateral force resisting system of the structure is therefore allowed to remain unaltered.

SEAL OMITANT Ancol.

10/28/2021

North Carolina Firm No. C4113 Principal Engineering, Inc.

Page 3 of 3

Conclusion:

To the best of my professional knowledge and belief, the subject construction and photovoltaic system installation will be in compliance with all state and local building codes and guidelines in effect at the time of our review.

Limitations:

Engineer's assessment of the existing structure is based on recent field reports and current photographs of the elements of the structure that were readily accessible at the time of inspection. The design of the solar panel racking (mounts, rails, connectors, etc.), connections between the racking and panels, and electrical engineering related to the installation are the responsibility of others. The photovoltaic system installation must be by competent personnel in accordance with manufacturer recommendations and specifications and should meet or exceed industry standards for quality. The contractor is responsible for ensuring that the solar array is installed according to the approved plans and must notify the engineer of any undocumented damage or deterioration of the structure, or of discrepancies between the conditions depicted in the approved plans and those discovered on site so that the project may be reevaluated and altered as required. Engineer does not assume any responsibility for improper installation of the proposed photovoltaic system.

SEAL O41743

SEAL O41743

Jenny OHFRAND

10/28/2021

North Carolina Firm No. C4113 Principal Engineering, Inc.

Uplift and Wind Downforce Calculation Summary (ASCE 7-10)

Mount, Rack, & Panel Proportioning

Property Owner:	Cheryl Carmona	Individual Panel Dimensions		ensions
Project Address:	30 Salisbury Lane	Length (in)	Width (in)	Area (sf)
City, State:	Sprng Lake, North Carolina 28390	77	39	20.85

Wind Load Calculation Summary (ASCE 7-10 C&C Provisions)						
Building Characteristics, Design Input, and Adjustment Factors						
Roof Dimensions: Length (b):	52 ft.	<u></u>				
Width (w):	50 ft.	Least Dimension: 50 ft.				
Roof Height (h):	25 ft.	Must be less than 60 ✓				
Pitch: 10 on 12 =	39.8°	Must be less than 45° ✓				
Roof Configuration	Gable					
Roof Structure:	2x Rafters					
Roof material:	Plywood					
Ultimate Wind Speed (mph):	118	From ASCE 7-10, Fig. 26.5				
Exposure Category:	С	Para 26.7.3				
Directionality Factor, K _d	0.85	Table 26.6-1				
Risk Category:	2	Table 1.5-2				
Exposure Coefficient, K _z	1.09	Table 30.3-1				
Topographic Adj., K _{zt}	1	Fig. 26.8-1				
Effective Wind Area (sf):	21	(Area per individual panel)				
Velocity Pressure (psf), q _h :	33.03	psf, Eq. 30.3-1				
Internal Pressure Coeff, GC _{pi}	0.18	Table 26.11-1				

Roof Zone Strip (a), in ft, Fig. 30.5-1, Note 5	
1 - Least Roof Horizontal Dimension (L or W) x 0.10	5
2 - Roof Height x 0.4	10
3 - Least Roof Horizontal Dimension (L or W) x 0.04	2
4 - Lesser of (1) and (2)	5
5 - Greater of (3) and (4)	5
6 - Greater of (5) and 3 feet	a= 5 ft.



North Carolina Firm No. C4113 Principal Engineering, Inc.

Net Design Wind Pressures							
	(ASCE 7, Eq. 30.4.1; Load Factor for ASD = 0.6, per ASCE 7, 2.4.1)						
	Uplift (-psf) Down (psf)						
	GC_p	Pressure	GC_p	Pressure	Description of Zone		
Zone 1	-0.95	-22.4	0.85	20.4	Interior Roof Area, >(a) ft from edge		
Zone 2	-1.12	-25.7	0.85	20.3	Strip of (a) ft wide at roof edge		
Zone 3	-1.12	-25.7	0.85	20.3	Corner intersection of Zone 2 strips		

Snow Load					
Ground Snow Load, p _g	10.0	From ASCE 7 or AHJ			
Terrain Category:	С	Para 6.5.6.3			
Exposure	Fully				
Exposure FactorCe	0.9	Table 7-2			
Thermal Factor, Ct	1.0	Table 7-3			
Importance Factor, I _s	1.0	Table 1.5.2			
Roof Configuration	Gable				
Roof Slope	39.8°				
Distance from Eave to Ridge	25.0				
p _m , Minimum required Snow Load	N/A	Para. 7.3.4			
pf, Calculated Snow Load	6.30	Eq. 7.3-1			
pf, Design Snow Load	6.30 psf				

North Carolina Firm No. C4113 Principal Engineering, Inc.

	Adams Calastian and Curation					
		iviount Se	election and Spacing			
Manufact	turer:	Unirac	Perpendicular Panel Orientation			
Mount:		Flashloc Comp Kit	Allowable Arrangement by Uplift Pressure			
Substrate	: :	Wood Rafters	< 37 psf: 2 rails, mounts @ 4'-0" o.c.			
Connecto	r:	5/16" x 4" Lag Screw	37 to 75 psf: 2 rails, mounts @ 2'-0" o.c.			
			75 to 112 psf: 3 rails, mounts @ 2'-0" o.c.			
Allowable	e Uplift:	480 max.	112 to 150 psf: 4 rails, mounts @ 2'-0" o.c.			
Required Mount Layout		lount Layout	> 150 psf : Mount capacity exceeded			
Zone 1	Zone 1 2 rails, mounts @ 4'-0" o.c.					
Zone 2 2 rails, mounts @ 4'-0" o.c.		unts @ 4'-0" o.c.				
Zone 3 2 rails, mounts @ 4'-0" o.c.		unts @ 4'-0" o.c.				
(Allowable loads are based on		Allowable loads are based on	individual mount failure before rail failure)			



North Carolina Firm No. C4113 Principal Engineering, Inc.

NEW PHOTOVOLTAIC SYSTEM 4.50 KW DC 30 SALISBURY LN, SPRING LAKE, NC 28390

GENERAL NOTES

1.1.1 PROJECT NOTES:

1703 OR UL 1741 ACCESSORY

1.1.2 THIS PHOTOVOLTAIC (PV) SYSTEM SHALL COMPLY WITH THE NATIONAL ELECTRIC CODE (NEC) ARTICLE 690, ALL MANUFACTURERS'S LISTING AND INSTALLATION INSTRUCTIONS, AND THE RELEVANT CODES AS SPECIFIED BY THE AUTHORITY HAVING JURISDICTION'S (AHJ) APPLICABLE CODES.

- 1.1.3 THE UTILITY INTERCONNECTION APPLICATION MUST BE APPROVED AND PV SYSTEM INSPECTED PRIOR TO PARALLEL OPERATION
- 1.1.4 GROUND FAULT DETECTION AND INTERRUPTION (GFDI) DEVICE IS INTEGRATED WITH THE MICRO-INVERTER IN ACCORDANCE WITH NEC 690.41(B) 1.1.5 ALL PV SYSTEM COMPONENTS; MODULES, UTILITY-INTERACTIVE INVERTERS, AND SOURCE CIRCUIT COMBINER BOXES ARE IDENTIFIED AND LISTED FOR USE IN PHOTOVOLTAIC SYSTEMS AS REQUIRED BY NEC 690.4: PV MODULES: UL1703, IEC61730, AND IEC61215, AND NFPA 70 CLASS C FIRE INVERTERS: UL 1741 CERTIFIED, IEEE 1547, 929, 519 COMBINER BOX(ES): UL
- 1.1.6 MAX DC VOLTAGE CALCULATED USING MANUFACTURER PROVIDED TEMP COEFFICIENT FOR VOC. IF UNAVAILABLE, MAX DC VOLTAGE CALCULATED ACCORDING TO NEC 690.7.
- 1.1.7 ALL INVERTERS, PHOTOVOLTAIC MODULES, PHOTOVOLTAIC PANELS, AND SOURCE CIRCUIT COMBINERS INTENDED FOR USE IN A PHOTOVOLTAIC POWER SYSTEM WILL BE IDENTIFIED AND LISTED FOR THE APPLICATION PER 690.4. SHALL BE INSTALLED ACCORDING TO ANY INSTRUCTIONS FROM LISTING OR LABELING [NEC 110.3].
- 1.1.8 ALL SIGNAGE TO BE PLACED IN ACCORDANCE WITH LOCAL BUILDING CODE. IF EXPOSED TO SUNLIGHT, IT SHALL BE UV RESISTANT. ALL PLAQUES AND SIGNAGE WILL BE INSTALLED AS REQUIRED BY THE NEC AND AHJ.

1.2.1 SCOPE OF WORK:

1.2.2 PRIME CONTRACTOR IS RESPONSIBLE FOR THE DESIGN AND SPECIFICATIONS OF THE GRID-TIED PHOTOVOLTAIC SYSTEM RETROFIT. PRIME CONTRACTOR WILL BE RESPONSIBLE FOR COLLECTING EXISTING ONSITE REQUIREMENTS TO DESIGN, SPECIFY, AND INSTALL THE EXTERIOR ROOF-MOUNTED PORTION OF THE PHOTOVOLTAIC SYSTEMS DETAILED IN THIS DOCUMENT

1.3.1 WORK INCLUDES:

- 1.3.2 PV RACKING SYSTEM INSTALLATION UNIRAC SOLAR
- 1.3.3 PV MODULE AND INVERTER INSTALLATION LG ELECTRONICS LG375N1C-A6 / ENPHASE IQ7PLUS-72-2-US INVERTER
- 1.3.4 PV EQUIPMENT ROOF MOUNT
- 1.3.5 PV SYSTEM WIRING TO A ROOF-MOUNTED JUNCTION BOX
- 1.3.6 PV LOAD CENTERS (IF INCLUDED)
- 1.3.7 PV METERING/MONITORING (IF INCLUDED)
- 1.3.8 PV DISCONNECTS
- 1.3.9 PV GROUNDING ELECTRODE & BONDING TO (E) GEC
- 1.3.10 PV FINAL COMMISSIONING
- 1.3.11 (E) ELECTRICAL EQUIPMENT RETROFIT FOR PV
- 1.3.12 SIGNAGE PLACED IN ACCORDANCE WITH LOCAL BUILDING CODE

PROJECT INFORMATION

OWNER

NAME: CHERYL CARMONA

PROJECT MANAGER

NAME: SHAHIN HAYNES PHONE: 8665071461

CONTRACTOR NAME

MARC JONES CONSTRUCTION, LLC DBA SUNPRO SOLAR

PHONE: 5052180838



SCOPE OF WORK

SYSTEM SIZE: STC:12 X 375W= 4.50 kW DC

PTC: 12 x 347.3W = 4.17 kW DC (12) LG ELECTRONICS LG375N1C-A6 (12) ENPHASE IQ7PLUS-72-2-US

ATTACHMENT TYPE: ROOF MOUNT

MSP UPGRADE: YES

UTILITY METER UPGRADE: NO

AUTHORITIES HAVING JURISDICTION

BUILDING: HARNETT COUNTY ZONING: HARNETT COUNTY UTILITY: SOUTH RIVER ELECTRIC

METER NO: 18317685

DESIGN SPECIFICATION

OCCUPANCY: II

CONSTRUCTION: SINGLE-FAMILY ZONING: RESIDENTIAL

GROUND SNOW LOAD: REFER STRUCTURAL LETTER
WIND EXPOSURE: REFER STRUCTURAL LETTER
WIND SPEED: REFER STRUCTURAL LETTER

APPLICABLE CODES & STANDARDS

BUILDING: IBC 2015, NCBC 2018

IRC 2015, NCRC 2018


ELECTRICAL: NEC 2017

FIRE: IFC 2015, NCFC 2018

VICINITY MAP



SATELLITE VIEW

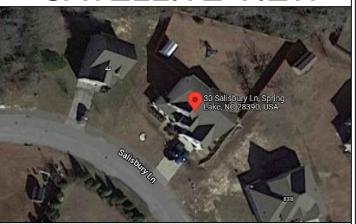

SHEET INDEX

G-001	COVER PAGE
G-002	NOTES
A-101	SITE PLAN
A-102	ELECTRICAL PLAN
A-103	ATTACHMENT PLAN
A-104	STRUCTURAL PLAN
E-601	LINE DIAGRAM
E-602	ELECTRICAL CALCULATIONS
E-603	PLACARD
R-001	RESOURCE DOCUMENT
R-002	RESOURCE DOCUMENT
R-003	RESOURCE DOCUMENT
R-004	RESOURCE DOCUMENT
R-005	RESOURCE DOCUMENT
R-006	RESOURCE DOCUMENT
R-007	RESOURCE DOCUMENT
R-008	RESOURCE DOCUMENT

SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

CHERYL CARMONA

30 SALISBURY LN,SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC







10/28/2021

North Carolina Firm No. C4113
Principal Engineering, Inc.

SHEET TITLE

COVER PAGE

DRAWN DATE	10/27/2021
DRAWN BY	AS

SHEET NUMBER

G-001

2.1.1 SITE NOTES:

- 2.1.2 A LADDER WILL BE IN PLACE FOR INSPECTION IN COMPLIANCE WITH CONVENTION IF THREE PHASE C OR L3- BLUE, OSHA REGULATIONS.
- 2.1.3 THE PV MODULES ARE CONSIDERED NON-COMBUSTIBLE AND THIS SYSTEM IS A UTILITY INTERACTIVE SYSTEM WITH NO STORAGE BATTERIES.
- 2.1.4 THE SOLAR PV INSTALLATION WILL NOT OBSTRUCT ANY PLUMBING, MECHANICAL, OR BUILDING ROOF VENTS.
- 2.1.5 PROPERACCESS AND WORKING CLEARANCE AROUND EXISTING AND PROPOSED ELECTRICAL EQUIPMENT WILL BE PROVIDED AS PERSECTION NEC 110.26.
- 2.1.6 ROOF COVERINGS SHALL BE DESIGNED, INSTALLED, AND MAINTAINED IN ACCORDANCE WITH THIS CODE AND THE APPROVED MANUFACTURER'S INSTRUCTIONS SUCH THAT THE ROOF COVERING SERVES TO PROTECT THE BUILDING OR STRUCTURE. 2.2.1 EQUIPMENT LOCATIONS:
- 2.2.2 ALL EQUIPMENT SHALL MEET MINIMUM SETBACKS AS REQUIRED BY 2.5.5 EQUIPMENT GROUNDING CONDUCTORS SHALLBE SIZED NEC 110.26.
- 2.2.3 WIRING SYSTEMS INSTALLED IN DIRECT SUNLIGHT MUST BE RATED MANUFACTORERS' INSTRUCTIONS. FOR EXPECTED OPERATING TEMPERATURE AS SPECIFIED BY NEC 690.31 2.5.6 EACH MODULE WILL BE GROUNDED USING WEEB (A),(C) AND NEC TABLES 310.15 (B)(2)(A) AND 310.15 (B)(3)(C).
- 2.2.4 JUNCTION AND PULL BOXES PERMITTED INSTALLED UNDER PV MODULES ACCORDING TO NEC 690.34.
- 2.2.5 ADDITIONAL AC DISCONNECT(S) SHALL BE PROVIDED WHERE THE INVERTER IS NOT WITHIN SIGHT OF THE AC SERVICING DISCONNECT. 2.2.6 ALL EQUIPMENT SHALL BE INSTALLED ACCESSIBLE TO QUALIFIED PERSONNEL ACCORDING TO NEC APPLICABLE CODES.
- 2.2.7 ALL COMPONENTS ARE LISTED FOR THEIR PURPOSE AND RATED FOR OUTDOOR USAGE WHEN APPROPRIATE.

2.3.1 STRUCTURAL NOTES:

- 2.3.2 RACKING SYSTEM & PV ARRAY WILL BE INSTALLED ACCORDING TO CODE-COMPLIANT INSTALLATION MANUAL. TOP CLAMPS REQUIRE A DESIGNATED SPACE BETWEEN MODULES. AND RAILS MUSTALSO EXTEND A MINIMUM DISTANCE BEYOND EITHER EDGE OF THE ARRAY/SUBARRAY, ACCORDING TO RAI MANUFACTURER'S INSTRUCTIONS.
- 2.3.3 JUNCTION BOX WILL BE INSTALLED PER MANUFACTURERS' SPECIFICATIONS. IF ROOF-PENETRATING TYPE, IT SHALL BE FLASHED & SEALED PER LOCAL REQUIREMENTS.
- 2.3.4 ROOFTOP PENETRATIONS FOR PV RACEWAY WILLBE COMPLETED AND SEALED W/ APPROVED CHEMICAL SEALANT PER CODE BY A LICENSED CONTRACTOR.
- 2.3.5 ALL PV RELATED ROOF ATTACHMENTS TO BE SPACED NO GREATER THAN THE SPAN DISTANCE SPECIFIED BY THE RACKING MANUFACTURER.
- 2.3.6 WHEN POSSIBLE, ALL PV RELATED RACKING ATTACHMENTS WILL BE STAGGERED AMONGST THE ROOF FRAMING MEMBERS.

2.4.1 WIRING & CONDUIT NOTES:

- 2.4.2 ALL CONDUIT AND WIRE WILL BE LISTED AND APPROVED FOR THEIR PURPOSE. CONDUIT AND WIRE SPECIFICATIONS AREBASED ON MINIMUM CODE REQUIREMENTS AND ARE NOT MEANT TO LIMIT UP-SIZING.
- 2.4.3 CONDUCTORS SIZED ACCORDING TO NEC 690.8, NEC 690.7.
- 2.4.4 VOLTAGE DROP LIMITED TO 1.5%.
- 2.4.5 DC WIRING LIMITED TO MODULE FOOTPRINT. MICROINVERTER WIRING SYSTEMS SHALL BE LOCATED AND SECURED UNDER THE ARRAY W/ SUITABLE WIRING CLIPS.

2.4.6 AC CONDUCTORS COLORED OR MARKED AS FOLLOWS: PHASE A OR L1- BLACK PHASE B OR L2- RED. OR OTHER YELLOW, ORANGE**, OR OTHER CONVENTION NEUTRAL-WHITE OR GREY IN 4-WIRE DELTA CONNECTED SYSTEMS THE PHASE WITH HIGHER VOLTAGE TO BE MARKED ORANGE [NEC 110.15].

2.5.1 GROUNDING NOTES:

2.5.2 GROUNDING SYSTEM COMPONENTS SHALL BE LISTED FOR THEIR PURPOSE, AND GROUNDING DEVISES EXPOSED TO THE ELEMENTS SHALL BE RATED FOR SUCH USE.

2.5.3 PV EQUIPMENT SHALL BE GROUNDED ACCORDING TO NEC 690.43 AND MINIMUM NEC TABLE 250.122.

2.5.4 METAL PARTS OF MODULE FRAMES, MODULE RACKING, AND ENCLOSURES CONSIDERED GROUNDED IN ACCORD WITH 250.134 AND 250.136(A).

ACCORDING TO NEC 690.45 AND MICROINVERTER

GROUNDING CLIPS AS SHOWN IN

MANUFACTURERDOCUMENTATION AND APPROVED BY THE AHJ IF WEEBS ARE NOT USED. MODULE GROUNDING LUGS MUST BE INSTALLED AT THE SPECIFIED GROUNDING LUG HOLES PER THE MANUFACTURERS' INSTALLATION REQUIREMENTS.

2.5.7 THE GROUNDING CONNECTION TO A MODULE SHALL BE ARRANGED SUCH THAT THE REMOVAL OFA MODULE DOES NOT INTERRUPT A GROUNDING CONDUCTOR TO ANOTHER MODULE. 2.5.8 GROUNDING AND BONDING CONDUCTORS, IF INSULATED, SHALL BE COLORED GREEN OR MARKED GREEN IF #4 AWG OR LARGER [NEC 250.119]

2.5.9 THE GROUNDING ELECTRODE SYSTEM COMPLIES WITH NEC 690.47 AND NEC 250.50 THROUGH 250.106. IF EXISTING SYSTEM IS INACCESSIBLE, OR INADEQUATE, A GROUNDING ELECTRODE SYSTEM PROVIDED ACCORDING TO NEC 250, NEC 690.47 AND AHJ.

2.5.10 GROUND-FAULT DETECTION SHALL COMPLY WITH NEC 690.41(B)(1) AND (2) TO REDUCE FIRE HAZARDS

2.6.1 DISCONNECTION AND OVER-CURRENT PROTECTION NOTES:

2.6.2 DISCONNECTING SWITCHES SHALL BE WIRED SUCH THAT WHENTHE SWITCH IS OPENED THE CONDUCTORS REMAINING ENERGIZED ARECONNECTED TO THE TERMINALS MARKED "LINE SIDE" (TYPICALLY THE UPPER TERMINALS). 2.6.3 DISCONNECTS TO BE ACCESSIBLE TO QUALIFIED UTILITY PERSONNEL, BE LOCKABLE, AND BE A VISIBLE-BREAK SWITCH 2.6.4 PV SYSTEM CIRCUITS INSTALLED ON OR IN BUILDINGS SHALL INCLUDE A RAPID SHUTDOWN FUNCTION TO REDUCE SHOCK HAZARD FOR EMERGENCY RESPONDERS IN ACCORDANCE WITH 690.12(A) THROUGH (D). 2.6.5 ALL OCPD RATINGS AND TYPES SPECIFIED ACCORDING TO NEC 690.8, 690.9, AND 240. 2.6.6 MICROINVERTER BRANCHES CONNECTED TO A SINGLE

2.6.7 IF REQUIRED BY AHJ, SYSTEM WILL INCLUDE ARC-FAULT CIRCUIT PROTECTION ACCORDING TO NEC 690.11 AND UL1699B.

BREAKER OR GROUPED FUSES IN ACCORDANCE WITH NEC

2.7.1 INTERCONNECTION NOTES:

2.7.2 LOAD-SIDE INTERCONNECTION SHALL BE IN ACCORDANCE WITH [NEC 705.12 (B)] 2.7.3 THE SUM OF THE UTILITY OCPD AND INVERTER CONTINUOUS OUTPUT MAY NOT EXCEED 120% OF BUSBAR RATING [NEC 705.12(B)(2)(3)(b)]. 2.7.4 THE SUM OF 125 PERCENT OF THE POWER SOURCE(S) OUTPUT CIRCUIT CURRENT AND THE RATING OF THE OVERCURRENT DEVICE PROTECTING THE BUSBAR SHALL NOT EXCEED 120 PERCENT OF THE AMPACITY OF THE BUSBAR, PV DEDICATED BACKFEED BREAKERS MUST BE LOCATED OPPOSITE END OF THE BUS FROM THE UTILITY SOURCE OCPD [NEC 705.12(B)(2)(3)]. 2.7.5 AT MULTIPLE ELECTRIC POWER SOURCES OUTPUT COMBINER PANEL, TOTAL RATING OF ALL

OVERCURRENT DEVICES SHALL NOT EXCEED AMPACITY OF BUSBAR. HOWEVER, THE COMBINED OVERCURRENT DEVICE MAY BE EXCLUDED ACCORDING TO NEC 705.12 (B)(2)(3)(C). 2.7.6 FEEDER TAP INTERCONECTION (LOADSIDE) ACCORDING TO NEC 705.12 (B)(2)(1) 2.7.7 SUPPLY SIDE TAP INTERCONNECTION ACCORDING TO NEC 705.12 (A) WITH SERVICE ENTRANCE CONDUCTORS IN ACCORDANCE WITH NEC 230.42 2.7.8BACKFEEDING BREAKER FOR ELECTRIC POWER SOURCES OUTPUT IS EXEMPT FROM ADDITIONAL FASTENING [NEC 705.12 (B)(5)].

CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

CHERYL CARMONA

30 SALISBURY LN, SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC







10/28/2021

North Carolina Firm No. C4113 Principal Engineering, Inc.


SHEET TITLE


NOTES

DRAWN DATE	10/27/2021
DRAWN BY	AS

SHEET NUMBER

G-002

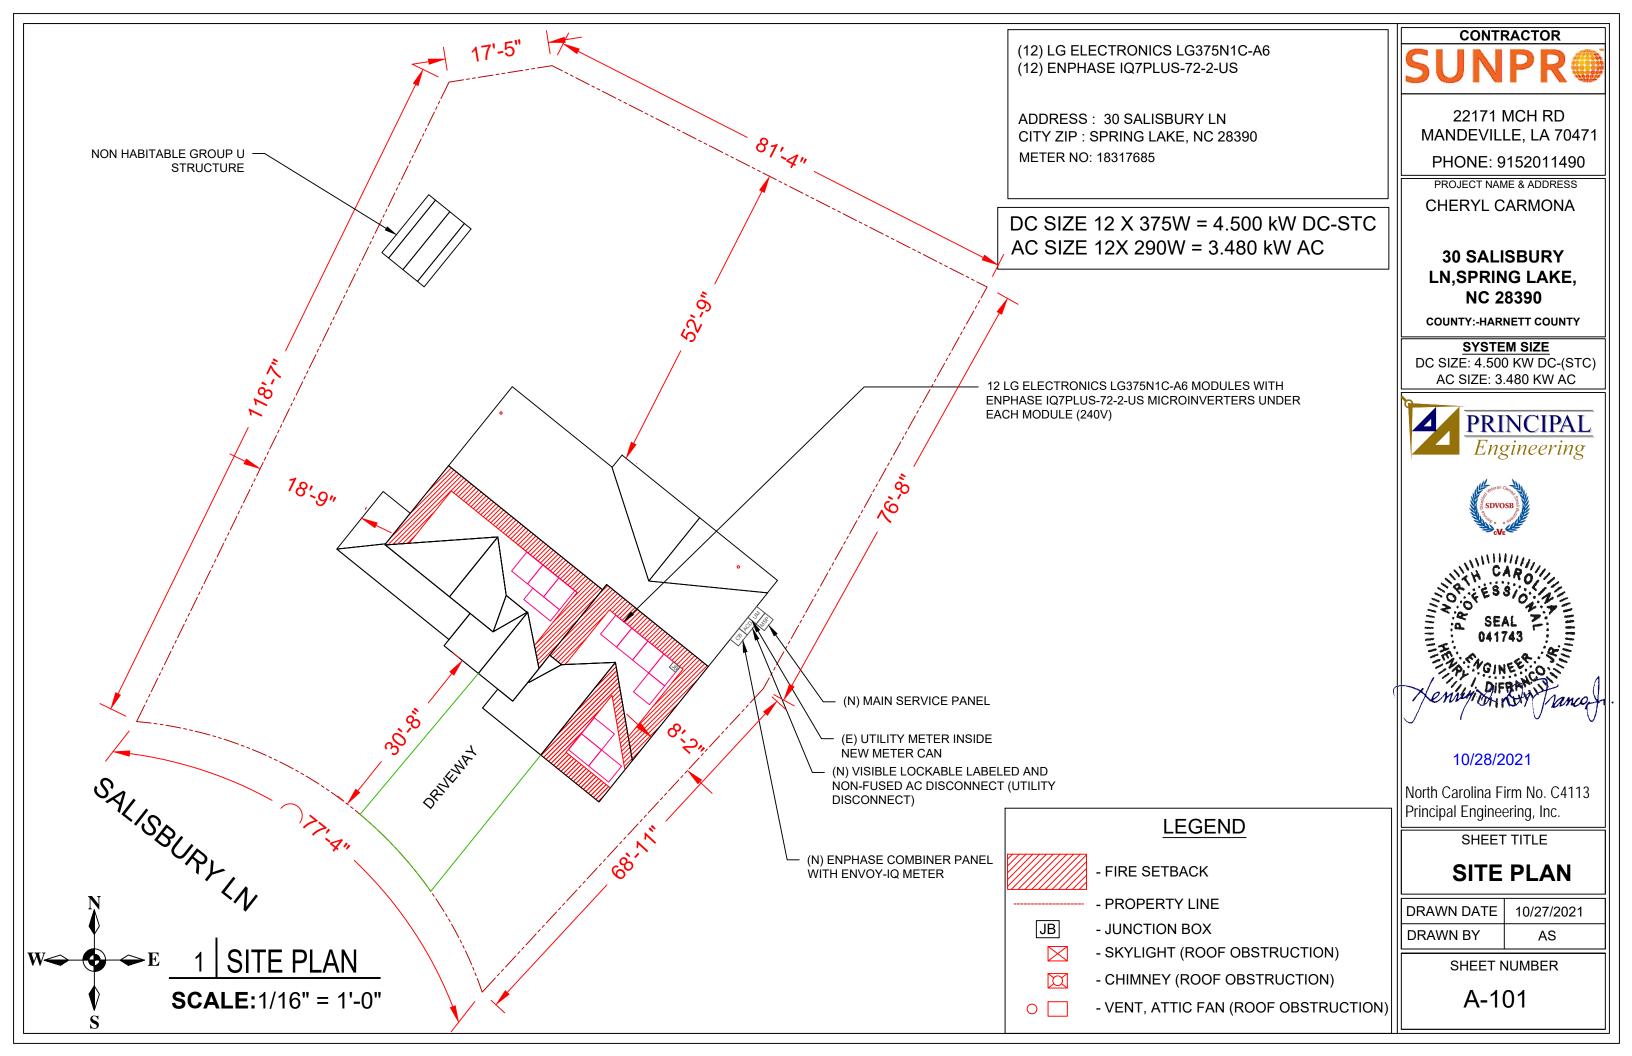

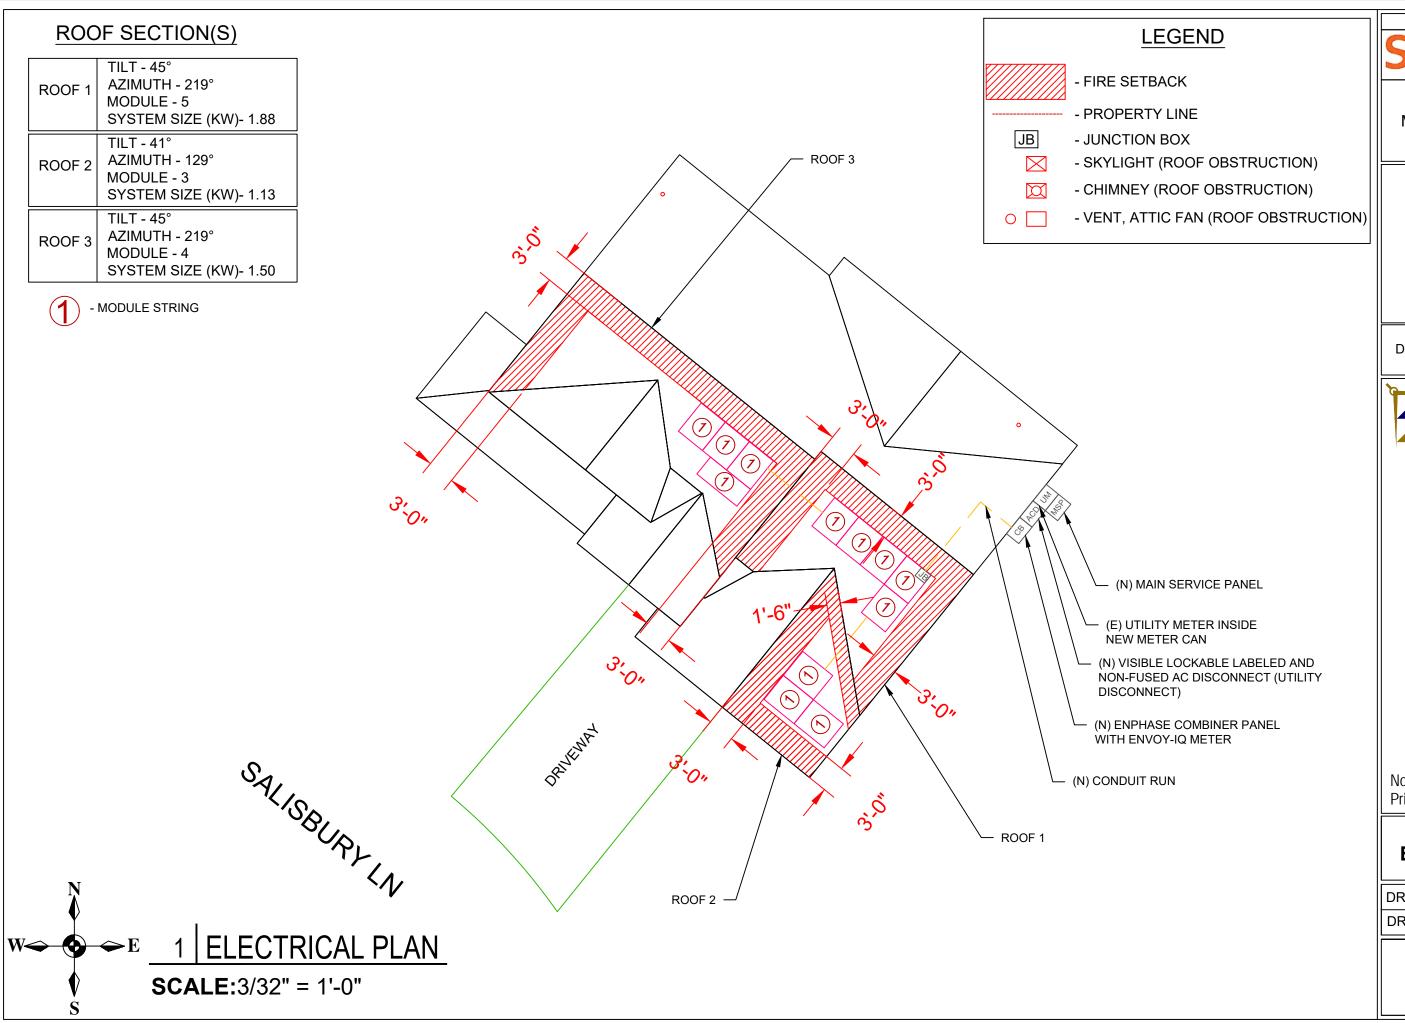

CONTRACTOR SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

CHERYL CARMONA

30 SALISBURY LN,SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC







10/28/2021

North Carolina Firm No. C4113 Principal Engineering, Inc.


SHEET TITLE

ELECTRICAL PLAN


DRAWN DATE	10/27/2021
DRAWN BY	AS


SHEET NUMBER

A-102



- Note 2: a)Lag bolt shall be mounted into rafters b)Notify Engineer immediately if conditions differ or prevent installation per plan.
- Note 3: Maximum rail cantilever distance beyond outermost mount is One-half the zone-specific mount spacing.
- Note 4: Installer shall adjust mount spacing by zone to match prescribed values on engineer's calculation letter

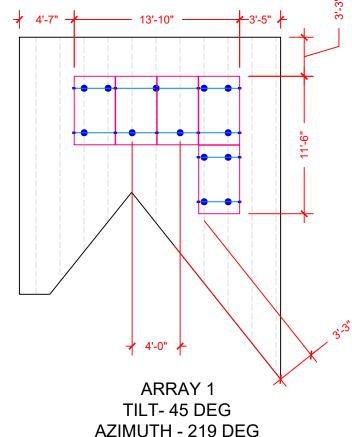


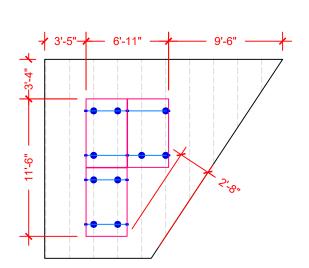

ARRAY 2 TILT- 41 DEG AZIMUTH - 129 DEG

1 ATTACHMENT PLAN

SCALE:1/8"=1'-0"

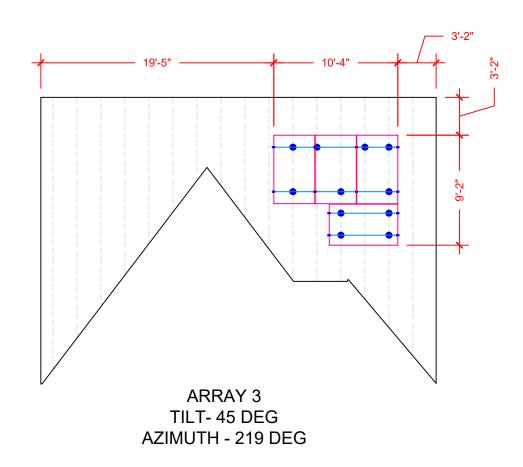

- CLAMP



- RAIL

- KAIL

- RAFTER

34 - TOTAL MOUNT

SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

CHERYL CARMONA

30 SALISBURY LN,SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC







10/28/2021

North Carolina Firm No. C4113 Principal Engineering, Inc.

SHEET TITLE

ATTACHMENT PLAN

DRAWN DATE 10/27/2021
DRAWN BY AS

SHEET NUMBER

A-103

SOLAR MODULE SPECIFICATIONS			
MANUFACTURER / MODEL #	LG ELECTRONICS LG375N1C-A6		
VMP	35.3V		
IMP	10.63A		
VOC	41.8V		
ISC	11.35A		
TEMP. COEFF. VOC	-0.26%/°C		
MODULE DIMENSION	68.50"L x 41.02"W x 1.57"D (In Inch)		

INVERTER SPECIFICATIONS			WIRE /CONDUIT SCHEDULE	
MANUFACTURER / MODEL #	ENPHASE IQ7PLUS-72-2-US MICROINVERTER	TAG	DESCRIPTION	
MIN/MAX DC VOLT RATING	22V MIN/ 60V MAX	1	#12/2 ROMEX IN ATTIC/#12 THWN-2 ON	┦╟
MAX INPUT POWER	235W-440W	'	EXTERIOR & (1)#6 THWN -2 / (GN)	
NOMINAL AC VOLTAGE RATING	240V/ 211-264V			$\exists \mathbb{I}$
MAX AC CURRENT	1.21A		#10 THWN-2 & (1)#6 THWN-2 GROUND / (GN)	- ∥
MAX MODULES PER STRING	13 (SINGLE PHASE)	3	#10 THWN-2 & (1)#6 THWN-2 GROUND / (GN)	╝
MAX OUTPUT POWER	290 VA	4	(1)#6 BARE GROUND	$\ \ $

DC SIZE 12 X 375W = 4.500 kW DC-STC AC SIZE 12X 290W = 3.480 kW AC

(GN) GENERAL CONDUIT NOTE:
CONDUIT TO BE UL LISTED FOR WET LOCATIONS AND UV
PROTECTED (EX. -EMT,SCH 80 PVC OR RMC)*FMC MAYBE
USED IN INDOOR APPLICATIONS WHERE PERMITTED BY
NEC ART .348

METER NO: 18317685

ENPHASE COMBINER PANEL WITH ENVOY IQ METER, (1) 20A / 240VAC CIRCUIT BREAKERS, NEMA 3R, UL LISTED, 125A RATED TO UTILITY GRID **ENVOY IQ** M - 12 AC DISCONNECT 60A (REVENUE GRADE METER) VISIBLE, LOCKABLE, PER MANUFACTURER LABELED AND NON-FUSIBLE (E) BI-DIRECTIONAL SPECIFICATIONS, EITHER UTILITY METER 10A OR 15A BREAKER IS INSIDE NEW METER LG ELECTRONICS LG375N1C-A6 SUITABLE FOR USE CAN 1-PHASE, 3-W, 120V/240V 10A/2P (N) MAIN BREAKER TO LINE (1) ENPHASE Q CABLES 12 MICROINVERTERS IN BRANCH CIRCUIT 1 HOUSE 240 V, 200A/2P (TOP FED) (N) MAIN SERVICE PANEL 225A RATED, 240V JUNCTION BOX LOAD/LINE SIDE UL LISTED INTERCONNECTION PV 30A/2P AT MAIN PANEL 20A/2P PER ART. 705.12(B) LOAD BACKFEED G ENPHASE IQ7PLUS-72-2-US MICROINVERTERS ONE UNDER G EACH PANEL(240V) GEC **EXISTING GROUNDING ELECTRODE SYSTEM** TO EARTH REF. NEC 250.52, 250.53(A)

INSTALL A NEW 200A METER CAN USE 2/0
WIRE. INSTALL A NEW EXTERIOR 225A
RATED 200A MAIN PANEL

SOLAR BREAKER LOCATED AT THE FURTHEST END OF BUSBAR FROM THE MAIN BREAKER OR FEEDER UNIT



22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

CHERYL CARMONA

30 SALISBURY LN,SPRING LAKE, NC 28390


COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC







10/28/2021

North Carolina Firm No. C4113 Principal Engineering, Inc.

SHEET TITLE

LINE DIAGRAM

DRAWN DATE	10/27/2021
DRAWN BY	AS

SHEET NUMBER

E-601

AMBIENT TEMPERATURE SPECS		
RECORD LOW TEMP	0°	
AMBIENT TEMP (HIGH TEMP 2%)	34°	
CONDUIT HEIGHT	0.5"	
CONDUCTOR TEMPERATURE RATE	90°	

PERCENT OF VALUES	NUMBER OF CURRENT CARRYING CONDUCTORS
.80	4-6
.70	7-9
.50	10-20

CALCULATIONS:

- 1. CURRENT CARRYING CONDUCTOR
- (A) <u>BEFORE IQ COMBINER PANEL</u> AMBIENT TEMPERATURE - (34)°C ...NEC 310.15(B)(3)(c) TEMPERATURE DERATE FACTOR - 0.96 ...NEC 310.15(B)(2)(a) GROUPING FACTOR - 1...NEC 310.15(B)(3)(a)

CONDUCTOR AMPACITY

- $= (INV O/P CURRENT) \times 1.25 / A.T.F / G.F ...NEC 690.8(B)$
- $= [(12 \times 1.21) \times 1.25] / [0.96 \times 1]$
- = 18.91A

SELECTED CONDUCTOR - #12 THWN-2 ...NEC 310.15(B)(16)

(B) AFTER IQ COMBINER PANEL
TEMPERATURE DERATE FACTOR - 0.96
GROUPING FACTOR - 1

CONDUCTOR AMPACITY

- $= (TOTAL INV O/P CURRENT) \times 1.25 / 0.96 / 1 ... NEC 690.8(B)$
- $= [(12 \times 1.21) \times 1.25] / [0.96 \times 1]$
- = 18.91 A

SELECTED CONDUCTOR - #10 THWN-2 ...NEC 310.15(B)(16)

- 2. PV OVER CURRENT PROTECTION ...NEC 690.9(B) = TOTAL INVERTER O/P CURRENT x 1.25 = (12 x 1.21) x 1.25 = 18.15 A SELECTED OCPD = 30 A ...NEC 240.6
- 3. <u>120% RULE FOR BACKFEED BREAKER</u> ...NEC 705.12(B)(2)(3)(b)

MCB + PV BREAKER <= (1.2 x BUS BAR RATING RATING)

(200 + 30) <= 1.2 x 225A

230.00 <= 270.00 HENCE OK



22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

CHERYL CARMONA

30 SALISBURY LN,SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC







10/28/2021

North Carolina Firm No. C4113 Principal Engineering, Inc.

SHEET TITLE ELECTRICAL CALCULATIONS

DRAWN DATE	10/27/2021
DRAWN BY	AS

SHEET NUMBER

E-602



LABEL 1 ON ALL CONDUITS SPACED AT MAX 10FT

! WARNING! ELECTRIC SHOCK HAZARD DO NOT TOUCH TERMINALS. TERMINALS ON BOTH LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITION

LABEL 5 AT EACH AC DISCONNECT



LABEL 9 AT UTILITY METER



LABEL 2 AT INVERTER

PHOTOVOLTAIC AC DISCONNECT

LABEL 6 AT EACH AC DISCONNECT



LABEL 10 AT UTILITY METER

SOLAR PV SYSTEM EQUIPPED WITH RAPID SHUTDOWN URN RAPID SHUTDOWN SWITCH TO THE "OFF" POSITION TO HUT DOWN PV SYSTEM AND REDUCE SHOCK HAZARD IN THE ARRAY


LABEL 3

! WARNING! DUAL POWER SOURCES • SECOND SOURCE IS PV SYSTEM LABEL 7



LABEL 8 AT MEP

AT MEP

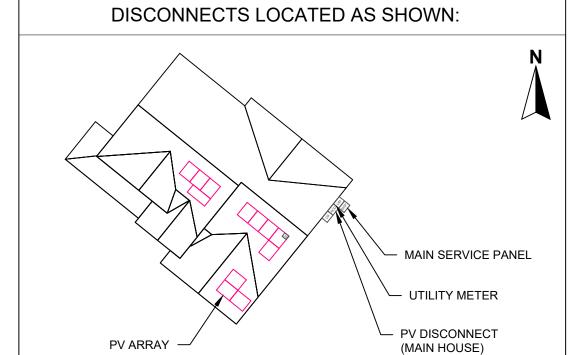

CAUTION

POWER TO THIS BUILDING IS ALSO SUPPLIED

FROM THE FOLLOWING SOURCES WITH



PHONE: 9152011490

CONTRACTOR

PROJECT NAME & ADDRESS **CHERYL CARMONA**

30 SALISBURY LN, SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC







10/28/2021

North Carolina Firm No. C4113 Principal Engineering, Inc.


SHEET TITLE

PLACARD

l	DRAWN DATE	10/27/2021
l	DRAWN BY	AS

SHEET NUMBER

E-603



AT INVERTER

PHOTOVOLTAIC DC DISCONNECT

LABEL 4 AT DC DISCONNECT

LG NeON®2

LG370N1C-A6

LG375N1C-A6

LG380N1C-A6 Preliminary



370W | 375W | 380W

The LG NeON® 2 is LG's best selling solar module and one of the most powerful and versatile modules on the market today. The cells are designed to appear all-black at a distance, and the performance warranty guarantees 90.6% of labeled power output at 25 years.









Features



Enhanced Performance Warranty

LG NeON® 2 has an enhanced performance warranty. After 25 years, LG NeON® 2 is guaranteed at least 90.6% of initial performance.



25-Year Limited Product Warranty

The NeON® 2 is covered by a 25-year limited product warranty. In addition, up to \$450 of labor costs will be covered in the rare case that a module needs to be repaired or replaced.



Solid Performance on Hot Days

LG NeON® 2 performs well on hot days due to its low temperature coefficient.



Roof Aesthetics

LG NeON® 2 has been designed with aesthetics in mind using thinner wires that appear all black at a distance.

When you go solar, ask for the brand you can trust: LG Solar

About LG Electronics USA, Inc.

energy source research program in 1985, supported by LG Group's vast experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX® series to the market, which is now available in 32 countries. The NeON® (previous MonoX® NeON), NeONP2, NeON®2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG's leadership and innovation in the solar industry.



Cell Properties (Material/Type)	Monocrystalline/N-type
Cell Maker	LG
Cell Configuration	60 Cells (6 x 10)
Module Dimensions (L x W x H)	1,740mm x 1,042mm x 40mm
Weight	18.6 kg
Glass (Material)	Tempered Glass with AR Coating
Backsheet (Color)	White
Frame (Material)	Anodized Aluminium
Junction Box (Protection Degree)	IP 68 with 3 Bypass Diodes
Cables (Length)	1,100mm x 2EA
Connector (Type/Maker)	MC 4/MC

LG370N1C-A6 | LG375N1C-A6 | LG380N1C-A6

Certifications and Warranty

	EC 61215-1/-1-1/2 : 2016, IEC 61730-1/2 : 2016 UL 61730-1 : 2017, UL 61730-2 : 2017	
Certifications**	ISO 9001, ISO 14001, ISO 50001	
	OHSAS 18001	
Salt Mist Corrosion Test	IEC 61701:2012 Severity 6	
Ammonia Corrosion Test	IEC 62716 : 2013	
Module Fire Performance	Type 1 (UL 61730)	
Fire Rating	Class C (UL 790, ULC/ORD C 1703)	
Solar Module Product Warranty	25 Year Limited	
Solar Module Output Warranty	Linear Warranty*	

Temperature Characteristics


NMOT*	[°C]	42 ± 3	
Pmax	[%/°C]	-0.34	
Voc	[%/°C]	-0.26	
lsc	[%/°C]	0.03	

^{*}NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m², Ambient temperature 20°C, Wind speed 1 m/s, Spectrum AM 1.5

Electrical Properties (NMOT)

Model		LG370N1C-A6	LG375N1C-A6	LG380N1C-A6
Maximum Power (Pmax)	[W]	277	281	285
MPP Voltage (Vmpp)	[V]	32.8	33.2	33.5
MPP Current (Impp)	[A]	8.46	8.48	8.49
Open Circuit Voltage (Voc)	[V]	39.3	39,4	39,4
Short Circuit Current (Isc)	[A]	9.09	9.13	9.16

I-V Curves



LG370-380N1C-A6_AUS.pdf

© 2020 LG Electronics USA, Inc. All rights reserved.

LG NeON®2

USA =

Preliminary

Electrical Properties (STC*) G380N1C-A6 Model LG370N1C-A6 370 34.9 35.3 35.7 MPP Voltage (Vmpp) [V] 10.65 MPP Current (Impp) 41.7 418 41.9 Open Circuit Voltage (Voc. ± 5%) [V] 11.31 11.35 11.39 20.4 20.7 21.0 Module Efficiency

Operating Conditions

Power Tolerance


Operating Temperature	[°C]	-40 ~+85	
Maximum System Voltage	[V]	1,000	
Maximum Series Fuse Rating	[A]	20	
Mechanical Test Load" (Front)	[Pa/psf]	5,400	
Mechanical Test Load* (Rear)	[Pa/psf]	4,000	

^{*}Based on IEC 61215-2: 2016 (Test Load = Design Load x Safety Factor (1.5)) Mechanical Test Loads 6,000Pa / 5,400Pa based on IEC 61215: 2005

Packaging Configuration

Number of Modules per Pallet	[EA]	25
Number of Modules per 40' Container	[EA]	650
Number of Modules per 53' Container	[EA]	850
Packaging Box Dimensions (Lx W x H)	[mm]	1,790 x 1,120 x 1,213
Packaging Box Dimensions (Lx W x H)	[in]	70.5 × 44.1 × 47.8
Packaging Box Gross Weight	[kg]	500
Packaging Box Gross Weight	[lb]	1,102

Dimensions (mm/inch)

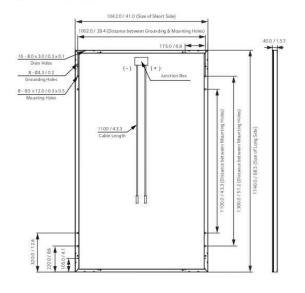

MANDEVILLE, LA 70471 PHONE: 9152011490 PROJECT NAME & ADDRESS **CHERYL CARMONA**

CONTRACTOR

22171 MCH RD

30 SALISBURY LN, SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC

SHEET TITLE RESOURCE **DOCUMENT**

DRAWN DATE	10/27/2021
DRAWN BY	AS

SHEET NUMBER

Data Sheet Enphase Microinverters Region: AMERICAS

Enphase IQ 7 and IQ 7+ Microinverters

The high-powered smart grid-ready Enphase IQ 7 Micro™ and Enphase IQ 7+ Micro™ dramatically simplify the installation process while achieving the highest system efficiency.

Part of the Enphase IQ System, the IQ 7 and IQ 7+ Microinverters integrate with the Enphase IQ Envoy™, Enphase IQ Battery™, and the Enphase Enlighten™ monitoring and analysis software.

IQ Series Microinverters extend the reliability standards set forth by previous generations and undergo over a million hours of power-on testing, enabling Enphase to provide an industry-leading warranty of up to 25 years.



Easy to Install

- · Lightweight and simple
- · Faster installation with improved, lighter two-wire cabling
- Built-in rapid shutdown compliant (NEC 2014 & 2017)

Productive and Reliable

- Optimized for high powered 60-cell and 72-cell* modules
- · More than a million hours of testing
- · Class II double-insulated enclosure
- UL listed

Smart Grid Ready

- · Complies with advanced grid support, voltage and frequency ride-through requirements
- Remotely updates to respond to changing grid requirements
- Configurable for varying grid profiles
- Meets CA Rule 21 (UL 1741-SA)
- * The IQ 7+ Micro is required to support 72-cell modules.



To learn more about Enphase offerings, visit enphase.com



Enphase IQ 7 and IQ 7+ Microinverters

INPUT DATA (DC)	IQ7-60-2-US		IQ7PLUS-72-2	-US	
Commonly used module pairings1	235 W - 350 W +		235 W - 440 W +	¥	
Module compatibility	60-cell PV mod	ules only	60-cell and 72-c	ell PV modules	
Maximum input DC voltage	48 V		60 V	A WEST TO A SECURITION OF THE	
Peak power tracking voltage	27 V - 37 V		27 V - 45 V		
Operating range	16 V - 48 V		16 V - 60 V		
Min/Max start voltage	22 V / 48 V		22 V / 60 V		
Max DC short circuit current (module Isc)	15 A		15 A		
Overvoltage class DC port	11		н		
DC port backfeed current	0 A		0 A		
PV array configuration	1 x 1 ungrounded array; No addition AC side protection requires max 20				
OUTPUT DATA (AC)	1Q 7 Microinve	erter	1Q 7+ Microin	verter	
Peak output power	250 VA		295 VA		
Maximum continuous output power	240 VA		290 VA		
Nominal (L-L) voltage/range ²	240 V / 211-264 V	208 V / 183-229 V	240 V / 211-264 V	208 V / 183-229 V	
Maximum continuous output current	1.0 A (240 V)	1.15 A (208 V)	1.21 A (240 V)	1.39 A (208 V)	
Nominal frequency	60 Hz		60 Hz		
Extended frequency range	47 - 68 Hz		47 - 68 Hz		
AC short circuit fault current over 3 cycles	5.8 Arms		5.8 Arms		
Maximum units per 20 A (L-L) branch circuit®	16 (240 VAC)	13 (208 VAC)	13 (240 VAC)	11 (208 VAC)	
Overvoltage class AC port	111		III	3 10	
AC port backfeed current	0 A		0 A		
Power factor setting	1.0		1.0		
Power factor (adjustable)	0.85 leading t	0.85 lagging	0.85 leading (0.85 lagging	
EFFICIENCY	@240 V	@208 V	@240 V	@208 V	
Peak efficiency	97.6 %	97.6 %	97.5 %	97.3 %	
CEC weighted efficiency	97.0 %	97.0 %	97.0 %	97.0 %	

MECHANICAL DATA		
Ambient temperature range	-40°C to +65°C	
Relative humidity range	4% to 100% (condensing)	
Connector type (IQ7-60-2-US & IQ7PLUS-72-2-US)	MC4 (or Amphenol H4 UTX with additional Q-DCC-5 adapter)	
Dimensions (WxHxD)	212 mm x 175 mm x 30.2 mm (without bracket)	
Weight	1.08 kg (2.38 lbs)	
Cooling	Natural convection - No fans	
Approved for wet locations	Yes	
Pollution degree	PD3	
Englanue	Place II double insulated, correspondential polymeric englacure	

FEATURES	
Communication	Power Line Communication (PLC)
Monitoring	Enlighten Manager and MyEnlighten monitoring options. Both options require installation of an Enphase IQ Envoy.
Disconnecting means	The AC and DC connectors have been evaluated and approved by UL for use as the load-break disconnect required by NEC 690.
Compliance	CA Rule 21 (UL 1741-SA) UL 62109-1, UL1741/IEEE1547, FCC Part 15 Class B, ICES-0003 Class B, CAN/CSA-C22.2 NO. 107.1-01 This product is UL Listed as PV Rapid Shut Down Equipment and conforms with NEC-2014 and

NEC-2017 section 690.12 and C22.1-2015 Rule 64-218 Rapid Shutdown of PV Systems, for AC

and DC conductors, when installed according manufacturer's instructions.

1. No enforced DC/AC ratio. See the compatibility calculator at https://enphase.com/en-us/support/module-compatibility

Environmental category / UV exposure rating NEMA Type 6 / outdoor

Nominal voltage range can be extended beyond nominal if required by the utility.
 Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.

To learn more about Enphase offerings, visit enphase.com

© 2019 Enphase Energy. All rights reserved. All trademarks or brands used are the property of Enphase Energy, Inc.



CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS **CHERYL CARMONA**

30 SALISBURY LN, SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC

> SHEET TITLE **RESOURCE DOCUMENT**

DRAWN DATE 10/27/2021 DRAWN BY AS

SHEET NUMBER

Data Sheet Enphase Networking

Enphase IQ Combiner 3

(X-IQ-AM1-240-3)

The Enphase IQ Combiner 3™ with Enphase IQ Envoy™ consolidates interconnection equipment into a single enclosure and streamlines PV and storage installations by providing a consistent, pre-wired solution for residential applications. It offers up to four 2-pole input circuits and Eaton BR series busbar assembly.



To learn more about Enphase offerings, visit enphase.com

Smart

- Includes IQ Envoy for communication and control
- Flexible networking supports Wi-Fi, Ethernet, or cellular
- · Optional AC receptacle available for PLC bridge
- Provides production metering and optional consumption monitoring
- Supports Ensemble Communications Kit for communication with Enphase Encharge™ storage and Enphase Enpower™ smart switch

Simple

- · Reduced size from previous combiner
- Centered mounting brackets support single stud mounting
- · Supports back and side conduit entry
- Up to four 2-pole branch circuits for 240 VAC plug-in breakers (not included)
- · 80 A total PV or storage branch circuits

Reliable

- Durable NRTL-certified NEMA type 3R enclosure
- · Five-year limited warranty
- UL listed



Enphase IQ Combiner 3

Weight

Compliance, Combiner

Compliance, IQ Envoy

MODEL NUMBER IQ Combiner 3 with Enphase IQ Envoy™ printed circuit board for integrated revenue grade PV X-IQ-AM1-240-3 production metering (ANSI C12.20 +/- 0.5%) and optional* consumption monitoring (+/- 2.5%). ACCESSORIES and REPLACEMENT PARTS (not included, order separately) Enphase Mobile Connect™

Enphase Mobile Connect™	
CELLMODEM-03 (4G/12-year data plan) CELLMODEM-01 (3G/5-year data plan) CELLMODEM-M1 (4G based LTE-M/5-year data plan)	Plug and play industrial grade cellular modem with data plan for systems up to 60 microinverters. (Available in the US, Canada, Mexico, Puerto Rico, and the US Virgin Islands, where there is adequate cellular service in the installation area.)
Consumption Monitoring* CT CT-200-SPLIT	Split core current transformers enable whole home consumption metering (+/- 2.5%).
* Consumption monitoring is required for Enphase Storage Systems	
Ensemble Communications Kit COMMS-KIT-01	Installed at the IQ Envoy. For communications with Enphase Encharge™ storage and Enphase Enpower™ smart switch. Includes USB cable for connection to IQ Envoy or Enphase IQ Combiner™ and allows wireless communication with Encharge and Enpower.
Circuit Breakers BRK-10A-2-240 BRK-15A-2-240 BRK-20A-2P-240	Supports Eaton BR210, BR215, BR220, BR230, BR240, BR250, and BR260 circuit breakers. Circuit breaker, 2 pole, 10A, Eaton BR210 Circuit breaker, 2 pole, 15A, Eaton BR215 Circuit breaker, 2 pole, 20A, Eaton BR220
EPLC-01	Power line carrier (communication bridge pair), quantity - one pair
XA-SOLARSHIELD-ES	Replace the default solar shield with this Ensemble Combiner Solar Shield to match the look and feel of the Enphase Enpower™ smart switch and the Enphase Encharge™ storage system
XA-PLUG-120-3	Accessory receptacle for Power Line Carrier in IQ Combiner 3 (required for EPLC-01)
XA-ENV-PCBA-3	Replacement IQ Envoy printed circuit board (PCB) for Combiner 3

Dimensions (WxHxD)	49.5 x 37.5 x 16.8 cm (19.5" x 14.75" x 6.63"). Height is 21.06" (53.5 cm with mounting bracket
MECHANICAL DATA	
Production Metering CT	200 A solid core pre-installed and wired to IQ Envoy
Envoy breaker	10A or 15A rating GE Q-line/Siemens Type QP /Eaton BR series included
Max. total branch circuit breaker rating (input)	80 A of distributed generation / 95 A with IQ Envoy breaker included
Max. continuous current rating (input from PV)	64 A
Branch circuits (solar and/or storage)	Up to four 2-pole Eaton BR series Distributed Generation (DG) breakers only (not included)
Max. fuse/circuit rating (output)	90 A
Max. continuous current rating (output to grid)	65 A
Eaton BR series busbar rating	125 A
System voltage	120/240 VAC, 60 Hz
Nating	Continuous daty

Ambient temperature range	-40° C to +46° C (-40° to 115° F)	
Cooling	Natural convection, plus heat shield	
Enclosure environmental rating	Outdoor, NRTL-certified, NEMA type 3R, polycarbonate construction	
Wire sizes	 20 A to 50 A breaker inputs: 14 to 4 AWG copper conductors 60 A breaker branch input: 4 to 1/0 AWG copper conductors Main lug combined output: 10 to 2/0 AWG copper conductors Neutral and ground: 14 to 1/0 copper conductors Always follow local code requirements for conductor sizing. 	
Altitude	To 2000 meters (6,560 feet)	
INTERNET CONNECTION OPTIONS	S	
Integrated Wi-Fi	802.11b/g/n	
Ethernet	Optional, 802.3, Cat5E (or Cat 6) UTP Ethernet cable (not included)	
Cellular	CELLMODEM-M1 4G based LTE-M cellular modem (not included). Note that an Enphase Mobile Connect cellular modem is required for all Ensemble installations.	
COMPLIANCE		

UL 60601-1/CANCSA 22.2 No. 61010-1

UL 1741, CAN/CSA C22.2 No. 107.1, 47 CFR, Part 15, Class B, ICES 003

Production metering: ANSI C12.20 accuracy class 0.5 (PV production)

To learn more about Enphase offerings, visit enphase.com

© 2021 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ Combiner 3, and other trademarks or service names are the trademarks of Enphase Energy, Inc. Data subject to change. 2021-05-20



SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

CHERYL CARMONA

30 SALISBURY LN,SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY


SYSTEM SIZE


DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC

RESOURCE DOCUMENT

DRAWN DATE 10/27/2021
DRAWN BY AS

SHEET NUMBER

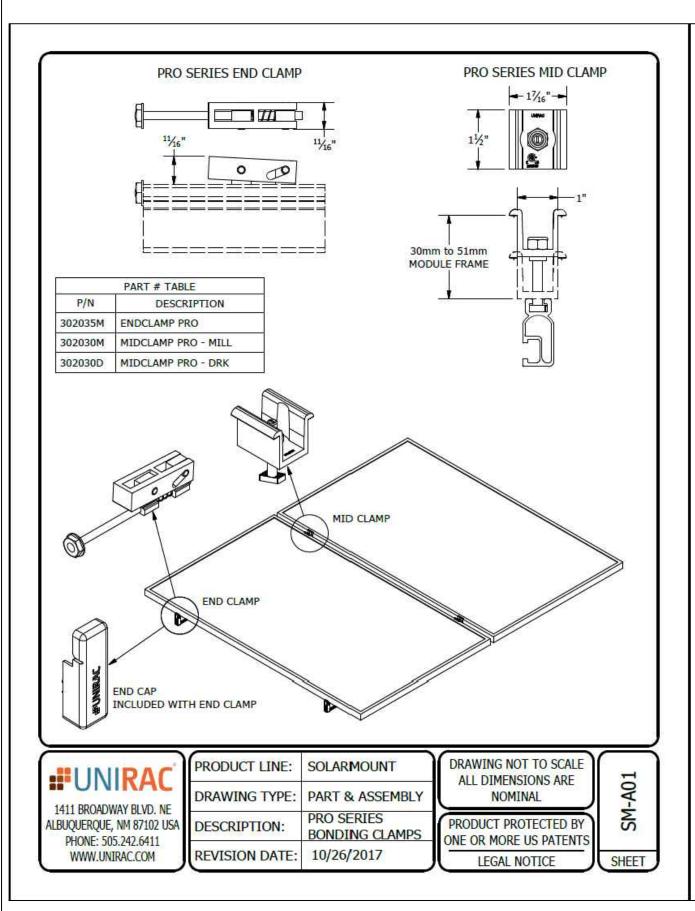

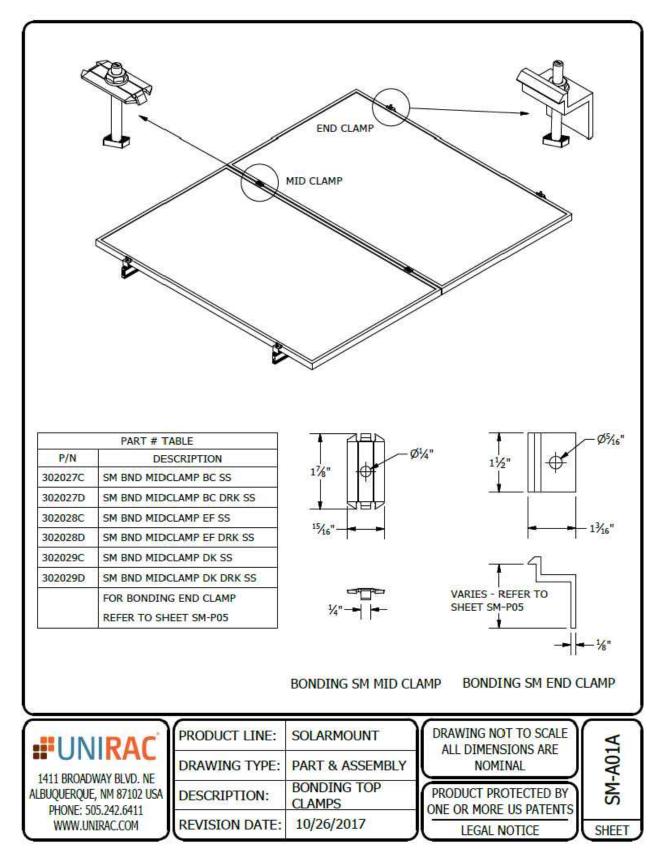

SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

CHERYL CARMONA

30 SALISBURY LN,SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY


SYSTEM SIZE


DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC

SHEET TITLE RESOURCE DOCUMENT

	DRAWN DATE	10/27/2021
Ш	DRAWN BY	AS

SHEET NUMBER

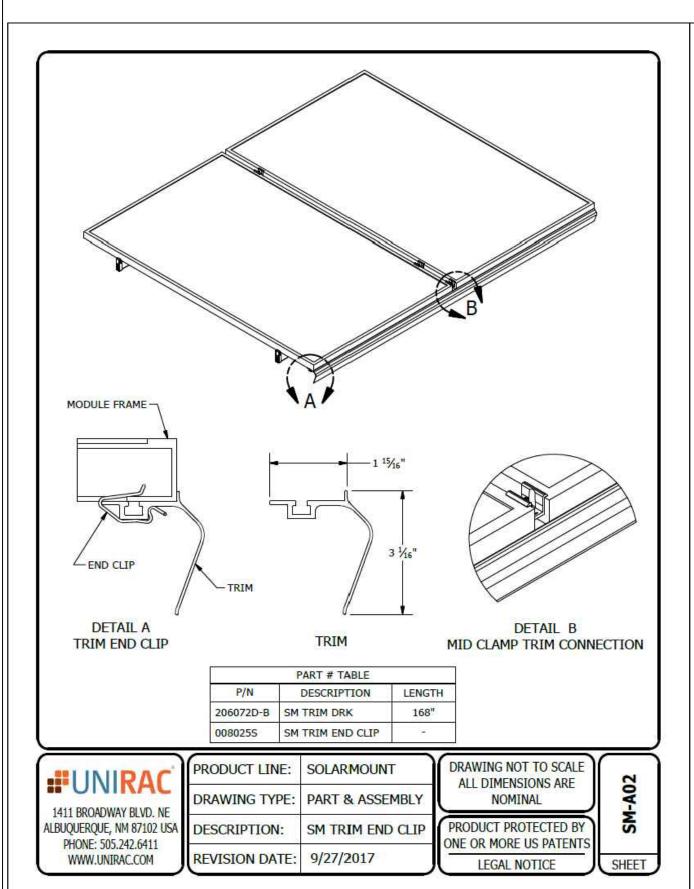

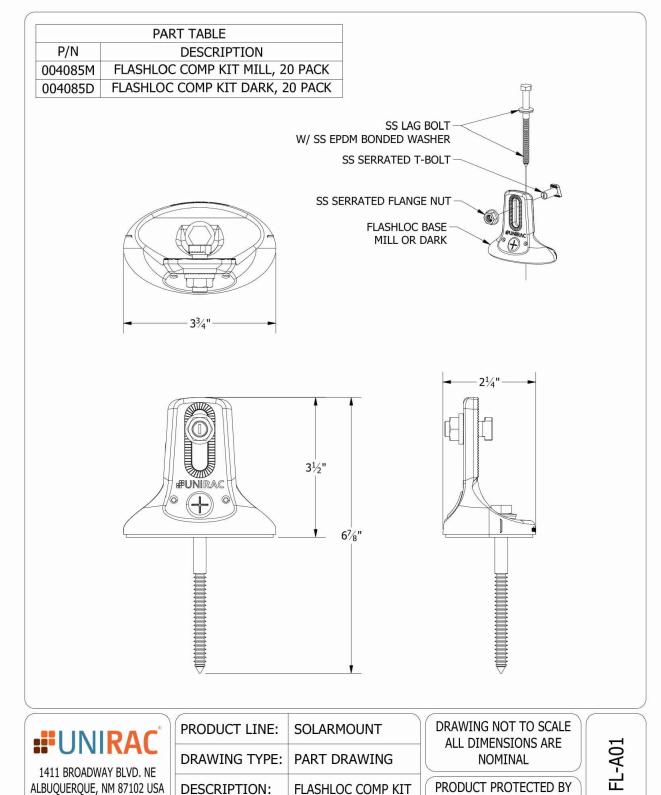

REVISION DATE: 10/3/2019

ONE OR MORE US PATENTS

LEGAL NOTICE

SHEET

PHONE: 505.242.6411

WWW.UNIRAC.COM

SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

CHERYL CARMONA

30 SALISBURY LN,SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY

SYSTEM SIZE


DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC


SHEET TITLE

RESOURCE DOCUMENT

DRAWN DATE 10/27/2021
DRAWN BY AS

SHEET NUMBER

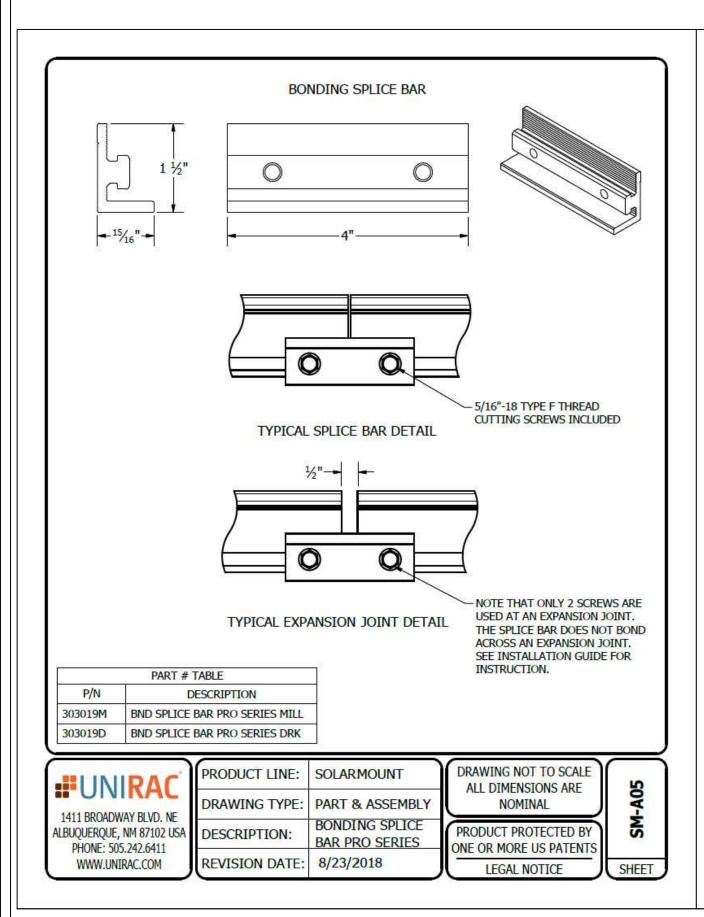

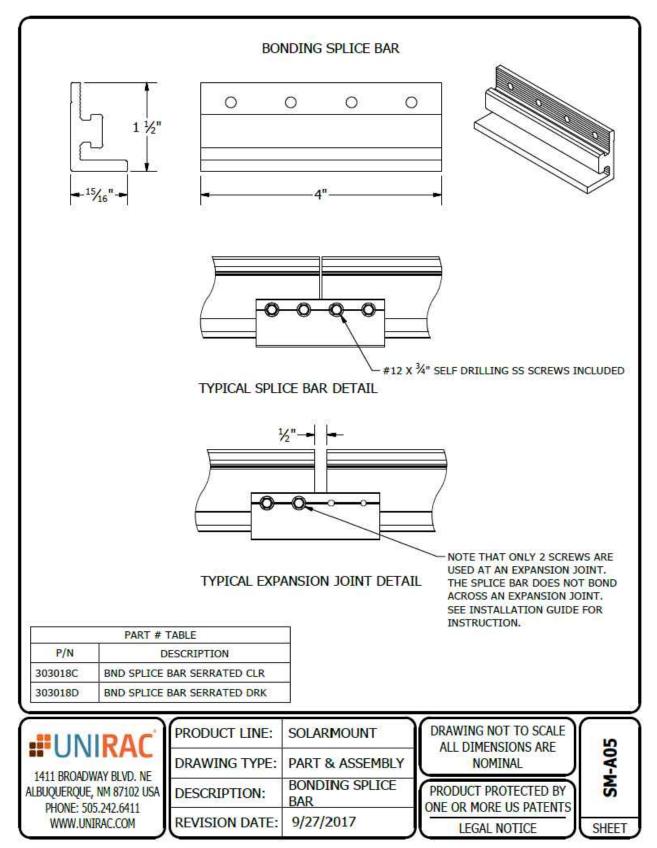

SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

CHERYL CARMONA

30 SALISBURY LN,SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY


SYSTEM SIZE


DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC

SHEET TITLE RESOURCE DOCUMENT

DRAWN DATE	10/27/2021
DRAWN BY	AS

SHEET NUMBER

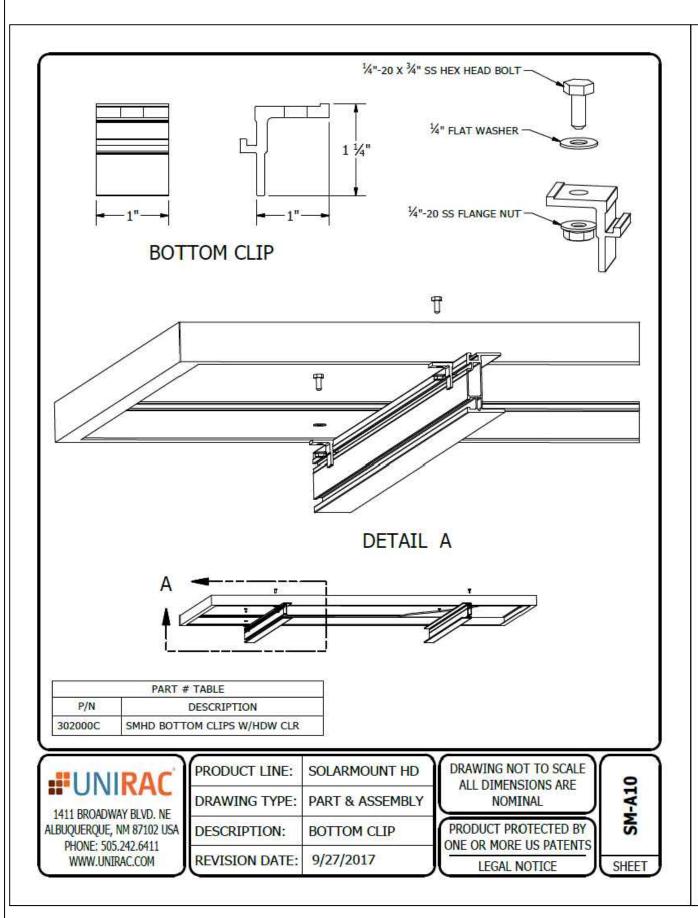

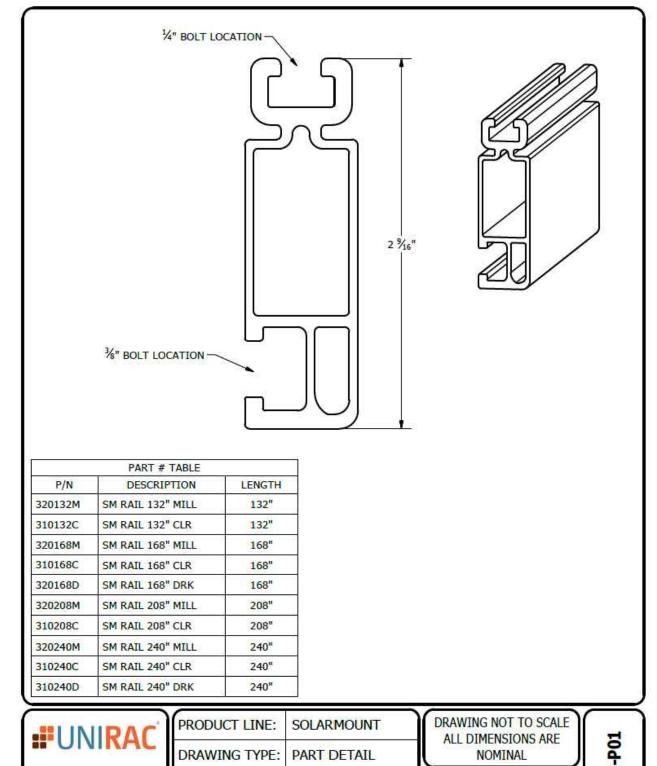

PART DETAIL

9/11/2017

STANDARD RAIL

NOMINAL

PRODUCT PROTECTED BY

ONE OR MORE US PATENTS

LEGAL NOTICE

SHEET

DRAWING TYPE:

DESCRIPTION:

REVISION DATE:

1411 BROADWAY BLVD. NE

ALBUQUERQUE, NM 87102 USA

PHONE: 505.242.6411 WWW.UNIRAC.COM

CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS **CHERYL CARMONA**

30 SALISBURY LN, SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY


SYSTEM SIZE


DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC

SHEET TITLE **RESOURCE DOCUMENT**

DRAWN DATE	10/27/2021
DRAWN BY	AS

SHEET NUMBER

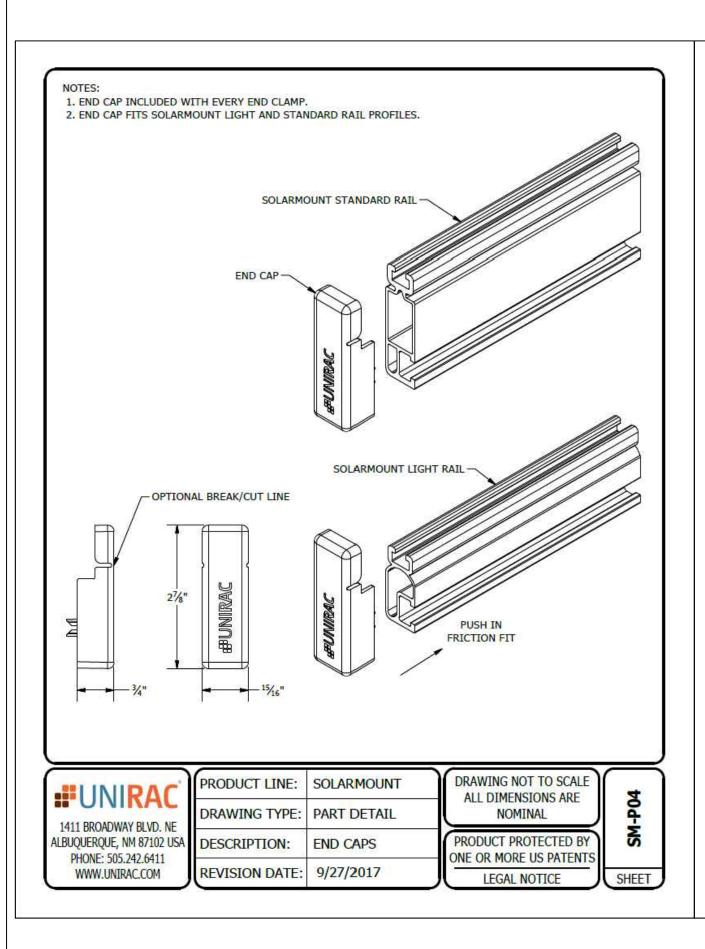

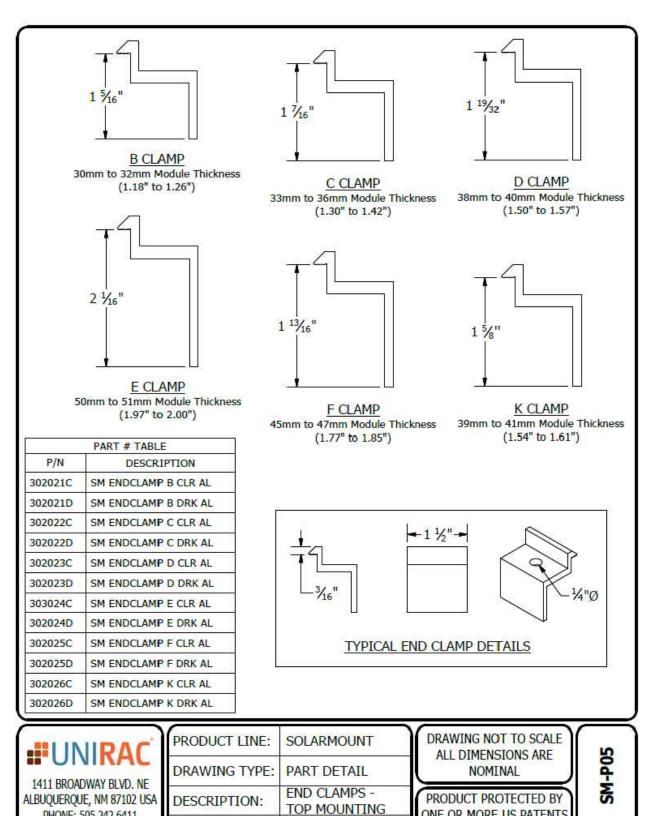

9/27/2017

REVISION DATE:

PHONE: 505.242.6411

WWW.UNIRAC.COM

ONE OR MORE US PATENTS

LEGAL NOTICE

SHEET

CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

CHERYL CARMONA

30 SALISBURY LN, SPRING LAKE, NC 28390

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 4.500 KW DC-(STC) AC SIZE: 3.480 KW AC

SHEET TITLE **RESOURCE DOCUMENT**

DRAWN DATE	10/27/2021
DRAWN BY	AS

SHEET NUMBER