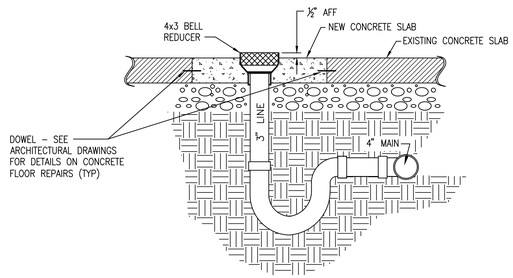

1 P6.01 HUB DRAIN INSTALLATION DETAIL
NOT TO SCALE

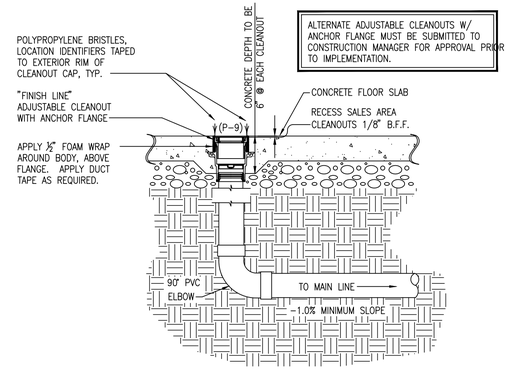

ALTERNATE ADJUSTABLE CLEANOUTS W/ ANCHOR FLANGE MUST BE SUBMITTED TO CONSTRUCTION MANAGER FOR APPROVAL PRIOR TO IMPLEMENTATION.

2 P6.01 SALES AREA CLEANOUT SECTION
NOT TO SCALE

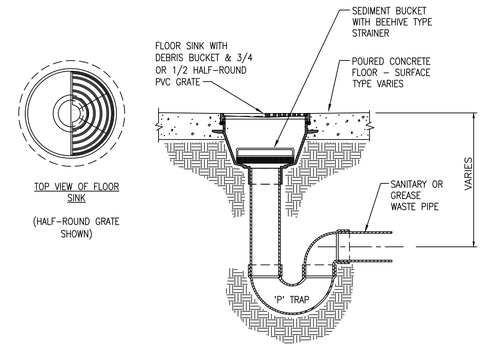

3 P6.01 FLOOR SINK INSTALLATION DETAIL
NOT TO SCALE



CONDENSATE DRAIN NOTES

1. CONDENSATE DRAIN LINES TO BE 3/4" MIN. TYPE 'M' COPPER WITH 1-1/2" MINIMUM STANDOFFS FROM WALL, BY PLUMBING CONTRACTOR.
2. CONDENSATE DRAIN LINES FROM FREEZERS TO HAVE EASY HEAT COPPER TUBE HEATER 20 WATTS PER LINEAR FT. 120 V AC OR APPROVED EQUAL. TAPE INSTALLATION BY REFRIGERATION CONTRACTOR.
3. INSTALL ONE HANGER PER EVAPORATOR DRAIN IN THE PRODUCE & MEAT PREP. ROOMS.
4. SLOPE IN COOLER 1/4"/FOOT TO HUB DRAIN. SLOPE IN FREEZER 3"/FOOT TO HUB DRAIN.
5. EACH EVAPORATOR SHALL HAVE ITS OWN DRAIN LINE RUNNING TO HUB DRAIN.

4 P6.01 TYPICAL CONDENSATE DRAINS
NOT TO SCALE

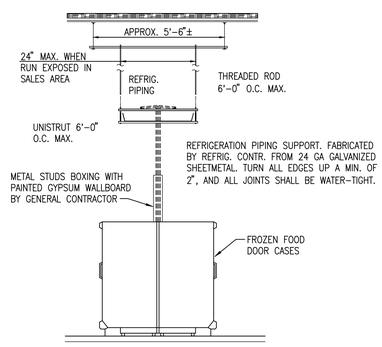

5 P6.01 OVERHEAD REFRIGERATION PIPING
NOT TO SCALE

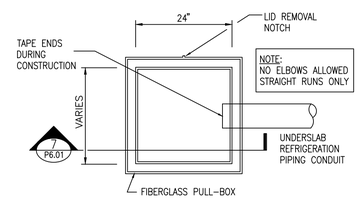

NOTE:
NO ELBOWS ALLOWED STRAIGHT RUNS ONLY

6 P6.01 ACCESS PIT PLAN VIEW
SCALE: 3/4" = 1'-0"

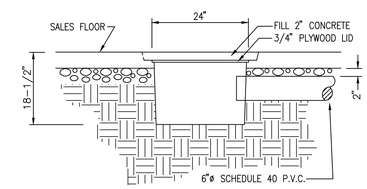

7 P6.01 SECTION THRU PIT
SCALE: 3/4" = 1'-0"

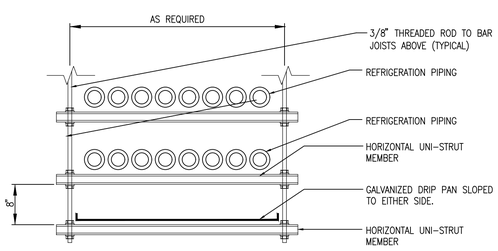

8 P6.01 OVERHEAD REFRIGERATION DRIP PAN DETAIL
NTS

LOCATION & PHONE FOR FIXTURE SUPPLIERS:

PLASTIC ODDITIES	SHELBY, NC	PH:(800) 438-5327
JOHN BOOS (HEFCO, LLC)	ROSWELL, GA.	PH:(800) 327-1817
GRAINGER	CHARLOTTE, NC	PH:(704) 904-6151
JOSAM	RICHMOND, VA	PH:(800) 446-2728
THERMA-STOR	DEC INTERNATIONAL	PH:(800) 533-7533
ABT, INC.	TROUTMAN, NC	PH:(800) 438-6057 OR (704) 525-3043
WATTS	SPINDALE, NC	PH:(800) 338-2581
WADE	CHARLOTTE, NC	PH:(704) 525-3043
B&G	MORTON GROVE, IL	PH:(847) 966-3700

CUHACI PETERSON

2600 Maitland Center Parkway
Suite #200
Maitland, FL 32751
P (407) 661-9100
F (407) 661-9101
c-p.com
Florida Corporate Certificate #AA C000526

COPYRIGHT © 2021 - ALL REPORTS, PLANS, SPECIFICATIONS, COMPUTER FILES, FIELD DATA, NOTES & OTHER DOCUMENTS ARE INSTRUMENTS OF SERVICE PREPARED BY: CUHACI PETERSON, (CP) AS INSTRUMENTS OF SERVICE REMAIN THE PROPERTY OF CP. CP SHALL RETAIN ALL COMMON LAW, STATUTORY, AND OTHER RESERVED RIGHTS, INCLUDING THE COPYRIGHT THERETO. ANY USE OR REPRODUCTION OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION FROM CP IS A VIOLATION OF FEDERAL COPYRIGHT LAWS.

ARCHITECT/ENGINEER SEAL

NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 23028 CHARLIE D. CURLIN JR.
4/14/23

CONSULTANT

SHULTZ ENGINEERING GROUP, PC
212 N. McDowell St, Suite 204
Charlotte, NC 28204
(P) 704.334.7363 | (F) 704.347.0093
www.shultzeg.com | SEG - 23-052
NC FIRM LICENSE NUMBER: C-0898
PM: CC M: HM E: xx P: HM

FOOD LION
2110 EXECUTIVE DRIVE
SALISBURY, NC 28145
PH: 704-633-8250 FX: 704-636-4940

REVISION / ISSUE HISTORY

REV	DATE	REVISION / ISSUE NAME
	04/14/2023	PERMIT

PROJECT NO 2220380	DRAWN BY HM HM
PERMIT SUB DATE 04/14/2023	CHECKED BY CC CC

PROJECT
FOOD LION STORE #2594
3260 RAY ROAD
SPRING LAKE, NC 28390
2594FLMK23

CLIENT
FOOD LION
2110 EXECUTIVE DRIVE
SALISBURY, NC 28145
PH: 704-633-8250 F: 704-636-5940

SHEET TITLE
PLUMBING SCHEDULES AND DETAILS

SHEET NO 2594P6.01_00
P6.01
REV