### SOIL & ENVIRONMENTAL SCIENTISTS

#### P.O. Box 400, Lillington, NC 27546-0400 Phone (910) 893-8743 / Fax (910) 893-3594 www.halowensoil.com

Project Name:					
County:	LHD Reference:				
Provided to:					
Name:					
Address:					
I,		<u>,</u> acknowledge	receipt	of	the

Licensed Soil Scientist Report which includes:

- Signed and sealed copy of the AOWE's report that includes the information in G.S. 130A-336.2(k)
- Operation and Management Program
- Authorization to Operate

I accept the septic system installation and understand that I will be responsible for continued adherence to the Operations and Management program established by the AOWE.

Drew Brody Signature

Date

SOIL & ENVIRONMENTAL SCIENTISTS

P.O. Box 400, Lillington, NC 27546-0400 Phone (910) 893-8743 / Fax (910) 893-3594 www.halowensoil.com

14 November 2024

Mattamy Homes, LLC 11000 Regency Parkway, Suite 110 Cary, NC 27518

Reference: LSS Report for Authorization to Operate (ATO) 37 Bering Cir, Angier, NC Lot 16, Riverfall SD, Ph 1 LHD # SFD2409-0010


Dear Mattamy Homes, LLC,

This LSS Report is being provided pursuant to and meets the requirements of G.S. 130A-336. This report is based on information provided by the property owner or their representative. Hal Owen & Associates, Inc. is not responsible for false or misleading information that may have been provided to us in pursuit of this permit, nor for concealed conditions on the property. Hal Owen & Associates Inc. does not warrant that the septic system will continue to function satisfactorily in the future.

The septic system for the above referenced property has been installed and was inspected by Hal Owen & Associates staff on 13 November 2024. The system has been installed in compliance with applicable NC General Statutes, Rules for Sewage Treatment and Disposal, and all conditions of the AOWE Permit. The system was installed within the design parameters of the Permit with some minor changes, which included the addition of a pump tank and pressure manifold. Enclosed with this report are the *Septic System Final Inspection Report*, As-Built map (Figure 1), and *Operation and Management Program*.

You will need to sign a document confirming receipt of this report and acceptance of the installed system (pg 1) and submit this report to the Local Health Department (LHD). The LHD shall issue a certificate of occupancy upon receipt of a complete ATO.

I appreciate the opportunity to provide this service. If you have any questions or need additional information, please contact me at your convenience.

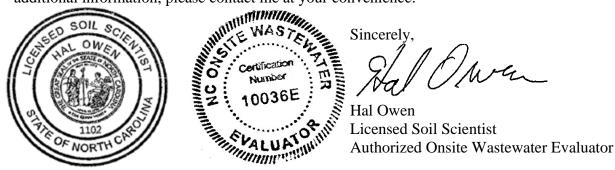

1

# Contacts

## APPLICANT

Applicant Name	Mattamy Homes, LLC
Mailing Address	11000 regency Parkway, Suite 110
Telephone Number	Cary, NC 27518
E-mail Address	919-625-9546

## SOIL SCIENTIST

Company Name	Hal Owen & Associates, Inc.	
Mailing Address	PO Box 400, Lillington, NC 27546	
Telephone Number	910-893-8743 Fax: 910-893-3594	
E-mail Address	hal@halowensoil.com	
Licensed Soil Scientist	Hal Owen, LSS#1102 and AOWE# 10036E	
System Designer	Jocelyn Proulx	
System Inspector	Jocelyn Proulx #9943I	

## INSTALLER

Company Name	David Brantley and Sons
Mailing Address	37 Pine Ridge Rd, Zebulon, NC 27597
Telephone Number	(919) 404-9511
Installer & Certification #	Cory J. Brantley #1036

## LOCAL HEALTH DEPARTMENT

Agency Name	Harnett County Health Department	
	Environmental Health Division	
Mailing Address	307 W Cornelius Harnett Blvd, Lillington, NC 27546	
Telephone Number	(910) 893-7547	
LHD Application #	SFD2409-0010	

# **Septic System Final Inspection Report**

Facility Type	Single Family Residence
Wastewater Type	Domestic
Water Supply	Public
Design Wastewater Flow	480 gpd
Soil LTAR	0.40

#### Installation

Date	13 November 2024
System Inspector	Jocelyn Proulx, #9943I
Installer	Cory J. Brantley #1036

#### Septic Tank:

Volume (gallons)	1000
Brand and Tank ID#	DB STB 502
Date of Manufacture	9/2/24
Certified watertight	NA
Distance to Structure	8'
Elevation of tank inlet	4' 6 1/2"
Elevation of tank outlet	4' 9 <sup>1</sup> / <sub>2</sub> "

## Effluent Filter:

Make and Model	SIMTECH STF 110
----------------	-----------------

### Pump Tank:

	Volume (gallons)	1000
	Brand and Tank ID#	DB PT 237
	Certified watertight	NA
	Elevation of tank inlet	4' 11"
	Elevation of tank outlet	5' 3''

#### Pump:

Make and Model	Ashland EPH30
Pump Sys- Elevation Head	5.84
Pump Sys- Friction Loss	1.17
Pump Sys- Design Head	3.0
Pump Sys- TDH	10.01
GPM (actual)	26.7

## Control Panel:

Manufacturer SJE Rhombus Mo	del # 1121W114H6A8AC10E15A17G
-----------------------------	-------------------------------

#### Distribution:

Supply Line Length to Distribution	64'
Supply Line Diameter	2"
Distribution Device:	Pressure Manifold
Number of outlets (laterals)	4


## Drainfield:

Туре	Quick4 Standard Chamber
Distance to Structure	19'
Distance to Well	NA

Trench Depth Trench Spacing		24" Trench width		36"		
		9'	Aggregate	chamber		
	<b>T</b> = = = 41 - ( <b>f</b> 4)	C4 - vt	N/: 1,11-			
	Length (ft)	<u>Start</u>	Middle	End		
Line 1	76	4' 7"	4' 7"	4' 7"		
Line 2	76	4' 8 <sup>3</sup> / <sub>4</sub> "	4' 8 <sup>3</sup> / <sub>4</sub> "	4' 8 <sup>3</sup> / <sub>4</sub> "		
Line 3	76	4' 10 ½"	4' 10 ½"	4' 10 ½"		
Line	76	4' 11 ½"	4' 11 <sup>1</sup> / <sub>2</sub> "	4' 11 <sup>1</sup> / <sub>2</sub> "		
Total	304					

All elevations are given as relative grade rod reading.

Notes:

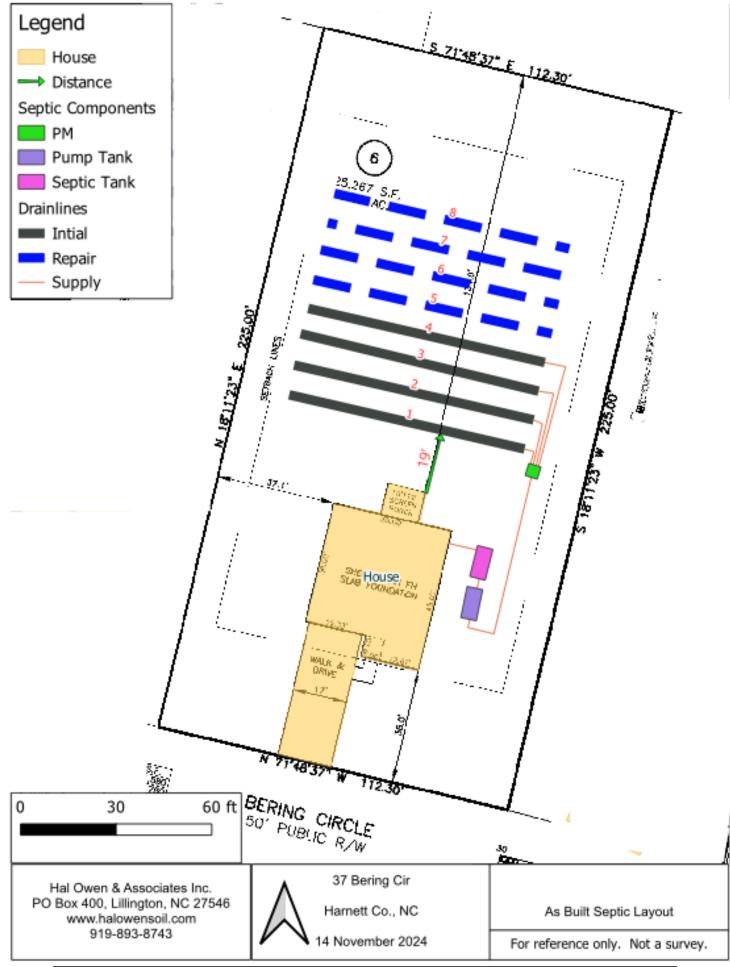

LSS Report for Authorization to Operate (ATO) 37 Bering Cir LHD # SFD2409-0010 14 N

14 November 2024

















# **Operation and Management Program**

In accordance with G.S. § 130A-336.2, the owner is responsible for continued adherence to the operations and management program. Septic systems safely treat and dispose of wastewaters produced in the bathroom, kitchen, and laundry. These wastewaters may contain disease-causing germs and pollutants that must be treated to protect human health and the environment. Septic systems must be properly used, operated, and maintained by the homeowner to assure the long-term performance of the system.

#### PERMIT CONDITIONS:

- I. Performance: System shall perform in accordance with Rule .1961.
- II. Monitoring: As required by Rule .1961.
- III. Maintenance: Ground absorption sewage treatment and disposal systems shall be checked, and the contents of the septic tank removed, periodically from all compartments, to ensure proper operation of the system. The contents shall be pumped whenever the solids level is found to be more than 1/3 of the liquid depth in any compartment. Other:

Subsurface system operator required? Yes <u>No X</u>

If yes, see attached sheet for additional operation conditions, maintenance and reporting. Operation:

V. Other: \_\_\_\_\_

IV.

## KNOW WHERE YOUR SEPTIC SYSTEM IS LOCATED

Your property has an onsite subsurface sewage waste disposal system. Familiarize yourself with the location of the system including the tanks, distribution devices, and disposal fields (including repair area). These areas shall be protected from excavation, building additions, outbuildings, pool construction, and soil disturbing activities. Prohibit vehicular traffic over the ground absorption field.

## **DAY-TO-DAY MANAGEMENT**

Don't use too much water.

- The drainfield does not have unlimited capacity.
- Typical daily water use is 50 gallons per person.
- The soil drainfield usually has a maximum daily design capacity of 120 gallons per bedroom, even for short periods of time.
- Overloads can occur seasonally, daily, or on the weekend.
- Water conservation will extend the life of your system.
- Repair dripping faucets and toilets.

Limit disposal to sewage.

- Don't use your septic tank as a trash can for cigarette butts, tissues, sanitary napkins, cotton swabs, cat box litter, coffee grounds, or disposable diapers.
- Restrict the use of your garbage disposal. These add quite a lot of extra solids.
- Don't pour grease or cooking oil down the drain.
- Don't poison your system with harmful chemicals such as solvents, oils, paints, thinners, discarded medications, disinfectants, pesticides, poisons, and other substances.
- Save money. Commercial septic tank additives are usually not necessary.

Protect the system from physical damage (site maintenance).

- Keep the soil over the drainfield covered with vegetation to prevent soil erosion.
- Don't drive vehicles over the system.
- Avoid construction over the system and repair area.
- Don't cover the tank or drainfield with asphalt or concrete.
- Do not install irrigation systems over your drainfield as these could damage the system and/or hydraulically overload the soils.

Dispose of all wastewater in an approved system.

- Don't put in a separate pipe to carry wash waters to a side ditch or the woods. This is illegal.
- Don't connect pipes from air conditioners or ice makers to the septic system.

## PERIODIC MAINTENANCE AND REPAIR

Home and yard (site maintenance):

- Protect and maintain the site of your septic tank and drainfield.
- In the drainfield area, cut down and remove trees that like wet conditions. This includes willows, elms, sweetgums, and some maples.
- Landscape the yard to divert surface waters away from the tank and drainfield. Eliminate depressional areas within the drainfield.
- Be sure that the water from the roof, gutters, and foundation drains does not flow over the system.
- Maintain drainage ditches, subsurface tiles, and drainage outlets so that water can flow freely from them.

Septic tank:

- Ensure tank risers remain accessible for measuring and pumping solids as well as cleaning the effluent filter.
- Measure how quickly sludge and scum accumulate in the tank. Pump septage when solids occupy 1/3 to 1/4 of the liquid capacity of the tank (frequency 1 to 3 years).
- Don't wait until your drainfield fails to have your tank pumped. By then, the drainfield may be ruined. With septic systems, an ounce of prevention is worth a ton of cure!

	Number of People Using the System				
Tank Size (gallons)	1	2	4	6	8
900	11	5	2	1	<1
1000	12	<mark>6</mark>	<mark>3</mark>	2	1
1250	16	8	3	2	1
1500	19	9	4	3	2

Table 1. Estimated septic tank inspection and pumping frequency (in years). Tank Size (gallons)

## SIGNS OF POSSIBLE SEPTIC SYSTEM PROBLEMS

- Sewage backing up into your toilets, tubs, or sinks.
- Slowly draining fixtures, particularly after it has rained.
- The smell of raw sewage accompanied by soggy soil or sewage discharged over the ground or in nearby ditches or woods.
- Note: pump systems sewage may come to the ground surface when the pump is turned on and then disappear after the pump turns off. This is still a system failure and must be repaired.
- An alarm flashing (red light) or beeping in the house or in the yard indicating a pump is not working properly or that the water level in a pump tank is too high and close to failure.
- Don't attempt to repair a failing system yourself. Get a repair permit and hire an experienced contractor.

## **REGULATIONS AND PRECAUTIONS:**

• Sewage contains germs that can cause diseases. Never enter a septic tank. Toxic and explosive gases in the tank present a hazard. Old tanks may collapse. Electrical controls present a shock and spark hazard. Secure the septic tank lid so that children cannot open it.

For more information about septic systems, contact your county Extension agent or local health department. <u>https://content.ces.ncsu.edu/septic-system-owners-guide</u>

## PREVENTIVE MAINTENANCE RECORD

Your Septic System Pumper		
Name:		
Address:		
Phone:	Email:	
Date System Installed:		
Date Work Done	Firm	Cost



## **CERTIFICATE OF LIABILITY INSURANCE**

DATE (MM/DD/YYYY)

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED							
REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER. IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).							
PRODUCER			CONTACT O US				
SIA Group, Inc.				Administrato	FAV	040.45	101
827 Gum Branch Road			(A/C, No, Ext): 910-45		(A/C, No):	910-45	5-7481
Jacksonville NC 28540			ADDRESS: certs@siagroup.com				
			INSURER(S) AFFORDING COVERAGE				NAIC #
DAVIBRA-02			INSURER A : Owners Insurance Company				32700
INSURED David Brantley & Sons, Inc.		DAVIDIA-02	INSURER B: Auto-Owners insurance Company				18988
37 Pine Ridge Road			INSURER C : FFVA M	lutual Insuran	ce Co.		10385
Zebulon NC 27597			INSURER D :				
			INSURER E :				
			INSURER F :				
		E NUMBER: 2025340388			REVISION NUMBER:		
THIS IS TO CERTIFY THAT THE POLICIES INDICATED. NOTWITHSTANDING ANY RI CERTIFICATE MAY BE ISSUED OR MAY EXCLUSIONS AND CONDITIONS OF SUCH	equireme Pertain, Policies.	INT, TERM OR CONDITION THE INSURANCE AFFORD LIMITS SHOWN MAY HAVE	OF ANY CONTRACT ED BY THE POLICIE BEEN REDUCED BY	OR OTHER I S DESCRIBEI PAID CLAIMS.	DOCUMENT WITH RESPEC	ст то и	WHICH THIS
INSR LTR TYPE OF INSURANCE	ADDL SUBF	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMIT	s	
A X COMMERCIAL GENERAL LIABILITY CLAIMS-MADE X OCCUR		35506165	7/2/2024	7/2/2025	EACH OCCURRENCE DAMAGE TO RENTED PREMISES (Ea occurrence)	\$ 1,000 \$ 300,0	
X cont liab					MED EXP (Any one person)	\$ 10,00	0
					PERSONAL & ADV INJURY	\$ 1,000	,000
GEN'L AGGREGATE LIMIT APPLIES PER:					GENERAL AGGREGATE	\$2,000	,000
POLICY X PRO- JECT LOC					PRODUCTS - COMP/OP AGG	\$2,000	,000
OTHER:						\$	
		53-914661-00	7/2/2024	7/2/2025	COMBINED SINGLE LIMIT (Ea accident)	\$ 1,000	,000
X ANY AUTO					BODILY INJURY (Per person)	\$	
OWNED SCHEDULED AUTOS ONLY					BODILY INJURY (Per accident)	t) \$	
X HIRED AUTOS ONLY X NON-OWNED AUTOS ONLY					PROPERTY DAMAGE (Per accident)	\$	
						\$	
B X UMBRELLA LIAB X OCCUR		5391466101	7/2/2024	7/2/2025	EACH OCCURRENCE	\$ 3,000	,000
EXCESS LIAB CLAIMS-MADE					AGGREGATE	\$ 3,000	,000
DED X RETENTION \$ 10,000						\$	
C WORKERS COMPENSATION AND EMPLOYERS' LIABILITY Y / N		WC850-0050098-2024A	7/2/2024	7/2/2025	X PER OTH- STATUTE ER		
ANYPROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED?	N / A				E.L. EACH ACCIDENT	\$ 1,000	
(Mandatory in NH)					E.L. DISEASE - EA EMPLOYEE		
If yes, describe under DESCRIPTION OF OPERATIONS below	<u>                                      </u>	05500405		7/0/00	E.L. DISEASE - POLICY LIMIT	\$ 1,000	
A Contractors Equipment		35506165	7/2/2024	7/2/2025	Leased/Rented	\$50,0	00
DESCRIPTION OF OPERATIONS / LOCATIONS / VEHIC	LES (ACORI	D 101, Additional Remarks Schedu	le, may be attached if mor	re space is require	ed)		
CERTIFICATE HOLDER			CANCELLATION				
SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.							
827 S 8th St Lillington NC 27546	AUTHORIZED REPRESENTATIVE Avana Evans						
© 1988-2015 ACORD CORPORATION. All rights reserved.							

The ACORD name and logo are registered marks of ACORD