

**HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH**  
**Well Abandonment Permit**

EH2001-0022

Permit Number: \_\_\_\_\_ Application Number: \_\_\_\_\_ Applicant Name: Smithfield Farm Co

Address: 1616 McKoy Town Rd

Type of Well: Drilled Total Dept: 60' Diameter: 24" Grouted: Yes Static Water Level:


Directions to Site: End of Mckoy Town road behind Tire Chip Plant

Agent of the State *[Signature]* REHS-I Date: 3/2/2020

Abandonment Procedure: Abandonment Procedure: 1. Remove all plumbing or piping into the well, along with any obstructions inside the well; 2. Remove as much of the well tile casing as possible, but no less than to a depth of three feet below land surface; 3. remove all soil or other subsurface material present down to the top of the remaining well casing, and extending to a width of at least 12 inches outside of the well casing on all sides; 4. Using 5 oz. of hypochlorite solution (such as HTH), disinfect the well in accordance with 15A NCAC 2C .0111 of this Subchapter. Do not use a common commercial household liquid bleach, as this is too weak a solution to ensure proper disinfection; 5. Fill the well up to the top of the remaining casing with cement grout, concrete grout, bentonite grout, dry clay, or material excavated during drilling of the well and then compacted in place; 6. Pour a one foot thick concrete grout or cement grout plug that fills the entire excavated area about the top of the casing, including the area extending on all sides of the casing out to a width of at least 12 inches on all sides; 7. Complete the abandonment process by filling the remainder of the well above the concrete or cement plug with additional concrete grout, cement grout, or soil.

Note: Contact Harnett County Environmental Health for appointment prior to beginning of well abandonment procedure.

**Well must be abandoned by a Certified North Carolina well driller/contractor.**

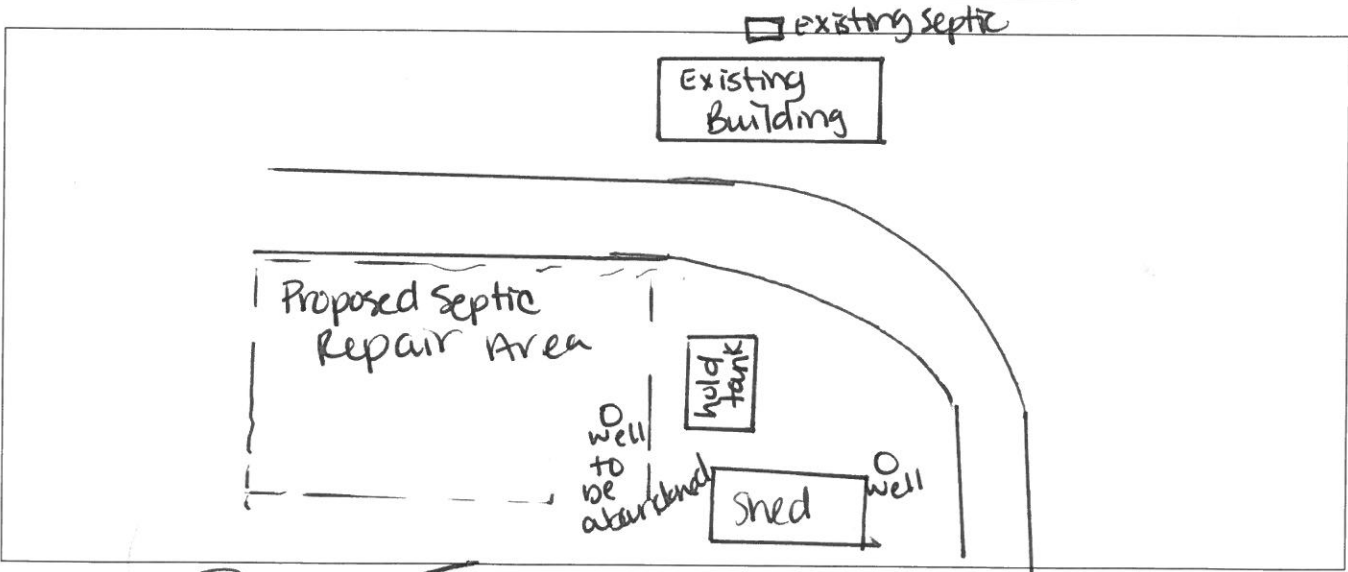

*[Signature]*  
Property Owner's or Owners Legal Representative Signature Required

03.02.20  
Date