SOUTHEASTERN SOIL & ENVIRONMENTAL ASSOC., INC.

PROPOSED SUBSURFACE WASTE DISPOSAL SYSTEM DETAIL SHEET

SUBDIVISION Forest Oaks LOT 1

INITIAL SYSTEM 3 Infiltrator REPAIR SYSTEM Infiltrator (w pump)

BENCHMARK ELEV. 100.0 LOCATION Rear corner Lot 1 (future phase)

TYPE OF DISTRIBUTION D-box (serial dist)

LTAR = 0.4 gpd/ft²

LINE	ELEVATION	LENGTH	FLAG COLOR
1	99.0	100'	O
2	98.84	50'	W
3	98.50	45'	Y
4	97.92	50'	O

BY M Eake DATE 07/2005

FLAG COLOR: Y = YELLOW R = RED W = WHITE B = BLUE O = ORANGE P = PINK

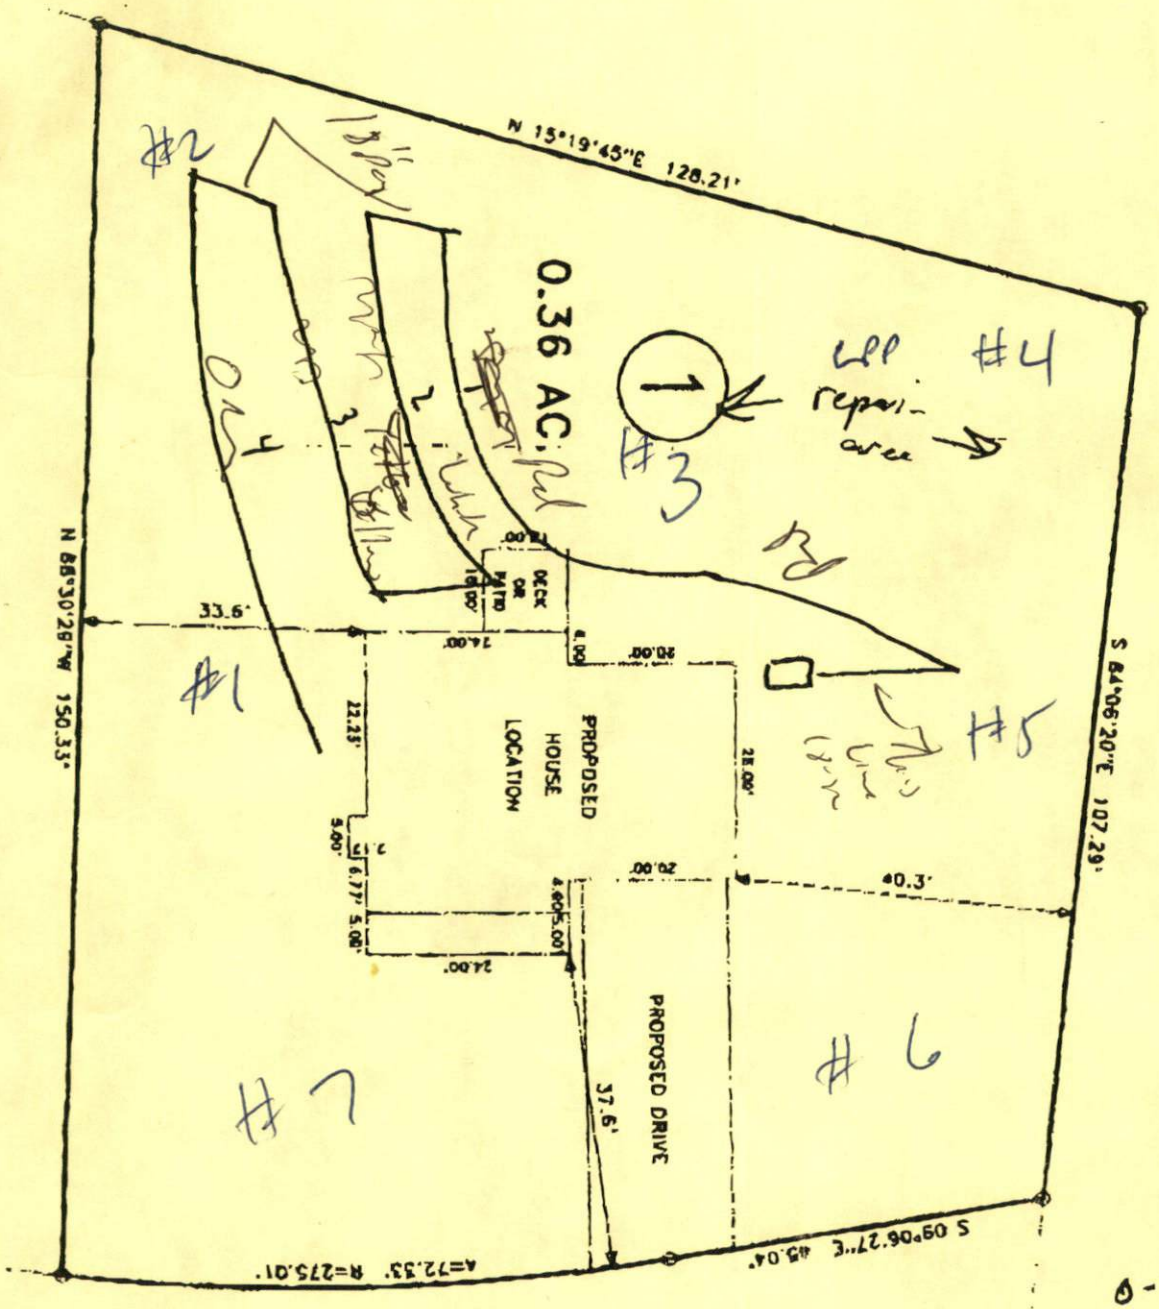

0-21 Loam
11-38+ SCL
38-48 SC
0.4 LTAR

18-24" Trench

1 x 225' +
3' INFILTRATION