
## Harnett County Department of Public Health

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

PROPERTY LOCATION: 55 FISHER RD (NEILLS CREEK RD - SR SUBDIVISION SOUTH CREEK LOT # 35
NEW REPAIR EXPANSION Site Improvements required prior to Construction Authorization Issuance:
Type of Structure: 44.1'x42' 3-BEDROOM SFD
Proposed Wastewater System Type: Pump to 25% Red. Sys.  Projected Daily Flow: 360 GPD
Number of bedrooms: 3Number of Occupants: 6max
Basement (Nes X) No
Pump Required: XYes No May be required based on final location and elevations of facilities
Type of Water Supply: 🔲 Community 🗵 Public 🔲 Well Distance from well <u>NA</u> feet Permit valid for: 🗵 Five years
Permit conditions: No expiration
Authorized State Agent:: Date: 07/22/2020 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.
Construction Authorization
(Required for Building Permit)
The construction and installation requirements of Rules 1950, 1952, 1954, 1955, 1956, 1957, 1958, and 1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.
PROPERTY LOCATION: 55 FISHER RD (NEILLS CREEK RD - S SUBDIVISION SOUTH CREEK LOT # 35
facility Type: 44.1'x42' 3-BEDROOM S New Expansion Repair
Basement? Yes No Basement Fixtures? Yes No
Type of Wastewater System** 25% Reduction System (Initial) Wastewater Flow: 360 GPD
See note below, if applicable ( )
25% Reduction System (Repair)
nstallation Requirements/Conditions Number of trenches 4
eptic Tank Size 1000 gallons Exact length of each trench 60 feet Trench Spacing: 9 Feet on Center
Pump Tank Size 1000 gallons Trenches shall be installed on contour at a Soil Cover: 12 to 6 inches
Maximum Trench Depth of: 24 to 18 inches (Maximum soil cover shall not exceed
(Trench bottoms shall be level to +/-1/4" 36" above the trench bottom)
in all directions)  Pump Requirements:ft. TDH vsGPMNAinches below pipe
Aggregate Depth: NAinches above pipe
onditions: Pump to Medium D-Box. Install Deep to shallow and keep uphill  NA inches total
VATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. IO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.
*If applicable: 1 understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
Owner/Legal Representative Signature: Date:
his Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This
onstruction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.  SEE ATTACHED SITE SKETCH
AND LOCAL CORRECT Construction Authorization Expiration Date:
AND LES CURALO Construction Authorization Expiration Date: 07/22/2005

## Harnett County Department of Public Health Site Sketch

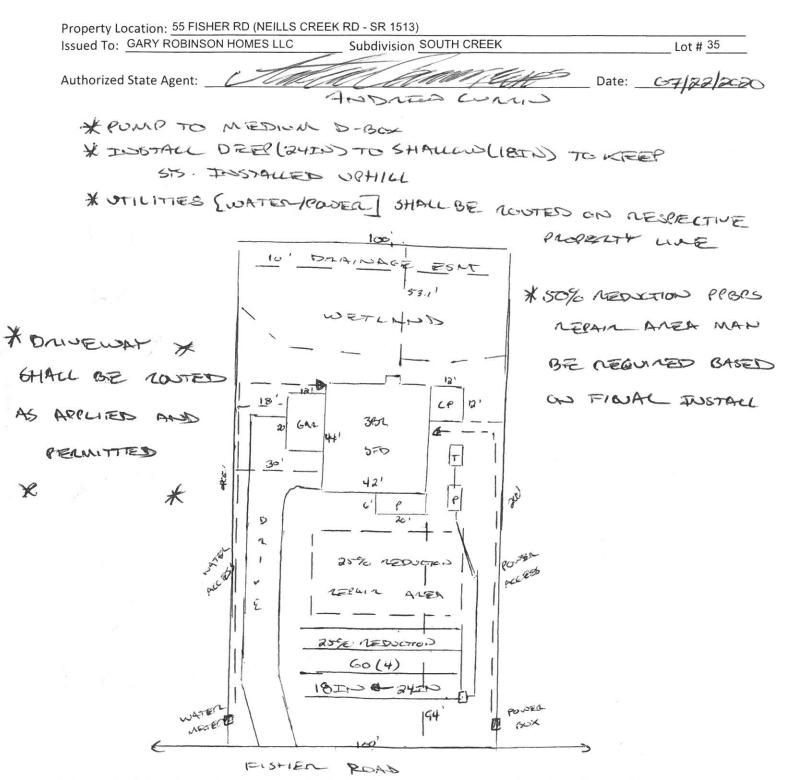

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.