

Trenco
818 Soundside Rd
Edenton, NC 27932

Re: 30488-30488A
34 PRINCE PLACE - FLOOR

The truss drawing(s) referenced below have been prepared by Truss Engineering Co. under my direct supervision based on the parameters provided by 84 Components - #2383.

Pages or sheets covered by this seal: I50248449 thru I50248463

My license renewal date for the state of North Carolina is December 31, 2022.

North Carolina COA: C-0844



February 15, 2022

Johnson, Andrew

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

Job 30488-30488A	Truss F1	Truss Type Floor	Qty 4	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	150248449
---------------------	-------------	---------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:07 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywRii-E97X_MF5snyGONOADTXH_aFOk2a1HOU0iyc0kZzkw2c

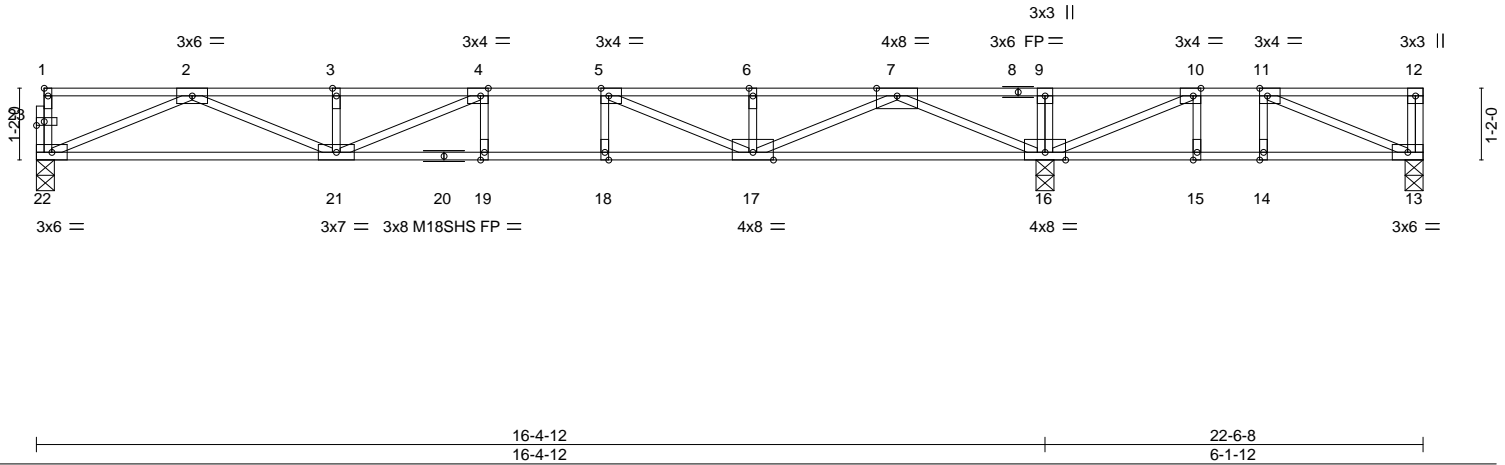


Plate Offsets (X,Y)-- [1:Edge,0-0-12], [4:0-1-8,Edge], [5:0-1-8,Edge], [10:0-1-8,Edge], [11:0-1-8,Edge], [23:0-1-8,0-0-12]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.84	Vert(LL)	-0.23	19-21	>839	MT20	197/144
TCDL 10.0	Lumber DOL	1.00	BC 0.87	Vert(CT)	-0.32	19-21	>617	M18SHS	244/190
BCLL 0.0	Rep Stress Incr	YES	WB 0.70	Horz(CT)	0.04	16	n/a		
BCDL 5.0	Code IRC2015/TPI2014		Matrix-S						
								Weight: 112 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (size) 22=0-3-8, 16=0-3-8, 13=0-3-8
 Max Uplift 13=145(LC 3)
 Max Grav 22=807(LC 10), 16=1557(LC 1), 13=259(LC 4)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-2582/0, 3-4=-2582/0, 4-5=-2834/0, 5-6=-2024/0, 6-7=-2024/0, 7-9=0/1430, 9-10=0/1430, 10-11=-295/543
 BOT CHORD 21-22=0/1603, 19-21=0/2834, 18-19=0/2834, 17-18=0/2834, 16-17=0/713, 15-16=-543/295, 14-15=-543/295, 13-14=-543/295
 WEBS 2-22=-1741/0, 7-16=-2130/0, 2-21=0/1072, 3-21=-287/0, 7-17=0/1474, 6-17=-255/10, 4-21=-525/67, 5-17=-1006/0, 10-16=-1235/0, 11-13=-321/589

- NOTES-**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - 3) All plates are MT20 plates unless otherwise indicated.
 - 4) All plates are 1.5x4 MT20 unless otherwise indicated.
 - 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 145 lb uplift at joint 13.
 - 6) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 7) CAUTION, Do not erect truss backwards.



Job 30488-30488A	Truss F2	Truss Type Floor	Qty 2	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	150248450
---------------------	-------------	---------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:09 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywRii-AYFHP2GLNOC_dhYZKtal3?KkpsGPIHsJ9G57pRzkw2a

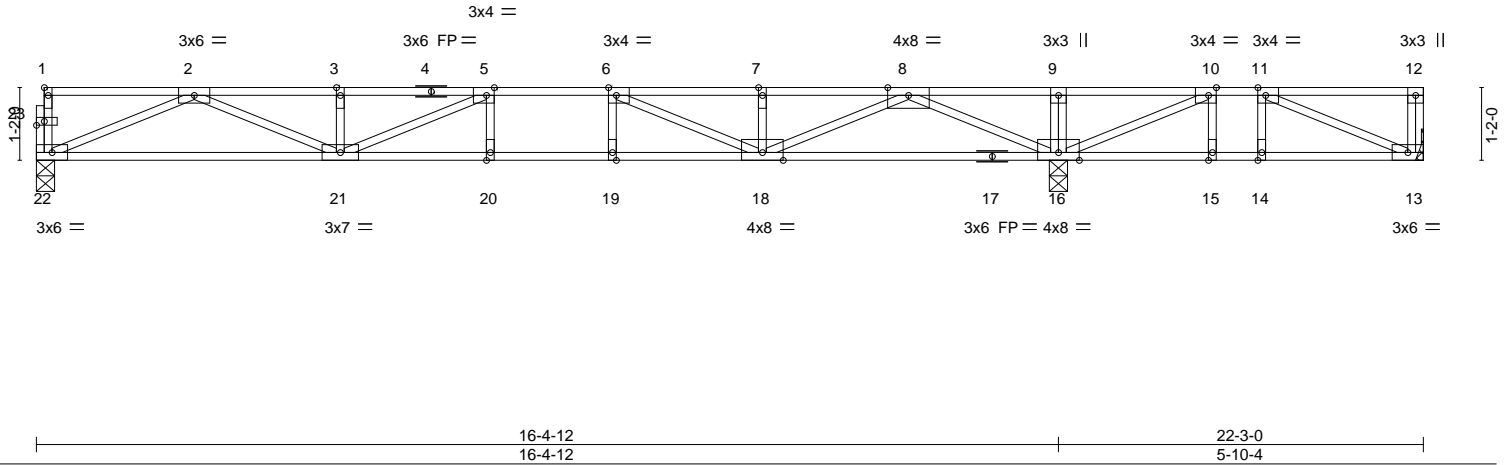



Plate Offsets (X,Y)--	[1:Edge,0-0-12], [5:0-1-8,Edge], [6:0-1-8,Edge], [10:0-1-8,Edge], [11:0-1-8,Edge], [23:0-1-8,0-0-12]
-----------------------	--

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.87	Vert(LL)	-0.23 20-21	>839	480	MT20	197/144
TCDL 10.0	Lumber DOL	1.00	BC 0.87	Vert(CT)	-0.32 20-21	>617	360		
BCLL 0.0	Rep Stress Incr	YES	WB 0.71	Horz(CT)	0.04 16	n/a	n/a		
BCDL 5.0	Code IRC2015/TPI2014		Matrix-S						
								Weight: 111 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat) *Except* 17-22: 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (size) 13=Mechanical, 22=0-3-8, 16=0-3-8
 Max Uplift 13=188(LC 3)
 Max Grav 13=231(LC 4), 22=796(LC 10), 16=1591(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-2535/0, 3-5=-2535/0, 5-6=-2748/0, 6-7=-1900/0, 7-8=-1900/0, 8-9=0/1552, 9-10=0/1552, 10-11=-237/626
 BOT CHORD 21-22=0/1578, 20-21=0/2748, 19-20=0/2748, 18-19=0/2748, 16-18=0/566, 15-16=-626/237, 14-15=-626/237, 13-14=-626/237
 WEBS 2-22=-1713/0, 8-16=-2151/0, 2-21=0/1047, 3-21=-288/0, 8-18=0/1493, 7-18=-253/12, 5-21=-491/85, 6-18=-1024/0, 10-16=-1276/0, 11-13=-257/680

- NOTES-**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - 3) All plates are 1.5x4 MT20 unless otherwise indicated.
 - 4) Refer to girder(s) for truss to truss connections.
 - 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 188 lb uplift at joint 13.
 - 6) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 7) CAUTION, Do not erect truss backwards.



Job 30488-30488A	Truss F3	Truss Type Floor	Qty 3	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	I50248451
---------------------	-------------	---------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:10 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywRii-ekpfcOHZ8iKrFr7lub5_cDtzrGaEUppTOWqgLUzkw2Z



Scale = 1:21.6

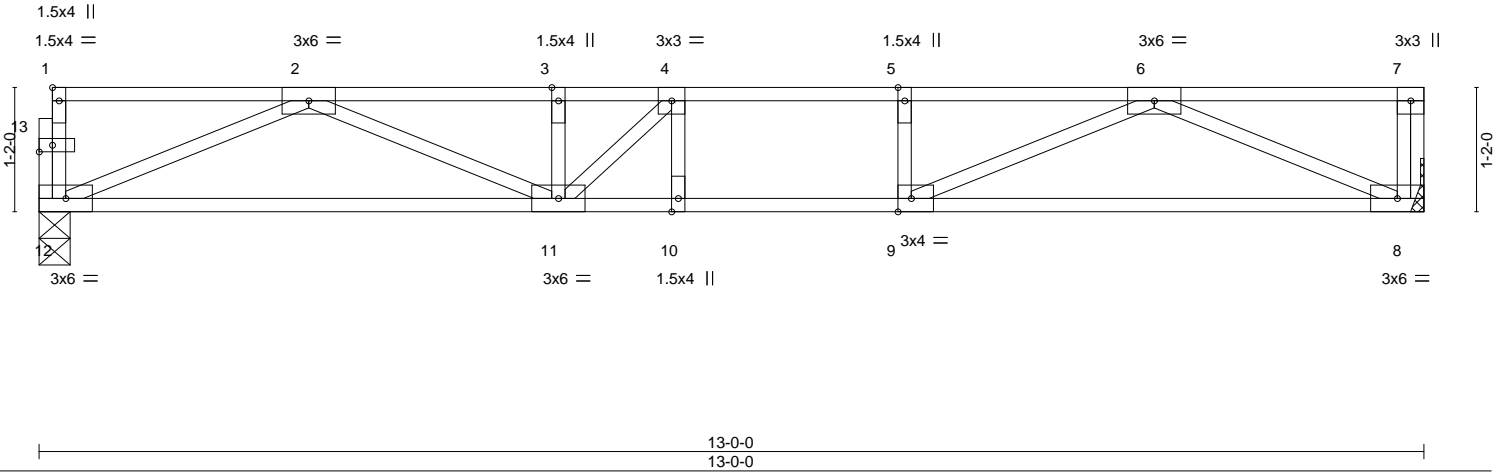


Plate Offsets (X,Y)-- [1:Edge,0-0-12], [9:0-1-8,Edge], [13:0-1-8,0-0-12]

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.59	in (loc) l/defl L/d	MT20	197/144
TCDL 10.0	Plate Grip DOL 1.00	BC 0.96	Vert(LL) -0.15 10-11 >994 480		
BCLL 0.0	Lumber DOL 1.00	WB 0.41	Vert(CT) -0.19 10-11 >787 360		
BCDL 5.0	Rep Stress Incr YES	Matrix-S	Horz(CT) 0.03 8 n/a n/a		
	Code IRC2015/TPI2014			Weight: 64 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 2-2-0 oc bracing: 9-10.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (size) 12=0-3-8, 8=Mechanical
Max Grav 12=695(LC 1), 8=701(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-2046/0, 3-4=-2046/0, 4-5=-2088/0, 5-6=-2088/0
BOT CHORD 11-12=0/1349, 10-11=0/2088, 9-10=0/2088, 8-9=0/1349
WEBS 2-12=-1464/0, 6-8=-1470/0, 2-11=0/763, 6-9=0/860, 5-9=-258/0, 4-11=-381/189

- NOTES-**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - 3) Refer to girder(s) for truss to truss connections.
 - 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 5) CAUTION, Do not erect truss backwards.



Job 30488-30488A	Truss F4	Truss Type Floor	Qty 3	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	I50248452
---------------------	-------------	---------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:10 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywRii-ekpfcOHZ8iKrFr7lub5_cDt0IGIPUtXTOWqgLuzkwZ2



Scale = 1:13.0

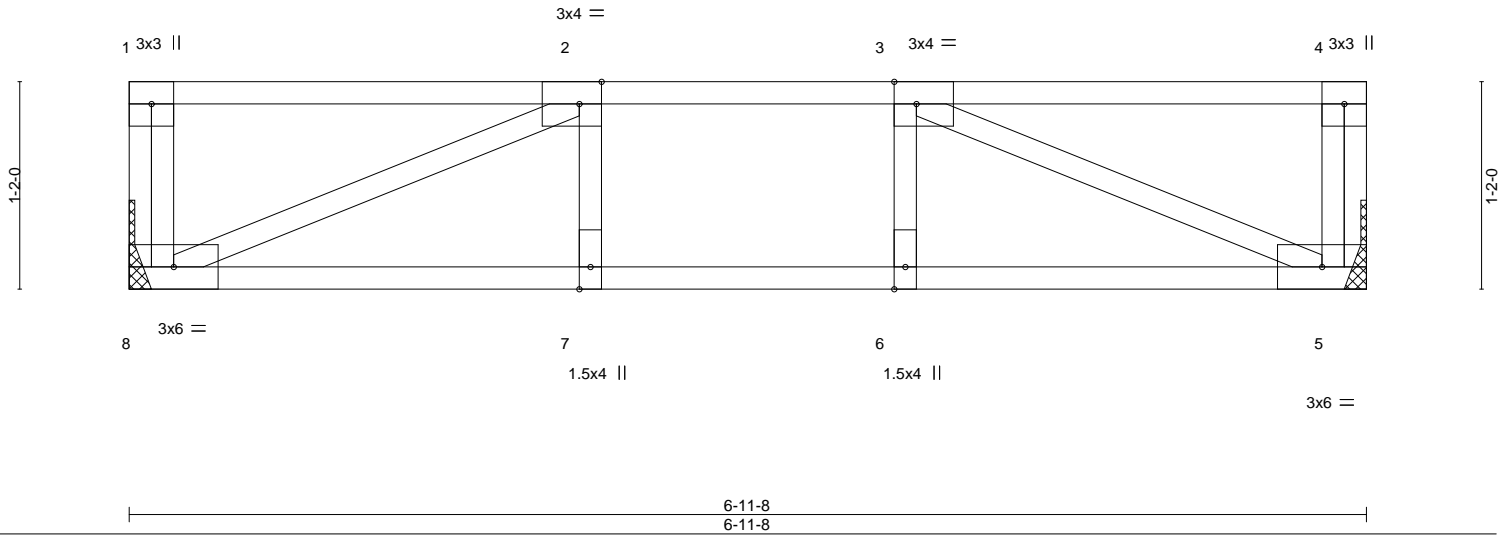



Plate Offsets (X,Y)--	[2:0-1-8,Edge], [3:0-1-8,Edge]				
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.41	Vert(LL) -0.04 7-8 >999 480	MT20	197/144
TCDL 10.0	Lumber DOL 1.00	BC 0.31	Vert(CT) -0.04 7-8 >999 360		
BCLL 0.0	Rep Stress Incr YES	WB 0.17	Horz(CT) 0.01 5 n/a n/a		
BCDL 5.0	Code IRC2015/TPI2014	Matrix-S		Weight: 36 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (size) 8=Mechanical, 5=Mechanical
Max Grav 8=369(LC 1), 5=369(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-599/0
BOT CHORD 7-8=0/599, 6-7=0/599, 5-6=0/599
WEBS 2-8=-650/0, 3-5=-650/0


- NOTES-**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - 3) Refer to girder(s) for truss to truss connections.
 - 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

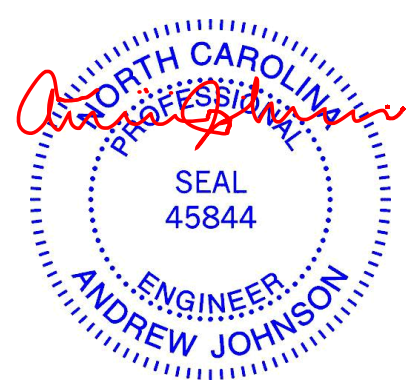


Job 30488-30488A	Truss F5	Truss Type Floor	Qty 1	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	150248453
---------------------	-------------	---------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:11 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywRii-6xM2pklbv0Sht_ixSlcD8QQFJf8mDMecdaaEtKzkw2Y



Scale = 1:13.0

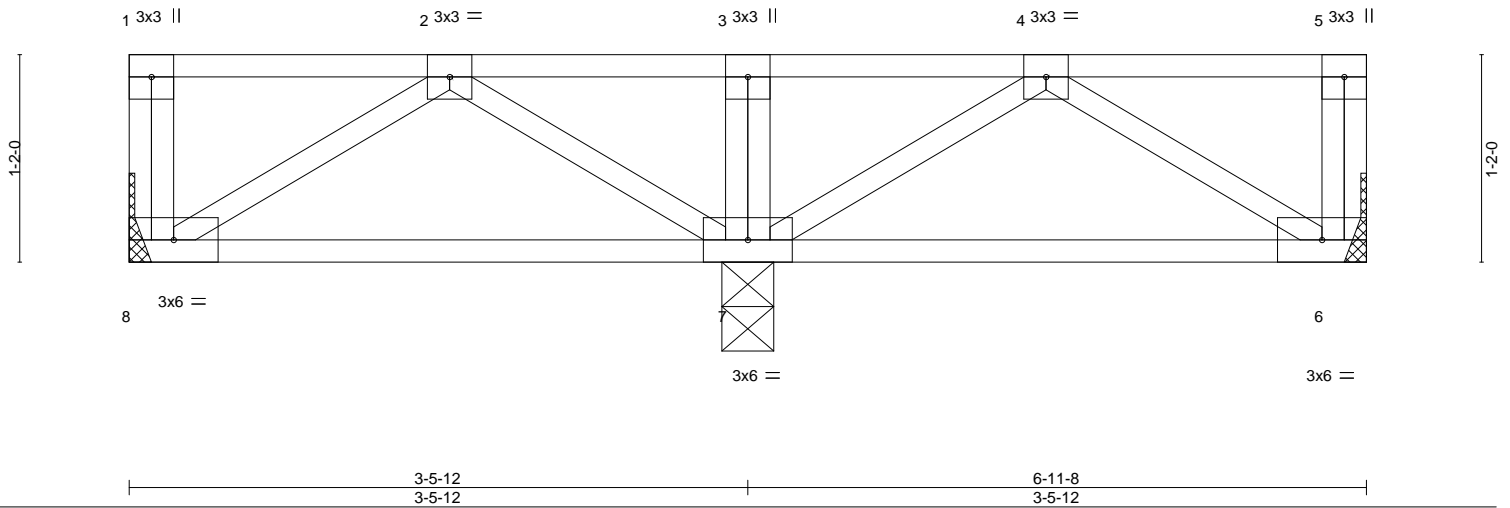

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP	
TCLL 40.0	Plate Grip DOL	1.00	TC 0.16	Vert(LL)	0.00	7	****	480	MT20	197/144
TCDL 10.0	Lumber DOL	1.00	BC 0.11	Vert(CT)	-0.01	6-7	>999	360		
BCLL 0.0	Rep Stress Incr	YES	WB 0.05	Horz(CT)	0.00	6	n/a	n/a		
BCDL 5.0	Code IRC2015/TPI2014		Matrix-P							
									Weight: 40 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)
BOT CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)
WEBS 2x4 SP No.3(flat)


BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-11-8 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 8=Mechanical, 6=Mechanical, 7=0-3-8
Max Grav 8=164(LC 3), 6=164(LC 4), 7=430(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Unbalanced floor live loads have been considered for this design.
- 2) As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 5) CAUTION, Do not erect truss backwards.

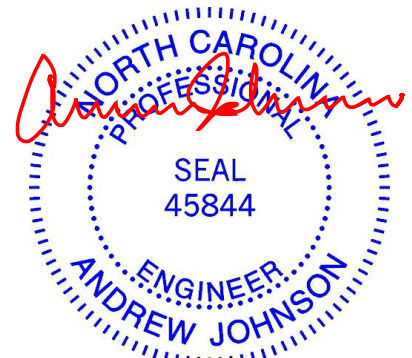

February 15, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



818 Soundside Road
Edenton, NC 27932

Job 30488-30488A	Truss F6	Truss Type Floor	Qty 6	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	I50248454
---------------------	-------------	---------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:12 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywRii-a7wQ14JEgJaYV8H8?07SheyKV3KeykJJsEJnPrmkw2X



Scale = 1:19.7

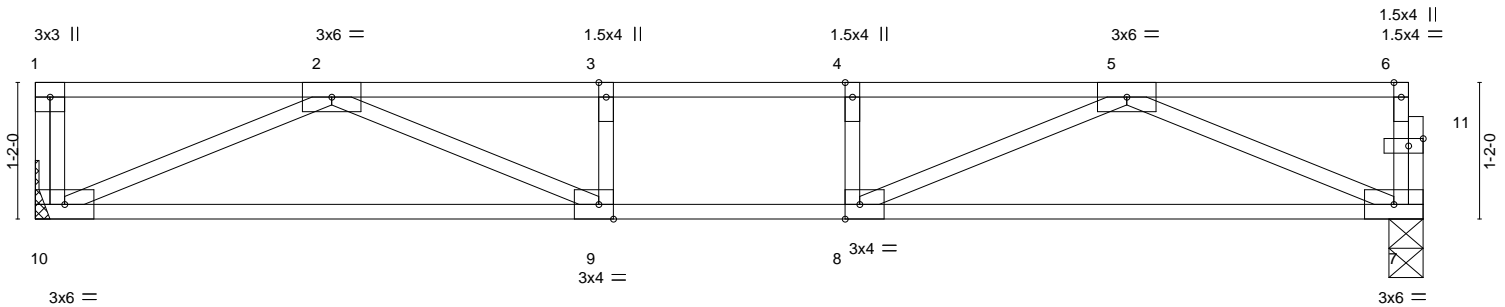


Plate Offsets (X,Y)--	[8:0-1-8,Edge], [9:0-1-8,Edge], [11:0-1-8,0-0-12]
-----------------------	---

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.52	Vert(LL)	-0.14	7-8	>977	MT20	197/144
TCDL 10.0	Lumber DOL	1.00	BC 0.65	Vert(CT)	-0.20	7-8	>690		
BCLL 0.0	Rep Stress Incr	YES	WB 0.34	Horz(CT)	0.02	7	n/a		
BCDL 5.0	Code IRC2015/TPI2014		Matrix-S						
								Weight: 58 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (size) 10=Mechanical, 7=0-3-8
Max Grav 10=638(LC 1), 7=632(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1761/0, 3-4=-1761/0, 4-5=-1761/0
BOT CHORD 9-10=0/1202, 8-9=0/1761, 7-8=0/1199
WEBS 2-10=-1309/0, 5-7=-1301/0, 2-9=0/704, 5-8=0/705

- NOTES-**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - 3) Refer to girder(s) for truss to truss connections.
 - 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.



Job 30488-30488A	Truss F7	Truss Type Floor	Qty 5	Ply 1	34 PRINCE PLACE - FLOOR 150248455
---------------------	-------------	---------------------	----------	----------	--------------------------------------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:13 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywrIi-2JUoEQJsRdiP6IsKZjehDrVVNTh2hB7v4u3KyCzkw2W



Scale: 3/8"=1'

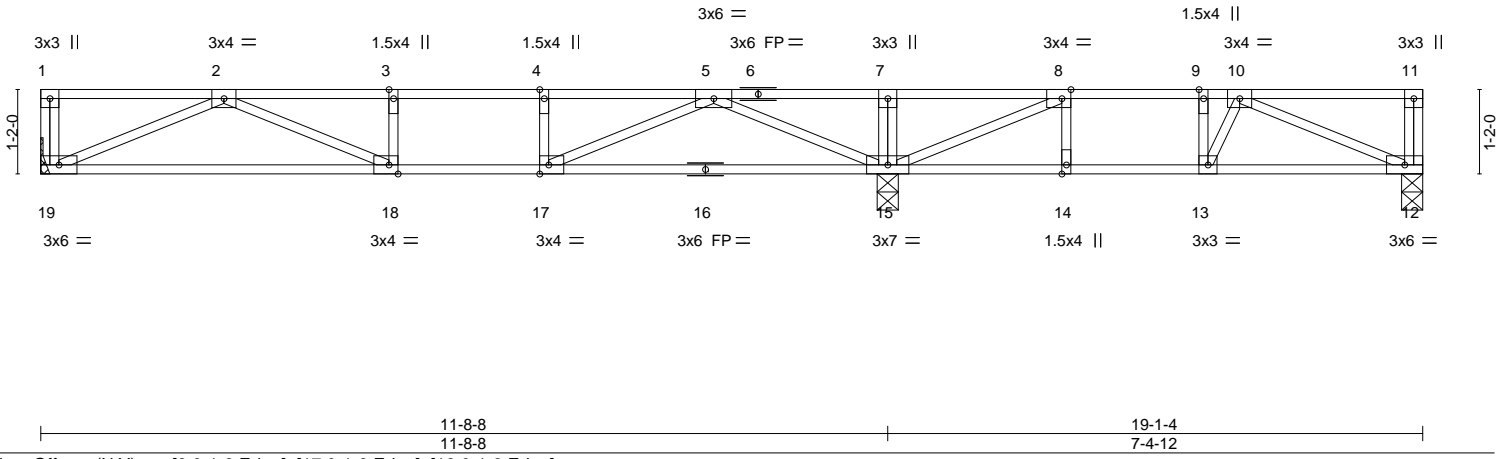


Plate Offsets (X,Y)--	[8:0-1-8,Edge], [17:0-1-8,Edge], [18:0-1-8,Edge]				
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.57	Vert(LL) -0.14 18-19 >999 480	MT20	197/144
TCDL 10.0	Lumber DOL 1.00	BC 0.63	Vert(CT) -0.21 18-19 >675 360		
BCLL 0.0	Rep Stress Incr YES	WB 0.37	Horz(CT) 0.03 12 n/a n/a		
BCDL 5.0	Code IRC2015/TPI2014	Matrix-S			
				Weight: 94 lb	FT = 20%F, 11%E

LUMBER-		BRACING-	
TOP CHORD	2x4 SP No.2 or 2x4 SPF No.2(flat)	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2 or 2x4 SPF No.2(flat)	BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing.
WEBS	2x4 SP No.3(flat)		

REACTIONS. (size) 19=Mechanical, 15=0-3-8, 12=0-3-8
Max Grav 19=612(LC 10), 15=1137(LC 1), 12=387(LC 7)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1618/0, 3-4=-1618/0, 4-5=-1618/0, 5-7=0/517, 7-8=0/517, 8-9=-628/16, 9-10=-628/16
BOT CHORD 18-19=0/1142, 17-18=0/1618, 15-17=0/981, 14-15=-16/628, 13-14=-16/628, 12-13=0/635
WEBS 7-15=-251/0, 2-19=-1245/0, 5-15=-1343/0, 2-18=0/520, 5-17=0/783, 4-17=-267/0, 8-15=-947/0, 10-12=-692/0

- NOTES-**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - 3) Refer to girder(s) for truss to truss connections.
 - 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 5) CAUTION, Do not erect truss backwards.




Job 30488-30488A	Truss F8	Truss Type Floor	Qty 12	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	150248456
---------------------	-------------	---------------------	-----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:13 2022 Page 1
ID:is6TgJ7xgi0_J9veeoXft8ywRii-2JUoEQJsRdiP6IsKZjehDrVR0TcMh6Mv4u3KyCzkw2W



Scale = 1:29.2

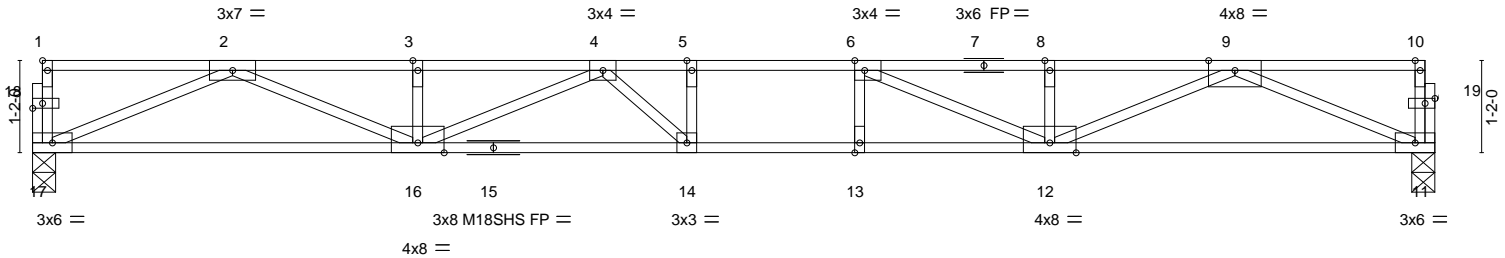

17-9-0
17-9-0

Plate Offsets (X,Y)-- [1:Edge,0-0-12], [6:0-1-8,Edge], [18:0-1-8,0-0-12], [19:0-1-8,0-0-12]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.79	Vert(LL)	-0.32 14-16	>652	480	MT20	197/144
TCDL 10.0	Lumber DOL	1.00	BC 0.93	Vert(CT)	-0.45 14-16	>472	360	M18SHS	244/190
BCLL 0.0	Rep Stress Incr	YES	WB 0.68	Horz(CT)	0.07 11	n/a	n/a		
BCDL 5.0	Code IRC2015/TPI2014		Matrix-S						
								Weight: 87 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.1(flat) *Except*
7-10: 2x4 SP No.2 or 2x4 SPF No.2(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 5-3-13 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 2-2-0 oc bracing: 14-16.

REACTIONS. (size) 17=0-3-8, 11=0-3-8
Max Grav 17=956(LC 1), 11=956(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-3246/0, 3-4=-3246/0, 4-5=-3980/0, 5-6=-3980/0, 6-8=-3230/0, 8-9=-3230/0
BOT CHORD 16-17=0/1946, 14-16=0/3898, 13-14=0/3980, 12-13=0/3980, 11-12=0/1945
WEBS 2-17=-2114/0, 9-11=-2113/0, 2-16=0/1422, 9-12=0/1406, 8-12=-266/28, 4-16=-715/0, 6-12=-1051/0, 4-14=-217/506, 5-14=-260/74

- NOTES-**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - 3) All plates are MT20 plates unless otherwise indicated.
 - 4) All plates are 1.5x4 MT20 unless otherwise indicated.
 - 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 6) CAUTION, Do not erect truss backwards.



February 15, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



818 Soundside Road
Edenton, NC 27932

Job 30488-30488A	Truss F10	Truss Type Floor	Qty 7	Ply 1	34 PRINCE PLACE - FLOOR 150248457 Job Reference (optional)
---------------------	--------------	---------------------	----------	----------	--

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:08 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywRii-iMhvBiGjd5470XzNmA3WWooXFSvb0rRAXclZG?zkwb2b



Scale = 1:29.2

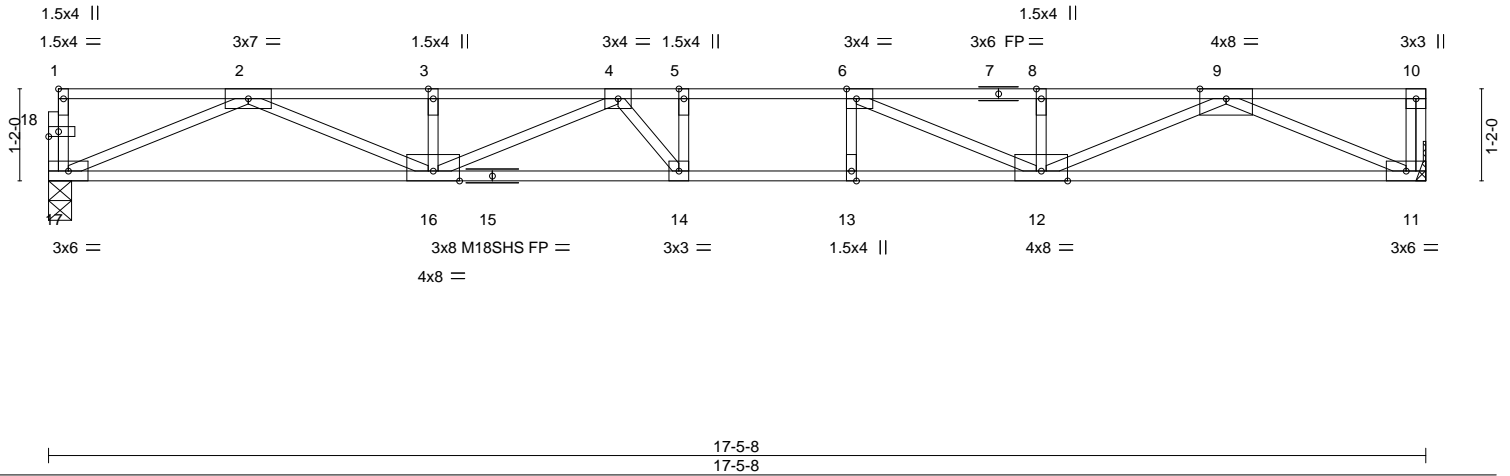



Plate Offsets (X,Y)--	[1:Edge,0-0-12], [6:0-1-8,Edge], [18:0-1-8,0-0-12]				
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.98	Vert(LL) -0.31 14 >670 480	MT20	197/144
TCDL 10.0	Lumber DOL 1.00	BC 0.91	Vert(CT) -0.43 14 >485 360	M18SHS	244/190
BCLL 0.0	Rep Stress Incr YES	WB 0.66	Horz(CT) 0.07 11 n/a n/a		
BCDL 5.0	Code IRC2015/TPI2014	Matrix-S			
				Weight: 86 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2(flat) *Except* 7-10: 2x4 SP No.2 or 2x4 SPF No.2(flat)	TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (size) 17=0-3-8, 11=Mechanical
Max Grav 17=940(LC 1), 11=946(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-3170/0, 3-4=-3170/0, 4-5=-3854/0, 5-6=-3854/0, 6-8=-3160/0, 8-9=-3160/0
BOT CHORD 16-17=0/1909, 14-16=0/3793, 13-14=0/3854, 12-13=0/3854, 11-12=0/1910
WEBS 2-17=-2074/0, 9-11=-2081/0, 2-16=0/1380, 9-12=0/1368, 8-12=-265/22, 4-16=-690/0,
6-12=-996/0, 4-14=-228/495, 5-14=-296/103


- NOTES-**
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - 3) All plates are MT20 plates unless otherwise indicated.
 - 4) Refer to girder(s) for truss to truss connections.
 - 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 6) CAUTION, Do not erect truss backwards.

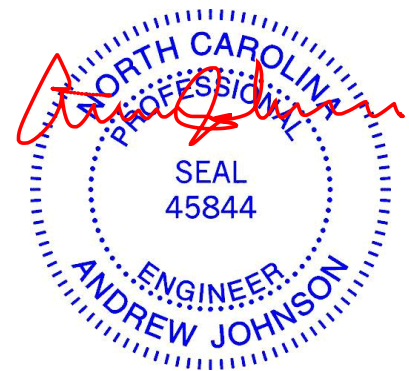

Job 30488-30488A	Truss FG	Truss Type FLOOR GIRDER	Qty 1	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	I50248458
---------------------	-------------	----------------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:14 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywRii-WV2ASIKUCxqGkSRW7R9wm31eYt?VQZ92JYouUfzkw2V

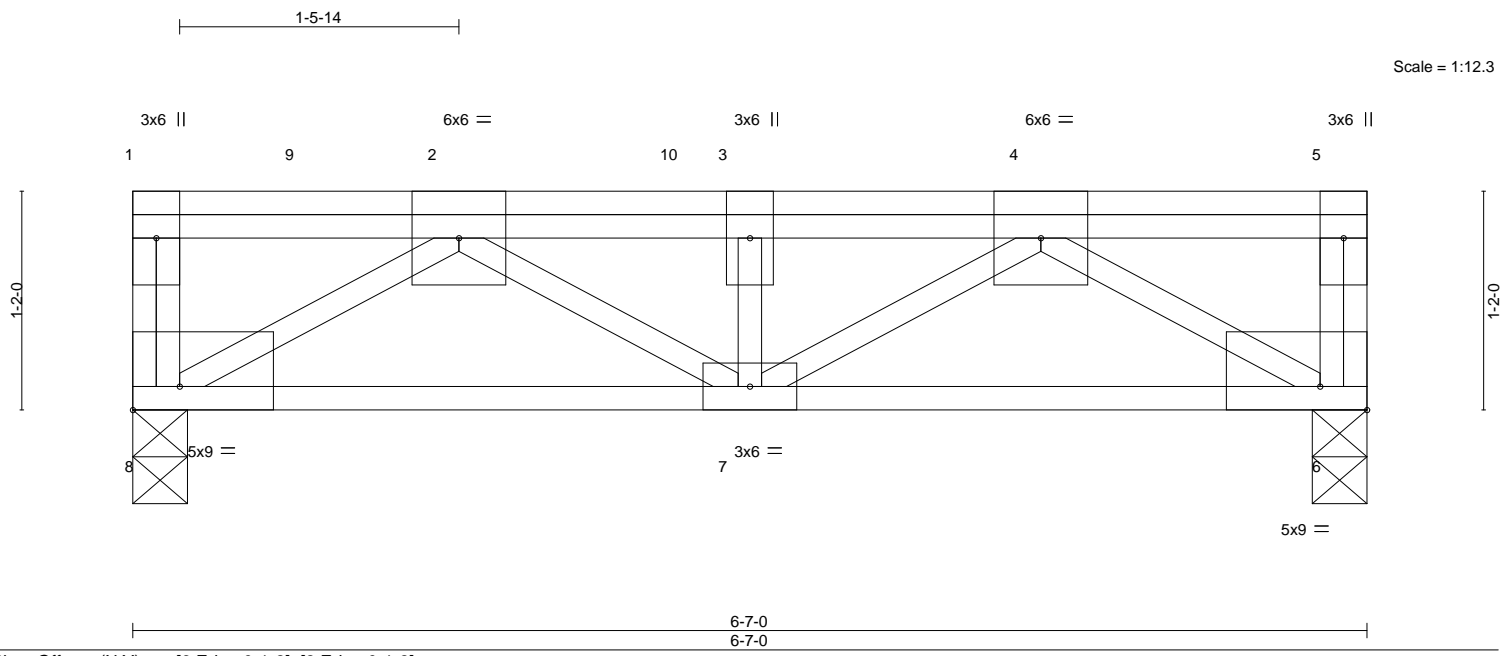

Scale = 1:12.3

Plate Offsets (X, Y)--	[6:Edge,0-1-8], [8:Edge,0-1-8]				
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.67	Vert(LL) -0.04 7 >999 480	MT20	197/144
TCDL 10.0	Lumber DOL 1.00	BC 0.75	Vert(CT) -0.05 7 >999 360		
BCLL 0.0	Rep Stress Incr NO	WB 0.64	Horz(CT) 0.02 6 n/a n/a		
BCDL 5.0	Code IRC2015/TPI2014	Matrix-P		Weight: 45 lb	FT = 20%F, 11%E


LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (size) 8=0-3-8, 6=0-3-8
Max Grav 8=1814(LC 1), 6=1622(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-8=-401/0, 2-3=-2977/0, 3-4=-2977/0
BOT CHORD 7-8=0/2304, 6-7=0/2281
WEBS 2-8=-2694/0, 2-7=0/796, 3-7=-832/0, 4-7=0/823, 4-6=-2668/0

NOTES-
1) As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
2) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
3) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 276 lb down at 0-11-12, 609 lb down at 0-11-12, 269 lb down at 2-11-12, 601 lb down at 2-11-12, 269 lb down at 4-11-12, and 601 lb down at 4-11-12, and 113 lb down at 6-5-8 on top chord. The design/selection of such connection device(s) is the responsibility of others.
4) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard
1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 6-8=-10, 1-5=-100
Concentrated Loads (lb)
Vert: 5=-113(B) 4=-870(F=-601, B=-269) 9=-885(F=-609, B=-276) 10=-870(F=-601, B=-269)

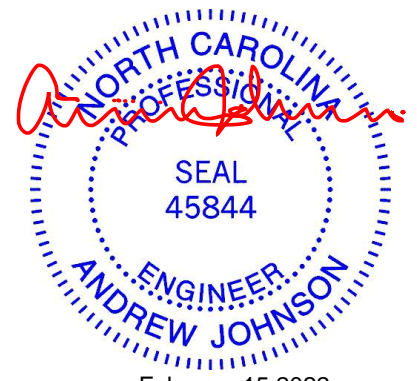

February 15, 2022


Job 30488-30488A	Truss KW1	Truss Type GABLE	Qty 1	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	150248459
---------------------	--------------	---------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:15 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywrIi-?icYf5L6zEy7Mc?jh8h9JGaycHWH9AyCYBYR05zkw2U

0-1-8

Scale = 1:37.2

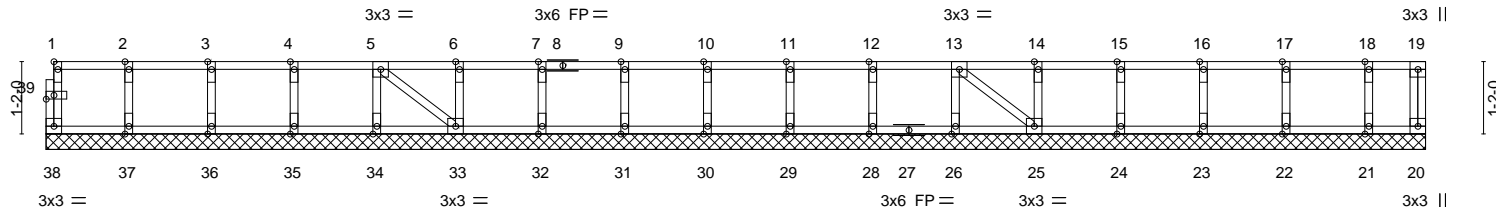

1-4-0	2-8-0	4-0-0	5-4-0	6-8-0	8-0-0	9-4-0	10-8-0	12-0-0	13-4-0	14-8-0	16-0-0	17-4-0	18-8-0	20-0-0	21-4-0	22-3-0
1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	0-11-0

Plate Offsets (X,Y)-- [1:Edge,0-0-12], [39:0-1-8,0-0-12]


LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.08	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	20	n/a		
BCDL 5.0	Code IRC2015/TPI2014		Matrix-S						
								Weight: 97 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	
OTHERS 2x4 SP No.3(flat)	

REACTIONS. All bearings 22-3-0.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 38, 20, 37, 36, 35, 34, 33, 32, 31, 30, 29, 28, 26, 25, 24, 23, 22, 21

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - All plates are 1.5x4 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.

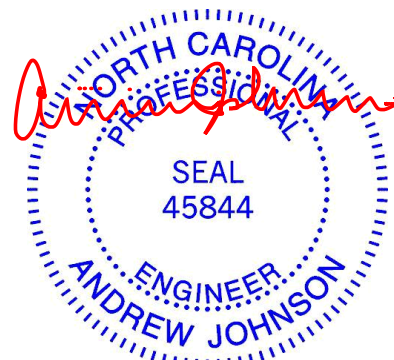

February 15, 2022


WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



Job 30488-30488A	Truss KW2	Truss Type GABLE	Qty 1	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	150248460
---------------------	--------------	---------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:16 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywrRii-TuAxtRMkkY4_zmavEsCOrU784gsZudNLmrH_ZXzkw2T

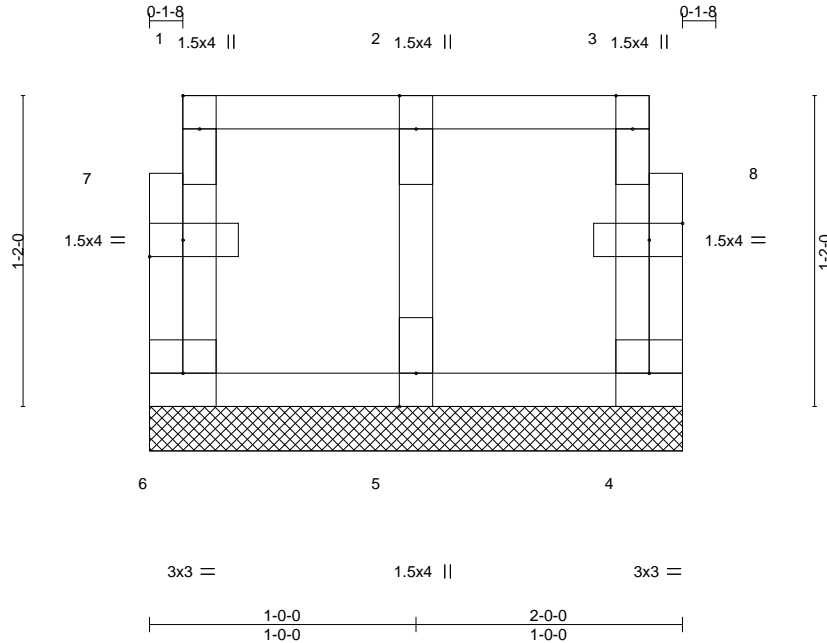

Scale = 1:8.6

Plate Offsets (X,Y)-- [1:Edge,0-0-12], [7:0-1-8,0-0-12], [8:0-1-8,0-0-12]									
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.03	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.02	Horz(CT)	0.00	4	n/a		
BCDL 5.0	Code IRC2015/TPI2014		Matrix-R					Weight: 12 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)
BOT CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)


BRACING-
TOP CHORD Structural wood sheathing directly applied or 2-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 6=2-0-0, 4=2-0-0, 5=2-0-0
Max Grav 6=42(LC 1), 4=42(LC 1), 5=96(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
- Gable requires continuous bottom chord bearing.
- Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- Gable studs spaced at 1-4-0 oc.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

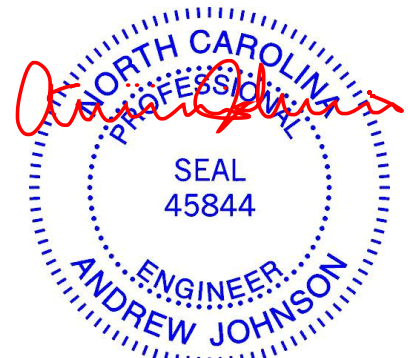

February 15, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



818 Soundside Road
Edenton, NC 27932


Job 30488-30488A	Truss KW3	Truss Type Floor Supported Gable	Qty 1	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	150248461
---------------------	--------------	-------------------------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:17 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywRii-x4kJ4nNMVsCrbv95oZjdOhf154Cgd4RV?V1Y5_zkw2S

0-1-8

Scale = 1:31.4

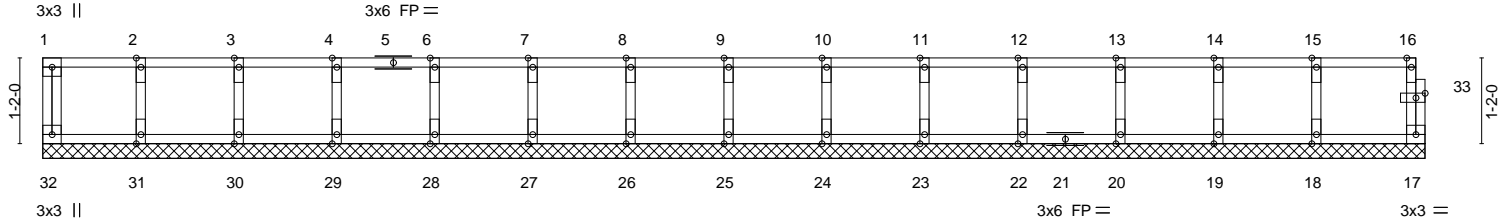

18-9-12
18-9-12

Plate Offsets (X,Y)--	[33:0-1-8,0-0-12]						
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP		
TCLL 40.0	Plate Grip DOL 1.00	TC 0.08	Vert(LL) n/a - n/a 999	MT20	197/144		
TCDL 10.0	Lumber DOL 1.00	BC 0.01	Vert(CT) n/a - n/a 999				
BCLL 0.0	Rep Stress Incr YES	WB 0.03	Horz(CT) 0.00 17 n/a n/a				
BCDL 5.0	Code IRC2015/TPI2014	Matrix-R					
						Weight: 79 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)
BOT CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 18-9-12.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 32, 17, 31, 30, 29, 28, 27, 26, 25, 24, 23, 22, 20, 19, 18

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - All plates are 1.5x4 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.



February 15, 2022

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

ENGINEERING BY
TRENCO
A MiTek Affiliate

818 Soundside Road
Edenton, NC 27932


Job 30488-30488A	Truss KW4	Truss Type GABLE	Qty 2	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	150248462
---------------------	--------------	---------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:17 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywRii-x4kJ4nNMVsCrbv95oZjdOhf154Cmd4RV?V1Y5_zkw2S

0-1-8

Scale = 1:29.6

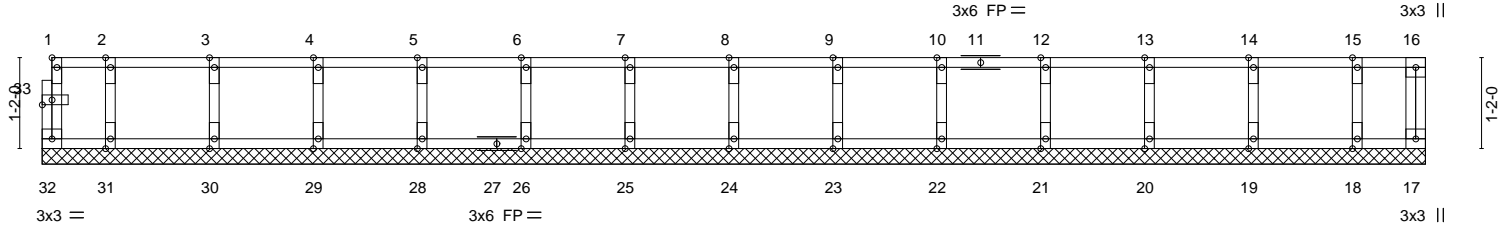

0-10-8	2-2-8	3-6-8	4-10-8	6-2-8	7-6-8	8-10-8	10-2-8	11-6-8	12-10-8	14-2-8	15-6-8	16-10-8	17-9-0
0-10-8	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	1-4-0	0-10-8


Plate Offsets (X,Y)-- [1:Edge,0-0-12], [33:0-1-8,0-0-12]					
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.08	Vert(LL) n/a - n/a 999	MT20	197/144
TCDL 10.0	Lumber DOL 1.00	BC 0.01	Vert(CT) n/a - n/a 999		
BCLL 0.0	Rep Stress Incr YES	WB 0.03	Horz(CT) 0.00 17 n/a n/a		
BCDL 5.0	Code IRC2015/TPI2014	Matrix-R		Weight: 76 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	
OTHERS 2x4 SP No.3(flat)	

REACTIONS. All bearings 17-9-0.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 32, 17, 24, 25, 26, 28, 29, 30, 31, 23, 22, 21, 20, 19, 18

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - All plates are 1.5x4 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.

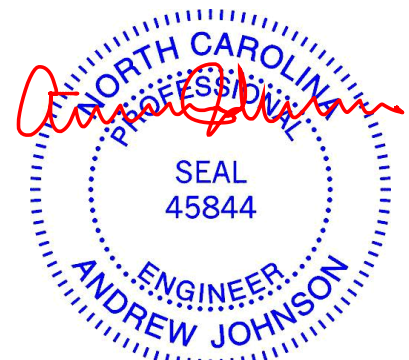


February 15, 2022

Job 30488-30488A	Truss KW6	Truss Type GABLE	Qty 1	Ply 1	34 PRINCE PLACE - FLOOR Job Reference (optional)	I50248463
---------------------	--------------	---------------------	----------	----------	---	-----------

84 Components (Dunn), Dunn, NC - 28334,

8.530 s Dec 6 2021 MiTek Industries, Inc. Tue Feb 15 10:44:18 2022 Page 1
ID:is6TgJ7xgi0_J9veeoxFt8ywRii-PHlhH7N_G9KiD3kiMGEswvCTrUX_MXheE9m5dQzkw2R

Scale = 1:13.5

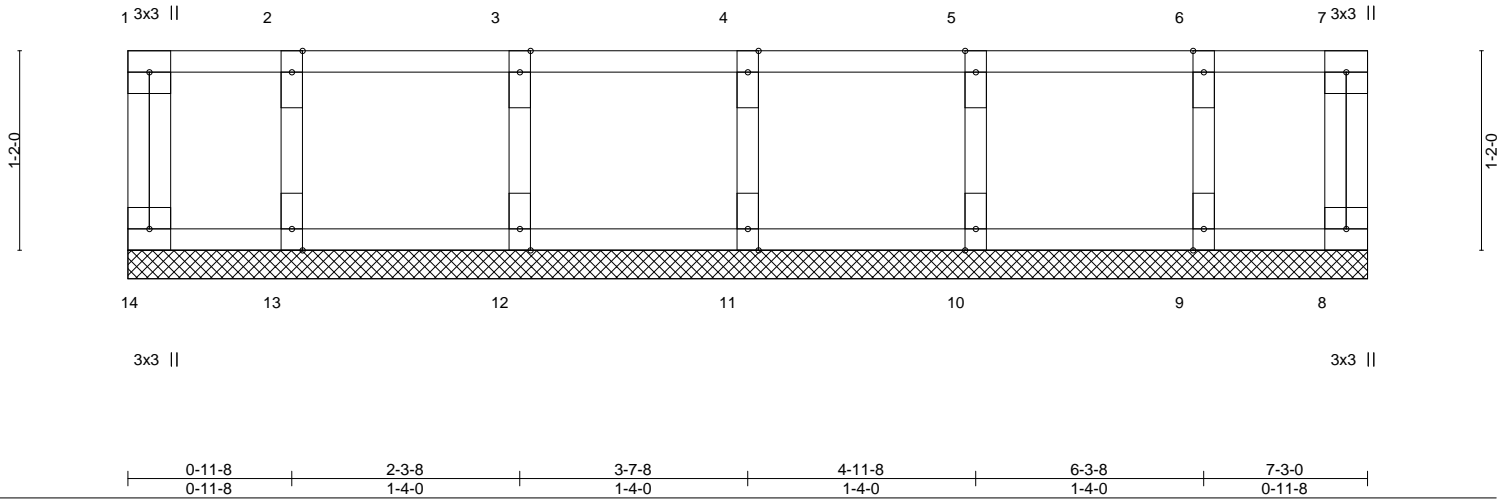

LOADING (psf)	SPACING-	CSL.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.08	Vert(LL) n/a	-	n/a	999	MT20	197/144
TCDL 10.0	Lumber DOL 1.00	BC 0.01	Vert(CT) n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr YES	WB 0.03	Horz(CT) 0.00	8	n/a	n/a		
BCDL 5.0	Code IRC2015/TPI2014	Matrix-R					Weight: 34 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)
BOT CHORD 2x4 SP No.2 or 2x4 SPF No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 7-3-0.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 14, 8, 11, 12, 13, 10, 9

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- As requested, plates have not been designed to provide for placement tolerances or rough handling and erection conditions. It is the responsibility of the fabricator to increase plate sizes to account for these factors.
 - All plates are 1.5x4 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.



February 15, 2022


WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
Edenton, NC 27932

Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.

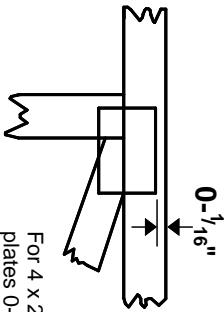

For 4 x 2 orientation, locate plates 0- 1/16" from outside edge of truss.



This symbol indicates the required direction of slots in connector plates.


* Plate location details available in **MITek 20/20 software or upon request.**

PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TPI 1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-89: Design Standard for Bracing, Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

6-4-8
dimensions shown in ft-in-sixteenths
(Drawings not to scale)

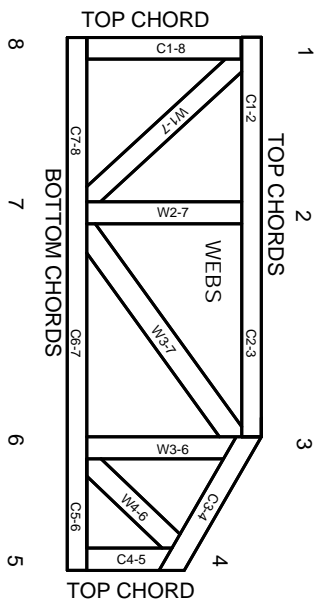

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

ICC-ES Reports:

ESR-1311, ESR-1352, ESR1988
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TPI 1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MITteK® All Rights Reserved



MITek Engineering Reference Sheet: Mill-7473 rev. 5/19/2020



General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TPI 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TPI 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TPI 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.